TERMINUS: Making the Case for Domain Foundation Models in Time Series Classification

Pauline Blavy[1], Ali Ismail-Fawaz[1], Cyril Meyer[1], Germain Forestier[1,2] and Maxime Devanne[1]

IRIMAS, Université de Haute-Alsace, France
firs-tname.last-name@uha.fr
DSAI, Monash University, Australia
first-name.last-name@monash.edu

Abstract. Foundation models aim to learn broad inductive biases from large and heterogeneous datasets, enabling transfer across tasks through zero-shot, few-shot, or fine-tuning strategies. However, the No-Free-Lunch theorem challenges the idea that a single learned inductive bias can be universally appropriate. Learning the bias does not remove the need for prior assumptions: the architecture, pretraining objective, and pretraining distribution themselves encode assumptions about the problems to be solved. This limitation is most apparent in zero-shot learning, but remains relevant in few-shot learning and fine-tuning, where the original pretrained bias can influence or even hinder adaptation to a new problem. We argue that foundation models should therefore not be viewed as a path toward universal learners, but as a mechanism for learning reusable inductive biases within meaningful families of problems. This perspective motivates domain- and application-specific foundation models, where prior knowledge explicitly constrains the scope of pretraining and provides a theoretically better-grounded basis for downstream generalization.

Keywords: Time Series Classification · Deep Learning · Pretraining · Foundation Models · Domain Foundation Models

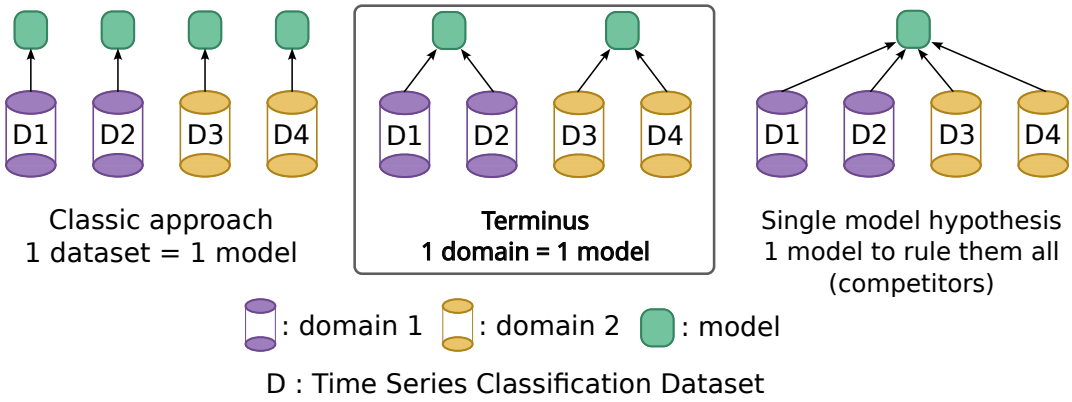


Fig. 1: Comparing the proposed work of TERMINUS (middle) to the classical approach (left) and what has been claimed for foundation models (right).

1 Introduction

Time series data are ubiquitous, spanning domains from medical practice to telecommunication systems. A time series is a sequence of data points ordered along some axis, typically time, however it can also be position, frequency, distance, and so on. The data mining community has defined many tasks on time series data. For example, Time Series Forecasting (TSF) aims to predict future values from past observations, Time Series Anomaly Detection (TSAD) seeks to identify abnormal or unexpected patterns, and Time Series Classification (TSC) assigns each sequence a discrete categorical label. The standard machine learning setup for TSC is to train on a labeled training set and evaluate on a separate, unseen test set.

Over the last fifteen years, the amount of data available for TSC has grown significantly. For many years, researchers relied on a collection of 44 datasets [25] of the UCR archive, until its expansion in 2015 with 85

datasets across eight domains [8]; by 2018 the archive had grown to 128 datasets [10]. This expansion prompted a surge of interest in deep learning for TSC, and by 2019 several studies showed that deep models can outperform traditional machine-learning approaches on TSC [23]. As both the number and size of datasets increased, the community began to demand even more data. For instance, the UEA multivariate TSC archive [4] introduced around 30 new datasets in 2020; the UCR archive has continued to expand with additional 14 datasets added to the 128 baseline [30]. More recently, recognizing the need for larger sample sizes within each dataset, not just a larger count of datasets, the MONSTER archive [11] was proposed, covering new domains such as activity recognition and greatly expanding Satellite Image Time Series (SITS). In the medical domain, we recently proposed a new multivariate TSC archive [21] for skeleton-based rehabilitation assessment, comprising 39 datasets.

With this growth in both dataset count and dataset size, attention has shifted to defining so-called "**foundation models**" for time series. Most current efforts seek a unified model, which we refer to as a General Foundation Model (GFM), that can handle any time series task (classification, forecasting, anomaly detection, etc.) across diverse application domains (medical, traffic, and more). The common thread among these approaches is pretraining: rather than initializing models randomly, the model is first trained on a different, preferably larger, dataset and then adapted to the target data, either by fine-tuning its parameters or by using it directly without any further training (zero-shot). This idea is the core concept of foundation models.

While pretraining is a long-standing idea in deep learning, its application to time series raises open questions: How should a foundation model be trained? Can a single model truly support multiple downstream tasks? Should it operate across domains, or be domain-specific? In this position paper, we argue that a single model that "reigns over everything" does not exist, *No One Model To Rule Them All*. Our argument is related to the *No-Free-Lunch theorem* [35] and goes further for time series. First, across tasks there is no single shared structure. Classification is primarily a pattern-recognition/discretization problem, whereas forecasting is an iterative or recursive regression problem. Empirically, this is reflected in model behavior: Recurrent Neural Networks (RNNs) tend to perform better for TSF than for TSC, as they excel at modeling long-term dependencies (useful for TSF) but are less effective for local pattern discrimination (central to TSC) [23]. Second, across *domains*[1], the only universal structure is the ordering axis, often time, but sometimes frequency, position, or distance. Even core notions like trend and seasonality can differ in meaning across domains, further complicating universal modeling. Given these considerations, and with a focus on TSC, we propose *Domain Foundation Models* (DFMs): foundation models designed for a single application domain to solve TSC, which lie between specialist models trained on a single dataset and GFMs (Figure 1). This position is the starting point for a new four-year project, TERMINUS, funded by the Agence Nationale de la Recherche (ANR).

2 History of Foundation Models

2.1 Unsupervised Pretraining and Transfer Learning

The idea of initializing a model with knowledge acquired on other data, rather than from random weights, appeared long before the term foundation model. In the early days of deep learning, unsupervised layer-wise pretraining was used to make deep networks trainable, and Erhan et al. [12] showed that it acts as a form of regularization, guiding optimization toward regions of the parameter space with better generalization. As the supervised training of deep networks became feasible, the focus shifted to transfer learning, which consists in training a network on a large source dataset and re-using its features for a different target task. Yosinski et al. [38] quantified this transferability and showed that the first layers of a network learn general features, while the last layers become increasingly specific to the source task. They also observed that the benefit of transfer decreases as the source and target tasks become more dissimilar. This observation, made in computer vision, is central to our position: what is learned during pretraining is only as useful as the source data is related to the target data.

2.2 First Foundation Models: Vision and NLP

The paradigm then changed in scale rather than in nature with the rise of large pretrained language models. GPT-3 [7] demonstrated that a sufficiently large model trained on a broad text corpus can solve new tasks from only a few examples given in its input, without any update of its parameters. In vision, models such as CLIP [33] followed a similar path by learning transferable visual representations from large collections of image-text pairs. Bommasani

[1] In this work, "domain" refers to the application area of the data (EEG, traffic etc.), not "domain" in the sense of "domain adaptation".

et al. [6] introduced the term *foundation model* to describe any model trained on broad data, generally with self-supervision at scale, that can be adapted to a wide range of downstream tasks. They highlighted two properties of these models: emergence, where capabilities arise implicitly from scale, and homogenization, where a single model serves as the common basis for many applications. It is precisely this homogenization assumption that we question for time series data.

2.3 Time Series Foundation Models: From Representation Learning to TSFMs

In time series, pretraining first appeared through self-supervised representation learning, with encoders trained to produce general-purpose embeddings of time series that are then used for classification [15]. This field then moved toward larger models pretrained on a vast amount of heterogeneous data, commonly referred to as Time Series Foundation Models (TSFMs), which can be grouped according to the tasks they target.

Forecasting models. The first and largest family of TSFMs is dedicated to forecasting. Early models such as Chronos [2], TimesFM [9] and Moirai [36] pretrain Transformers on large multi-domain corpora in order to forecast unseen series without any fine-tuning. Their successors [1, 18, 28] extend these models to multivariate inputs and longer contexts, while often becoming smaller and relying more on synthetic data. However, no single model dominates across all settings, as rankings change with the type of temporal pattern being forecast [32].

Multi-task models. A second family claims to address several tasks with a single model. MOMENT [19] pretrains a Transformer with masked reconstruction and evaluates it on forecasting, classification, anomaly detection and imputation, while UniTS [16] relies on task tokens so that a single network with shared weights can handle both generative and predictive tasks. GPT4TS [39] goes further by re-using a language model pretrained on text, of which only a small subset of parameters is fine-tuned for each time series task.

Classification models. The last family, which is more recent but growing quickly, is dedicated to TSC. NuTime [27] and Mantis [14] pretrain Transformer encoders with a contrastive objective on large collections of real-world series, and UniShape [29] adds a shape-aware module that focuses on the most discriminative subsequences. Synthetic data has rapidly become central to this family: CauKer [37] showed that classification TSFMs can be pretrained solely on synthetic series while exhibiting clearer scaling behavior than with real-world collections of data. At the same time, several articles question what these models actually need. Frozen forecasting models [3] provide competitive features for TSC without any classification-specific pretraining, in-context approaches remove the need for a trained classifier [13], and random convolutional features combined with a tabular in-context learner even outperform current TSC foundation models [31].

Taken together, these works show that the volume of real-world data is not sufficient to explain the performance of TSFMs, and that some low-level representations can be shared across tasks. This does not mean, however, that a single model is the most appropriate choice for every task, as we discuss in Section 4. Moreover, the composition of the pretraining data, and in particular its application domain, remains a largely uncontrolled variable: most models pool data from heterogeneous domains, implicitly assuming that patterns learned on traffic data, for instance, transfer to ECG signals. In light of the observations of Yosinski et al. [38], we argue that the domain is a key factor in the choice of pretraining data, which motivates the Domain Foundation Models we introduce in the following sections.

3 Time Series Classification Domains

Time series are discrete representations of real-world phenomena, which organize into an ordered sequence the values taken by the variables that model the phenomenon. The ordering axis is most often time, but it can also be a wavelength for spectra or a position along a contour for shapes. The phenomenon that is measured, as well as how it is measured, define the properties of the resulting time series (Figure 2). Electrocardiograms (ECG), for instance, capture the electrical activity of the heart, which varies within milliseconds, and are therefore sampled at several hundred hertz, while satellite image time series monitor the evolution of land cover, which is much slower, and are acquired every few days across multiple spectral bands. Domains thus differ in their sampling frequency, but also in the length of their series, their number of channels and their level of noise.

Furthermore, similar patterns can carry different meanings across domains. A succession of regular peaks corresponds to heartbeats in an ECG, while it corresponds to daily rush hours in traffic data. A deformation of such patterns can completely change their meaning in one domain while being irrelevant in another: a widening of the

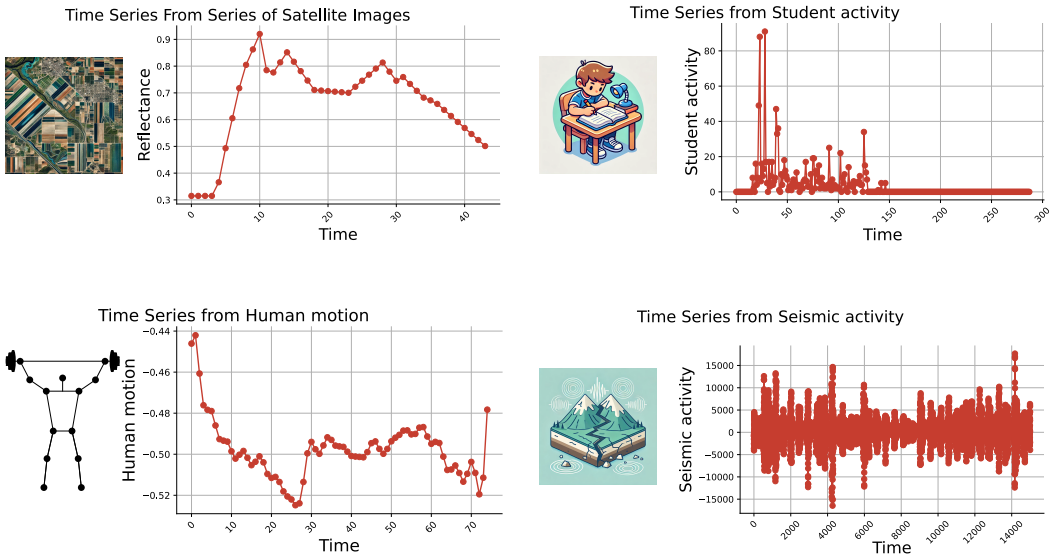


Fig. 2: Examples of time series from four application domains: satellite image time series, student activity, human motion and seismic activity. Each domain differs in its sampling, its length and the nature of its patterns.

typical spike pattern in an ECG can indicate a cardiac disorder, whereas a slightly longer rush hour does not change the nature of traffic data. In the same way, the amplitude of a signal can be informative in some domains and meaningless in others, so that a normalization step that is harmless for one domain can remove discriminative information for another. Finally, a domain is also characterized by the distribution of its classes. In medical applications, a class of interest such as a rare pathology may represent only a small fraction of the observations, and this imbalance is a property of the real-world application, whereas in other domains the classes are naturally balanced.

These differences are already visible in classical TSC benchmarks, where each dataset is associated with a domain. The UCR archive [10] contains, for example, ECG5000, in which heartbeats are classified into five categories, GunPoint, which distinguishes hand motions of pointing a gun from simply pointing a finger, Coffee, in which spectra are used to discriminate between Arabica and Robusta beans, and FordA, which aims at detecting engine problems from sound measurements. The UEA archive [4] extends this collection to multivariate data, with datasets such as BasicMotions, in which accelerometer and gyroscope signals are used to recognize physical activities, or SelfRegulationSCP1, in which EEG recordings are classified according to the cortical potentials of the subject. However, these domains mix application areas (ECG, EEG), acquisition modalities (Sensor, Spectro) and data representations (Image), which shows that the notion of domain is not yet clearly defined in the TSC literature.

A question that will require further exploration is whether, and how, domains can be grouped. Even though ECG and EEG model different phenomena, they come from similar applications and share some properties, such as being physiological signals sampled at high frequency with a strong variability between subjects. The granularity of what can be considered a domain therefore requires further discussion, in order to determine whether the most viable Domain Foundation Model for such an example should be trained on a broad medical domain, or whether two distinct models are needed to reach the full generalization potential on ECG and EEG data.

4 Domain Foundation Models

Before discussing domains, we first argue that a foundation model for TSC should be dedicated to this task. Classification and forecasting rely on different representations of a time series: forecasting requires a causal model that extrapolates the future from the most recent observations, while classification requires a global representation of the whole series that highlights the patterns discriminating its classes, wherever they occur. These different needs are reflected in the design of current TSFMs. Forecasting models are mostly built on causal decoders trained to predict the next values of a series [9, 28], whereas classification models rely on non-causal encoders pretrained with contrastive objectives that learn invariances relevant to classification [14, 27]. Even models that claim to handle several tasks share a backbone but rely on task-specific heads or tokens [16, 19]. The fact that frozen forecasting models provide competitive features for TSC [3] shows that some low-level patterns are shared between tasks, but

the choices that make a model efficient, such as its architecture, its pretraining objective and the invariances it learns, remain specific to the task. In this work, we therefore fix the task to TSC and focus on the second question: should a foundation model operate across domains?

As discussed in Section 3, the only structure shared by all time series is the ordering of their values, while the properties that make a series discriminative are defined by its application domain. These heterogeneities already exist between datasets of the same domain: two ECG datasets can be recorded with different devices, sampling frequencies or numbers of leads. Pooling several domains in a single pretraining corpus adds new patterns, invariances and meanings on top of these differences, which makes it very difficult for a single model to learn a representation that is relevant for all of them.

This difficulty is a direct consequence of the No-Free-Lunch theorem [35], which states that, averaged over all possible problems, no learning algorithm performs better than any other. A model can therefore only outperform others on a given family of problems if its inductive bias is adapted to this family. Foundation models do not escape this result: they learn their inductive bias from data, but the architecture, the pretraining objective and above all the pretraining distribution still encode assumptions about the problems to be solved. Baxter [5] formalized this idea by showing that a bias can be learned from many tasks, provided that these tasks are sampled from a common environment of related problems. Under this view, a foundation model pretrained on all available time series implicitly assumes that all time series form a single environment, which the differences discussed in Section 3 contradict. We argue that the application domain is a more natural candidate for such an environment.

We therefore define a Domain Foundation Model (DFM) as a foundation model pretrained on data from a single application domain, in order to learn an inductive bias that is shared by the problems of this domain and to transfer it to new datasets of the same domain. This idea is not new in itself and has already proven effective outside of TSC benchmarks. In neuroscience, LaBraM [24] was pretrained on about 2,500 hours of EEG recordings coming from around twenty datasets, and segments the signals into channel patches so that recordings with different electrode configurations can be used together. In remote sensing, Presto [34] is a lightweight Transformer pretrained on pixel-level time series that combine optical and radar satellite observations with climate and elevation data, and is designed for the downstream tasks of this domain. Both models handle the heterogeneity of their own domain explicitly, instead of assuming that time series from all domains share a common structure.

In TSC, early work on transfer learning already showed that the benefit of pretraining strongly depends on the choice of the source dataset, and that selecting a source dataset similar to the target one improves the results [22]. PHIT [20] went a step further by pretraining a model on all the datasets of the same domain of the UCR archive, using a pretext task that consists in predicting the dataset each series comes from, before fine-tuning it on each dataset. To handle the different distributions of these datasets, a Batch Normalization Multiplexer learns a separate normalization layer per dataset. Over 88 datasets, this domain pretraining significantly outperformed the same architecture trained from scratch, with the largest gains on datasets with fewer than a thousand training samples, and improved the average accuracy on seven of the eight domains of the archive.

The relevance of a DFM nevertheless depends on its architecture, its pretraining objective and the amount of data available in the domain, and restricting the pretraining data to a single domain does not guarantee better performance by itself, as we discuss in Section 6. In the following section, we illustrate with a simple proof of concept on synthetic data how the composition of the pretraining data alone can affect the representation learned by a foundation model, and how this effect depends on the capacity of the model.

5 Proof of Concept

To illustrate the position defended in the previous sections, we designed a simple experiment on synthetic data that compares a Domain Foundation Model (DFM), pretrained on a single domain, to a General Foundation Model (GFM), pretrained on several domains. The objective of this experiment is not to propose a new model, but to isolate the effect of the composition of the pretraining data on the representation learned by a foundation model.

We generated three synthetic datasets of 200 time series each, corresponding to three domains with distinct properties (Figure 3). Domain A presents a strong periodicity and a shape morphology that resembles ECG signals, Domain B is characterized by a strong temporal sparsity without smooth continuity, and Domain C presents a strong autocorrelation and a drift without any periodicity. Both foundation models share the same architecture, an AutoEncoder whose encoder is made of five convolutional layers with n filters each, and whose decoder is made of five transposed convolutional layers with n filters each, followed by an additional transposed convolutional layer that reconstructs the input series. The models are pretrained on the reconstruction of their input: the DFM is pretrained only on Domain A, while the GFM is pretrained on the three domains together.

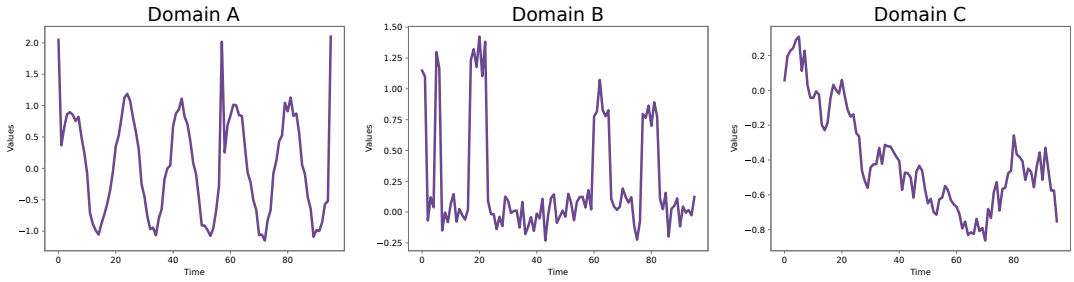


Fig. 3: Synthetic examples from three domains: (A) periodic, ECG-like signals; (B) sparse signals with abrupt bursts; (C) autocorrelated signals with drift and no periodicity.

The pretrained encoders are then used to project an unseen dataset into their latent space, where a downstream classification task is performed. We chose the ECG200 dataset of the UCR archive [10], in which heartbeats are classified as normal or as corresponding to a myocardial infarction, as it belongs to the domain that Domain A was designed to resemble. Two classifiers are trained on the latent representations of the training set and evaluated on the test set: a 1-Nearest Neighbor with the Euclidean distance (1NN) and a linear perceptron (LP). A 1NN with Dynamic Time Warping applied to the raw series serves as a baseline.

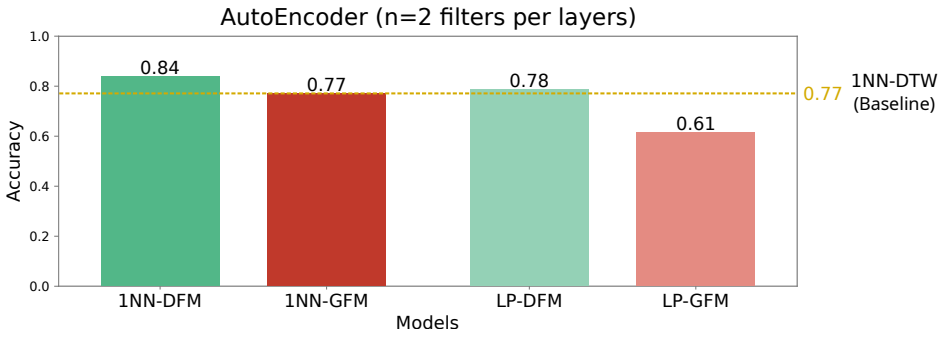


Fig. 4: Accuracy on the ECG200 test set of a 1NN and a linear perceptron (LP) trained on the latent representations of the DFM and the GFM, with $n = 2$ filters per layer, compared to a 1NN with DTW applied to the raw series.

With $n = 2$ filters per layer, the DFM achieves the highest accuracy with both classifiers, reaching 0.84 with the 1NN and 0.78 with the LP, whereas the GFM does not improve on the baseline, with 0.77 with the 1NN and 0.61 with the LP (Figure 4). When the number of filters per layer increases from 1 to 32, the advantage of the DFM is mostly observed for low capacities, and the performances of both models converge as the capacity grows. A projection of the latent spaces with UMAP (Figure 5) confirms this observation: with $n = 2$, the latent space of the DFM separates the two classes much better than that of the GFM, while with $n = 8$ and $n = 64$ both latent spaces become similar and separate most of the samples.


These results suggest a trade-off between specialization and generalization that depends on the capacity of the model. When the capacity is limited, the GFM has to distribute it across temporal patterns that are incompatible with each other, while the DFM can dedicate it entirely to the patterns of its domain. When the capacity increases, the GFM can represent the patterns of all domains and this gap closes. This experiment remains a simplified example, and the results may differ on real-world data, with more complex domains or with other pretraining objectives. It nevertheless shows that the composition of the pretraining data alone, all other things being equal, can change the quality of the representation learned by a foundation model, which motivates a systematic study of Domain Foundation Models on real-world TSC domains.

6 Alternative Views


Our position can be challenged by several recent observations, which we discuss below.



(a) $n_f = 2$

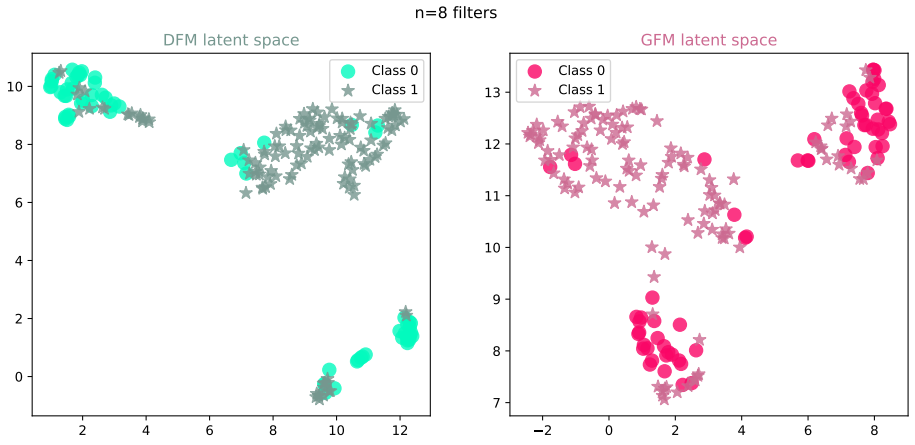

(b) $n_f = 8$

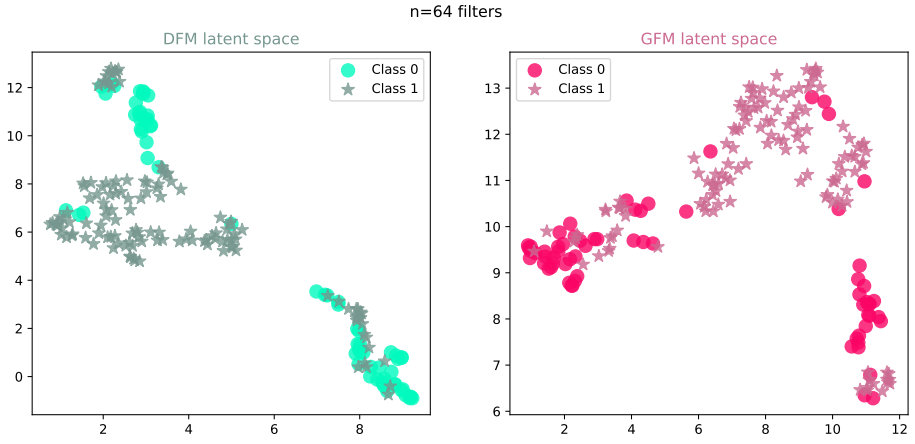

(c) $n_f = 64$

Fig. 5: Comparison of DFM and GFM latent spaces for different numbers of filters.

Scale may be enough. Our own proof of concept shows that the gap between the DFM and the GFM closes as the capacity of the model increases, and recent forecasting models report steady gains with model size up to billions of parameters [26]. One could therefore argue that a sufficiently large GFM will eventually capture the patterns of every domain. We do not dispute this possibility, but we argue that the benefit of DFMs lies in their efficiency: a smaller model, pretrained on less data and at a lower computational cost, can reach a similar or better representation within its domain. This matters in many application domains, such as medicine, where data are scarce, privacy constraints limit the pooling of datasets, and models often need to be deployed on limited hardware. Interestingly, the model of [26] is itself pretrained on a single source domain, observability data, complemented with synthetic data.

Generic models can outperform domain-specific ones. A generic TSFM has been reported to outperform an EEG-specific foundation model on EEG classification [17]. This result shows that restricting the pretraining data to a single domain is not sufficient by itself: the architecture, the pretraining objective and the amount of data available in the domain remain decisive. In our view, it calls for a careful design of DFMs rather than for their abandonment, and it highlights the need for controlled comparisons in which only the composition of the pretraining data varies, as in our proof of concept.

Synthetic data may replace domain data. Classification TSFMs can be pretrained solely on synthetic series [37], and synthetic data is increasingly used in forecasting [1]. If generic synthetic data is sufficient, the need for domain data could be questioned. However, synthetic generators also encode assumptions about the series they produce, through the choice of their kernels, trends or causal structures. Designing generators that reproduce the properties of a given domain is, in our view, a promising way to build DFMs when real data is scarce, rather than an alternative to them.

Pretraining may not be needed at all. Random convolutional features combined with a tabular in-context learner outperform current TSC foundation models [31]. This result questions the added value of current foundation models for TSC in general, whether they are general or domain-specific. It reinforces our view that the question is not only how much data a model is pretrained on, but which data, and that the benefit of pretraining should always be measured against strong models that are not pretrained.

7 Conclusion

In this position paper, we argued that a single foundation model able to handle every time series task across every application domain does not exist. Following the No-Free-Lunch theorem, a foundation model does not remove the need for prior assumptions. Its architecture, pretraining objective and, above all, pretraining data encode an inductive bias, which can only be appropriate for a given family of problems. Across tasks, classification and forecasting require different representations and design choices. Across domains, the only structure shared by all time series is the ordering of their values, while the properties that make a series discriminative, such as the meaning of its patterns, its invariances, its sampling frequency or the distribution of its classes, are defined by its application domain. Recent works on TSFMs also show that the volume of real-world data is not sufficient to explain their performance, and that the composition of the pretraining data remains a largely uncontrolled variable.

Given these considerations, and with a focus on TSC, we proposed Domain Foundation Models: foundation models pretrained on data from a single application domain, which aim to learn an inductive bias shared by the problems of this domain and to transfer it to new datasets of the same domain. Our proof of concept on synthetic data illustrated that, all other things being equal, a model pretrained on a single domain can learn a more relevant representation than a model pretrained on several domains, especially when its capacity is limited.

Several questions remain open and will be addressed within the TERMINUS project. First, the notion of domain itself needs to be clearly defined. Second, the architectures and pretraining strategies that best leverage the data of a domain have to be identified, along with metrics of similarity between domains to guide knowledge transfer and distillation across related domains. Finally, the distribution of data can also shift within a domain, so that test-time adaptation strategies will be studied to adapt Domain Foundation Models to the concept drift that occurs in real-world applications. We hope that this position will encourage the community to consider the application domain as a central component in the design of foundation models for time series classification.

References

1. Ansari, A.F., Shchur, O., Küken, J., Auer, A., Han, B., Mercado, P., Rangapuram, S.S., Shen, H., Stella, L., Zhang, X., Goswami, M., Kapoor, S., Maddix, D.C., Guerron, P., Hu, T., Yin, J., Erickson, N., Desai, P.M., Wang, H., Rangwala,

H., Karypis, G., Wang, Y., Bohlke-Schneider, M.: Chronos-2: From univariate to universal forecasting. arXiv preprint arXiv:2510.15821 (2025)
2. Ansari, A.F., Stella, L., Turkmen, A.C., Zhang, X., Mercado, P., Shen, H., Shchur, O., Rangapuram, S.S., Arango, S.P., Kapoor, S., Zschiegner, J., Maddix, D.C., Wang, H., Mahoney, M.W., Torkkola, K., Wilson, A.G., Bohlke-Schneider, M., Wang, B.: Chronos: Learning the language of time series. Transactions on Machine Learning Research (2024)
3. Auer, A., Klotz, D., Böck, S., Hochreiter, S.: Pre-trained forecasting models: Strong zero-shot feature extractors for time series classification. arXiv preprint arXiv:2510.26777 (2025)
4. Bagnall, A., Dau, H.A., Lines, J., Flynn, M., Large, J., Bostrom, A., Southam, P., Keogh, E.: The UEA multivariate time series classification archive, 2018. arXiv preprint arXiv:1811.00075 (2018)
5. Baxter, J.: A model of inductive bias learning. Journal of Artificial Intelligence Research **12**, 149–198 (2000)
6. Bommasani, R., Hudson, D.A., Adeli, E., et al.: On the opportunities and risks of foundation models. arXiv preprint arXiv:2108.07258 (2021)
7. Brown, T., Mann, B., Ryder, N., Subbiah, M., et al.: Language models are few-shot learners. In: Advances in Neural Information Processing Systems. vol. 33, pp. 1877–1901 (2020)
8. Chen, Y., Keogh, E., Hu, B., Begum, N., Bagnall, A., Mueen, A., Batista, G.: The UCR time series classification archive. `http://www.cs.ucr.edu/~eamonn/time_series_data/` (2015)
9. Das, A., Kong, W., Sen, R., Zhou, Y.: A decoder-only foundation model for time-series forecasting. In: International Conference on Machine Learning. Proceedings of Machine Learning Research, vol. 235, pp. 10148–10167 (2024)
10. Dau, H.A., Bagnall, A., Kamgar, K., Yeh, C.C.M., Zhu, Y., Gharghabi, S., Ratanamahatana, C.A., Keogh, E.: The UCR time series archive. IEEE/CAA Journal of Automatica Sinica **6**(6), 1293–1305 (2019)
11. Dempster, A., Foumani, N.M., Tan, C.W., Miller, L., Mishra, A., Salehi, M., Pelletier, C., Schmidt, D.F., Webb, G.I.: MONSTER: Monash scalable time series evaluation repository. arXiv preprint arXiv:2502.15122 (2025)
12. Erhan, D., Bengio, Y., Courville, A., Manzagol, P.A., Vincent, P., Bengio, S.: Why does unsupervised pre-training help deep learning? Journal of Machine Learning Research **11**(19), 625–660 (2010)
13. Fang, J., Xie, S., Nie, S., Ling, Y., Liu, Y., Li, Z., Zhang, K., Pan, L., Palpanas, T., Cai, R.: Rethinking zero-shot time series classification: From task-specific classifiers to in-context inference. arXiv preprint arXiv:2602.00620 (2026)
14. Feofanov, V., Wen, S., Xie, S., Roschmann, S., Alonso, M., Guo, H., Ilbert, R., Tiomoko, M., Bouniot, Q., Akata, Z., Pan, L., Zhang, J., Redko, I.: Mantis: Lightweight foundation model for time series classification. arXiv preprint arXiv:2502.15637 (2025)
15. Franceschi, J.Y., Dieuleveut, A., Jaggi, M.: Unsupervised scalable representation learning for multivariate time series. In: Advances in Neural Information Processing Systems. vol. 32, pp. 4650–4661 (2019)
16. Gao, S., Koker, T., Queen, O., Hartvigsen, T., Tsiligkaridis, T., Zitnik, M.: UniTS: A unified multi-task time series model. In: Advances in Neural Information Processing Systems. vol. 37 (2024)
17. Gnassounou, T., Moakher, Y., Xie, S., Feofanov, V., Redko, I.: Leveraging generic time series foundation models for EEG classification. arXiv preprint arXiv:2510.27522 (2025)
18. Google Research: TimesFM 2.5. `https://github.com/google-research/timesfm` (2025)
19. Goswami, M., Szafer, K., Choudhry, A., Cai, Y., Li, S., Dubrawski, A.: MOMENT: A family of open time-series foundation models. In: International Conference on Machine Learning. Proceedings of Machine Learning Research, vol. 235, pp. 16115–16152 (2024)
20. Ismail-Fawaz, A., Devanne, M., Berretti, S., Weber, J., Forestier, G.: Finding foundation models for time series classification with a pretext task. In: Pacific-Asia Conference on Knowledge Discovery and Data Mining (PAKDD) Workshops (2024)
21. Ismail-Fawaz, A., Devanne, M., Berretti, S., Weber, J., Forestier, G.: Deep learning for skeleton based human motion rehabilitation assessment: A benchmark. arXiv preprint arXiv:2507.21018 (2025)
22. Ismail Fawaz, H., Forestier, G., Weber, J., Idoumghar, L., Muller, P.A.: Transfer learning for time series classification. In: IEEE International Conference on Big Data. pp. 1367–1376 (2018)
23. Ismail Fawaz, H., Forestier, G., Weber, J., Idoumghar, L., Muller, P.A.: Deep learning for time series classification: a review. Data Mining and Knowledge Discovery **33**(4), 917–963 (2019)
24. Jiang, W.B., Zhao, L.M., Lu, B.L.: Large brain model for learning generic representations with tremendous EEG data in BCI. In: International Conference on Learning Representations (2024)
25. Keogh, E.: The UCR time series classification/clustering homepage. `http://www.cs.ucr.edu/~eamonn/time_series_data/` (2006)
26. Khwaja, E., Lettieri, C., Woo, G., Belouadah, E., Cenac, M., Jarry, G., Paquin, E., Zhao, X., Zhukova, V., Abou-Amal, O., Liu, C., Talwalkar, A., Asker, D.: Toto 2.0: Time series forecasting enters the scaling era. arXiv preprint arXiv:2605.20119 (2026)
27. Lin, C., Wen, X., Cao, W., Huang, C., Bian, J., Lin, S., Wu, Z.: NuTime: Numerically multi-scaled embedding for large-scale time-series pretraining. Transactions on Machine Learning Research (2024)
28. Liu, C., Aksu, T., Liu, J., Liu, X., Yan, H., Pham, Q., Savarese, S., Sahoo, D., Xiong, C., Li, J.: Moirai 2.0: When less is more for time series forecasting. arXiv preprint arXiv:2511.11698 (2025)
29. Liu, Z., Wang, Y., Li, B., Zheng, J., Eldele, E., Wu, M., Ma, Q.: A unified shape-aware foundation model for time series classification. In: AAAI Conference on Artificial Intelligence (2026)
30. Middlehurst, M., Schäfer, P., Bagnall, A.: Bake off redux: a review and experimental evaluation of recent time series classification algorithms. Data Mining and Knowledge Discovery **38**(4), 1958–2031 (2024)

31. O'Rourke, F.M., Trisovic, A., Bertsimas, D.: RocketPFN: Accurate time series classification via in-context learning. arXiv preprint arXiv:2606.21786 (2026)
32. Qiao, Z., Pan, S., Wang, A., Zhukova, V., Liu, Y., Jiang, X., Wen, Q., Long, M., Jin, M., Liu, C.: It's TIME: Towards the next generation of time series forecasting benchmarks. arXiv preprint arXiv:2602.12147 (2026)
33. Radford, A., Kim, J.W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., Sastry, G., Askell, A., Mishkin, P., Clark, J., Krueger, G., Sutskever, I.: Learning transferable visual models from natural language supervision. In: International Conference on Machine Learning. Proceedings of Machine Learning Research, vol. 139, pp. 8748–8763 (2021)
34. Tseng, G., Cartuyvels, R., Zvonkov, I., Purohit, M., Rolnick, D., Kerner, H.: Lightweight, pre-trained transformers for remote sensing timeseries. arXiv preprint arXiv:2304.14065 (2023)
35. Wolpert, D.H.: The lack of a priori distinctions between learning algorithms. Neural Computation **8**(7), 1341–1390 (1996)
36. Woo, G., Liu, C., Kumar, A., Xiong, C., Savarese, S., Sahoo, D.: Unified training of universal time series forecasting transformers. In: International Conference on Machine Learning. Proceedings of Machine Learning Research, vol. 235, pp. 53140–53164 (2024)
37. Xie, S., Feofanov, V., Zhang, J., Palpanas, T., Redko, I.: CauKer: Classification time series foundation models can be pretrained on synthetic data. In: International Conference on Learning Representations (2026)
38. Yosinski, J., Clune, J., Bengio, Y., Lipson, H.: How transferable are features in deep neural networks? In: Advances in Neural Information Processing Systems. vol. 27 (2014)
39. Zhou, T., Niu, P., Wang, X., Sun, L., Jin, R.: One fits all: Power general time series analysis by pretrained LM. In: Advances in Neural Information Processing Systems. vol. 36, pp. 43322–43355 (2023)