

Operating Systems Syllabus



Isfahan University of Technology
Electrical and Computer Engineering Department
1400-1 semester

Zeinab Zali



Computer System Organization


- One or more CPUs, device controllers connect through common **bus** providing access to shared memory
- Concurrent execution of CPUs and devices competing for memory cycles

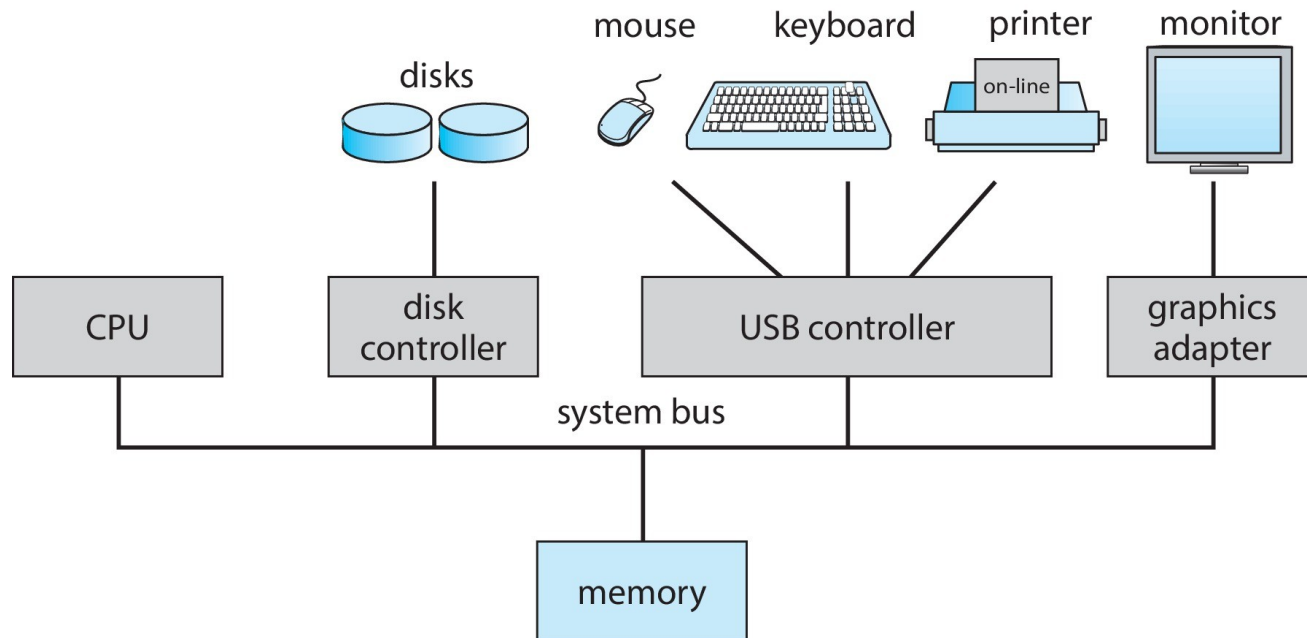





Device Controller


- I/O devices and the CPU can execute concurrently
- Each device controller is in charge of a particular device type
- Each device controller has a **local buffer**
- Each device controller type has an operating system **device driver** to manage it
- CPU moves data from/to main memory to/from local buffers
- I/O is from the device to local buffer of controller
- Device controller informs CPU that it has finished its operation by causing an **interrupt**

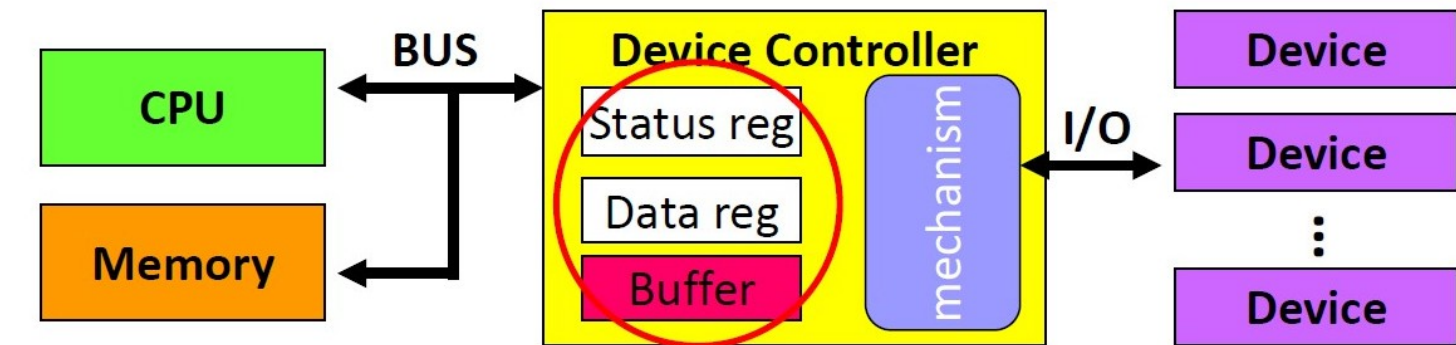

Device Controller

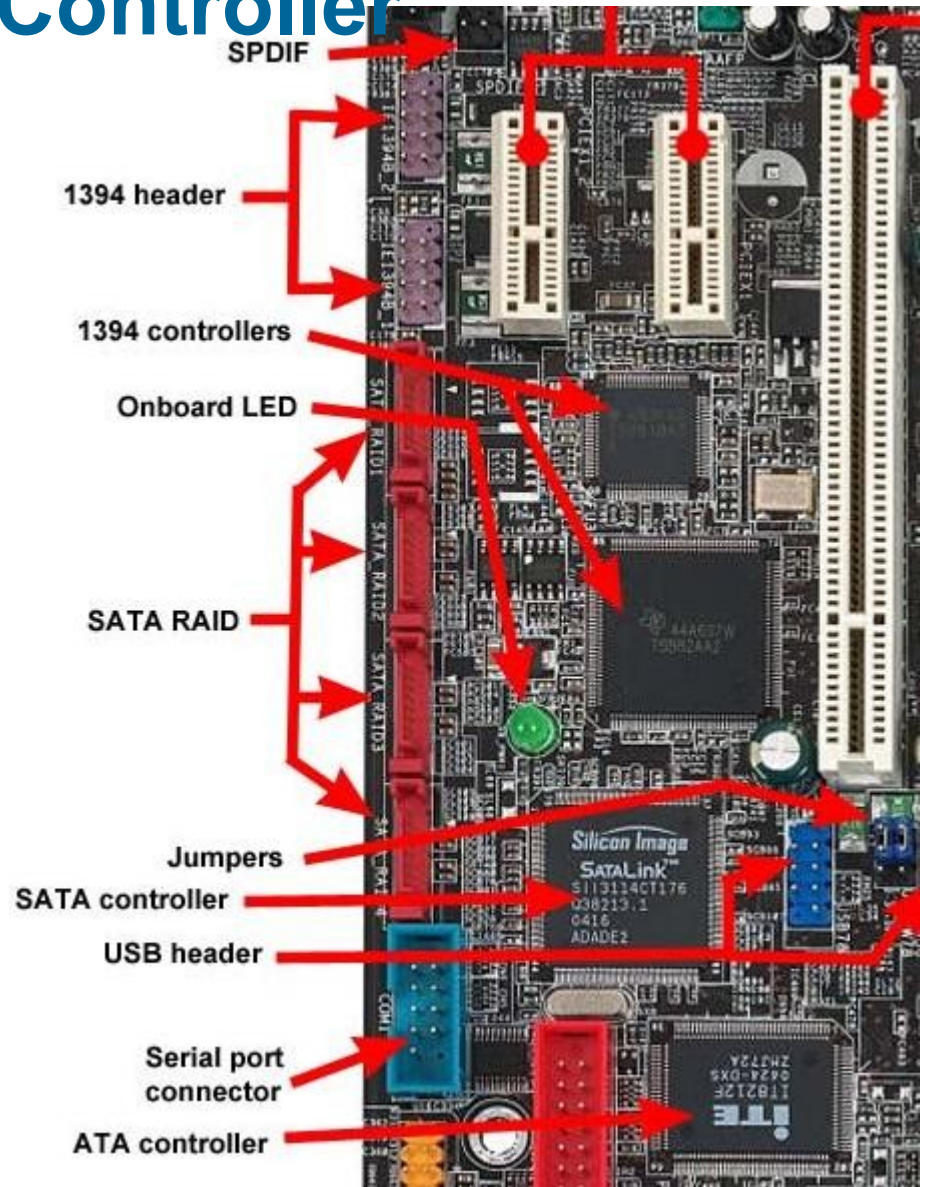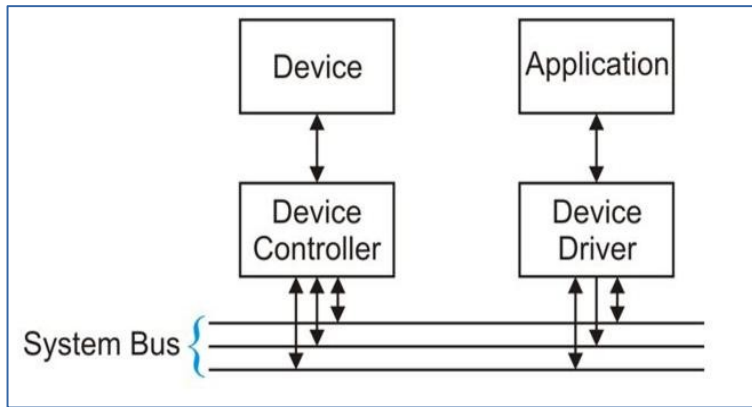

Device Controller

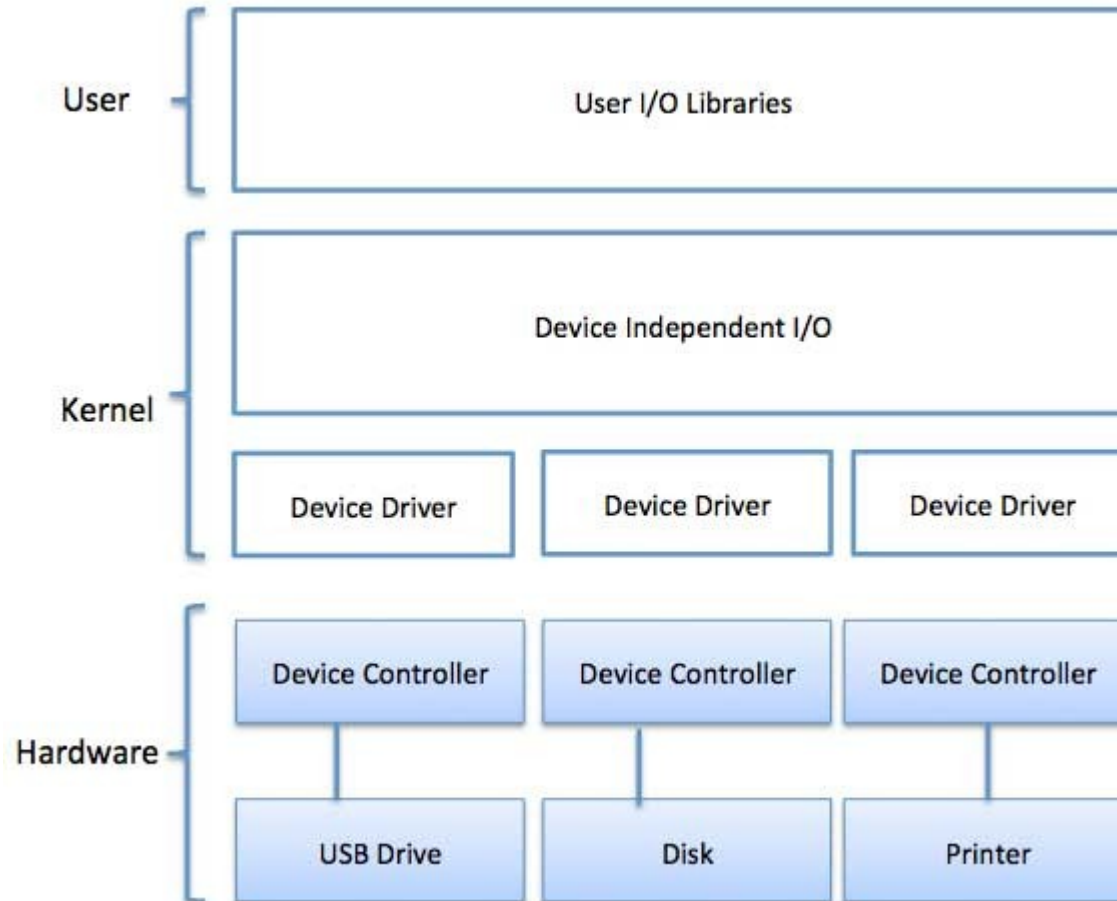





Common Functions of Interrupts

- Interrupt transfers control to the interrupt **service routine** generally, through the **interrupt vector**, which contains the addresses of all the service routines
- Interrupt architecture must save the address of the interrupted instruction
- A **trap** or **exception** is a software-generated interrupt caused either by an error or a user request
- **An operating system is interrupt driven**




Interrupt types

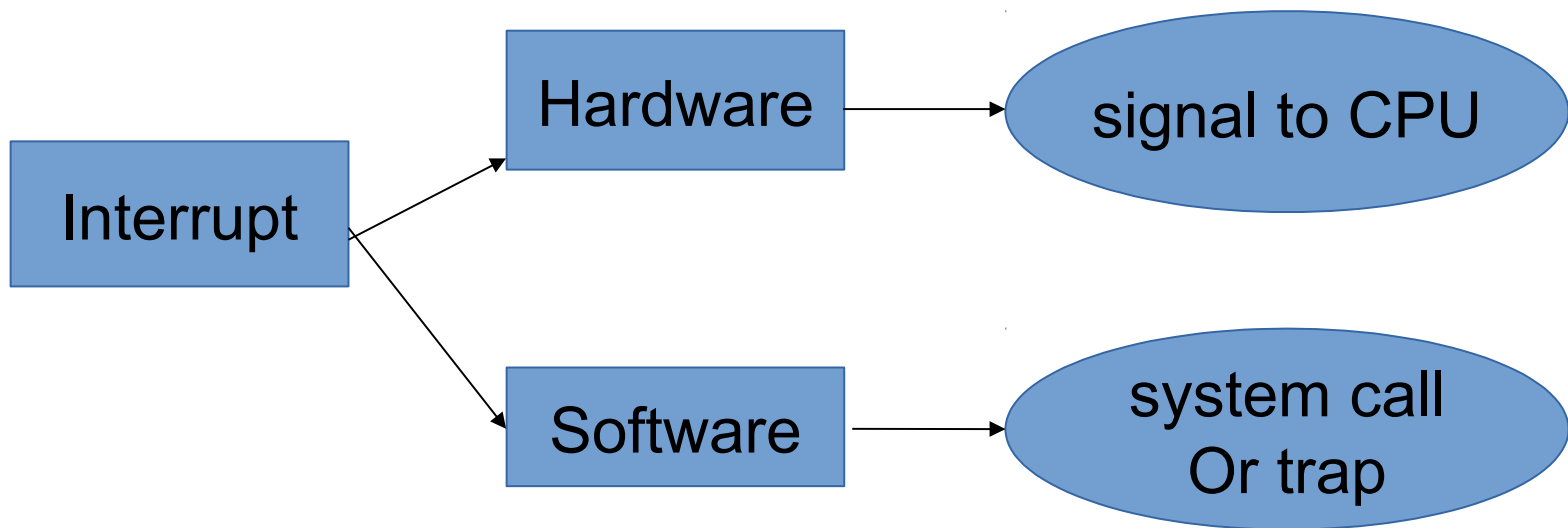





Interrupt Timeline

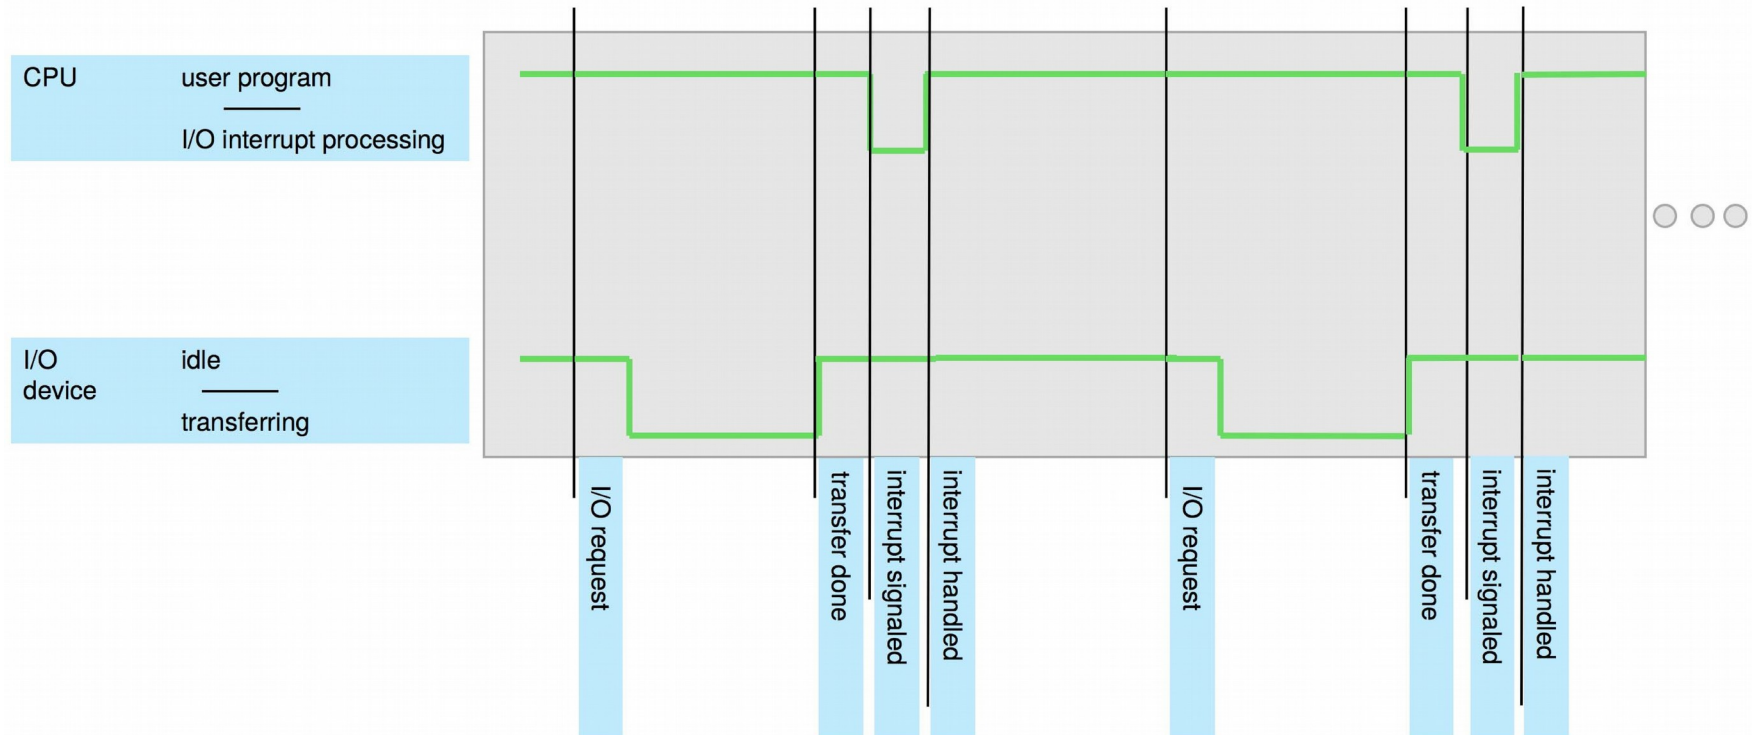



Interrupt Handling

- The operating system preserves the state of the CPU by storing the registers and the program counter
- Determines which type of interrupt has occurred:
- Separate segments of code determine what action should be taken for each type of interrupt

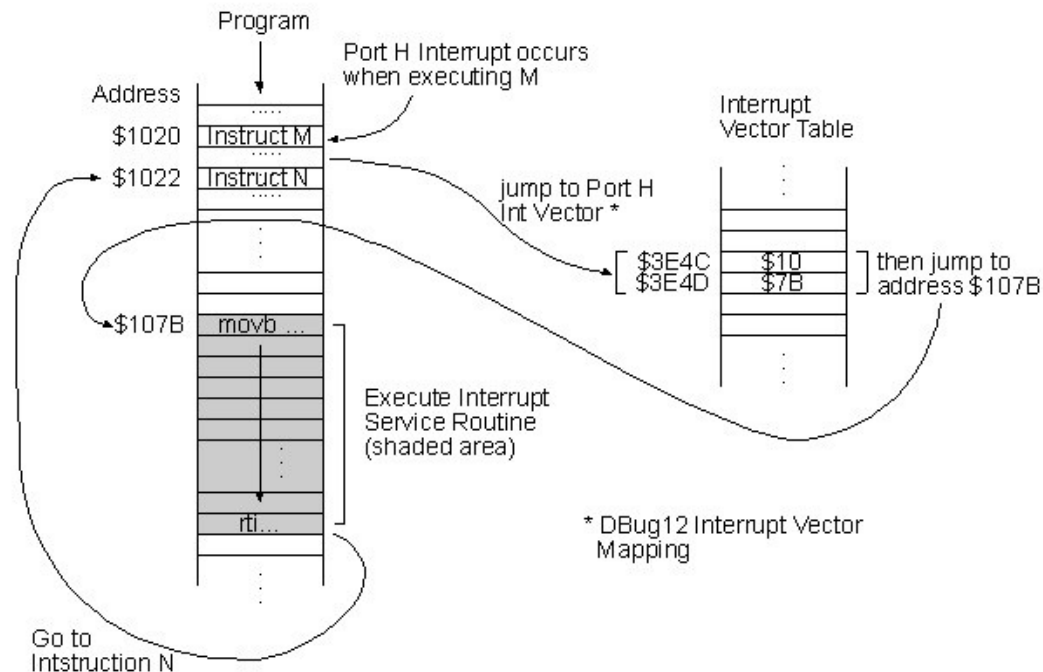



Two I/O handling methods

- After I/O starts, control returns to user program only upon I/O completion
 - Wait instruction idles the CPU until the next interrupt
 - Wait loop (contention for memory access)
 - At most one I/O request is outstanding at a time, no simultaneous I/O processing
- After I/O starts, control returns to user program without waiting for I/O completion
 - **System call** – request to the OS to allow user to wait for I/O completion
 - **Device-status table** contains entry for each I/O device indicating its type, address, and state
 - OS indexes into I/O device table to determine device status and to modify table entry to include interrupt






Two I/O Methods

Direct Memory Access (DMA)

Synchronous



Asynchronous

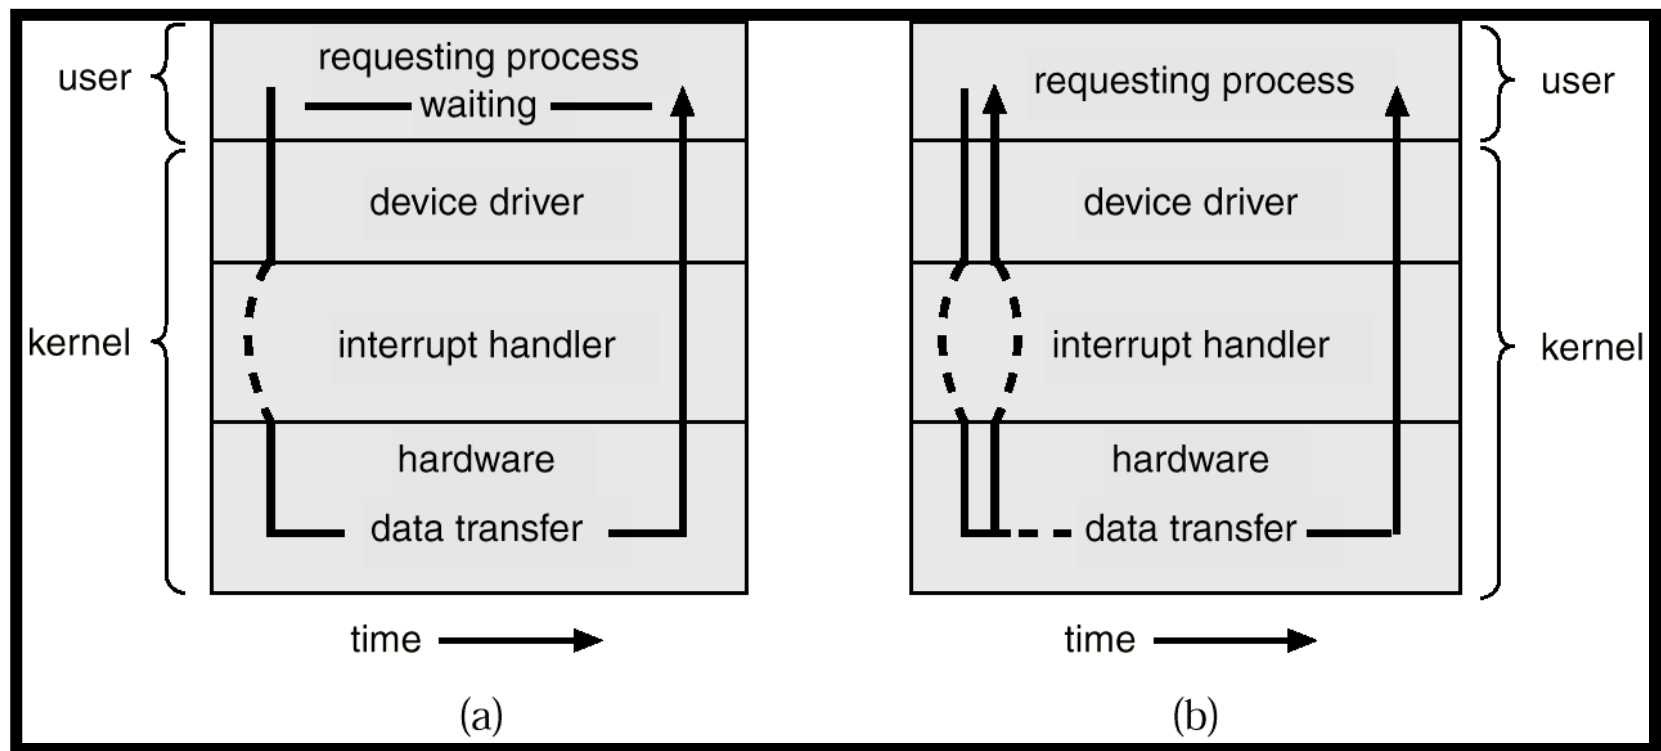



Direct Memory Access Structure

- Used for high-speed I/O devices able to transmit information at close to memory speeds
- Device controller transfers blocks of data from buffer storage directly to main memory without CPU intervention
- Only one interrupt is generated per block, rather than the one interrupt per byte

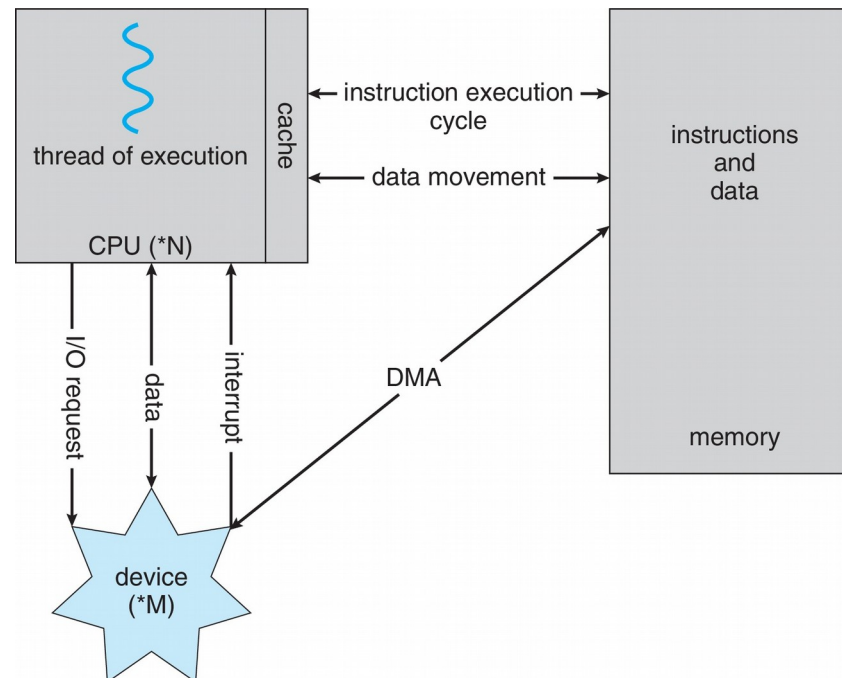




Kernel

- “The one program running at all times on the computer” is the **kernel**, part of the operating system
- Everything else is either
 - A **system program** (ships with the operating system, but not part of the kernel) , or
 - An **application program**, all programs not associated with the operating system
- Today’s OSES for general purpose and mobile computing also include **middleware** – a set of software frameworks that provide additional services to application developers such as databases, multimedia, graphics



Kernel

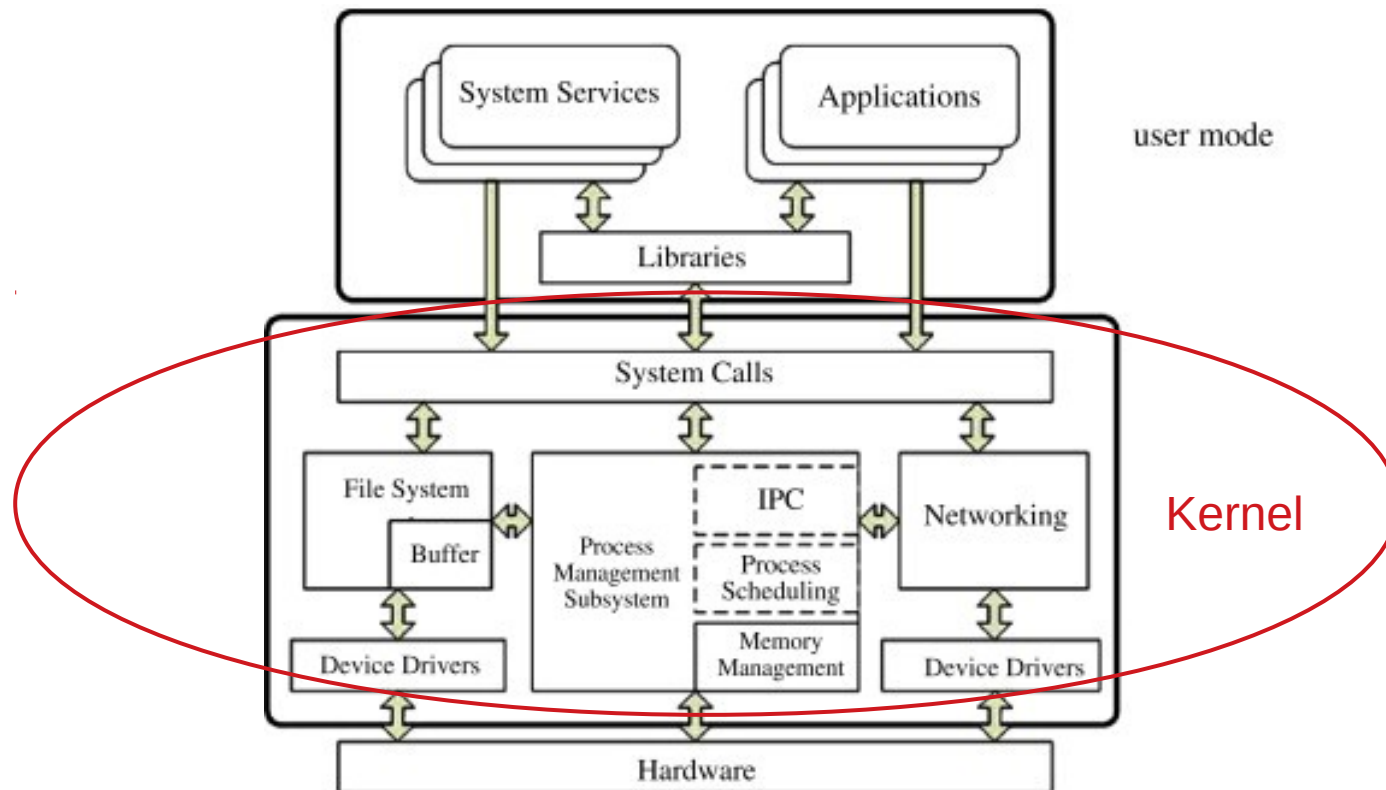



System programs (Services)

- System programs provide a convenient environment for program development and execution. They can be divided into:
 - File manipulation
 - Status information sometimes stored in a file
 - Programming language support
 - Program loading and execution
 - Communications
 - Background services
 - Application programs
- Most users' view of the operating system is defined by system programs, not the actual system calls





System programs (Cont.)

- Provide a convenient environment for program development and execution
 - Some of them are simply user interfaces to system calls; others are considerably more complex
- **File management** - Create, delete, copy, rename, print, dump, list, and generally manipulate files and directories
- **Status information**
 - Some ask the system for info - date, time, amount of available memory, disk space, number of users
 - Others provide detailed performance, logging, and debugging information
 - Typically, these programs format and print the output to the terminal or other output devices
 - Some systems implement a **registry** - used to store and retrieve configuration information

Registry or /etc/..





System programs (Cont.)

■ Background Services

- Launch at boot time
 - ▶ Some for system startup, then terminate
 - ▶ Some from system boot to shutdown
- Provide facilities like disk checking, process scheduling, error logging, printing
- Run in user context not kernel context
- Known as **services**, **subsystems**, **daemons**


■ Application programs


- Don't pertain to system
- Run by users
- Not typically considered part of OS
- Launched by command line, mouse click, finger poke





Operating System Services

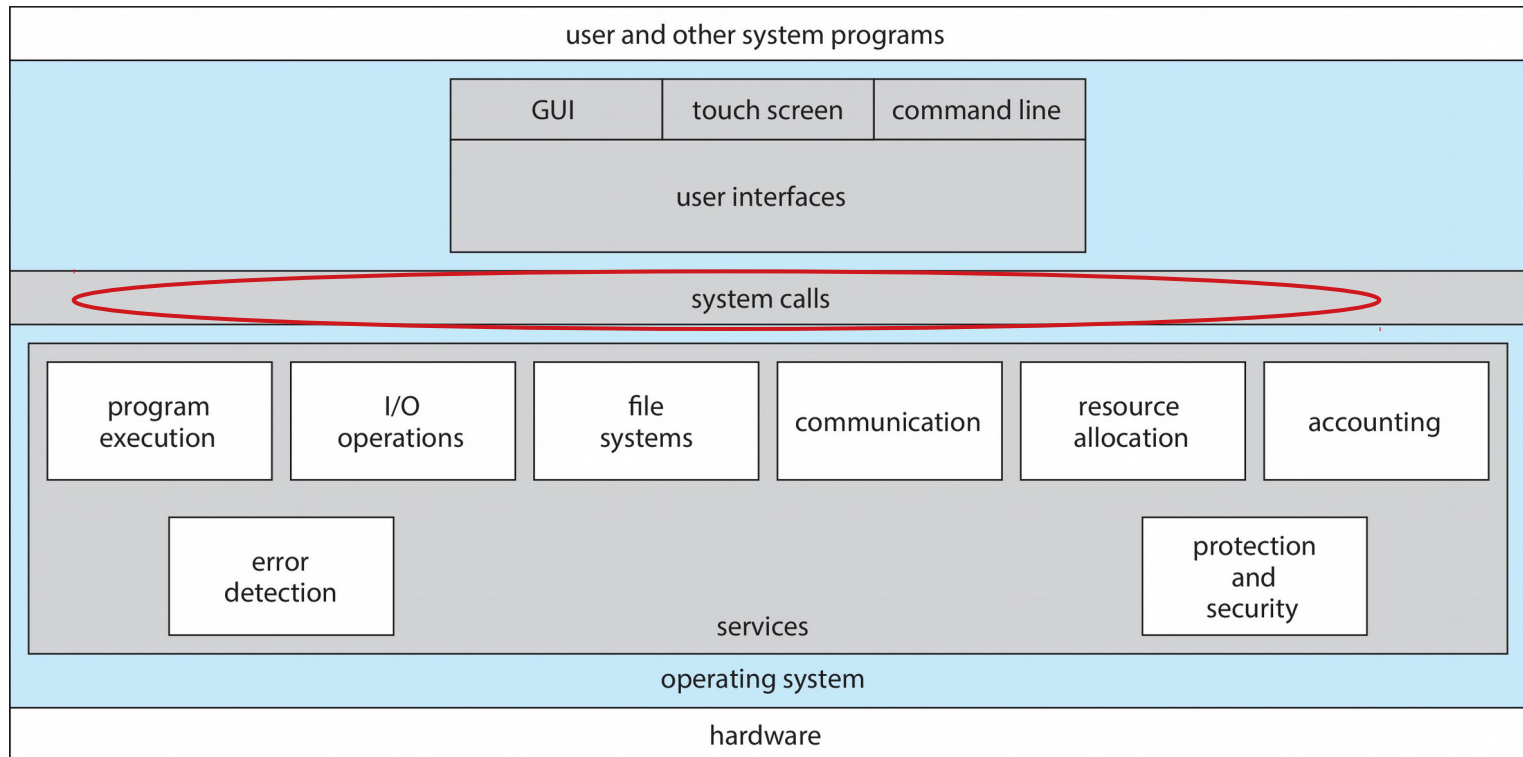





System Calls

- **Programming interface to the services provided by the OS**
- Typically written in a high-level language (C or C++)
- Mostly accessed by programs via a high-level **Application Programming Interface (API)** rather than direct system call use
- Three most common APIs
 - Win32 API for Windows
 - POSIX API for POSIX-based systems (including virtually all versions of UNIX, Linux, and Mac OS X),
 - Java API for the Java virtual machine (JVM)

System call is the method used by a process to request action by the OS. The system call service routine is a part of the OS







Dual-mode Operation

- **Dual-mode** operation allows OS to protect itself and other system components
 - **User mode** and **kernel mode**
- **Mode bit** provided by hardware
 - Provides ability to distinguish when system is running user code or kernel code.
 - When a user is running \approx mode bit is “user”
 - When kernel code is executing \approx mode bit is “kernel”
- How do we guarantee that user does not explicitly set the mode bit to “kernel”?
 - System call changes mode to kernel, return from call resets it to user
- Some instructions designated as **privileged**, only executable in kernel mode






Transition from User to Kernel Mode

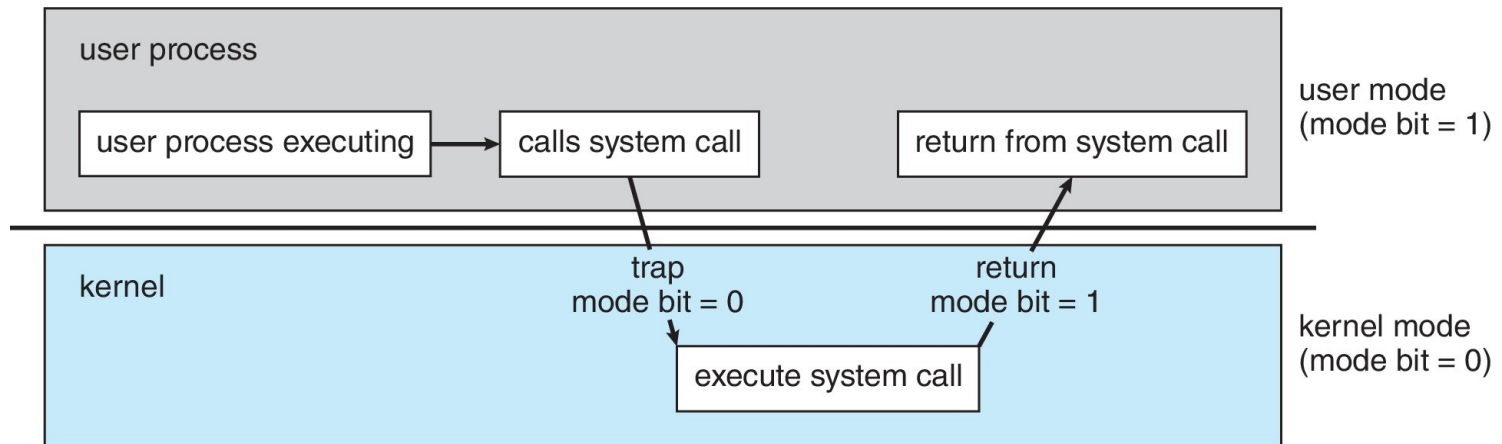



Example of System Calls

- System call sequence to copy the contents of one file to another file

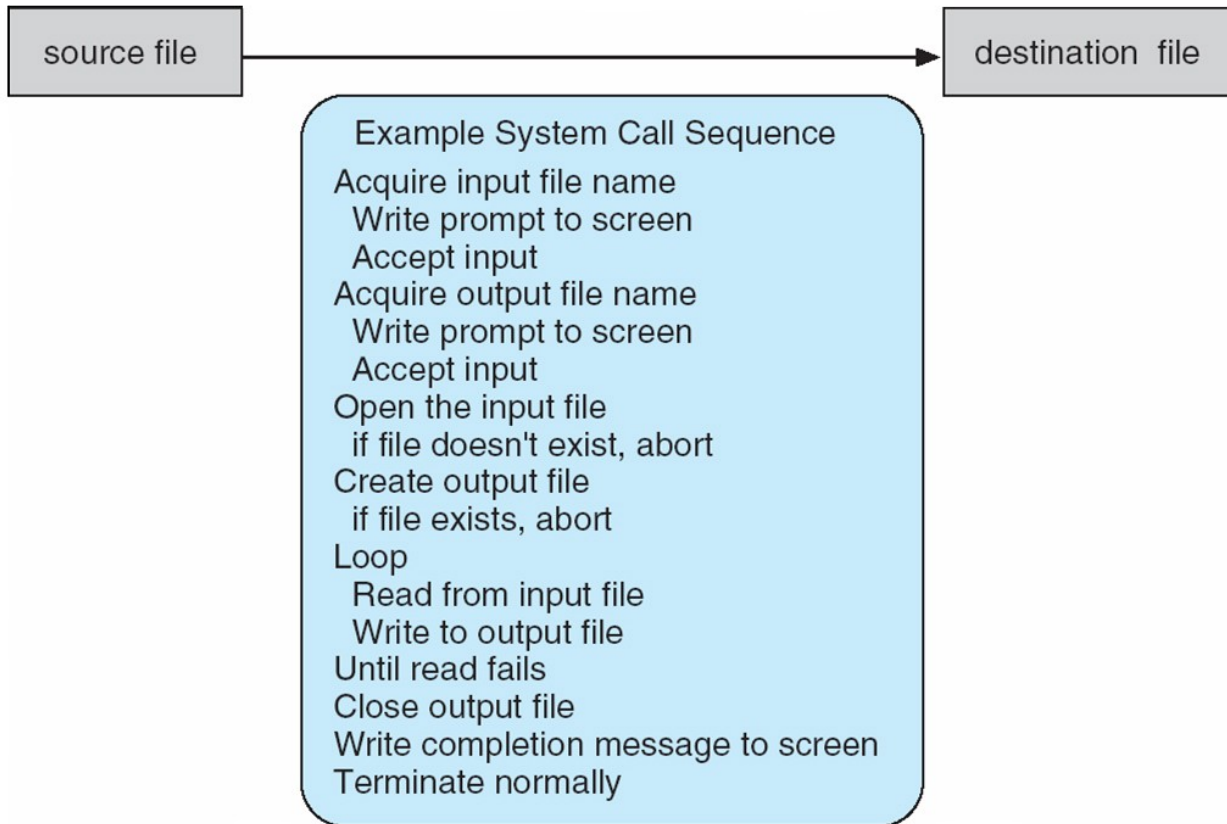



Example of Standard API

EXAMPLE OF STANDARD API

As an example of a standard API, consider the `read()` function that is available in UNIX and Linux systems. The API for this function is obtained from the man page by invoking the command

```
man read
```


on the command line. A description of this API appears below:

<pre>#include <unistd.h></pre>		
<pre>ssize_t</pre>	<pre>read(int fd, void *buf, size_t count)</pre>	
return	function	parameters
value	name	

A program that uses the `read()` function must include the `unistd.h` header file, as this file defines the `ssize_t` and `size_t` data types (among other things). The parameters passed to `read()` are as follows:

- `int fd`—the file descriptor to be read
- `void *buf`—a buffer into which the data will be read
- `size_t count`—the maximum number of bytes to be read into the buffer

On a successful read, the number of bytes read is returned. A return value of 0 indicates end of file. If an error occurs, `read()` returns `-1`.






System Call Implementation


- Typically, a number is associated with each system call
 - **System-call interface** maintains a table indexed according to these numbers
- The system call interface invokes the intended system call in OS kernel and returns status of the system call and any return values
- The caller need know nothing about how the system call is implemented
 - Just needs to obey API and understand what OS will do as a result call
 - Most details of OS interface hidden from programmer by API
 - ▶ **Managed by run-time support library (set of functions built into libraries included with compiler)**






API – System Call – OS Relationship

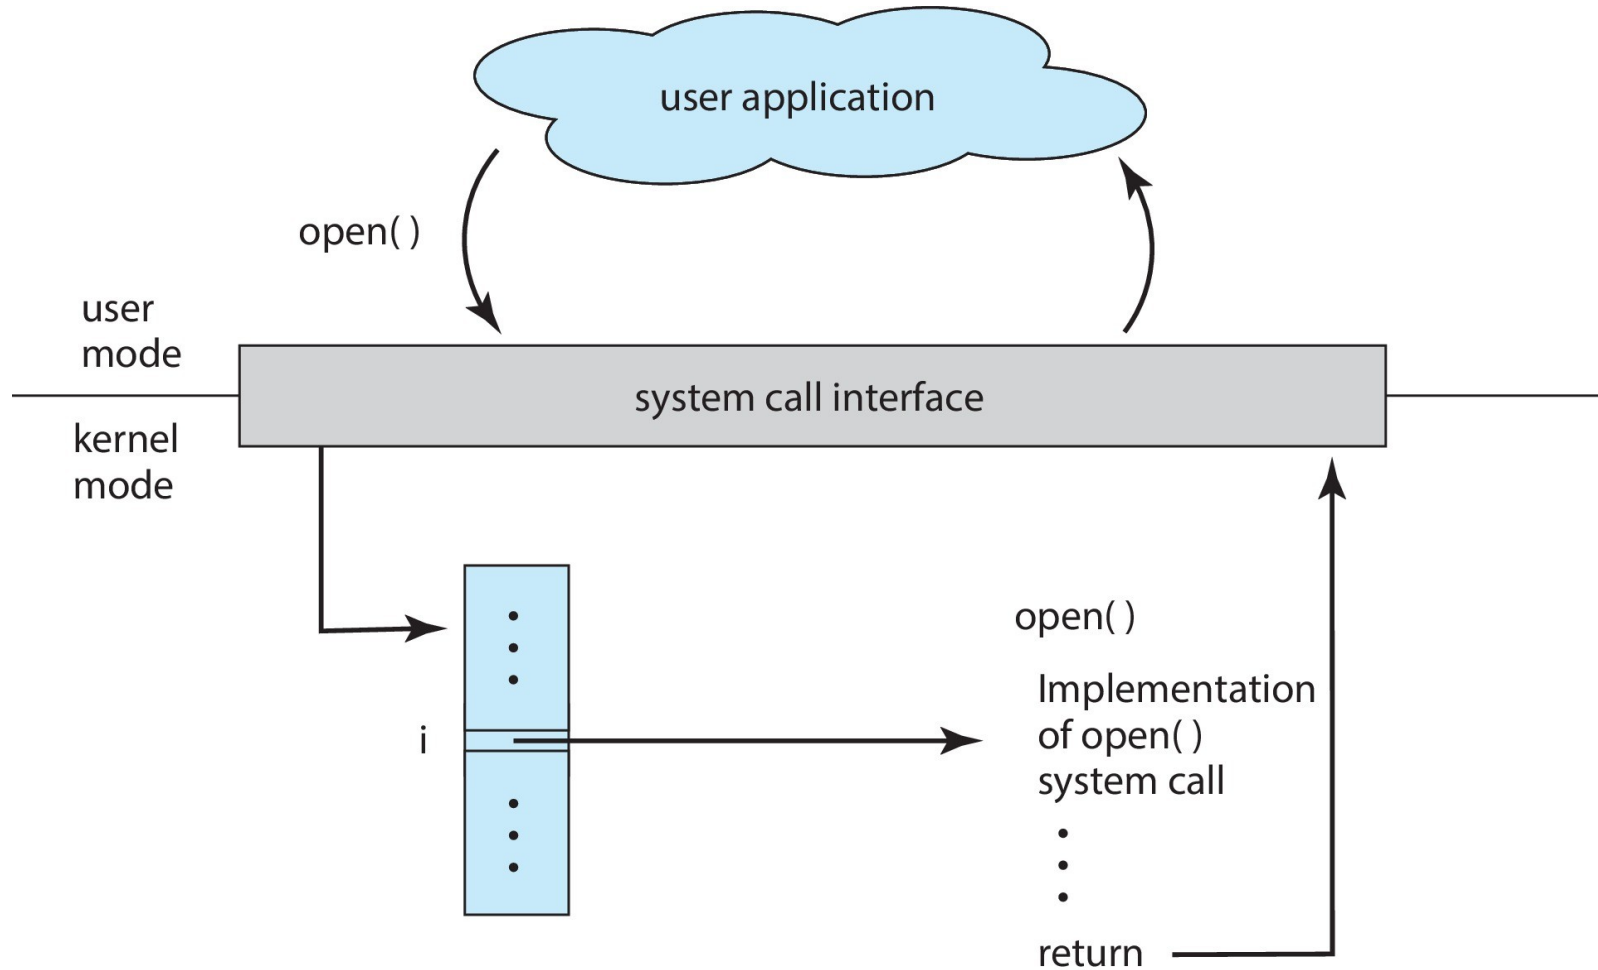



Types of System Calls

- Process control
 - Create, terminate, end, abort, load, execute, ...
 - Debugger for determining bugs, single step execution
 - Locks for managing access to shared data between processes
- File management
 - create file, delete file, open, close, read, write, ...
- Device management
 - request, release, read, write, attach or detach devices
- Information maintenance
 - get time or date, set time or date, get system data, ...
- Communications
 - create, delete communication connection, ...
- Protection
 - Control access to resources, Get and set permissions, Allow and deny user access, ...






Examples of Windows and Unix System Calls

EXAMPLES OF WINDOWS AND UNIX SYSTEM CALLS

The following illustrates various equivalent system calls for Windows and UNIX operating systems.



	Windows	Unix
Process control	CreateProcess() ExitProcess() WaitForSingleObject()	fork() exit() wait()
File management	CreateFile() ReadFile() WriteFile() CloseHandle()	open() read() write() close()
Device management	SetConsoleMode() ReadConsole() WriteConsole()	ioctl() read() write()
Information maintenance	GetCurrentProcessID() SetTimer() Sleep()	getpid() alarm() sleep()
Communications	CreatePipe() CreateFileMapping() MapViewOfFile()	pipe() shm_open() mmap()
Protection	SetFileSecurity() InitializeSecurityDescriptor() SetSecurityDescriptorGroup()	chmod() umask() chown()







Standard C Library Example

- C program invoking `printf()` library call, which calls `write()` system call

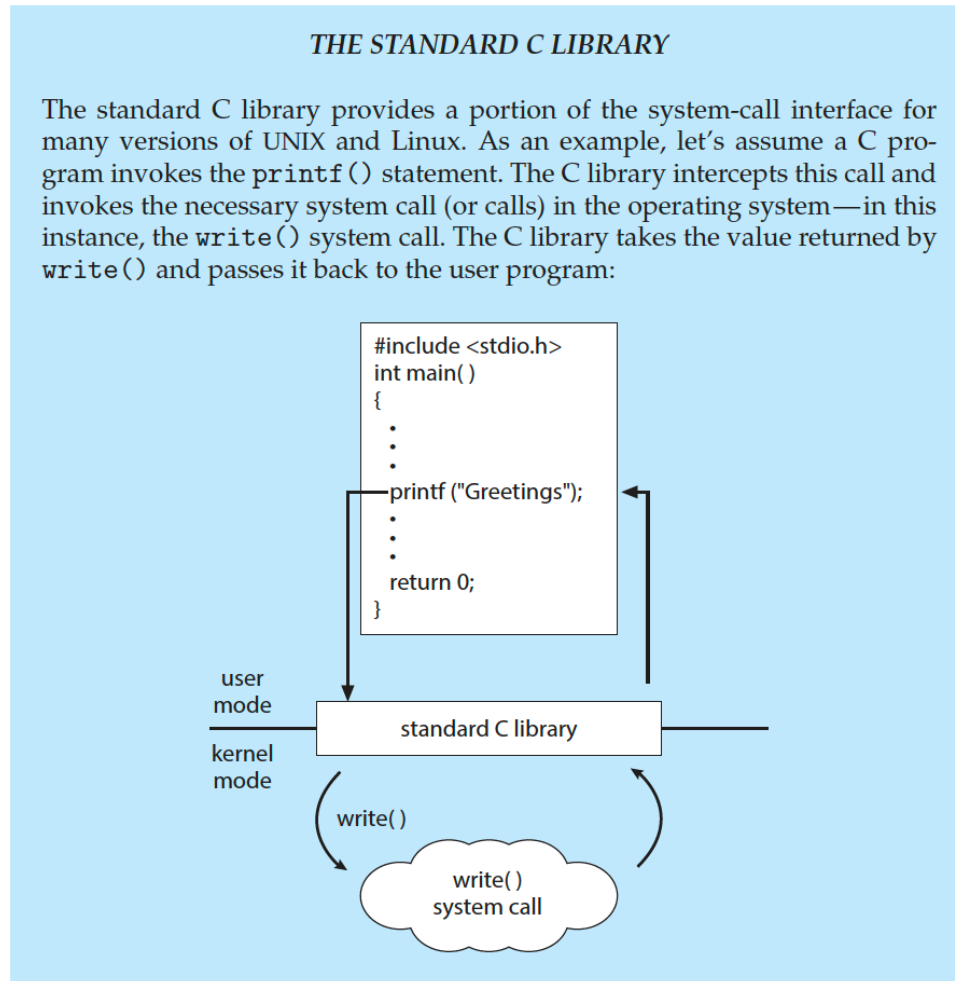




Operating System Services

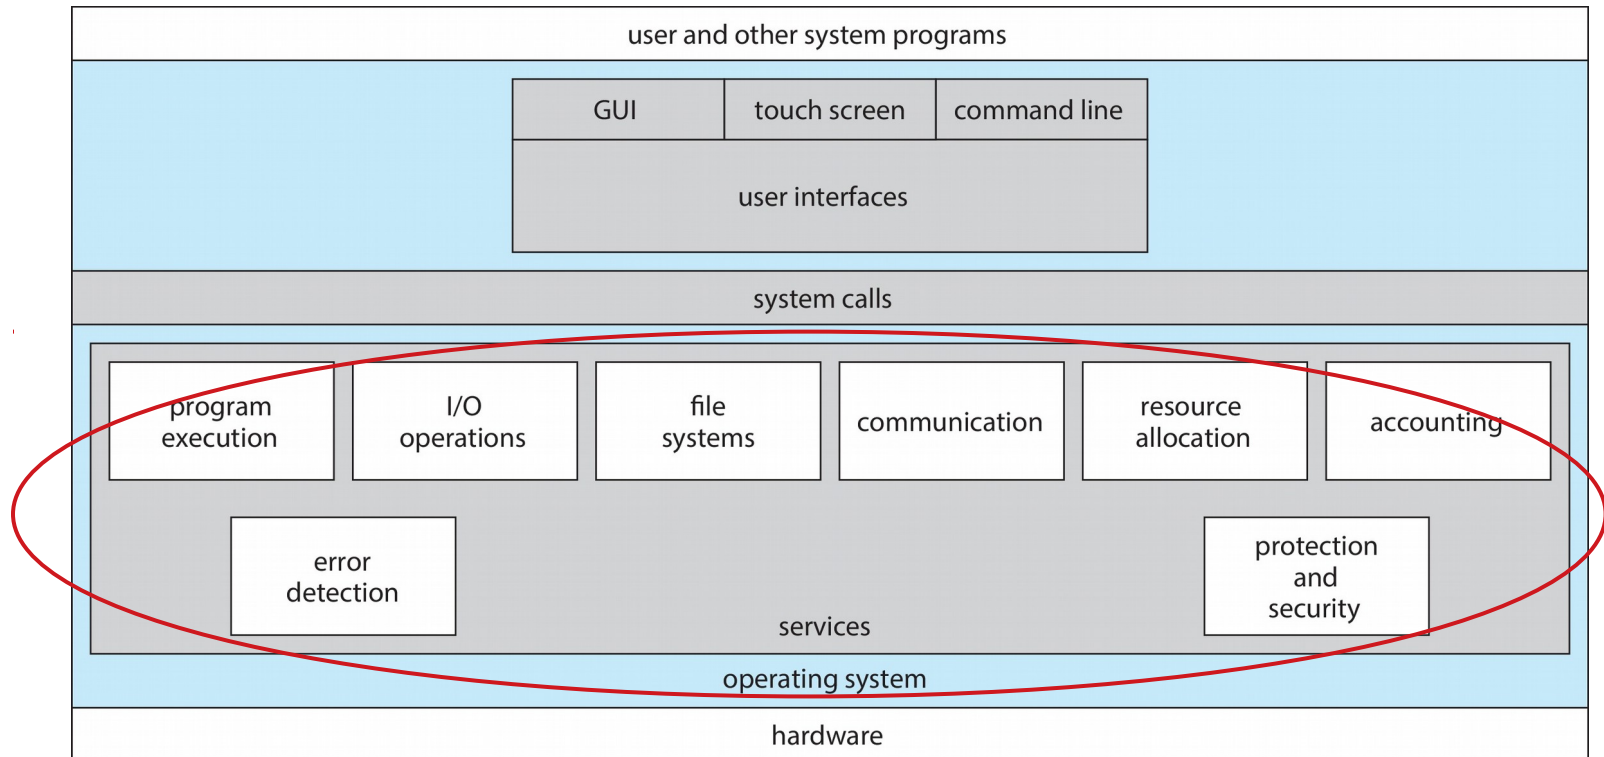

Operating System Services

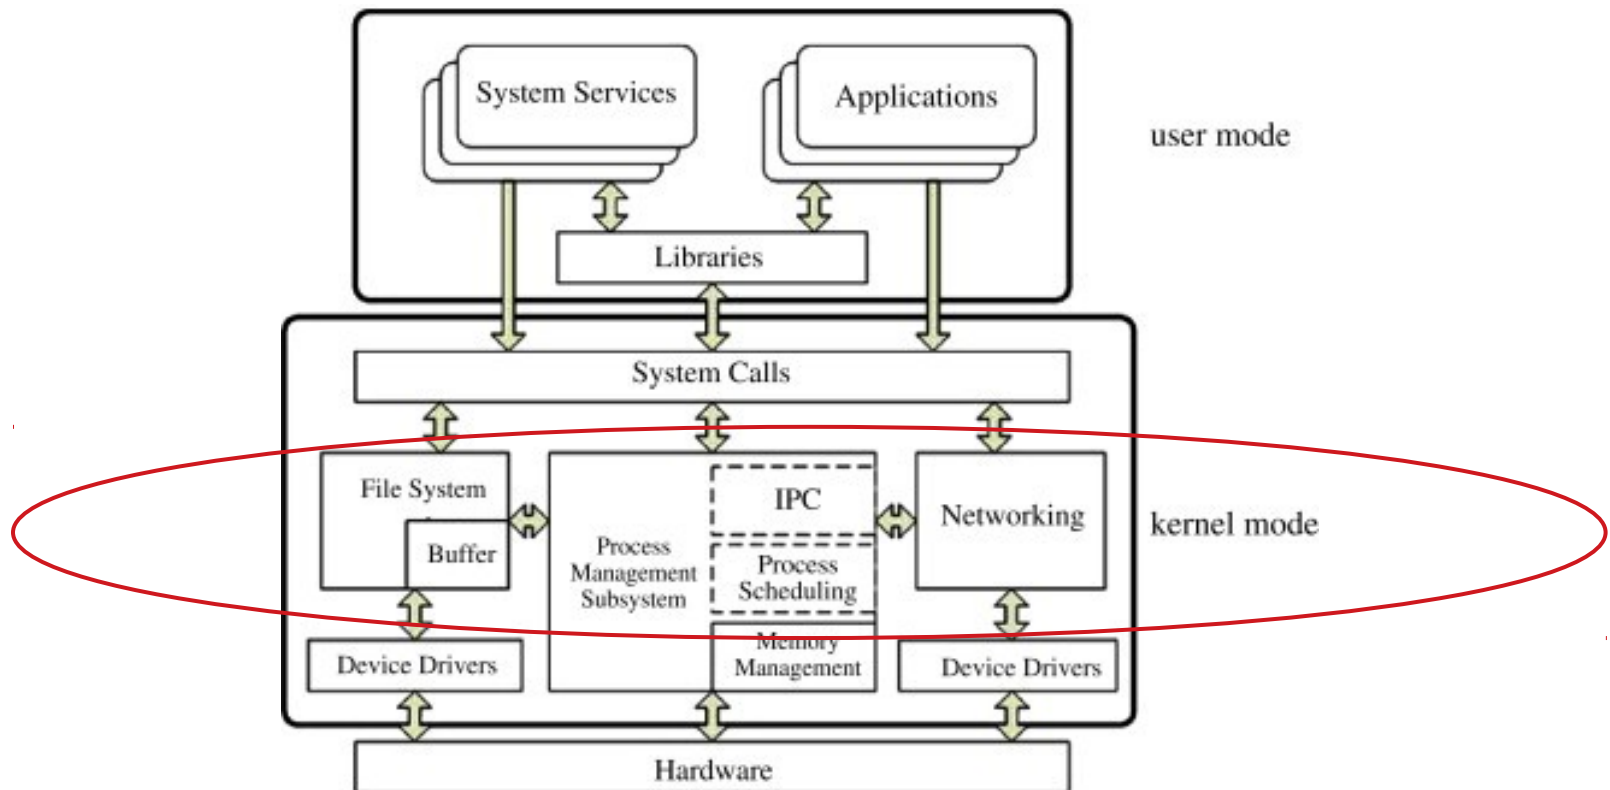



Operating System Services

- Operating systems provide an environment for execution of programs and services to programs and users
- One set of operating-system services provides functions that are helpful to the user:
 - **User interface** - Almost all operating systems have a user interface (**UI**).
 - ▶ Varies between **Command-Line (CLI)**, **Graphics User Interface (GUI)**, **touch-screen**, **Batch**
 - **Program execution** - The system must be able to load a program into memory and to run that program, end execution, either normally or abnormally (indicating error)
 - **I/O operations** - A running program may require I/O, which may involve a file or an I/O device
 - **File-system manipulation** - The file system is of particular interest. Programs need to read and write files and directories, create and delete them, search them, list file information, permission management.





Operating System Services (Cont.)

- One set of operating-system services provides functions that are helpful to the user (Cont.):
 - **Communications** – Processes may exchange information, on the same computer or between computers over a network
 - ▶ Communications may be via shared memory or through message passing (packets moved by the OS)
 - **Error detection** – OS needs to be constantly aware of possible errors
 - ▶ May occur in the CPU and memory hardware, in I/O devices, in user program
 - ▶ For each type of error, OS should take the appropriate action to ensure correct and consistent computing
 - ▶ Debugging facilities can greatly enhance the user's and programmer's abilities to efficiently use the system






Operating System Services (Cont.)

- Another set of OS functions exists for ensuring the efficient operation of the system itself via resource sharing
 - **Resource allocation** - When multiple users or multiple jobs running concurrently, resources must be allocated to each of them
 - ▶ Many types of resources - CPU cycles, main memory, file storage, I/O devices.
 - **Logging** - To keep track of which users use how much and what kinds of computer resources
 - **Protection and security** - The owners of information stored in a multiuser or networked computer system may want to control use of that information, concurrent processes should not interfere with each other
 - ▶ **Protection** involves ensuring that all access to system resources is controlled
 - ▶ **Security** of the system from outsiders requires user authentication, extends to defending external I/O devices from invalid access attempts





Command Line interpreter

- CLI or **command interpreter** allows direct command entry
- **Function:** Primarily fetches a command from user and executes it
- **Organization:** Sometimes implemented in kernel, sometimes by systems program
- **Multiple flavors** implemented – **shells**
 - Bourne shell, bash, third-party shells
- **Implementation approaches:**
 - commands are built-in
 - Commands are just names of programs
 - Benefit: flexible for adding new features without shell modification

```
echo $SHELL
```






Bourne Shell Command Interpreter

```
1. root@r6181-d5-us01:~ (ssh)
× root@r6181-d5-u... ❶ × ssh ❷ × root@r6181-d5-us01... ❸

Last login: Thu Jul 14 08:47:01 on ttys002
iMacPro:~ pbg$ ssh root@r6181-d5-us01
root@r6181-d5-us01's password:
Last login: Thu Jul 14 06:01:11 2016 from 172.16.16.162
[root@r6181-d5-us01 ~]# uptime
 06:57:48 up 16 days, 10:52,  3 users,  load average: 129.52, 80.33, 56.55
[root@r6181-d5-us01 ~]# df -kh
Filesystem                Size      Used Avail Use% Mounted on
/dev/mapper/vg_ks-lv_root    50G       19G   28G  41% /
tmpfs                      127G      520K   127G   1% /dev/shm
/dev/sda1                   477M       71M   381M  16% /boot
/dev/dssd0000               1.0T     480G   545G  47% /dssd_xfs
tcp://192.168.150.1:3334/orangefs
                          12T    5.7T   6.4T  47% /mnt/orangefs
/dev/gpfs-test              23T     1.1T    22T   5% /mnt/gpfs
[root@r6181-d5-us01 ~]#
[root@r6181-d5-us01 ~]# ps aux | sort -nrk 3,3 | head -n 5
root      97653 11.2  6.6 42665344 17520636 ?    S<Ll  Jul13 166:23 /usr/lpp/mmfs/bin/mmfsd
root      69849  6.6  0.0      0      0 ?        S    Jul12 181:54 [vpthread-1-1]
root      69850  6.4  0.0      0      0 ?        S    Jul12 177:42 [vpthread-1-2]
root       3829  3.0  0.0      0      0 ?        S    Jun27 730:04 [rp_thread 7:0]
root       3826  3.0  0.0      0      0 ?        S    Jun27 728:08 [rp_thread 6:0]
[root@r6181-d5-us01 ~]# ls -l /usr/lpp/mmfs/bin/mmfsd
-r-x----- 1 root root 20667161 Jun  3  2015 /usr/lpp/mmfs/bin/mmfsd
[root@r6181-d5-us01 ~]#
```





User Operating System Interface - GUI

- User-friendly **desktop** metaphor interface
 - Usually mouse, keyboard, and monitor
 - **Icons** represent files, programs, actions, etc
 - Various mouse buttons over objects in the interface cause various actions (provide information, options, execute function, open directory (known as a **folder**))
 - Invented at Xerox PARC
- Many systems now include both CLI and GUI interfaces
 - Microsoft Windows is GUI with CLI “command” shell
 - Apple Mac OS X is “**Aqua**” GUI interface with UNIX kernel underneath and shells available
 - Unix and Linux have CLI with optional GUI interfaces (**CDE**, **KDE**, **GNOME**)





Touchscreen Interfaces

- Touchscreen devices require new interfaces
 - Mouse not possible or not desired
 - Actions and selection based on gestures
 - Virtual keyboard for text entry
- Voice commands

