

Density-Based Dynamic Ensemble Learning Algorithm via Gaussian Mixture Model Clustering for Enhanced Predictive Analytics.

Abstract—Dynamic ensemble learning is a powerful technique for enhancing predictive accuracy and robustness by combining multiple classifiers. However, traditional methods face challenges in providing personalized predictions and balancing classifier diversity with ensemble generalization. This paper introduces a novel Density-Based Dynamic Ensemble Learning Algorithm using Gaussian Mixture Models to address these issues. The proposed algorithm leverages Gaussian Mixture Models to capture complex data structures, creating subsets that reflect specific patterns, which are then used to train distinct base classifiers, ensuring diversity within the ensemble. The density-based dynamic selection strategy intelligently selects classifiers for each test instance based on its proximity to these clustered subsets, enhancing accuracy and adaptability. **Principal Component Analysis is applied as a preprocessing step, with 157 principal components retaining 95% of the variance to keep clustering tractable in the high-dimensional feature space.**[T2: #7 added PCA statement to abstract (R2#1)] The algorithm is evaluated against single ensemble methods as well as other dynamic ensemble methods to assess its performance and effectiveness, using logistic regression, support vector machine, k-nearest neighbors, and decision tree as base learners. Results demonstrate that the proposed method, particularly when combined with logistic regression and support vector machine, outperforms other methods, underscoring the effectiveness of the density-based selection strategy. Further analysis shows that increasing the number of clusters and sampling ratio improves the F-score, though with diminishing returns beyond a certain point.

Index Terms—Dynamic Ensemble Learning, Gaussian Mixture Models, Density-Based Ensemble Learning, Predictive Analytics, Model Personalization, Decision-Making Efficiency.

I. Introduction

THE advent of dynamic ensemble classifiers heralds a new epoch in machine learning, addressing critical needs across sectors such as medical diagnostics [1], cybersecurity [2], and more. Recent advancements have shown that these classifiers significantly enhance the accuracy and robustness of human activity recognition (HAR) systems, as well as medical diagnostics, particularly in fields like cardiovascular disease detection using novel ensemble classifiers [3]. For instance, evolutionary dual-ensemble class imbalance learning methods have demonstrated superior performance in recognizing diverse human actions by optimizing the combination of base classifiers [4]. Ensemble learning, by synergizing multiple classifiers, offers unparalleled robustness and accuracy, far surpassing the capabilities of individual classifiers [5]–[9]. This approach, known as Multiple Classifier Systems (MCS), leverages diverse models for enhanced prediction reliability. Specifically, Dynamic Ensemble Selection (DES)

refines this concept by customizing classifier combinations for each test instance, thus ensuring adaptability and precision in predictive analytics [10], [11]. The sophistication of ensemble methods is evident in their application to complex tasks, where they have consistently outperformed single-model approaches [12], [13]. Despite the advancements, ensemble learning faces significant challenges. Key among these is the need for personalized predictions for scenarios such as fluctuating market trends or evolving cybersecurity threats [14]. Traditional ensemble methods struggle with the nuanced balance between classifier diversity and ensemble generalization, a barrier to harnessing their full potential [15]. Furthermore, the dilemma of maintaining robustness without increasing ensemble complexity presents a persistent challenge in dynamic selection methods. These issues underscore the necessity for innovative solutions that can adapt to variable data conditions while maintaining accuracy and efficiency [14].

Our proposed model, the Density-Based Dynamic Ensemble Learning algorithm via Gaussian Mixture Model clustering (DDEL-GMM), addresses these challenges with a groundbreaking approach in dynamic ensemble learning. By integrating Gaussian Mixture Models (GMM) for sophisticated data clustering and a density-based dynamic selection strategy, DDEL-GMM enhances personalization and accuracy in prediction tasks. Specifically, it is designed to adapt to complex data structures and enhance predictive personalization, which are common hurdles in traditional ensemble methods. By advancing beyond these limitations, DDEL-GMM sets a new standard for adaptability, precision, and decision-making efficiency in the field. This model does not merely improve existing methods; it represents a paradigm shift in how ensemble learning can be approached, promising significant advancements in various complex and dynamic scenarios.

This study leverages a complex dataset with high-dimensional characteristics, generated from wearable sensor technology, to rigorously evaluate the performance of the proposed dynamic ensemble learning model. The dataset originates from recordings of human activity, captured using accelerometers and gyroscopes integrated into smartphones. These sensors meticulously track the subtle movements and changes in orientation as subjects engage in various physical activities, providing a rich source of information for activity recognition tasks.

Each recording in the dataset corresponds to a distinct activity performed by a subject and encapsulates a time series of sensor readings. At each time step within a record-

ing, the accelerometers and gyroscopes measure linear acceleration and angular velocity, respectively, across three orthogonal axes (X, Y, and Z). This intricate sampling process generates a high-dimensional feature space, where each feature represents the magnitude of a specific sensor measurement (acceleration or angular velocity) along a particular axis at a given time instance. To address the computational challenges of this high-dimensional space and to ensure model stability, Principal Component Analysis (PCA) was applied as a preprocessing step. The analysis showed that retaining 157 principal components was sufficient to preserve 95% of the variance, enabling efficient and effective clustering and classification within the DDEL-GMM framework.

The raw sensor data, while rich in information, is inherently prone to noise and uncertainty. This stems from a confluence of factors inherent to the nature of wearable sensing:

- **Sensor Imperfections:** Like all physical instruments, accelerometers and gyroscopes exhibit limitations in their sensitivity and accuracy. Minute variations in sensor readings can arise from internal electronic noise, temperature fluctuations, and manufacturing inconsistencies.
- **Environmental Interference:** The surrounding environment can introduce spurious signals that contaminate the sensor readings. Electromagnetic interference from nearby electronic devices, vibrations from the floor or other surfaces, and even changes in air pressure can all contribute to noise in the data.
- **Placement and Movement Variability:** The placement of the smartphone on the subject's body (e.g., pocket, belt, hand) and variations in the manner of movement can significantly influence the sensor readings. Slight shifts in the device's position or changes in the execution of an activity introduce inconsistencies into the collected data.

These inherent challenges, particularly the variability arising from sensor placement and individual movement styles, underscore the limitations of a rigid, single model classification model. This is where the proposed dynamic ensemble model demonstrates its strength. By employing Gaussian Mixture Models (GMMs), the model effectively captures the underlying data distribution, accounting for its multi-modality and effectively distinguishing meaningful patterns from random fluctuations. Moreover, the model's density-based selection strategy ensures that for each test instance, the most appropriate base learners, trained on relevant data partitions, are selected for prediction. This dynamic and context-aware approach enhances the model's robustness and accuracy, enabling it to achieve high performance even when faced with the complexities of real-world sensor data.

This paper is organized as follows: Section II provides a comprehensive review of existing literature in ensemble learning, dynamic ensemble selection, and related clustering approaches, positioning our work within this context,

highlighting the challenges addressed, and underscoring its contributions. Section III details the proposed DDEL-GMM framework, elaborating on the GMM-based data clustering and the density-based dynamic selection mechanism. Section IV presents the experimental setup, discusses the evaluation results comparing DDEL-GMM with other methods, and analyzes the impact of key parameters. Finally, Section V concludes the paper, summarizing the findings and suggesting potential directions for future research.

II. Literature Review

While ensemble learning and dynamic ensemble selection (DES) have shown considerable promise [10], [11], [16], significant challenges remain, particularly in effectively handling complex data distributions, adapting predictions to individual instances, and efficiently balancing classifier diversity with generalization [14], [15]. This review examines existing approaches and positions our proposed DDEL-GMM, which addresses these challenges through a novel density-based framework leveraging Gaussian Mixture Models, by highlighting its differences from state-of-the-art methods and underscoring its contributions.

A. Ensemble Learning and Dynamic Ensemble Selection
Ensemble learning marks a significant stride in machine learning, particularly in the context of predictive modeling. Combining multiple models, such as through Bagging, Random Subspace Method, and Random Forest, ensemble learning approaches have improved predictive accuracy and robustness [16]. The diversification among base models is key to the success of these methods. Furthermore, dynamic ensemble selection techniques have evolved, allowing for the adaptation of model selection based on each test sample's specific characteristics, thereby offering more personalized predictions [17]. This is particularly useful in applications like breast cancer detection, where an ensemble of deep learning networks has been shown to improve diagnostic accuracy using consensus-adaptive weighting techniques [18].

The DeepCluE approach employs a convolutional neural network to generate diverse clusterings from multiple layers, effectively selecting the most informative ones for final clustering [19]. Similarly, the probabilistic combination of non-linear eigenprojections for ensemble classification enhances the reliability of classifications by integrating a probabilistic support vector machine (SVM) approach, allowing for better handling of uncertainty in predictions [20].

These examples illustrate the ongoing efforts to enhance ensemble methods, yet many still grapple with optimal diversity generation and adaptive selection in highly heterogeneous data. Our DDEL-GMM contributes by proposing a GMM-based data partitioning that aims to create inherently diverse and specialized base classifiers, followed by a density-based selection mechanism that

adapts to local data characteristics more fluidly than some consensus or static weighting schemes.

B. Ensemble Pruning and Clustering-based Approaches

Ensemble pruning optimizes the selection of classifiers within an ensemble to balance efficiency and performance. Diverse strategies, including ranking-based methods and optimization-based methods like Optimum-Path Forest (OPF) ensemble pruning [21], illustrate the evolving landscape of ensemble pruning. Additionally, clustering-based approaches, which organize similar classifiers and select the most representative ones for the ensemble, add another dimension to enhancing the efficiency of ensemble learning systems [16].

While pruning focuses on selecting from an existing pool, and traditional clustering often groups classifiers post-training, DDEL-GMM integrates clustering directly into the training data partitioning phase using GMMs. This proactive approach aims to build a diverse and competent ensemble from the outset, rather than pruning less effective members later, addressing the challenge of efficiently constructing high-performing ensembles. The contribution here is a more integrated clustering-for-diversity strategy rather than clustering-for-pruning.

C. Dynamic Classifier Selection Techniques

Dynamic classifier selection techniques, focusing on estimating and utilizing the competence levels of classifiers, have seen significant advancements. Approaches like META-DES and Dynamic Selection on Complexity (DSOC) have emphasized the importance of the region of competence in classifier selection, leading to more accurate and tailored predictions. The refinement of these techniques, considering both correctly-classified and misclassified samples, has contributed to improved accuracy in dynamic selection systems, making them more effective in diverse machine learning applications [16].

Many DES techniques define the region of competence based on K-Nearest Neighbors or local instance similarity. DDEL-GMM defines competence based on the probability density of a test instance with respect to GMM-defined clusters. This is a key difference, as it moves from instance-based distance to a probabilistic, model-based density estimation for competence assessment, potentially offering more robust selections in sparse or noisy regions. The contribution is a density-informed competence estimation for DES.

D. Recent Advancements and Current Limitations

Guo et al. [22] exposed the shortcomings of traditional scoring systems like SAPS II, SOFA [23], and single machine learning models in critical care settings [24]. This work introduced the Dynamic Ensemble Learning Algorithm based on K-means (DELAK) method, employing K-means sampling and dynamic ensemble selection to address these issues, an approach in line with current

trends in ensemble methods for enhanced predictive performance [25], [26]. However, DELAK, like many other distance-based dynamic ensemble methods, struggled to capture the intricacies of complex data distributions and personalize predictions for new test instances, a limitation echoed in contemporary research [27], [28].

DELAK's reliance on K-means, which typically forms spherical clusters and can be sensitive to initialization, is a key point of divergence for DDEL-GMM. Our approach uses GMMs, which can model non-spherical clusters and provide a probabilistic assignment, addressing the challenge of representing complex data distributions more accurately. The contribution of DDEL-GMM here is the use of a more flexible clustering algorithm (GMM) to better partition complex data spaces for training specialized classifiers, leading to improved personalization.

Further contributions, such as the META-DES.Oracle framework in [29], extended the scope by utilizing meta-learning for classifier selection. While groundbreaking, this approach grappled with potential overfitting and computational complexities stemming from its intricate meta-feature framework and the optimization process using PSO-BP optimization algorithm, which integrates Particle Swarm Optimization (PSO) with the Backpropagation (BP) neural network training method [30]. Additionally, its reliance on linear classifiers limited its effectiveness in scenarios with non-linear relationships. DDEL-GMM, in contrast, does not employ a meta-learning layer for selection but rather a direct density-based assessment, potentially reducing complexity and overhead compared to intricate meta-feature frameworks. It also inherently supports non-linear base classifiers without modification to the selection mechanism itself, addressing the challenge of applicability to diverse base models. Recent ensemble learning advancements have focused on overcoming these limitations by exploring diverse methods like bagging, boosting, and decision tree ensembles, which have been shown to offer more robust solutions in handling complex data patterns [24]. These techniques, along with novel approaches such as ensemble methods for dirty data, provide a framework for integrating multiple learning algorithms and addressing the challenges observed in META-DES.Oracle, particularly ensuring model generalization [31].

Similarly, Wang et al. [32] and Zhang et al. [11] introduced novel selection methods, yet faced challenges in the sensitivity of unsupervised ensemble selection to the influence of class labels and the limitations of distance metrics for assessing classifier competence. These issues are also reflected in studies focusing on unsupervised data selection and ensemble classifiers, which further emphasize the complexities in selecting and combining multiple learning models without the guidance of labeled data [33]. To address such challenges related to unsupervised selection and reliance on distance metrics, DDEL-GMM employs a distinct strategy. It leverages GMM-identified data structures to inform the creation of specialized base learners from labeled data and subsequently uses a

density-based mechanism for dynamic classifier selection. This approach aims to provide a more robust competence assessment by moving beyond simple distance metrics and more effectively incorporating insights from the underlying data distribution, even when initial structures are found unsupervisedly, thereby offering an alternative to the sensitivities noted in prior works. Recent advancements in unsupervised ensemble classification, particularly in handling data dependencies and using clustering ensembles for feature selection, provide new perspectives and potential solutions to these challenges [34], [35], [36].

Sowkarthika et al. [37] tackled the issue of class overlapping and noise, highlighting the inadequacy of existing ensemble methods in handling these complexities. Additionally, Perez-Gallego et al. [38] addressed the unique challenges in quantification tasks, proposing a dynamic ensemble method integrating data complexity measures. However, adaptability to data variability data environments remained a challenge for these approaches, an issue further explored in recent works such as [39] dynamic neural network ensemble algorithm, which effectively balances diversity and accuracy across various inputs. New insights into dynamic ensemble methods for data streams are provided by [40], who discuss the integration of drift detection algorithms and dynamic updates, crucial for real-time data processing. The GMM component of DDEL-GMM is inherently suited to model overlapping distributions through probabilistic assignments, and the density-based selection is designed to be adaptive. This addresses the challenge of handling class overlap more effectively than methods relying on hard partitioning, as the probabilistic nature of GMMs can model these overlapping regions. The contribution is enhanced robustness in scenarios with significant class overlap.

Yet, it encountered difficulties in handling highly complex data distributions, particularly in defining regions of competence and adapting to significant data variation [41]. The challenges of adaptability in dynamically changing data environments are also addressed in the META-DES framework, which employs meta-learning techniques to enhance classifier competence through a variety of meta-features [40]. Additionally, the dynamic ensemble selection for quantification tasks, which further pushes the boundary of dynamic adaptability using data complexity measures, shows promising results in specific applications such as agricultural yield prediction and financial forecasting [38], [42].

In summary, while existing dynamic ensemble methods like K-means-based (e.g., DELAK) and meta-learning based (e.g., META-DES.Oracle) have advanced the field, they often face limitations in handling highly complex and overlapping data distributions, potential computational overhead, or sensitivity to the geometric definition of competence regions. Our proposed DDEL-GMM differentiates itself by integrating Gaussian Mixture Models for sophisticated data clustering—capturing multi-modal and non-spherical data patterns—and a subsequent density-based dynamic selection strategy. This approach directly

addresses the challenges of achieving robust personalization and adaptability in complex, noisy environments. The primary contribution of DDEL-GMM to the literature is thus a more flexible and statistically grounded framework for dynamic ensemble learning, designed to improve predictive accuracy and decision-making efficiency by more accurately modeling data sub-structures and employing a nuanced, density-informed mechanism for classifier selection, especially for data exhibiting intricate structures, as often encountered in real-world applications like sensor-based activity recognition.

III. Methodology

A. The proposed DDEL-GMM framework

This paper proposes a novel dynamic ensemble model, the Density-Based Dynamic Ensemble Learning algorithm via Gaussian Mixture Model clustering (DDEL-GMM). DDEL-GMM is designed to enhance predictive accuracy in providing personalized predictions. By employing Gaussian Mixture Models (GMM) for clustering and a density-based decision-making approach, the model aims to achieve a more granular analysis of complex data distributions and provide a robust framework for classifier competence estimation.

As illustrated in Figure 1, the training phase of DDEL-GMM involves leveraging GMM to effectively capture the underlying structure of the data. This approach facilitates the creation of specialized classifiers that are adept at recognizing specific data patterns within complex and overlapping distributions. [T2 change: #12 removed a duplicated generalization-phase paragraph that was misplaced here (it recurs correctly before the generalization figure below).]

Furthermore, as depicted in Figure 2, the generalization phase employs a density-based dynamic ensemble selection mechanism. This ensures that, during prediction, the most relevant classifiers contribute more significantly based on the density estimation of the input data point, thereby enhancing the model's overall performance and robustness.

Significant contributions in the realm of GMM for ensemble learning include [43]'s work on Gaussian mixture learning, which improves the efficiency and accuracy of ensemble models real-world applications by combining hierarchical clustering with the Expectation-Maximization algorithm. Additionally, Liu et al.'s [44] recent work on robustly learning mixtures of Gaussians provides theoretical backing for the efficacy of GMM in complex distribution scenarios, supporting our model's approach. This approach allows our model to excel in scenarios where data patterns are intricate and where adaptability to changing data distributions is crucial. By effectively capturing the nuances of complex data and dynamically weighting the contributions of individual classifiers, our model offers a significant advancement in the field of ensemble learning.

We introduce an advanced ensemble learning strategy that is deeply rooted in the principles of data density and specialization. Our proposed methodology consists

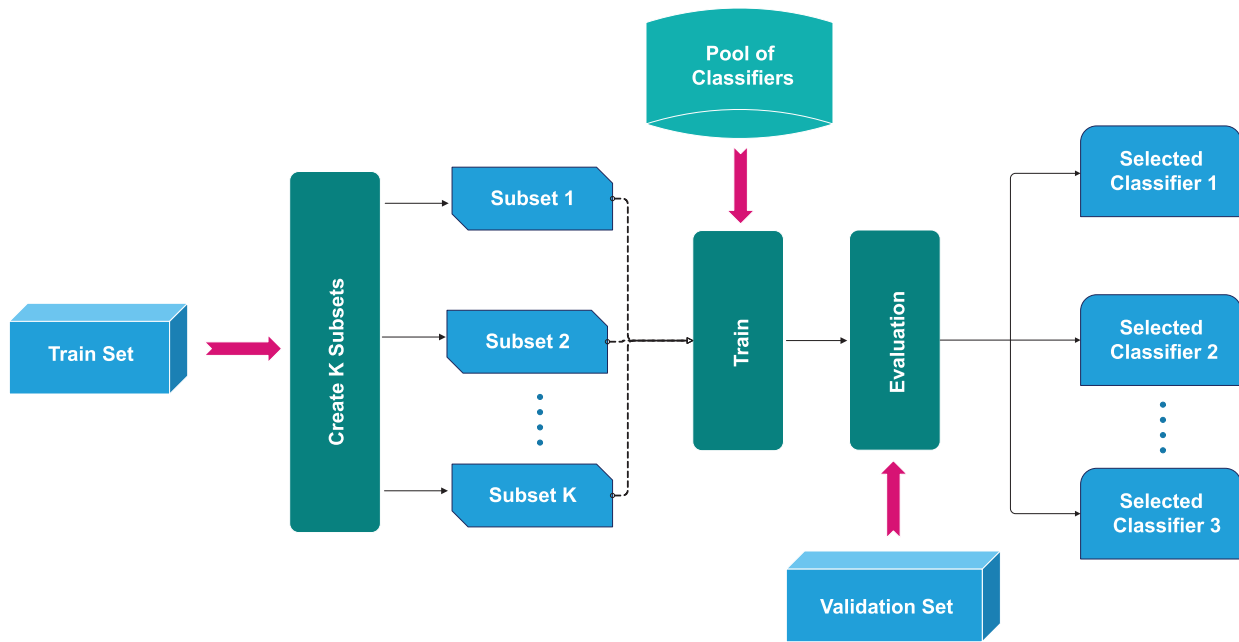


Fig. 1. Training phase of proposed model

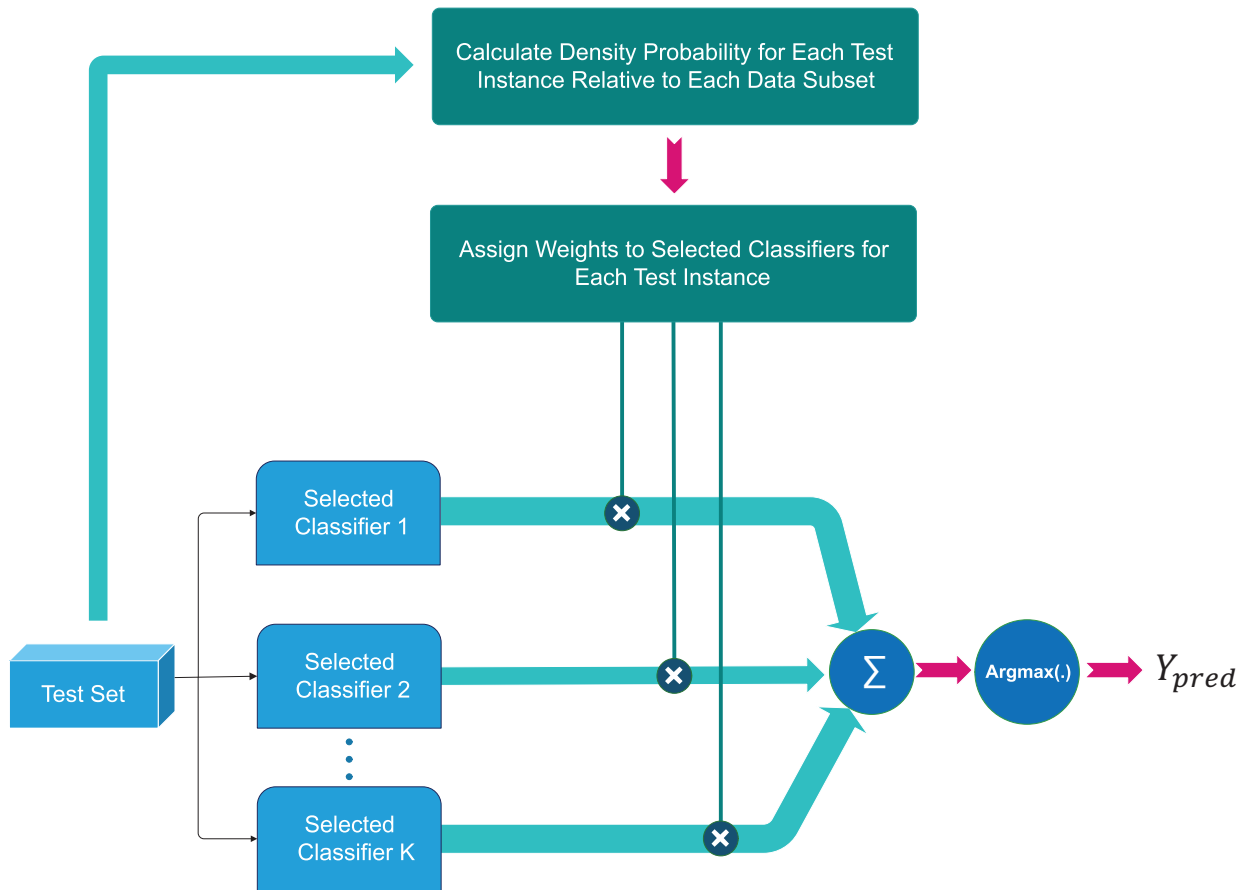


Fig. 2. Generalization phase of proposed model

of two interrelated components: the Gaussian Mixture Model (GMM) Sampling and the Density-based Dynamic Ensemble.

B. GMM Clustering & Sampling

Traditional ensemble techniques often create subsets of data either randomly or using simple heuristics. While

effective for many datasets, the increasing complexity and multimodal nature of modern datasets necessitate a more sophisticated approach. Enter GMM Sampling, a method designed to capture the intricate structures within datasets and thereby enhance the versatility of ensemble models.

Motivation: The driving force behind employing GMM in the ensemble paradigm is its ability to recognize and capture underlying patterns within datasets. Given that many datasets exhibit a multimodal distribution, GMM's capability to model data as a mixture of several Gaussian distributions becomes invaluable. By ensuring that each base classifier in the ensemble is trained on data that mirrors these Gaussian components, we bolster the ensemble's capacity to recognize and respond to subtle data structures.

GMM Overview: Mathematically, a Gaussian Mixture Model represents data as a weighted combination of M Gaussian distributions as shown in Equation 1.

$$p(\mathbf{x}) = \sum_{i=1}^M \pi_i \mathcal{N}(\mathbf{x} | \mu_i, \Sigma_i) \quad (1)$$

Where:

- x is a data point.
- π_i denotes the mixture weight of the i^{th} Gaussian.
- $\mathcal{N}(\mathbf{x} | \mu_i, \Sigma_i)$ is the Gaussian distribution with parameters mean μ_i and covariance Σ_i .

The Gaussian distribution $\mathcal{N}(\mathbf{x} | \mu_i, \Sigma_i)$ is defined as shown in Equation 2:

$$\mathcal{N}(\mathbf{x} | \mu_i, \Sigma_i) = \frac{1}{(2\pi)^{d/2} |\Sigma_i|^{1/2}} \times \exp\left(-\frac{1}{2} (\mathbf{x} - \mu_i)^T \Sigma_i^{-1} (\mathbf{x} - \mu_i)\right) \quad (2)$$

where d is the dimensionality of x .

Parameter Estimation via Expectation-Maximization (E-M): The crux of GMM lies in the accurate estimation of its parameters. The E-M algorithm serves this purpose. It's an iterative algorithm, progressively refining the parameters to maximize the likelihood of observing the given data:

- 1) **E-Step:** Computes the posterior probabilities, essentially estimating the likelihood of a data point originating from a specific Gaussian component.

$$\gamma_{ji} = \frac{\pi_i \mathcal{N}(x_j | \mu_i, \Sigma_i)}{\sum_{k=1}^K \pi_k \mathcal{N}(x_j | \mu_k, \Sigma_k)} \quad \text{for } i = 1, 2, \dots, K \quad (3)$$

- 2) **M-Step:** Refines the parameters based on the probabilities obtained from the E-Step, ensuring that the overall likelihood of the data given the model parameters is maximized.

The objective function Q that the E-M algorithm aims to maximize is given by Equation 4.

$$Q(\theta | \theta^{(t)}) = \sum_{i=1}^N \sum_{j=1}^M \gamma_{ij}^{(t)} [\log \pi_j + \log \mathcal{N}(\mathbf{x}_i | \mu_j, \Sigma_j)] \quad (4)$$

where $\gamma_{ij}^{(t)}$ is the posterior probability of the i^{th} data point belonging to the j^{th} Gaussian component at iteration t .

The update equations for the M-step are in Equations 5 to 7.

$$\pi_j^{(t+1)} = \frac{1}{N} \sum_{i=1}^N \gamma_{ij}^{(t)} \quad (5)$$

$$\mu_j^{(t+1)} = \frac{\sum_{i=1}^N \gamma_{ij}^{(t)} \mathbf{x}_i}{\sum_{i=1}^N \gamma_{ij}^{(t)}} \quad (6)$$

$$\Sigma_j^{(t+1)} = \frac{\sum_{i=1}^N \gamma_{ij}^{(t)} (\mathbf{x}_i - \mu_j^{(t+1)}) (\mathbf{x}_i - \mu_j^{(t+1)})^T}{\sum_{i=1}^N \gamma_{ij}^{(t)}} \quad (7)$$

Implications of GMM Sampling in Ensemble Learning: Once the GMM parameters are derived, they play a pivotal role in segmenting the data. Each Gaussian component identified by the GMM provides insights into a specific data structure or pattern. When data points are assigned to subsets based on their association with these Gaussian components, it ensures that each subset is representative of a distinct data pattern. Training individual classifiers on these subsets equips the ensemble with a diverse set of experts, each attuned to a specific data structure. This nuanced approach to data sampling offers several advantages:

- **Diversity:** Ensures that base classifiers capture diverse perspectives of the data.
- **Specialization:** Each base classifier becomes an expert in a specific data pattern, enhancing the ensemble's overall competence
- **Robustness:** By training specialized classifiers on distinct data patterns identified by GMM, the ensemble becomes more resilient to wide variations in the data, as no single classifier is overwhelmed by the entire dataset's complexity.

Operational Steps: With the GMM parameters in place, the methodology involves ranking data points based on their likelihoods under each Gaussian component. A sampling ratio, ϕ , then determines the fraction of top-ranking data points to be included in each subset. These subsets, rich in structure and pattern, serve as the training data for individual base classifiers. The detailed algorithmic steps for this process are outlined in Algorithm 1.

C. Density-based Dynamic Ensemble Algorithm

Traditional ensemble learning methods often rely on the simple aggregation of base classifiers' outputs, without considering the inherent nuances associated with the data

Algorithm 1 GMM Sampling

Input: Sampling ratio ϕ ; Training dataset D ; Training data without labels X ; Cluster number K
Output: Data subsets $D' = D'_1 \cup D'_2 \cup \dots \cup D'_K$

- 1: procedure GMM Sampling(ϕ, X, K)
- 2: Initialize K Gaussian components with means
- 3: $\mu_1, \mu_2, \dots, \mu_K$ and covariances $\Sigma_1, \Sigma_2, \dots, \Sigma_K$
- 4: Initialize mixing coefficients $\pi_1, \pi_2, \dots, \pi_K$ such that $\sum_{i=1}^K \pi_i = 1$
- 5: repeat
- 6: E-step: Compute the responsibilities for each sample $x_j \in X$ using Equation 3.
- 7: M-step: Update μ_m, Σ_m, π_m using Equations 5, 6, and 7.
- 8: until convergence of parameters μ_i, Σ_i , and π_i
- 9: for $i = 1, 2, \dots, K$ do
- 10: Compute the responsibilities for each instance in X with respect to Gaussian component i
- 11: Select $\text{int}(m \times \phi)$ instances with the highest responsibilities into partition C'_i
- 12: end for
- 13: Return the labels in D to instances in C' to get K data subsets $D' = D'_1 \cup D'_2 \cup \dots \cup D'_K$
- 14: end procedure

regions that different base classifiers might be specialized in. The Density-based Dynamic Ensemble methodology emerges as an innovative response to this limitation, ensuring that the ensemble's predictions are sensitive to the intrinsic data densities associated with test instances.

Motivation: In fact, the base classifiers are in competition, and their contribution to the final decision depends on the density probability of the test instance relative to the data subset each classifier was trained on. Given that different data subsets (derived from Gaussian Mixture Model (GMM) sampling) capture unique data structures, the classifiers trained on these subsets specialize in different regions of the data distribution. Therefore, for any given test instance, it is essential to evaluate the competence of each classifier based on the density of the test instance within the relevant data subset, allowing the ensemble to leverage the classifiers with the highest competence.

Density Estimation: The density of a test instance with respect to a data subset is indicative of the likelihood that the test instance belongs to that subset. Mathematically, the density $\rho_i(z)$ of a test instance z concerning a subset D'_i is calculated using the Gaussian density function as shown in Equation 8:

$$\rho_i(z) = \frac{1}{(2\pi)^{\frac{d}{2}} |\Sigma_i|^{\frac{1}{2}}} \exp\left(-\frac{1}{2}(z - \mu_i)^T \Sigma_i^{-1} (z - \mu_i)\right) \quad (8)$$

Where μ_i and Σ_i are the mean and covariance matrix, respectively, of the Gaussian component associated with subset D'_i . **Classifier Invocation:** After computing densities, the weight of each classifier is determined based on the

density of the test instance with respect to the subset the classifier was trained on. This means that all classifiers contribute to the final prediction, but their influence is modulated by how well the test instance aligns with the data distribution of the corresponding subset. The weights are proportional to the densities, giving more importance to classifiers associated with higher densities for the test instance.

Decision Aggregation: An ensemble's strength lies in its ability to amalgamate insights from multiple base classifiers. In the Density-based Dynamic Ensemble approach, predictions from all base classifiers are aggregated using a weighted voting scheme. Specifically, the probability vector for each class is calculated by weighting the predictions of each classifier according to the density of the test instance with respect to the subset on which that classifier was trained. The final predicted class label is the one with the highest combined probability. The algorithmic steps for this methodology are presented in Algorithm 2.

$$y_{\text{pred}} = \arg\max(\mathbf{y}_{\text{prob}}) \quad (9)$$

Where $\mathbf{y}_{\text{prob}}$ is the probability vector of the test instance belonging to each class.

Algorithm 2 The density-based dynamic ensemble for multi-class classification.

Require: Training dataset $D' = D'_1 \cup D'_2 \cup \dots \cup D'_K$; Test example $e_i = (e_i^1, e_i^2, \dots, e_i^n)^T$; Gaussian components $\mu = \{\mu_i | i = 1, 2, \dots, K\}$ and $\Sigma = \{\Sigma_i | i = 1, 2, \dots, K\}$.
Ensure: Predicted class label y_{pred} ; Predicted probability vector $\mathbf{y}_{\text{prob}}$.

- 1: procedure Base Classifiers Training(D')
- 2: for $\eta = 1, 2, \dots, K$ do
- 3: Train base model $h_\eta(\cdot)$ on training data subset D'_η
- 4: end for
- 5: Return $h = \{h_\eta(\cdot) | \eta = 1, 2, \dots, K\}$
- 6: end procedure
- 7: procedure Ensemble(e_i, μ, Σ, h)
- 8: Use each base classifier to predict the label of e_i to get a result vector $\mathbf{h}(e_i) = (h_1(e_i), h_2(e_i), \dots, h_K(e_i))^T$
- 9: Compute the density of test example e_i with respect to each subset D'_i using the Gaussian density function:
$$\rho_i(e_i) = \frac{1}{(2\pi)^{\frac{d}{2}} |\Sigma_i|^{\frac{1}{2}}} \exp\left(-\frac{1}{2}(e_i - \mu_i)^T \Sigma_i^{-1} (e_i - \mu_i)\right)$$
- 10: Compute the weight vector for test example e_i :
$$\mathbf{w}_i = \left(\frac{\rho_1(e_i)}{\sum_{j=1}^K \rho_j(e_i)}, \frac{\rho_2(e_i)}{\sum_{j=1}^K \rho_j(e_i)}, \dots, \frac{\rho_K(e_i)}{\sum_{j=1}^K \rho_j(e_i)} \right)^T$$
- 11: Compute the probability vector of e_i belonging to each class: $\mathbf{y}_{\text{prob}} = \mathbf{w}_i^T \cdot \mathbf{h}(e_i)$
- 12: Assign the predicted class label:
- 13: $y_{\text{pred}} = \arg\max(\mathbf{y}_{\text{prob}})$
- 14: end procedure

Implications: The Density-based Dynamic Ensemble approach offers several advantages:

- **Precision:** By considering data densities, the methodology ensures that all classifiers are considered, but the most relevant ones are given greater weight, enhancing classification precision.
- **Adaptability:** The approach is inherently adaptable, adjusting the ensemble’s response based on the test instance’s location within the data distribution.
- **Reduced Overfitting:** Leveraging density information ensures that the ensemble doesn’t overly rely on any single classifier, reducing the chances of overfitting.

In summation, the Density-based Dynamic Ensemble methodology infuses ensemble learning with a level of sensitivity and adaptability, ensuring that predictions are both accurate and attuned to the intricacies of the dataset’s distribution.

IV. Results and Analysis

To evaluate the effectiveness of the four ensemble methods, this study employs several key performance metrics. The primary metric for assessing classification performance is the F-score, which provides a balanced measure of precision and recall. To understand the consistency and robustness of the methods, the mean, standard deviation, and maximum of the F-scores obtained from cross-validation are also reported. These metrics collectively offer a comprehensive view of each model’s accuracy, stability, and peak performance.

The performance of various ensemble methods, with a base learner count $nc = 6$ and a regularization parameter $\phi = 0.5$, is systematically compared in Table I [T2: #10 hardcoded “Table 1” → \ref (R1#11)]. This table assesses four ensemble methods—DensityE (a density-based ensemble method), DistE (a distance-based ensemble method), AvgE (an average-based ensemble method), and MaxE (a maximum-based ensemble method)—using four distinct types of base learners: logistic regression (lr), support vector machine (svm), k-nearest neighbors (knn), and decision tree (dt).

A. Ensemble Method Performance Analysis

Table I reveals that the DensityE ensemble method consistently achieves the highest mean scores across most base learners. Specifically, the logistic regression base learner combined with the DensityE method attains a mean score of 0.973, closely followed by the support vector machine base learner with a mean score of 0.969. The k-nearest neighbors base learner also performs well under the DensityE method, achieving a mean score of 0.958. Conversely, the decision tree base learner shows significantly lower performance across all ensemble methods, with the highest mean score of 0.841 observed under the DistE method.

TABLE I
Comparison of Ensemble Methods with Different Base Learners

Ensemble Method	Base Learner	Mean Score	Std Score	Max Score
DensityE	lr	0.973	0.003	0.978
	svm	0.969	0.003	0.976
	knn	0.958	0.004	0.968
	dt	0.821	0.010	0.839
DistE	lr	0.962	0.043	0.977
	svm	0.959	0.040	0.974
	knn	0.948	0.031	0.966
	dt	0.841	0.016	0.864
AvgE	lr	0.750	0.210	0.965
	svm	0.897	0.115	0.965
	knn	0.856	0.118	0.951
	dt	0.720	0.108	0.827
MaxE	lr	0.508	0.034	0.574
	svm	0.855	0.040	0.907
	knn	0.722	0.122	0.892
	dt	0.410	0.143	0.653

The DistE method also exhibits strong performance, particularly with logistic regression and support vector machine base learners, achieving mean scores of 0.962 and 0.959, respectively. The AvgE and MaxE methods, however, generally demonstrate lower performance across all base learners. The AvgE method performs moderately well with support vector machine and k-nearest neighbors, achieving mean scores of 0.897 and 0.856, respectively. The MaxE method shows the least effective performance, especially with the logistic regression base learner, which only achieves a mean score of 0.508.

B. Key Insights from Performance Analysis

The comparative performance analysis offers several crucial insights into the principles of constructing effective ensemble models:

- 1) **Superiority of Density-Based Weighting:** The DensityE method’s top-tier performance confirms that dynamically weighting classifiers based on a test instance’s probability density is more effective than using simpler distance metrics (DistE) or static aggregation methods (AvgE, MaxE). This approach provides a more nuanced and robust assessment of classifier competence in localized data regions.
- 2) **Critical Role of Base Learner Selection:** The choice of base learner has a profound impact on overall performance. Logistic Regression and Support Vector Machines proved to be the most effective partners for our framework. This underscores that an advanced ensemble strategy cannot fully compensate for a base learner that is ill-suited to the data’s characteristics.
- 3) **Insufficiency of Simple Aggregation:** The significantly lower and more variable scores of the AvgE and MaxE methods reveal the limitations of non-adaptive aggregation. These static methods fail to leverage the localized expertise of the specialized classifiers, confirming that the full potential of an ensemble is unlocked only through a dynamic and intelligent selection or weighting mechanism.

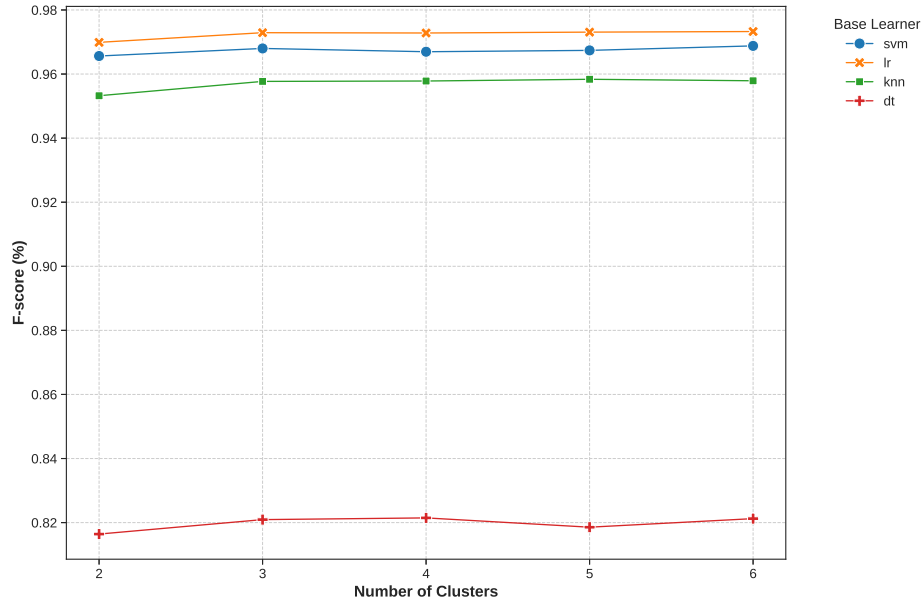


Fig. 3. F-score vs Number of Clusters for Density ensemble method

C. Impact of Cluster Number and Sampling Ratio

Figure 3 illustrates the relationship between the number of clusters and the F-score for the DensityE ensemble method. The support vector machine consistently outperforms other base learners across various cluster numbers, maintaining a high F-score close to 0.97. Logistic regression follows closely, while k-nearest neighbors and decision tree show lower performance. This trend suggests that increasing the number of clusters generally enhances the F-score, indicating that more detailed partitioning of the data can lead to better ensemble performance. However, the improvement plateaus beyond a certain number of clusters, suggesting a point of diminishing returns.

Figure 4 presents the F-score plotted against the sampling ratio for the DensityE ensemble method. As the sampling ratio increases, the F-score improves for all base learners. The support vector machine achieves the highest F-score, with logistic regression and k-nearest neighbors following. The decision tree base learner, once again, shows the lowest performance. This positive correlation between sampling ratio and F-score highlights the importance of using a larger sample size to enhance model performance, likely because larger samples provide more representative data, allowing the ensemble to make more accurate predictions.

[T2 change: #6 fixed cross-wired Fig 3/4: reordered so the clusters figure precedes the sampling-ratio figure (matching text order) and corrected each \label to match its caption (R1#13).]

Figure 5 provides a visual representation of the distribution of scores for each ensemble method and base learner combination. This figure reinforces the tabulated results, highlighting the overall superior performance of the DensityE and DistE methods. The variability in scores is also depicted, with DensityE and DistE showing tighter

distributions compared to AvgE and MaxE. Notably, the single SVM model achieves a high and consistent performance, underscoring the robustness of SVM as a standalone model.

V. Discussion

The results unequivocally indicate that the DensityE ensemble method offers superior performance compared to other ensemble methods, particularly when logistic regression and support vector machine are utilized as base learners. This finding underscores the efficacy of DensityE's approach in leveraging the strengths of diverse base learners and effectively managing their combined output. The superior performance of logistic regression and support vector machine base learners can be attributed to their robustness and strong generalization capabilities, especially when applied to data with complex underlying distributions.

The comparative analysis across different base learners highlights the critical role of base learner selection in ensemble methods. While linear models like logistic regression and support vector machine benefit significantly from the ensemble approach, non-linear models such as k-nearest neighbors and decision trees show relatively lower performance. This disparity may be due to the inherent differences in how these models handle data complexity and variability.

The insights gained from Figures 1 and 2 provide a deeper understanding of ensemble dynamics. Increasing the number of clusters generally leads to better performance, but the benefits diminish beyond a certain point. Similarly, a higher sampling ratio enhances the F-score, emphasizing the value of larger training samples for achieving higher accuracy.

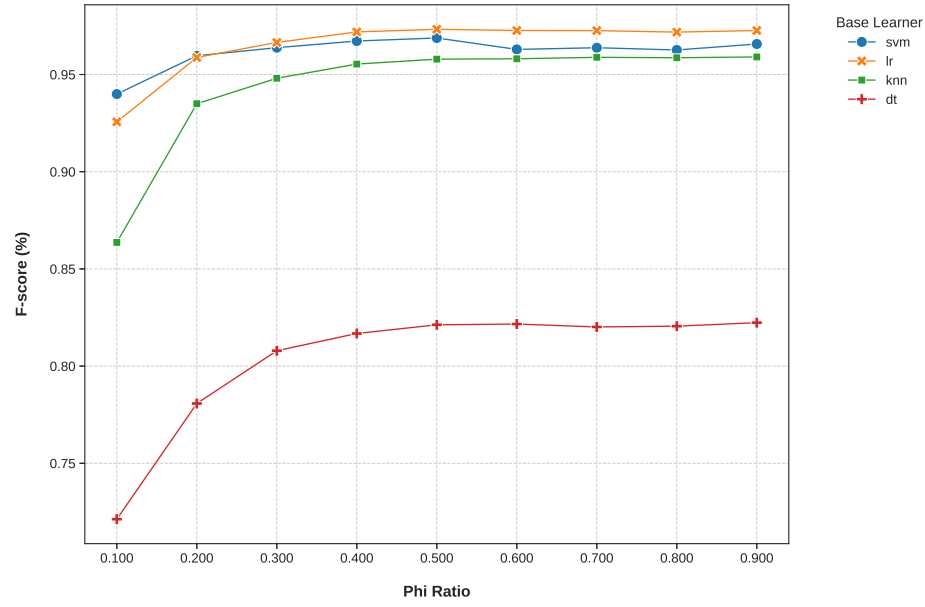


Fig. 4. F-score vs Sampling Ratio for Density ensemble method

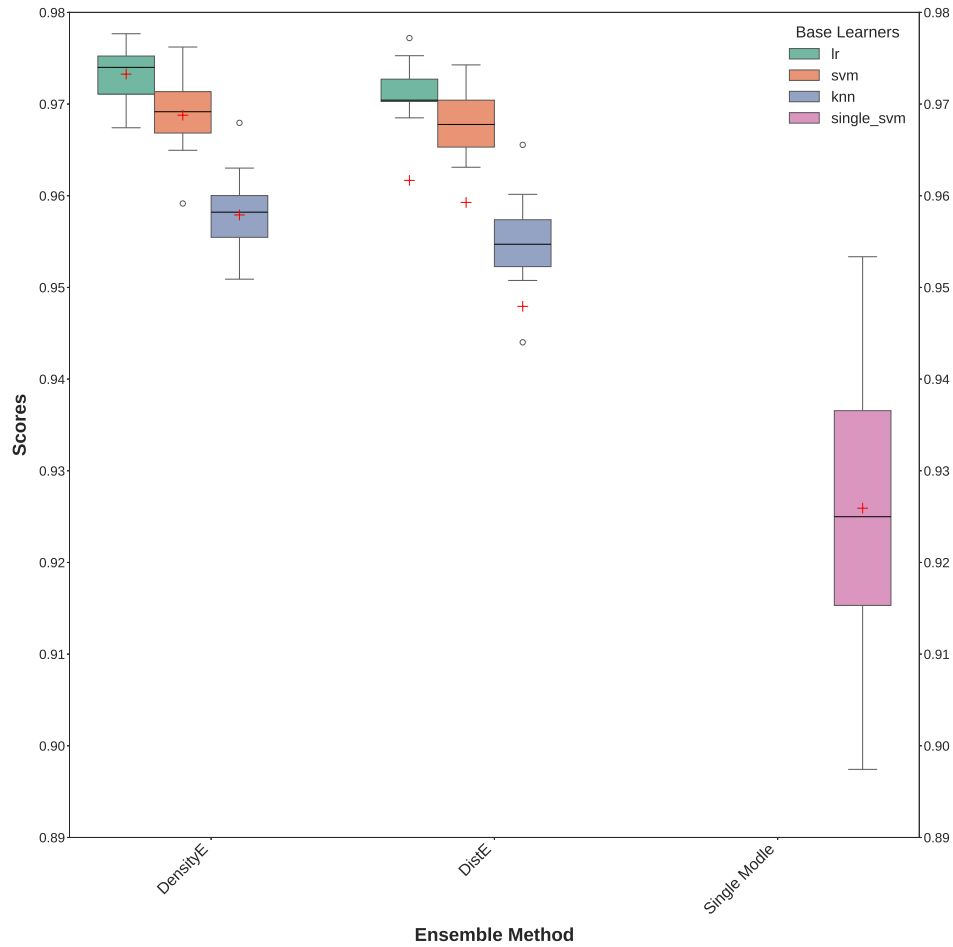


Fig. 5. Comparison of F-score Distributions Across Different Ensemble Methods and Base Learners

In conclusion, the DensityE ensemble method, particularly when paired with logistic regression and support

vector machine base learners, demonstrates the most promising performance. Future research could explore the integration of more sophisticated base learners and the application of these ensemble methods to various types of datasets to further validate their robustness and generalizability. Additionally, investigating the effects of varying other parameters within the DensityE method may yield further performance improvements and insights.

VI. Conclusion

In this paper, we introduced the Density-Based Dynamic Ensemble Learning Algorithm using Gaussian Mixture Models (DDEL-GMM), a novel framework specifically engineered to enhance the personalization of predictions in complex data environments. The core challenge addressed is the limitation of traditional models in adapting to the unique characteristics of individual data points. DDEL-GMM tackles this by employing a sophisticated two-stage process. First, it uses Gaussian Mixture Models to partition the data into nuanced, overlapping clusters, capturing underlying data structures more effectively than methods based on rigid partitioning. This allows for the training of highly specialized base classifiers. Second, its density-based dynamic selection mechanism creates a bespoke, weighted ensemble for each individual test instance, ensuring that the final prediction is highly personalized and context-aware.

Our experimental evaluation confirmed the superior performance of this personalized approach. DDEL-GMM, particularly when paired with Logistic Regression and Support Vector Machine base learners, significantly outperformed other ensemble strategies. Crucially, it addresses the key limitations of prior work such as the DELAK model. While DELAK utilizes K-means, which struggles with non-spherical data distributions, DDEL-GMM's use of GMMs allows for a more flexible and accurate modeling of complex data structures. This leads to a more effective specialization of base learners and, ultimately, more precise predictions. The density-based selection further refines the model's competence assessment beyond simple distance metrics, enhancing its robustness and accuracy.

The findings establish DDEL-GMM as a powerful solution for classification tasks where personalization is paramount. The primary contribution of this work is a robust framework that advances the state-of-the-art in dynamic ensemble learning by delivering more accurate, reliable, and highly personalized predictive analytics.

Future research will aim to build upon this foundation. We intend to explore the integration of more diverse and complex base learners and to test the framework's generalizability across various domains where personalized modeling is critical, such as personalized medicine and financial risk assessment. Further investigation into optimizing the GMM clustering phase and adapting the framework for real-time data streams will also be key areas of focus.

References

- [1] L. P. Zimmerman, P. A. Reyfman, A. D. R. Smith, Z. Zeng, A. Kho, L. N. Sanchez-Pinto, and Y. Luo, "Early prediction of acute kidney injury following ICU admission using a multivariate panel of physiological measurements," *BMC Medical Informatics and Decision Making*, vol. 19, no. 1, p. 16, Jan. 2019. [Online]. Available: <https://doi.org/10.1186/s12911-019-0733-z>
- [2] G. Folino and P. Sabatino, "Ensemble based collaborative and distributed intrusion detection systems: A survey," *Journal of Network and Computer Applications*, vol. 66, pp. 1–16, May 2016. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1084804516300248>
- [3] M. Hosseini Chagahi, S. Mohammadi Dashtaki, B. Moshiri, and M. d. Jalil Piran, "Cardiovascular disease detection using a novel stack-based ensemble classifier with aggregation layer, DOWA operator, and feature transformation," *Computers in Biology and Medicine*, vol. 173, p. 108345, May 2024. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0010482524004293>
- [4] Y. Guo, Y. Chu, B. Jiao, J. Cheng, Z. Yu, N. Cui, and L. Ma, "Evolutionary Dual-Ensemble Class Imbalance Learning for Human Activity Recognition," *IEEE Transactions on Emerging Topics in Computational Intelligence*, vol. 6, no. 4, pp. 728–739, Aug. 2022. [Online]. Available: <https://ieeexplore.ieee.org/document/9546996>
- [5] Y. Xu, Z. Yu, W. Cao, and C. L. P. Chen, "A Novel Classifier Ensemble Method Based on Subspace Enhancement for High-Dimensional Data Classification," *IEEE Transactions on Knowledge and Data Engineering*, vol. 35, no. 1, pp. 16–30, Jan. 2023. [Online]. Available: <https://ieeexplore.ieee.org/document/9448482>
- [6] Y. Lv, S. Peng, Y. Yuan, C. Wang, P. Yin, J. Liu, and C. Wang, "A classifier using online bagging ensemble method for big data stream learning," *Tsinghua Science and Technology*, vol. 24, no. 4, pp. 379–388, Aug. 2019. [Online]. Available: <https://ieeexplore.ieee.org/document/8660404>
- [7] S. Mao, W. Lin, L. Jiao, S. Gou, and J.-W. Chen, "End-to-End Ensemble Learning by Exploiting the Correlation Between Individuals and Weights," *IEEE Transactions on Cybernetics*, vol. 51, no. 5, pp. 2835–2846, May 2021. [Online]. Available: <https://ieeexplore.ieee.org/document/8798694>
- [8] X. Li, H. Xiong, Z. Chen, J. Huan, C.-Z. Xu, and D. Dou, "In-Network Ensemble": Deep Ensemble Learning with Diversified Knowledge Distillation," *ACM Trans. Intell. Syst. Technol.*, vol. 12, no. 5, pp. 1–19, Oct. 2021. [Online]. Available: <https://dl.acm.org/doi/10.1145/3473464>
- [9] R. Pari, M. Sandhya, and S. Sankar, "A Multitier Stacked Ensemble Algorithm for Improving Classification Accuracy," *Comput. Sci. Eng.*, vol. 22, no. 4, pp. 74–85, Jul. 2020. [Online]. Available: <https://ieeexplore.ieee.org/document/8509171>
- [10] T. T. Nguyen, A. V. Luong, M. T. Dang, A. W.-C. Liew, and J. McCall, "Ensemble Selection based on Classifier Prediction Confidence," *Pattern Recognition*, vol. 100, p. 107104, Apr. 2020. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0031320319304054>
- [11] Z.-L. Zhang, Y.-Y. Chen, J. Li, and X.-G. Luo, "A distance-based weighting framework for boosting the performance of dynamic ensemble selection," *Information Processing & Management*, vol. 56, no. 4, pp. 1300–1316, Jul. 2019. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S030645731830712X>
- [12] D. Zhao, X. Wang, Y. Mu, and L. Wang, "Experimental Study and Comparison of Imbalance Ensemble Classifiers with Dynamic Selection Strategy," *Entropy (Basel)*, vol. 23, no. 7, p. 822, Jun. 2021.
- [13] Y.-R. Choi and D.-J. Lim, "DDes: A Distribution-Based Dynamic Ensemble Selection Framework," *IEEE Access*, vol. 9, pp. 40 743–40 754, 2021. [Online]. Available: <https://ieeexplore.ieee.org/document/9366872>
- [14] G. Ditzler, M. Roveri, C. Alippi, and R. Polikar, "Learning in Nonstationary Environments: A Survey," *IEEE Computational Intelligence Magazine*, vol. 10, no. 4, pp. 12–25, Nov. 2015. [Online]. Available: <https://ieeexplore.ieee.org/document/7296710>

- [15] S. Lessmann, B. Baesens, H.-V. Seow, and L. C. Thomas, "Benchmarking state-of-the-art classification algorithms for credit scoring: An update of research," *European Journal of Operational Research*, vol. 247, no. 1, pp. 124–136, Nov. 2015. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0377221715004208>
- [16] R. M. O. Cruz, R. Sabourin, and G. D. C. Cavalcanti, "Dynamic classifier selection: Recent advances and perspectives," *Information Fusion*, vol. 41, pp. 195–216, May 2018. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1566253517304074>
- [17] A. H. R. Ko, R. Sabourin, and J. Britto, Alceu Souza, "From dynamic classifier selection to dynamic ensemble selection," *Pattern Recognition*, vol. 41, no. 5, pp. 1718–1731, May 2008. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0031320307004499>
- [18] M. Dehghan Rouzi, B. Moshiri, M. Khoshnevisan, M. A. Akhaee, F. Jaryani, S. Salehi Nasab, and M. Lee, "Breast Cancer Detection with an Ensemble of Deep Learning Networks Using a Consensus-Adaptive Weighting Method," *Journal of Imaging*, vol. 9, no. 11, p. 247, Nov. 2023, number: 11 Publisher: Multidisciplinary Digital Publishing Institute. [Online]. Available: <https://www.mdpi.com/2313-433X/9/11/247>
- [19] D. Huang, D.-H. Chen, X. Chen, C.-D. Wang, and J.-H. Lai, "DeepCluE: Enhanced Image Clustering via Multi-layer Ensembles in Deep Neural Networks," Sep. 2023. [Online]. Available: <http://arxiv.org/abs/2206.00359>
- [20] J. E. Arco, A. Ortiz, J. Ramírez, F. J. Martínez-Murcia, Y.-D. Zhang, J. Broncano, M. . Berbis, J. Royuela-del Val, A. Luna, and J. M. Górriz, "Probabilistic Combination of Non-Linear Eigenprojections For Ensemble Classification," *IEEE Transactions on Emerging Topics in Computational Intelligence*, vol. 7, no. 5, pp. 1431–1441, Oct. 2023. [Online]. Available: <https://ieeexplore.ieee.org/document/9915486>
- [21] S. Fernandes, A. Souza, D. Gastaldello, D. Pereira, and J. Papa, "Pruning Optimum-Path Forest Ensembles Using Metaheuristic Optimization for Land-Cover Classification," *International Journal of Remote Sensing*, vol. 00, pp. 1–26, Apr. 2017.
- [22] C. Guo, M. Liu, and M. Lu, "A Dynamic Ensemble Learning Algorithm based on K-means for ICU mortality prediction," *Applied Soft Computing*, vol. 103, p. 107166, May 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1568494621000892>
- [23] B. Tekin, J. Kiliç, G. Taşkın, . Solmaz, O. Tezel, and B. B. Bağöz, "The Comparison of scoring systems: SOFA, APACHE-II, LODS, MODS, and SAPS-II in critically ill elderly sepsis patients," *J Infect Dev Ctries*, vol. 18, no. 1, pp. 122–130, Jan. 2024.
- [24] O. Sagi and L. Rokach, "Ensemble learning: A survey," *Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery*, vol. 8, p. e1249, Feb. 2018.
- [25] X. Dong, Z. Yu, W. Cao, Y. Shi, and Q. Ma, "A survey on ensemble learning," *Front. Comput. Sci.*, vol. 14, no. 2, pp. 241–258, Apr. 2020. [Online]. Available: <http://link.springer.com/10.1007/s11704-019-8208-z>
- [26] F. Jiang, J. He, and T. Tian, "A clustering-based ensemble approach with improved pigeon-inspired optimization and extreme learning machine for air quality prediction," *Applied Soft Computing*, vol. 85, p. 105827, Dec. 2019. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1568494619306088>
- [27] I. D. Mienye and Y. Sun, "A Survey of Ensemble Learning: Concepts, Algorithms, Applications, and Prospects," *IEEE Access*, vol. 10, pp. 99 129–99 149, 2022. [Online]. Available: <https://ieeexplore.ieee.org/document/9893798>
- [28] S. González, S. García, J. Del Ser, L. Rokach, and F. Herrera, "A practical tutorial on bagging and boosting based ensembles for machine learning: Algorithms, software tools, performance study, practical perspectives and opportunities," *Information Fusion*, vol. 64, pp. 205–237, Dec. 2020. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1566253520303195>
- [29] R. M. O. Cruz, R. Sabourin, and G. D. C. Cavalcanti, "META-DES.Oracle: Meta-learning and feature selection for dynamic ensemble selection," *Information Fusion*, vol. 38, pp. 84–103, Nov. 2017. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S156625351730101X>
- [30] M. N. Al-Andoli, K. S. Sim, S. C. Tan, P. Y. Goh, and C. P. Lim, "An Ensemble-Based Parallel Deep Learning Classifier With PSO-BP Optimization for Malware Detection," *IEEE Access*, vol. 11, pp. 76 330–76 346, 2023. [Online]. Available: <https://ieeexplore.ieee.org/document/10187128>
- [31] L. Liu, "Ensemble Learning Methods for Dirty Data: A Keynote at CIKM 2022," *SIGIR Forum*, vol. 57, no. 1, pp. 3:1–3:12, Dec. 2023. [Online]. Available: <https://doi.org/10.1145/3636341.3636346>
- [32] Z. Wang, S. Zhao, Z. Li, H. Chen, C. Li, and Y. Shen, "Ensemble selection with joint spectral clustering and structural sparsity," *Pattern Recognition*, vol. 119, p. 108061, Nov. 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S003132032100248X>
- [33] C.-L. Huang, J.-C. Wang, and B. Ma, "Ensemble based speaker recognition using unsupervised data selection," *SIP*, vol. 5, no. 1, May 2016, publisher: Now Publishers, Inc. [Online]. Available: <https://www.nowpublishers.com/article/Details/SIP-062>
- [34] H. Tian, L. Wang, H. Shen, and A. W.-C. Liew, "Improved Ensemble Classification for Evolving Data Streams," *IEEE Intelligent Systems*, vol. 37, no. 1, pp. 38–50, Jan. 2022, conference Name: IEEE Intelligent Systems. [Online]. Available: <https://ieeexplore.ieee.org/document/9238487>
- [35] P. A. Traganitis and G. B. Giannakis, "Unsupervised Ensemble Classification With Sequential and Networked Data," *IEEE Transactions on Knowledge and Data Engineering*, vol. 34, no. 10, pp. 5009–5022, Oct. 2022. [Online]. Available: <https://ieeexplore.ieee.org/document/9302602>
- [36] B. Ayerdi, I. Marqués, and M. Graña, "Spatially regularized semisupervised Ensembles of Extreme Learning Machines for hyperspectral image segmentation," *Neurocomputing*, vol. 149, pp. 373–386, Feb. 2015. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0925231214011424>
- [37] S. B., M. Gyanchandani, R. Wadhvani, and S. Shukla, "Data complexity-based dynamic ensembling of SVMs in classification," *Expert Systems with Applications*, vol. 216, p. 119437, Apr. 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0957417422024563>
- [38] P. Pérez-Gállego, A. Castaño, J. Ramón Quevedo, and J. José del Coz, "Dynamic ensemble selection for quantification tasks," *Information Fusion*, vol. 45, pp. 1–15, Jan. 2019. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1566253517303652>
- [39] K. Alam, N. Siddique, and H. Adeli, "A dynamic ensemble learning algorithm for neural networks," *Neural Computing and Applications*, vol. 32, Jun. 2020.
- [40] H. M. Gomes, J. P. Barddal, F. Enembreck, and A. Bifet, "A Survey on Ensemble Learning for Data Stream Classification," *ACM Comput. Surv.*, vol. 50, pp. 23:1–23:36, Mar. 2017.
- [41] B. Sierra, E. Lazkano, I. Irigoien, E. Jauregi, and I. Mendialdua, "K Nearest Neighbor Equality: Giving equal chance to all existing classes," *Information Sciences*, vol. 181, no. 23, pp. 5158–5168, Dec. 2011. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0020025511003562>
- [42] B. Swaminathan, S. Palani, and S. Vairavasundaram, "Meta Learning-Based Dynamic Ensemble Model for Crop Selection," *Applied Artificial Intelligence*, vol. 36, no. 1, p. 2145646, Dec. 2022. [Online]. Available: <https://www.tandfonline.com/doi/full/10.1080/08839514.2022.2145646>
- [43] J. Li and A. Nehorai, "Gaussian mixture learning via adaptive hierarchical clustering," *Signal Processing*, vol. 150, pp. 116–121, Sep. 2018. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0165168418301397>
- [44] A. Liu and A. Moitra, "Robustly Learning General Mixtures of Gaussians," *Journal of the ACM*, vol. 70, Feb. 2023.