

Rolling out CI/CD run using Github Actions for the Development Team:

CI/CD Runs has been Configured for front end and backend code using Github actions following are the CI/CD flows which development will follow


Mainly there are 3 CI/CD runs which deliver the product into the product

CI/CD Runs

1. Dev run (Auto Trigger)
2. QA run (Auto Trigger)
3. Release Run(Manual Trigger)


Dev run

- This run is automatically triggered, presumably on each push to the development branch.
- It's meant for integrating and testing new code changes promptly.

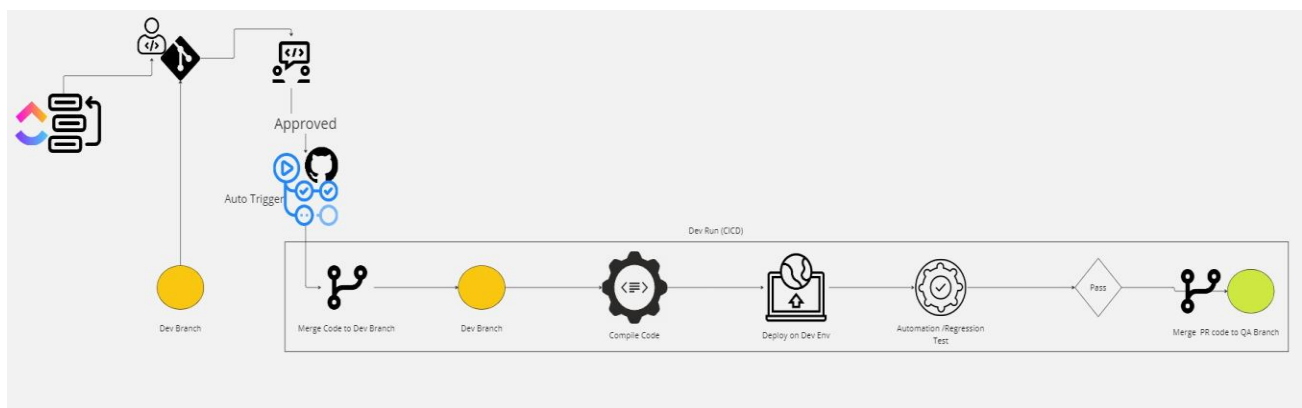

QA run

- This run is also automatically triggered, likely after the Dev run is successful, or upon a merge/push to a specific QA branch.
- Its purpose is to perform further testing, including regression and other quality assurance checks.

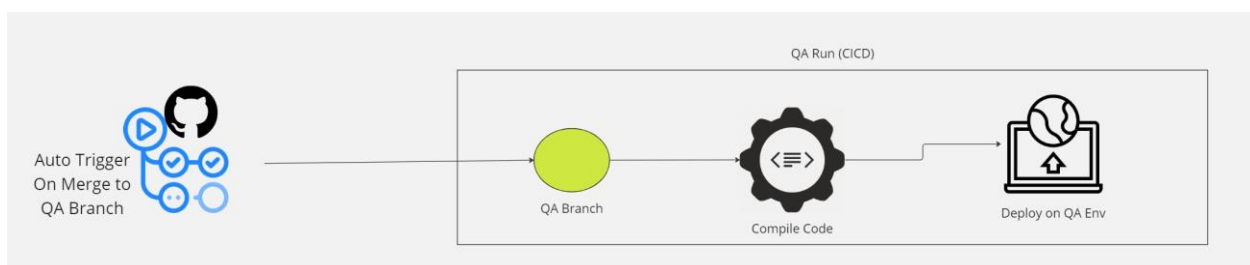

Release run

- This run is manually triggered, which might happen after the QA run passes, indicating that the code is ready for production.
- It involves final checks, pre-release testing, and deployment to the production environment.

