

NEPAL COLLEGE OF INFORMATION TECHNOLOGY

Balkumari, Lalitpur



(Affiliated to Pokhara University)

A Lab Report

On

Subject:- Web Technology.



Lab Report # 2

Title:- Introduction to HTML

Submitted by :-

Name:- Nishant Tiwari
Roll No:- 251726
Faculty:- Science and Technology
Year/Semester:- 2nd semester

Submitted to:-

Instructor:- Er. Simanta Kasaju
Department of Software
Submission Date:- 2083/02/04

Table Of Content

<u>S.N</u>	LAB TOPICS	DATE	SUBMITTED DATE	REMARKS
1.	INTRODUCTION TO HTML	2083/01/17	2081/01/05	
2.	LIST TAG	2083/01/28	2083/02/05	
3.				
4.				

Nishant

OBJECTIVE:- TO BE FAMILIARIZATIZED WITH THE LIST TAG(NESTED LIST TAG)

Theory:

1.Introduction:

An HTML list organizes content into ordered or unordered formats, making information clear and easy to read.

- HTML lists organize content using tags like , & .
- They improve readability by presenting data in a structured format.

Syntax:

```
<ul>
<li>Item 1</li>
  <li>Item 2</li>
    <li>Item 3</li>
</ul>
```

Html Tags

HTML (HyperText Markup Language) uses tags to define and structure elements on a webpage. Each tag tells the browser how to display the content - such as text, images, links, or layouts.

Types of HTML Lists

There are three main types of lists in HTML

1. Unordered List or Bulleted List

Unordered lists display items as bulleted points where the order of items does not matter, using the and tags.

- Unordered lists are ideal for scenarios where the sequence of the items is not important.
- The unordered list items are marked with bullets, also known as bulleted lists.
- An unordered list starts with the tag, and each list item begins with the tag.

Attribute: This tag contains two attributes which are listed below:

- **compact:** It will render the list smaller.
- **type:** It specifies which kind of marker is used in the list.

2. HTML Ordered List

Ordered lists are used when the items need to follow a specific sequence.

In an [ordered list](#), all list items are marked with numbers by default. An ordered list starts with the `<ol>` tag, and each list item begins with the `<li>` tag.

Attributes:

- **compact:** It defines the list should be compacted ([compact](#) attribute is not supported in HTML5. Use CSS instead.).
- **reversed:** [reversed](#) defines that the order will be descending.
- **start:** It defines from which number or alphabet the order will [start](#).

Syntax:

```
<ol>
  <li>Item1</li>
  <li>Item2</li>
  <li>Item3</li>
</ol>
```

•

3. HTML Description List

A [description list](#) is a list of terms, with a description of each term. Description lists are less common but very useful for definitions, glossaries, or any other key-value pairs of items.

- The `<dl>` tag defines the description list, the `<dt>` tag defines the term name, and the `<dd>` tag describes each term.
- Here, `<dt>` (description term) is used for the term being defined, and `<dd>` (description details) is used for the description.
- **type:** It defines which [type](#) (1, A, a, I, and i) of the order you want in your list of numeric, alphabetic, or roman numbers.

Syntax:

```
<dl>
  <dt>Item 1</dt>
  <dd>Description of Item 1 </dd>
  <dt>Item 2</dt>
  <dd>Description of Item 2</dd>
</dl>
```

Nested List in HTML

A nested list in HTML is a list that contains other lists within its list items. This creates a hierarchical structure, where each sublist is indented to visually represent its relationship to the parent list item.

1. Nested Unordered List in HTML

An [unordered list](#) in HTML is a collection of items represented by bullet points, providing a flexible way to display information without a specific order.

2. Nested Ordered List in HTML

In [HTML](#), an [ordered list](#) organizes items in a numbered sequence, providing a structured way to present information.

HTML Images

The HTML `<img>` tag is used to embed an image in web pages by linking them. It creates a placeholder for the image, defined by attributes like `src`, `width`, `height`, and `alt`, and does not require a closing tag.

- There are two ways to insert the images into a webpage:
- By providing a full path or address (URL) to access an internet file.

- By providing the file path relative to the location of the current web page file.
- tag is used to embed an image in a webpage.
- src specifies the image source URL.
- alt provides descriptive text if the image cannot be displayed.

HTML img Tag Attributes

Attribute	Description
<u>src</u>	Specifies the path to the image file.
<u>alt</u>	Provides alternate text for the image, useful for accessibility and when the image cannot be displayed.
<u>crossorigin</u>	Allows importing images from third-party sites with cross-origin access, typically used with canvas.
<u>height</u>	Specifies the height of the image.
<u>width</u>	Specifies the width of the image.
<u>ismap</u>	Specifies an image as a server-side image map.
<u>loading</u>	Specifies whether the browser should defer image loading or load it immediately.

Task 1: Write a code for following o/p

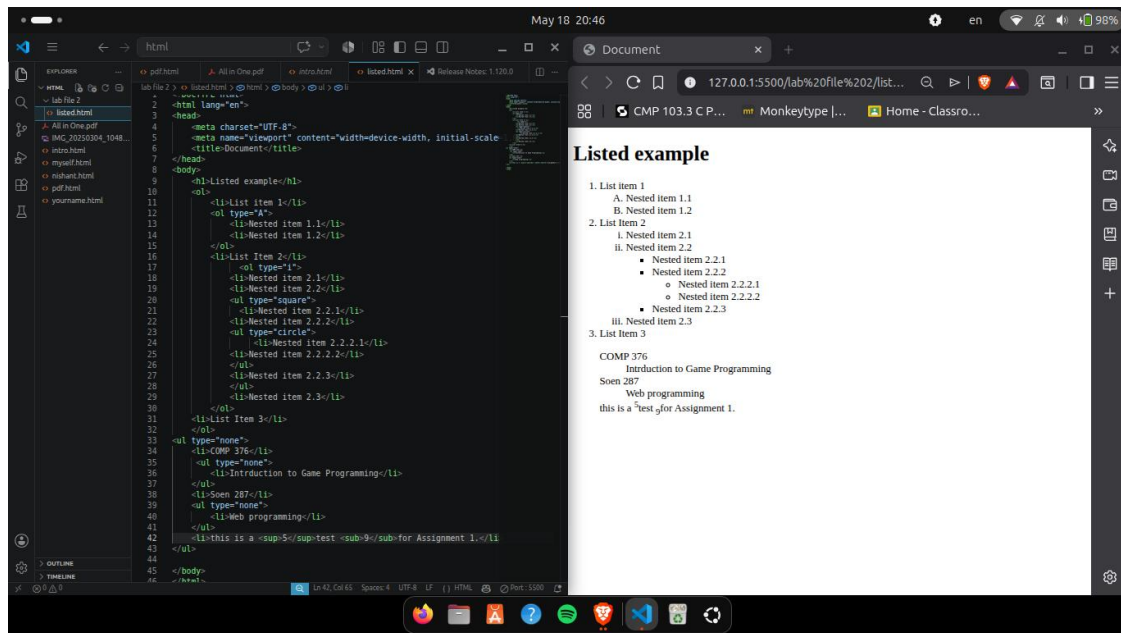


Fig:Task 1

Task2:Print the following result.

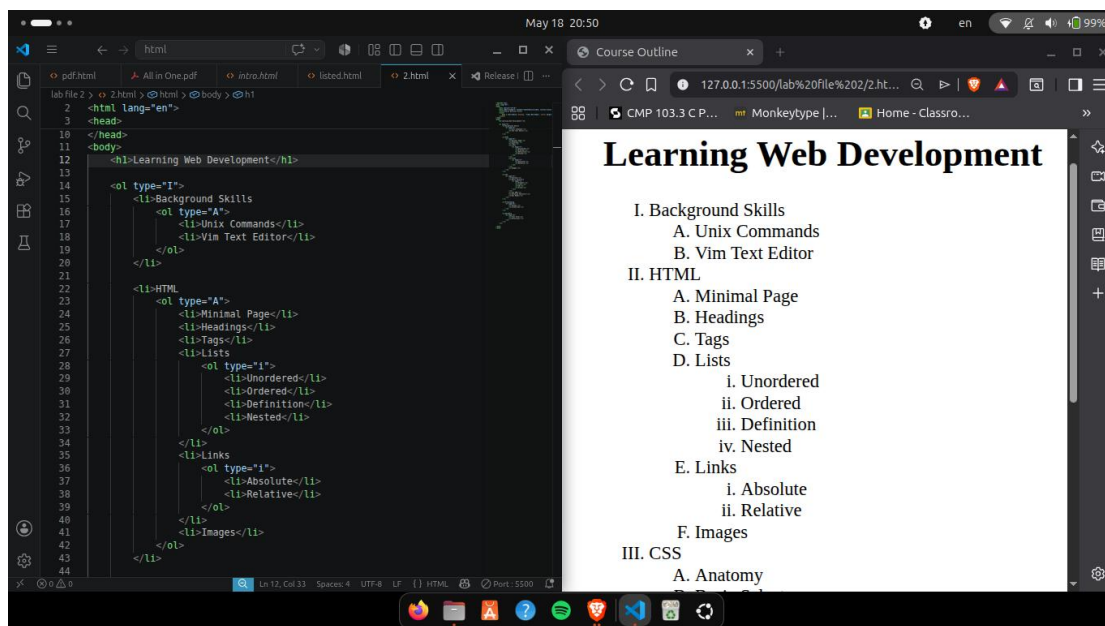


Fig:Task 2

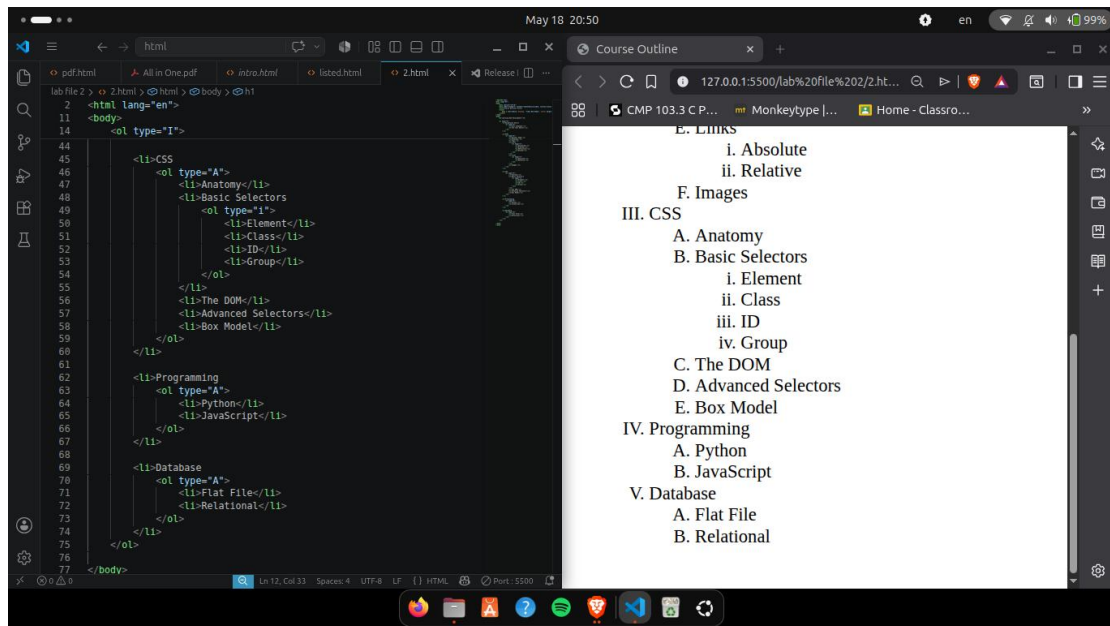


Fig:task 2.1

Task4:Design a a list that contains your favorite animals and their breeds, your favorite foods and their types, and your favorite places with their further categories. Include images for each item in the list.

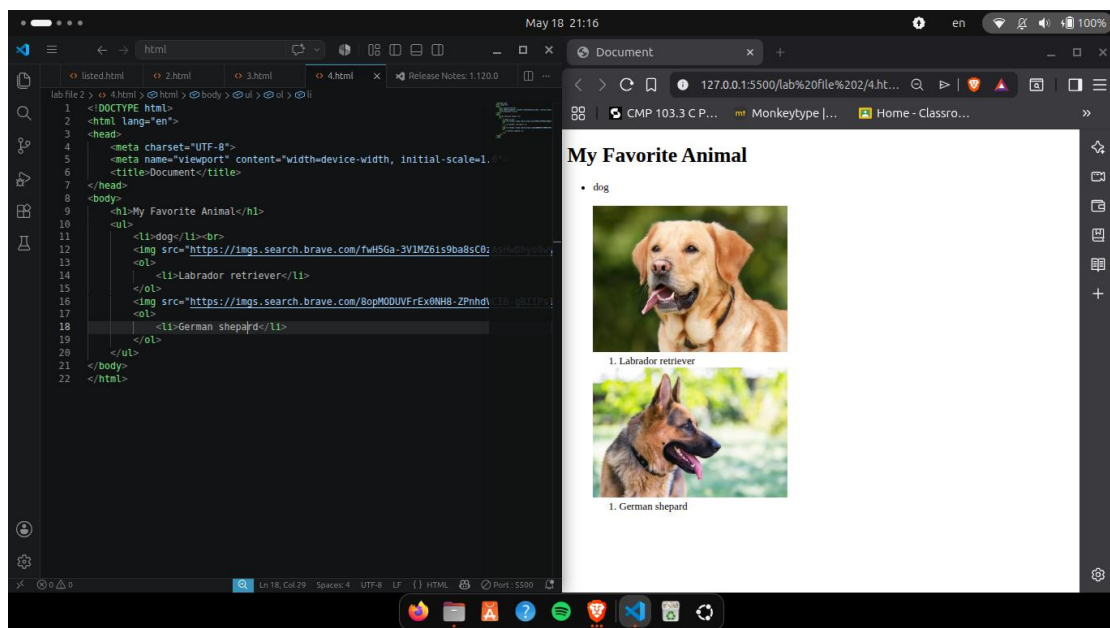


Fig:Favorite Animal

Nishant

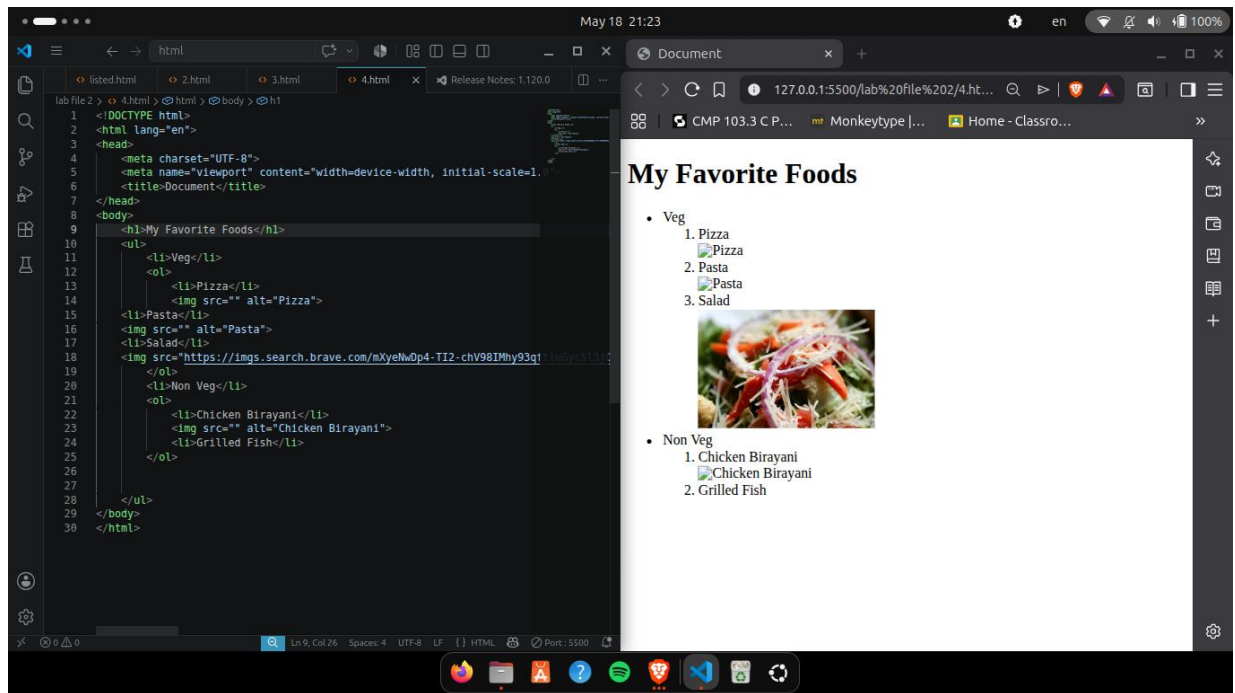


Fig: Favorite Foods

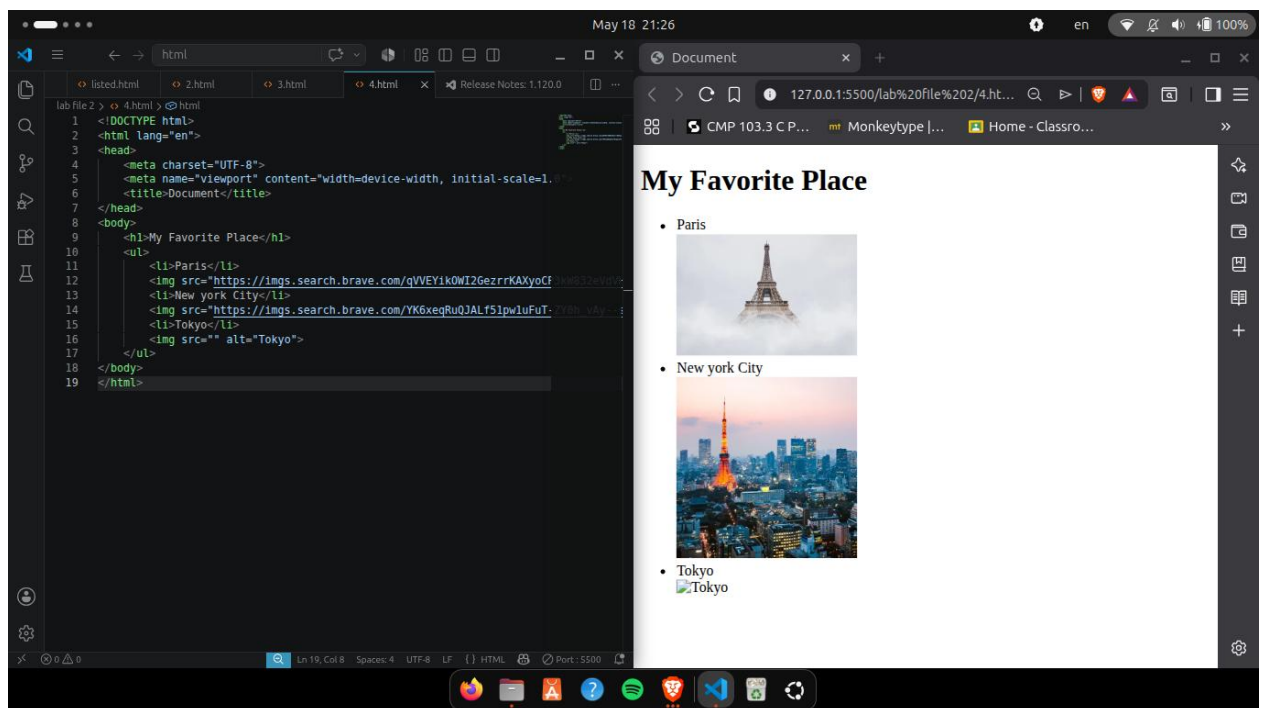


Fig: Favorite Places

Nishant