Chapter 3.9.5.2.16

Content section - Front matter

Table of contents

Page

Content section - Front matter 1
References 2
1 General 2
2 Front matter information 3
2.1 Schema basic rules 3
2.2 Content 4
2.3 Front matter 4
2.3.1 Title page 5
2.3.2 Table of contents 22
2.3.3 Front matter lists 32
3 Markup examples 43

List of tables

1 References 2

List of figures

1 Major elements in Front matter content 4
2 The three Front matter branches 5
3 Title page, page 1 - S1000D standard page-oriented presentation, example 6
4 Title page, page 2 - S1000D standard page-oriented presentation, example 7
5 Element <frontMatterTitlePage> 8
6 Element <productAndModel> 11
7 Element <dataRestrictions> 14
8 Element <productIllustration> 15
9 Element <enterpriseSpec> 16
10 Element <enterpriseLogo> 17
11 Element <responsiblePartnerCompany> 18
12 Element <publisherLogo> 18
13 Element <barCode> 19
14 Element <frontMatterInfo> 20
15 Table of contents, non-hierarchical - S1000D standard page-oriented presentation, example 23
16 Table of contents, hierarchical - S1000D standard page-oriented presentation, example 24
17 Element <frontMatterTableOfContent> 25
18 Element <tocList> 26
19 Element <dmRef> 28
20 Element <pmRef> 29
21 Element <externalPubRef> 31
22 LOEP - S1000D standard page-oriented presentation, example 32

23 LOEDM - S1000D standard page-oriented presentation, example....33
24 HIGH with updating instruction - S1000D standard page-oriented presentation, example....34
25 Element <frontMatterList>....35
26 Element <frontMatterSubList>....37
27 Element <frontMatterDmEntry>....38
28 Element <frontMatterPmEntry>....40
29 Element <frontMatterExternalPubEntry>....41

References

Table 1 References

Chap No./Document No.	Title
Chap 3.6	Information generation - Security and data restrictions
Chap 3.9.4	Authoring - Front matter
Chap 3.9.5.1	Data modules - Identification and status section
Chap 3.9.5.2.1.1	Common constructs - Change marking
Chap 3.9.5.2.1.2	Common constructs - Referencing
Chap 3.9.5.2.1.7	Common constructs - Figures, multimedia and foldouts
Chap 3.9.5.2.1.9	Common constructs - Preliminary requirements and requirements after job completion
Chap 3.9.5.2.1.10	Common constructs - Text elements
Chap 3.9.5.2.7	Content section - Parts information
Chap 3.9.5.2.11.6	Common information repository - Enterprise information
Chap 3.9.5.2.16.1	Front matter - Markup examples
Chap 3.9.5.3	Data modules - Applicability
Chap 3.9.6.1	Attributes - Project configurable values
Chap 4.9.1	Publication management - Publication module
Chap 4.9.2	Publication management - Coding publication modules
Chap 5.2.1.20	Common information sets - List of applicable publications
Chap 6.2.1	Page-oriented publications - Page layout, paper publications, headers and footers
Chap 6.2.3.1	Layout rules and examples - Front matter data modules

1 General

Front matter information can be captured and represented by using different Schemas. In general, all Front matter data modules can use the descriptive Schema except for ACT, CCT and PCT which have their own Schemas.

The Front matter Schema described in this chapter can be used to minimize manual authoring and in most cases support auto-generation of the Front matter data modules.

This Schema is used to capture and represent the following Front matter information:

- Title page - TITLE
- Table of contents - TOC
- List of effective pages - LOEP
- List of effective data modules - LOEDM
- Highlights - HIGH

The Schema also supports the capturing and representation of publication list data modules for the List of applicable publications. Refer to Chap 5.2.1.20.

Note

All other Front matter data module types than those given above must use the descriptive Schema.

Note

In future issues of the specification the remaining Front matter data module types (refer to Chap 3.9.4) will be included in the Front matter Schema.

The Front matter Schema has an Identification and status section and a Content section. The Identification and status section are used for managing the Front matter data module itself and is thus not used for presentation except for the headers and footers. The Content section consists of a set of branches for the different types of Front matter.

Note

The date in the footer is derived from the front matter data module element <issueDate> given in the element <identAndStatusSection>. Rules for data module issue dates are given in Chap 3.9.5.1.

The Schema is designed to derive basic information, such as issue information (refer to Para 2.3.1.4) and Table of contents entries (refer to Para 2.3.2.3.2) from a source publication module.

The Front matter data modules are primarily designed to be used as customized modules, but the Schema allows treating them as master Front matter data modules by using applicability.

Note

A publication often comprises data modules and publication modules using different ACT, CCT and PCT, and also has different project rules for applicability which must be carefully managed.

The Front matter Schema also allows change marking. To avoid confusion and unnecessary change marking, it is recommended that care be taken when applying change marking. For example, change marking the introductory paragraph using the element <reducedPara> in a Table of contents data module when it is reworded or when the issue number is changed. Refer to Chap 3.9.4.

The rules and guidance for S1000D standard page-oriented presentation of Front matter data modules are given in Chap 6.2.3.1 together with several examples of Front matter data modules.

2 Front matter information

2.1 Schema basic rules

The Front matter Schema defines a dedicated structure for the content of Front matter data modules.

This Schema can be used for all types of Front matter (eg, TITLE, TOC and LOEDM). It can also be used for publication lists data modules for the List of applicable publications.


Note

The title to be presented on the front matter data modules, except for TITLE, is derived from the element <infoName>. Any content of the mandatory element <techName> is suppressed. Refer to the general rules in Chap 6.2.3.1.

2.2 Content

Description: The element <content> contains the Content section of a Front matter data module.

Markup element: <content>

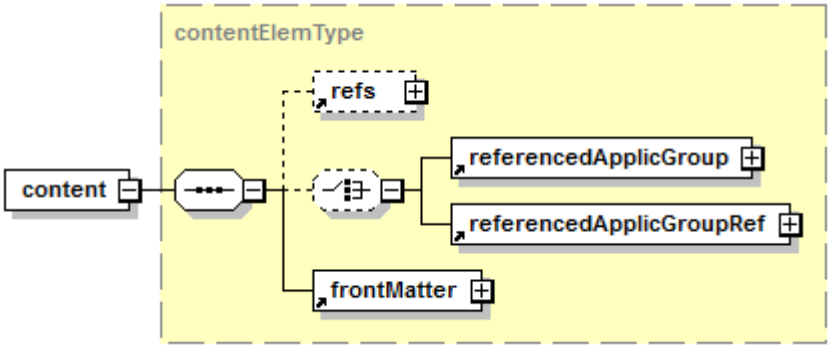

ICN-S3627-A10000D0603-001-01

Fig 1 Major elements in Front matter content

Attributes:

– id (O), the identifier of the element <content>. Refer to Chap 3.9.5.2.1.2.


Child elements:

– <refs>. Refer to Chap 3.9.5.2.1.2.
– <referencedApplicGroup>. Refer to Chap 3.9.5.3.
– <referencedApplicGroupRef>. Refer to Chap 3.9.5.3.
– <frontMatter>. Refer to Para 2.3.

2.3 Front matter

Description: The Front matter Schema contains three branches supporting the following Front matter types:

– Title page. Refer to Para 2.3.1.
– Table of contents. Refer to Para 2.3.2.
– Highlights and various Front matter lists. Refer to Para 2.3.3.

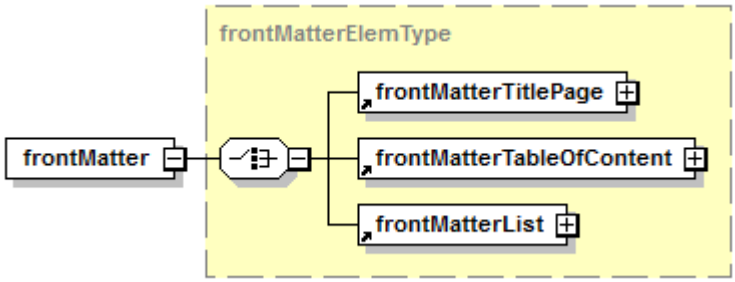


ICN-S3627-S1000D0557-002-01

Fig 2 The three Front matter branches

2.3.1 Title page

Description: The element <frontMatterTitlePage> contains the title page information.

Rules for presentation of title pages in accordance with the S1000D standard page-oriented presentation is given in Chap 6.2.3.1.

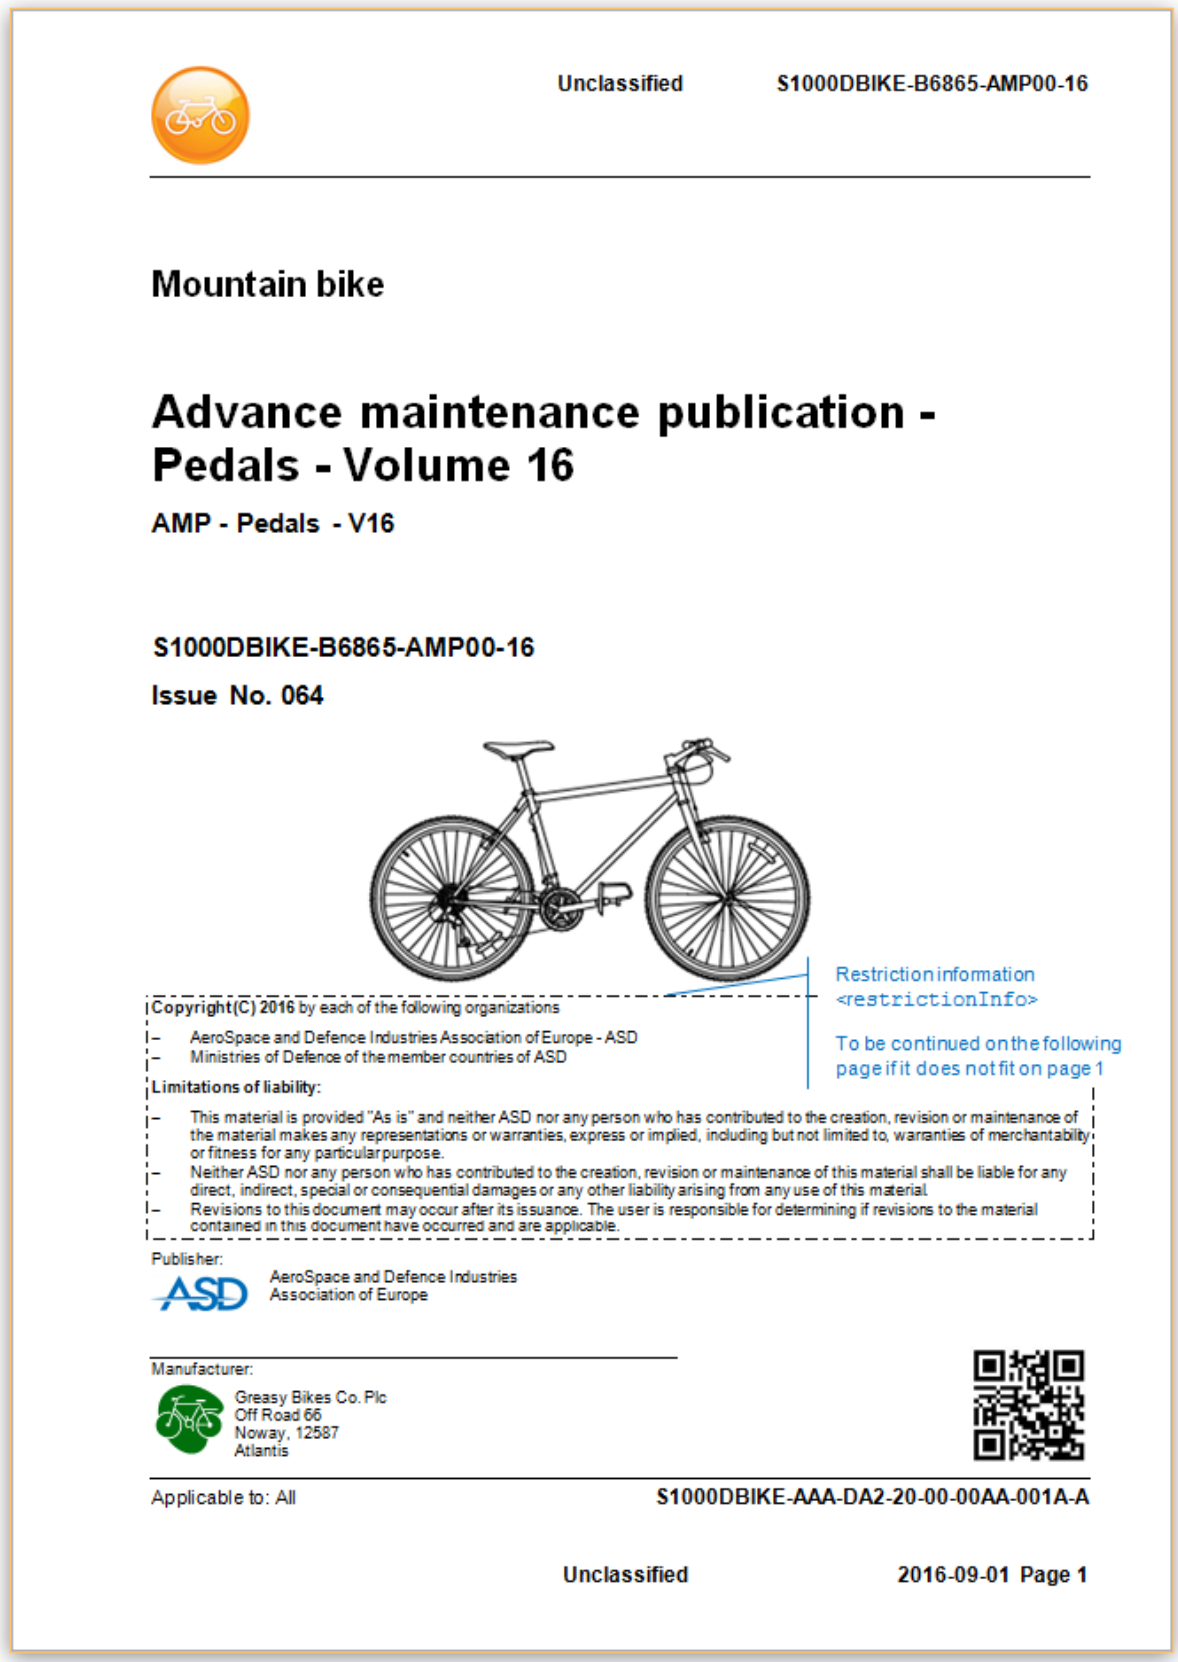

Unclassified S1000DBIKE-B6865-AMP00-16

Mountain bike

Advance maintenance publication - Pedals - Volume 16

AMP - Pedals - V16

S1000DBIKE-B6865-AMP00-16

Issue No. 064

Restriction information
<restrictionInfo>

To be continued on the following page if it does not fit on page 1

Copyright (C) 2016 by each of the following organizations
- AeroSpace and Defence Industries Association of Europe - ASD
- Ministries of Defence of the member countries of ASD

Limitations of liability:
- This material is provided "As is" and neither ASD nor any person who has contributed to the creation, revision or maintenance of the material makes any representations or warranties, express or implied, including but not limited to, warranties of merchantability or fitness for any particular purpose.
- Neither ASD nor any person who has contributed to the creation, revision or maintenance of this material shall be liable for any direct, indirect, special or consequential damages or any other liability arising from any use of this material.
- Revisions to this document may occur after its issuance. The user is responsible for determining if revisions to the material contained in this document have occurred and are applicable.

Publisher:
AeroSpace and Defence Industries Association of Europe


Manufacturer:
Greasy Bikes Co. Plc
Off Road 66
Noway, 12587
Atlantis

Applicable to: All S1000DBIKE-AAA-DA2-20-00-00AA-001A-A

Unclassified 2016-09-01 Page 1

ICN-S3627-S1000D0604-003-01


Fig 3 Title page, page 1 - S1000D standard page-oriented presentation, example

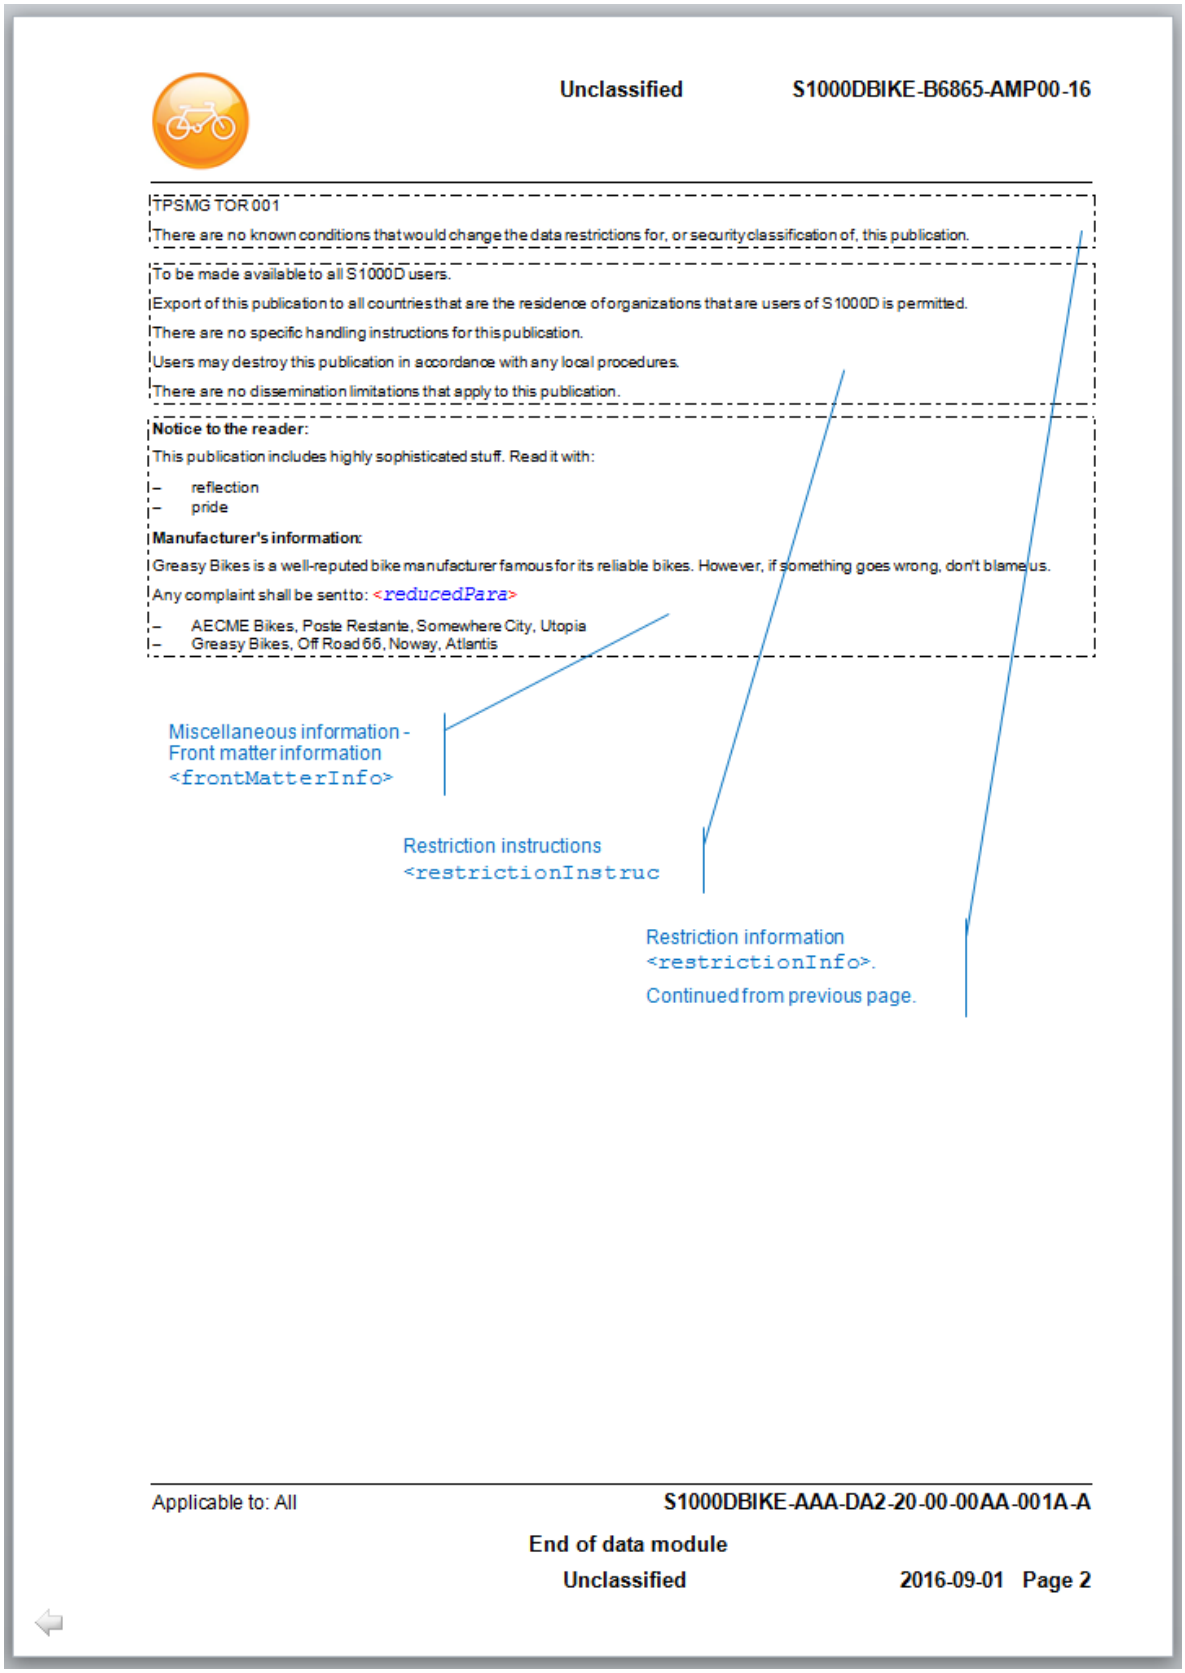

ICN-S3627-S1000D0605-003-01

Fig 4 Title page, page 2 - S1000D standard page-oriented presentation, example

Markup element: <frontMatterTitlePage>

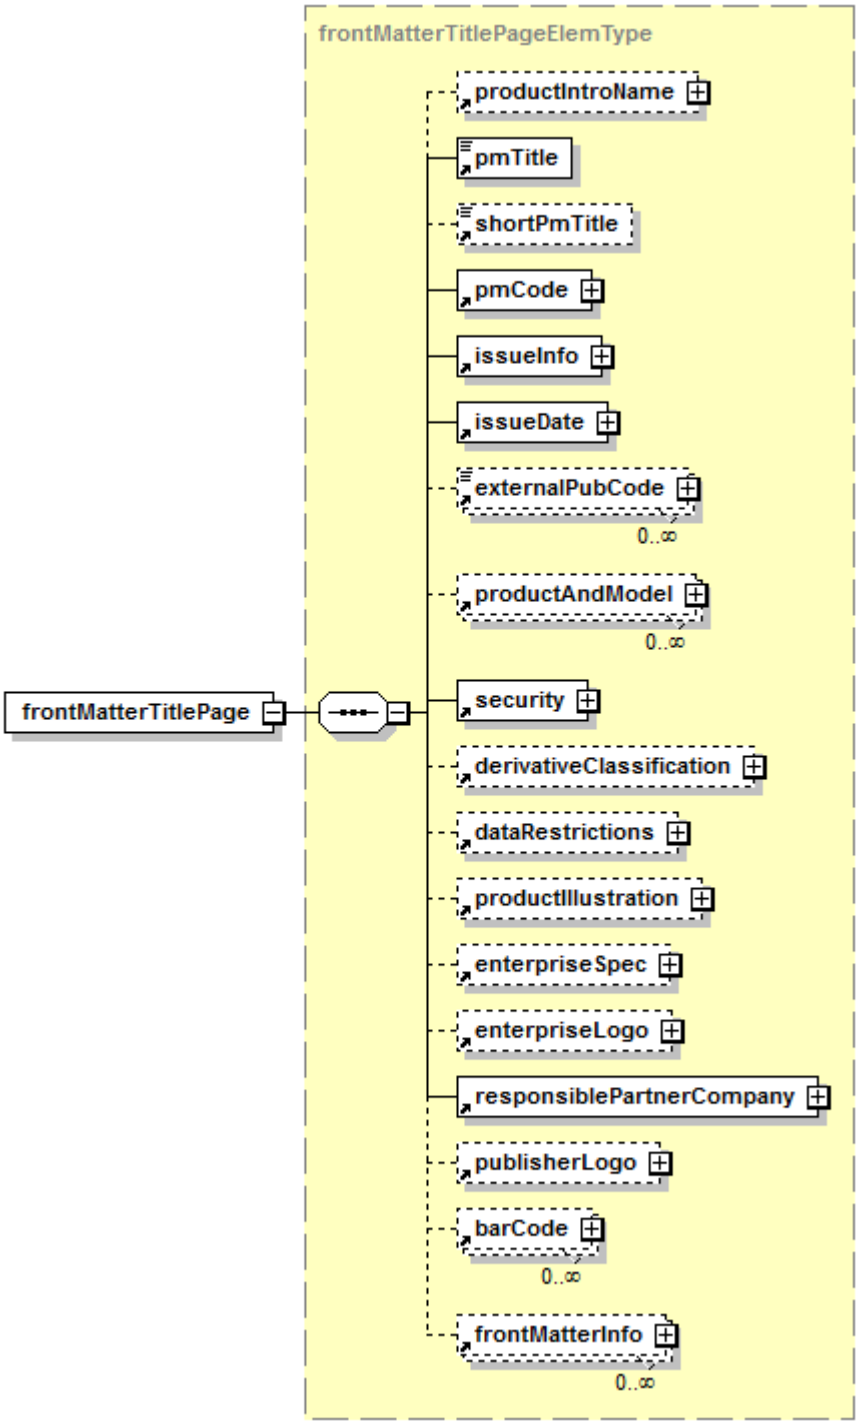

ICN-S3627-S1000D0558-002-01

Fig 5 Element <frontMatterTitlePage>

Attributes:

– None

Child elements:

- <productIntroName>. Refer to Para 2.3.1.1.
- <pmTitle>. Refer to Para 2.3.1.2.
- <shortPmTitle>. Refer to Para 2.3.1.2.
- <pmCode>. Refer to Para 2.3.1.3.
- <issueInfo>. Refer to Para 2.3.1.4.
- <issueDate>. Refer to Para 2.3.1.4.
- <externalPubCode>. Refer to Para 2.3.1.5.
- <productAndModel>. Refer to Para 2.3.1.6.
- <security>. Refer to Para 2.3.1.7.
- <derivativeClassification>. Refer to Para 2.3.1.8.
- <dataRestrictions>. Refer to Para 2.3.1.9.
- <productIllustration>. Refer to Para 2.3.1.10.
- <enterpriseSpec>. Refer to Para 2.3.1.11.
- <enterpriseLogo>. Refer to Para 2.3.1.12.
- <responsiblePartnerCompany>. Refer to Para 2.3.1.13.
- <publisherLogo>. Refer to Para 2.3.1.14.
- <barcode>. Refer to Para 2.3.1.15.
- <frontMatterInfo>. Refer to Para 2.3.1.16.

2.3.1.1 Product name

Description: The element <productIntroName> contains the name of the product or project documented in the publication or any commercial name to be presented on the title page.

Markup element: <productIntroName>

Attributes:

- None

Child elements:

- <name>. Refer to Chap 3.9.5.2.1.10.

Business rule decision point BRDP-S1-00294 - Content of the element <productIntroName>:

- Decide whether to use the element <productIntroName>.

Markup example:

```
<productIntroName><name>Mountain bike</name></productIntroName>
```

2.3.1.2 Publication title and short publication title

Description: The elements <pmTitle> and <shortPmTitle> contain the full name and the short name, respectively, of the publication to be presented on the title page.

The content is authored or derived from the source publication module.

Markup element: <pmTitle> and <shortPmTitle>. Refer to Chap 4.9.1.

Markup examples:

```
<pmTitle>Advance maintenance publication - Pedals - Volume
16</pmTitle>
<shortPmTitle>AMP - Pedals - V16</shortPmTitle>
```

2.3.1.3 Publication code

Description: The element <pmCode> contains the publication code to be presented on the title page.

The content is authored or derived from the Identification and status section of the source publication module.

Markup element: <pmCode>. Refer to Chap 4.9.2.

2.3.1.4 Issue information and date

Description: The elements <issueInfo> and <issueDate> contain the issue number, the inwork number and the issue date, respectively, of the publication to be presented on the title page.

The content is authored or derived from the source publication module.

Note

This issue date can be different from the date given in the <identAndStatusSection> of the front matter data module depending on project decisions. Refer to Chap 3.9.5.1.

Markup element: <issueInfo> and <issueDate>. Refer to Chap 3.9.5.1.

2.3.1.5 External publication codes

Description: The element <externalPubCode> contains a non-S1000D code, for example an ISBN.


Markup element: <externalPubCode>. Refer to Chap 3.9.5.2.1.2.

2.3.1.6 Product and model name

Description: The element <productAndModel> contains one or more product names and associated model names and their identifiers which are documented in the publication.

The content of the child elements are authored (as they are not stored in the source publication module).

Markup element: <productAndModel>

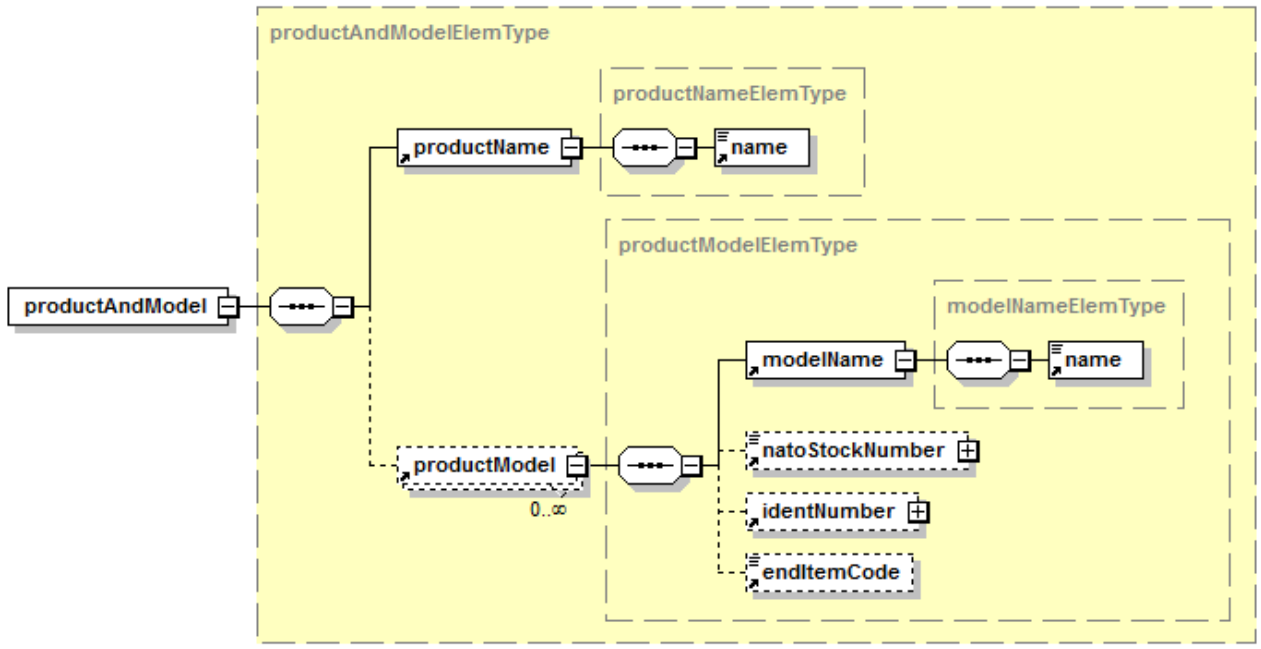

ICN-S3627-S1000D0559-002-01

Fig 6 Element <productAndModel>

Attributes:

– applicRefId (O), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3.

Child elements:

– <productName>. Refer to Para 2.3.1.6.1.
– <productModel>. Refer to Para 2.3.1.6.2.

Business rule decision point BRDP-S1-00295 - Use of the element <productAndModel>:

– Decide whether and how to use the element <productAndModel> and its child elements.

2.3.1.6.1 Product name

Description: The element <productName> contains the name of the product documented in the publication.

Markup element: <productName>

Attributes:

– None

Child elements:

– <name>. Refer to Chap 3.9.5.2.1.10.

2.3.1.6.2 Product model

Description: The element <productModel> contains the model name and its identifiers.

Markup element: <productModel>

Attributes:

– None

Child elements:

– <modelName>. Refer to Para 2.3.1.6.3.
– <natoStockNumber>. Refer to Para 2.3.1.6.4.
– <identNumber>. Refer to Para 2.3.1.6.5.
– <endItemCode>. Refer to Para 2.3.1.6.6.

Markup example:

```
<productModel>
<modelName><name>Mk I</name></modelName>
<natoStockNumber>6240-00-027-2059</natoStockNumber>
<identNumber>
<manufacturerCode>00000</manufacturerCode>
<partAndSerialNumber>
<partNumber>P/N 19283746</partNumber>
</partAndSerialNumber>
</identNumber>
<endItemCode>99A</endItemCode>
</productModel>
<productModel>
<modelName><name>Mk I De Luxe</name></modelName>
<natoStockNumber>6240-00-027-2063</natoStockNumber>
<identNumber>
<manufacturerCode>00000</manufacturerCode>
<partAndSerialNumber>
<partNumber>P/N 91827364</partNumber>
</partAndSerialNumber>
</identNumber>
<endItemCode>99B</endItemCode>
</productModel>
```

2.3.1.6.3 Model name

Description: The element <modelName> contains the model name of the product documented in the publication.

Markup element: <modelName>

Attributes:

– None

Child elements:

– <name>. Refer to Chap 3.9.5.2.1.10.

2.3.1.6.4 NATO stock number

Description: The element <natoStockNumber> contains the NATO stock number of the model of the Product documented in the publication. Refer to Chap 3.9.5.2.7.

Markup element: <natoStockNumber>. Refer to Chap 3.9.5.2.7 with the following exceptions:

– The attribute id must not be used. Refer to default BREX rule BREX-S1-00105.

– The element <refs> must not be used. Refer to default BREX rule BREX-S1-00106.

2.3.1.6.5 Identification number

Description: The element <identNumber> contains the manufacturer's identification information of the model of the product documented in the publication. Refer to Chap 3.9.5.2.1.9.

Markup element: <identNumber>. Refer to Chap 3.9.5.2.1.9 with the following exceptions:

– The element <refs> must not be used. Refer to default BREX rule BREX-S1-00107.

2.3.1.6.6 End item code

Description: The element <endItemCode> contains the end item code which typically consists of a three-character alphanumeric code. The end item code is another type of identifier, similar to NSN, CAGE Code, part number, etc.

Markup element: <endItemCode>

Attributes:

– None

Child elements:

– None

2.3.1.7 Security classification

Description: The element <security> contains the security classification and restrictive markings of the complete publication and its contained or associated illustrations.

This is the security classification which is presented on the Title page (in the header and the footer). Refer to Chap 6.2.1.

Note

The security classification given in the Identification and status section of the title page data module is only valid for the title page data module itself.

Markup element: <security>. Refer to Chap 3.9.5.1.

2.3.1.8 Derivative classification

Description: The element <derivativeClassification> contains all derivative classification actions taken (eg, source material, date of action, action type) to the information in the complete publication.

Note

The derivative classification information given in the Identification and status section of the title page data module is only valid for the title page data module itself.

Markup element: <derivativeClassification>. Refer to Chap 3.9.5.1.

2.3.1.9 Restriction information - Copyright


Description: The element <dataRestrictions> contains the instructions and information, applicable to the complete publication, that relate to the use, storage and handling.

The element is frequently used to include only a copyright statement using the element <copyright>. In these cases, the element <dataDistribution> is left empty.

Note

Any text to be presented in, for example bold, must be coded with corresponding attribute `emphasisType` value.

Markup element: <`dataRestrictions`>

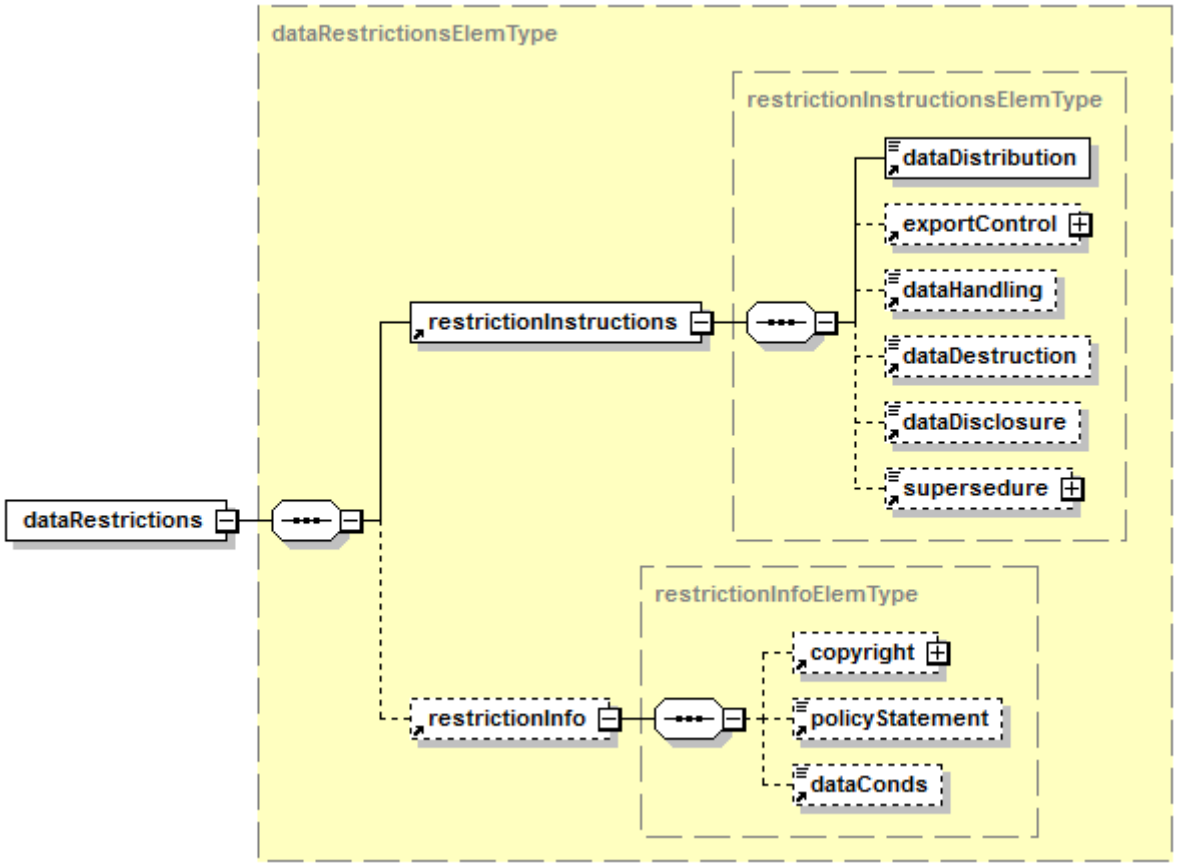

ICN-S3627-S1000D0763-001-01

Fig 7 Element <`dataRestrictions`>

Attributes:

Refer to Chap 3.9.5.1 with the following exceptions:

- `id`, `authorityName` and `authorityDocument` must not be used. Refer to default BREX rule BREX-S1-00108.

Child elements:

- <`restrictionInstructions`>. Refer to Chap 3.9.5.1.
- <`restrictionInfo`>. Refer to Chap 3.9.5.1.


Business rule decision point BRDP-S1-00296 - Use of the element <`dataRestrictions`> in the element <`frontMatterTitlePage`>:

- Decide whether and how to use the element <`dataRestrictions`> and its child elements.

2.3.1.10 Product illustration

Description: The element <productIllustration> contains illustrations of the product.

Markup element: <productIllustration>

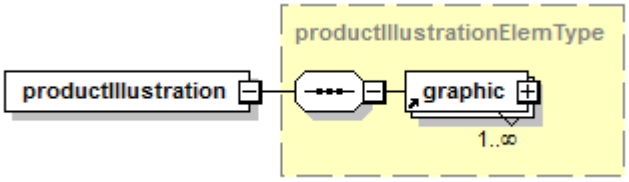

ICN-S3627-S1000D0764-001-01

Fig 8 Element <productIllustration>

Attributes:

– None

Child elements:

– <graphic>. Refer to Chap 3.9.5.2.1.7.


Note

The following attributes of the element <graphic> must not be used in this context: id, authorityName, authorityDocument and the xlink attributes. Refer to default BREX rule BREX-S1-00109.

2.3.1.11 Manufacturer

Description: The element <enterpriseSpec> contains information about the manufacturer of the product such as the enterprise name, the business unit and address.

Markup element: <enterpriseSpec>

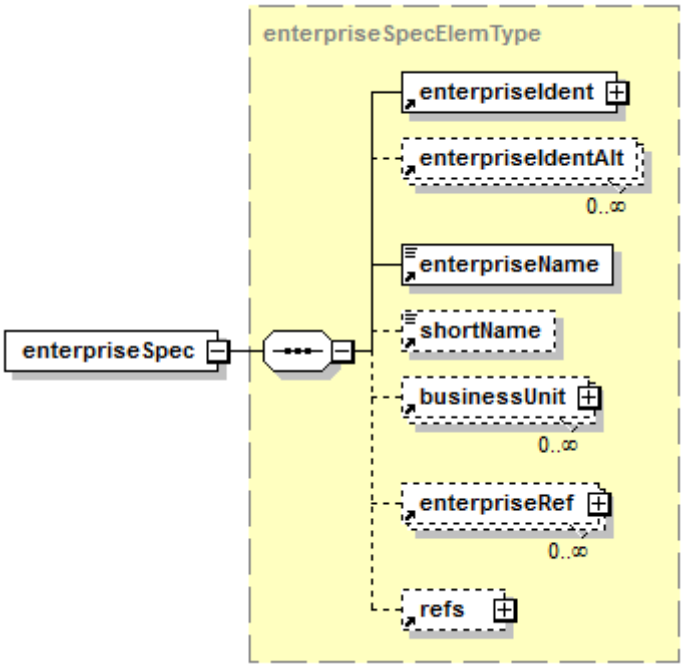

ICN-S3627-S1000D0765-001-01

Fig 9 Element <enterpriseSpec>

Attributes:

Refer to Chap 3.9.5.2.11.6 with the following exceptions:

– `id`, `authorityName` and `authorityDocument` must not be used. Refer to default BREX rule BREX-S1-00110.

Child elements:

Refer to Chap 3.9.5.2.11.6 with the following Note:

Note

Typically only the following elements are used: <`enterpriseName`> and <`businessUnitName`> giving the manufacturers name and the business unit name, and <`businessUnitAddress`> giving the address. Technically the Schema demands the company's CAGE code in the attribute `manufacturerCodeValue`. If the company has no CAGE code, it is allowed to use the value "`00000`".

Business rule decision point BRDP-S1-00297 - Use of the element <`enterpriseSpec`> in the element <`frontMatterTitlePage`>:

– Decide whether and how to use the element <`enterpriseSpec`>.

Markup example:

```
<enterpriseSpec>
<enterpriseIdent manufacturerCodeValue="00000"/>
<enterpriseName>Greasy Bikes Co. Plc
</enterpriseName>
<businessUnit>
<businessUnitName>Heavy bikes</businessUnitName>
<businessUnitAddress>
```

```
<street>Off Road 66</street>
<postalZipCode>12587</postalZipCode>
<city>Noway</city>
<country>Atlantis</country>
</businessUnitAddress>
</businessUnit>
</enterpriseSpec>
```

2.3.1.12 Manufacturer's logotype

Description: The element <enterpriseLogo> contains logotypes of the manufacturer of the Product.


The first appearance of the element <symbol> will by default be the one presented on the title page. Refer to Chap 6.2.3.1.

The content is authored or derived from the source publication module.

Note

As a publication module can include a number of symbols (in the element <logo> in the Identification and status section), a method has to be set up which logotype to be used as the Manufacturer's logo (eg, first logo to be used).

Markup element: <enterpriseLogo>

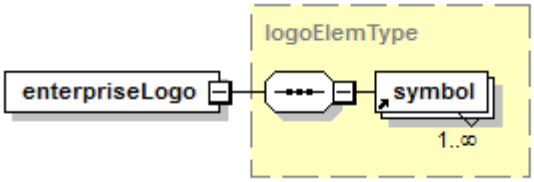

ICN-S3627-S1000D0766-001-01

Fig 10 Element <enterpriseLogo>

Attributes:

– None

Child elements:

– <symbol>. Refer to Chap 3.9.5.2.1.10.

Note

The following attributes of the element <symbol>must not be used in this context: id, authorityName, authorityDocument and the xlink attributes. Refer to default BREX rule BREX-S1-00111.

Business rule decision point BRDP-S1-00298 - Use of the element <enterpriseLogo>:


– Decide whether to use the element <enterpriseLogo> and if it is populated from the element <logo> given in the Identification and status section.

2.3.1.13 Publisher

Description: The element <responsiblePartnerCompany> contains the name of the publisher - responsible company, organization or authority - of the publication. Refer to Chap 3.9.5.1.

The content is authored or derived from the source publication module.

Markup element: <responsiblePartnerCompany>

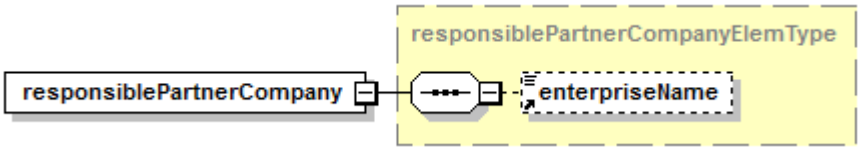

ICN-S3627-S1000D0767-001-01

Fig 11 Element <responsiblePartnerCompany>

Attributes:

- enterpriseCode (O). Refer to Chap 3.9.5.1.
- id must not be used. Refer to default BREX rule BREX-S1-00112.

Child elements:

- <enterpriseName>. Refer to Chap 3.9.5.2.11.6.

Note

The element <enterpriseName> is mandatory in this context (the Schema gives it as optional) and thus governed by the default BREX data module. Refer to default BREX rule BREX-S1-00113.

Markup example:

```
<responsiblePartnerCompany enterpriseCode="I9005">
<enterpriseName>Aerospace and Defence Industries Association of
Europe</enterpriseName>
</responsiblePartnerCompany>
```

2.3.1.14 Publisher's logotype

Description: The element <publisherLogo> contains logotypes of the publisher of the publication.


The first appearance of the element <symbol> will by default be the one presented on the title page. Refer to Chap 6.2.3.1.

The content is authored or derived from the source publication module.

Note

As a publication module can include a number of symbols (in the element <logo> in the Identification and status section), a method has to be set up which logotype to be used as the Publisher's logo (eg, first logo to be used).

Markup element: <publisherLogo>

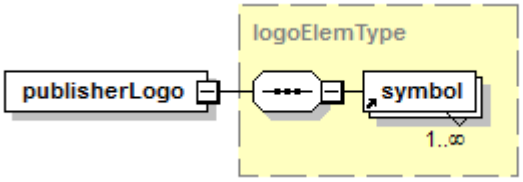

ICN-S3627-S1000D0768-001-01

Fig 12 Element <publisherLogo>

Attributes:

– None

Child elements:

– <symbol>. Refer to Chap 3.9.5.2.1.10.

Note

The following attributes of the element <symbol> must not be used in this context: id, authorityName, authorityDocument and the xlink attributes. Refer to default BREX rules BREX-S1-00111 and BREX-S1-00114.

Business rule decision point BRDP-S1-00299 - Method of populating the element <publisherLogo>:


– Decide whether and how to use the element <logo> in the Identification and status section to populate the element <publisherLogo>.

2.3.1.15 Barcode

Description: The element <barCode> contains the barcode information. Several barcodes can be used.

The first appearance of the element <barCode> will by default be the one presented on the title page. Refer to Chap 6.2.3.1.

Markup element: <barCode>

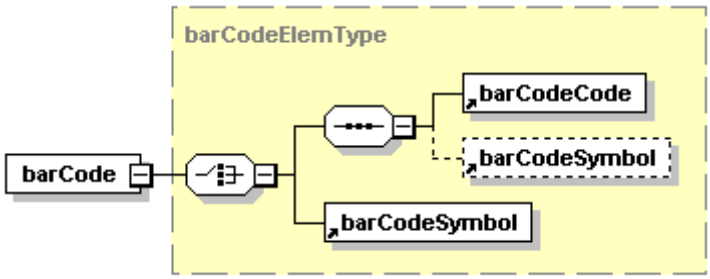

ICN-S3627-S1000D0560-001-01

Fig 13 Element <barCode>

Attributes:

– applicRefId must not be used. Refer to default BREX rule BREX-S1-00115.

Child elements:

– <barCodeCode>. Refer to Para 2.3.1.15.1.
– <barCodeSymbol>. Refer to Para 2.3.1.15.2.

2.3.1.15.1 Barcode value and symbology

Description: The element <barCodeCode> contains the barcode value and the used symbology.

Markup element: <barCodeCode>

Attributes:

– barCodeValue (M), the value of the barcode

– barCodeSymbology (M), the symbology of the linear or the matrix barcode. The attribute can have one of the following values:
  - "bcs01" thru "bcs99". Refer to Chap 3.9.6.1.

Child elements:

– None

Business rule decision point BRDP-S1-00300 - Use of the attribute barCodeSymbology:

– Decide whether to use the attribute barCodeSymbology and which barcode symbology to be used.

2.3.1.15.2 Barcode symbol

Description: The element <barCodeSymbol> contains the graphical representation of the barcode.

Markup element: <barCodeSymbol>

Attributes:

– infoEntityIdent (M). Refer to Chap 3.9.5.2.1.7.
– reproductionWidth (M) and reproductionHeight (M), the presentation sizes for the presentation system
– id must not be used. Refer to default BREX rule BREX-S1-00116.

Child elements:


– None

2.3.1.16 Miscellaneous information - Front matter information

Description: The element <frontMatterInfo> contains miscellaneous Front matter information (eg, manufacturer's information, error reporting, availability statements or general purpose notices including an introductory title). Several sets of Front matter information and types can be given.

The titles must be coded with attribute emphasisType value em01.

Markup element: <frontMatterInfo>

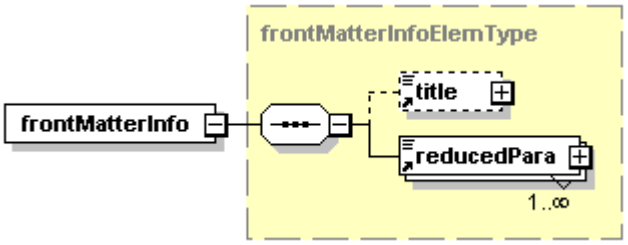

ICN-S3627-S1000D0561-001-01

Fig 14 Element <frontMatterInfo>

Attributes:

– frontMatterInfoType (O), the type of Front matter information. The values of this attribute can be used to govern the presentation of the content and also give the title of the actual Front matter information. The attribute can have one of the following values:

- "fmi01" thru "fmi99". Refer to Chap 3.9.6.1.

Child elements:

– <title>. Refer to Para 2.3.1.16.1.
– <reducedPara>. Refer to Para 2.3.1.16.2.

Business rule decision point BRDP-S1-00301 - Use of the element <frontMatterInfo>:

– Decide whether and how to use the element <frontMatterInfo> including the allowed values of the attribute frontMatterInfoType and their interpretation as titles at presentation. Refer to Chap 3.9.6.1.

Note

The content given in the element <title> takes precedence over the interpretation of the value of the attribute frontMatterInfoType.

Markup examples:

This is an example of General information frontMatterInfoType = "fmi01" with an authored title:

```
<frontMatterInfo frontMatterInfoType="fmi01">
<title>Notice to the reader:</title>
<reducedPara>This publication contains highly sophistcated
stuff. Read it with:
<reducedRandomList listItemPrefix="pf03">
<reducedRandomListItem>
<reducedListItemPara>reflection</reducedListItemPara>
</reducedRandomListItem>
<reducedRandomListItem>
<reducedListItemPara>pride</reducedListItemPara>
</reducedRandomListItem>
</reducedRandomList>
</reducedPara>
</frontMatterInfo>
```

This is an example of Manufacturer's information frontMatterInfoType = "fmi02" with an auto-generated title derived from the meaning of "fmi02". The information is presented on the title page:

```
<frontMatterInfo frontMatterInfoType="fmi02">
<title>Manufacturer's information:</title>
<reducedPara>Greasy Bikes is a well-reputed bike manufacturer
famous for its reliable bikes. However, if something goes wrong,
don't blame us.</reducedPara>
<reducedPara>Any complaint shall be sent to:
<reducedRandomList>
<reducedRandomListItem>
<reducedListItemPara>AECME Bikes, Poste Restante,
Somewhere City, Utopia</reducedListItemPara>
</reducedRandomListItem>
<reducedRandomListItem>
<reducedListItemPara>Greasy Bikes, Off Road 66, Noway,
Atlantis</reducedListItemPara>
```

```
</reducedRandomListItem>
</reducedRandomList>
</reducedPara>
</frontMatterInfo>
```

2.3.1.16.1 Title

Description: The element <title> contains the title of the Front matter information and must be presented before the content of the element <reducedPara>. As an alternative, the title can be derived from the attribute frontMatterInfoType if the element <title> is not used.

Note

Any title to be presented in, for example bold, must be coded with corresponding attribute emphasisType value.

Markup element: <title>

Attributes:

- securityClassification (O), commercialClassification (O), caveat (O) and derivativeClassificationRefId (O), the security and restrictive marking. Refer to Chap 3.6.
- changeType (O), changeMark (O) and reasonForUpdateRefIds (O), the change indications. Refer to Chap 3.9.5.2.1.1.

Child elements:

- Includes the same set of elements of the textElemGroup as used in the element <para> in descriptive data modules. Refer to Chap 3.9.5.2.1.10.

Business rule decision point BRDP-S1-00302 - Use of the element <title> in the element <frontMatterInfo>:

- Decide whether to use the content of the element <title> or the interpretation of the value of the attribute frontMatterInfoType as the title of the Front matter information.

2.3.1.16.2 Reduced paragraph

Description: The element <reducedPara> contains the Front matter information (eg, manufacturer's information, error reporting, availability statements or general purpose notices). Refer to Chap 3.9.5.2.1.10.

2.3.2 Table of contents

Description: The element <frontMatterTableOfContent> contains the Table of contents information. Two types of Table of contents are possible:

- A non-hierarchical (flat) structure. Refer to Fig 15.
- A hierarchical structure. Refer to Fig 16.

Both types list the data modules and any publications or external publications in the order given by the source publication module.

Note

The front matter data module title to be presented is derived from the element <infoName>. The content of the element <techName> is suppressed. Refer to Para 2.1 and the general rules in Chap 6.2.3.1.

Table of contents

The listed documents are included in issue 004, dated 2012-12-24, of this publication.

Title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Copyright	X4-A-00-00-00-01A-021A-A	2012-12-24	1	All
Highlights	X4-A-00-00-00-00A-00UA-A	2012-12-24	1	All
Introduction	X4-A-00-00-00-01A-018A-A	2011-11-01	4	All
Steamroller - Description	X4-A-00-00-00-00A-040A-A	2008-07-01	5	All
Steamroller - Description	X4-A-00-00-00-01A-040A-A	2011-11-01	7	Mk1
Steamroller - Description	X4-A-00-00-00-03A-040A-A	2012-12-24	8	MK2
...				

ICN-S3627-S1000D0606-003-01

Fig 15 Table of contents, non-hierarchical - S1000D standard page-oriented presentation, example

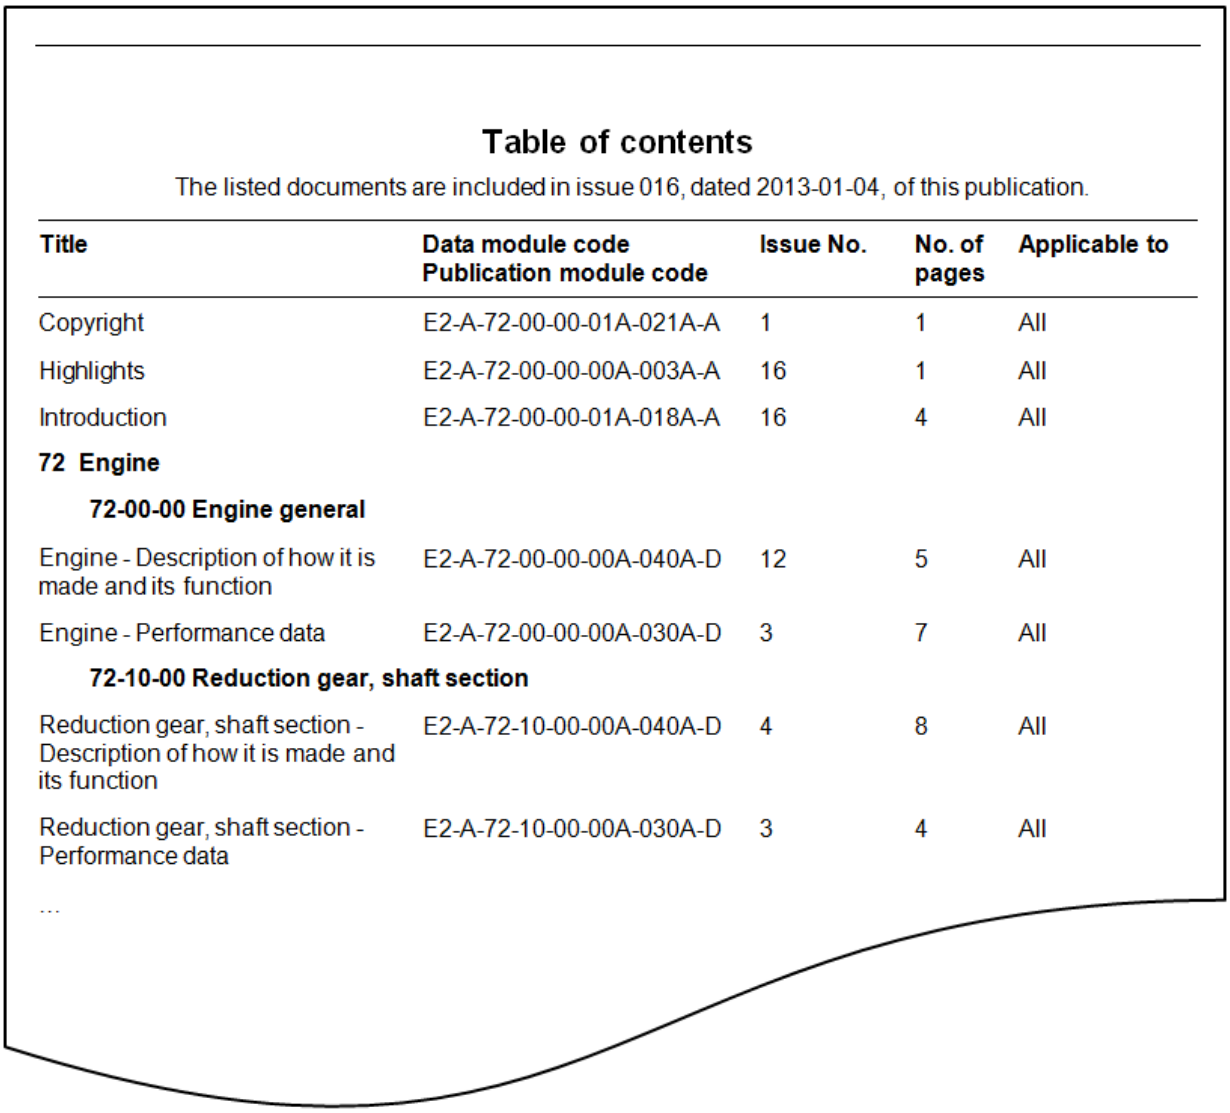


Table of contents


The listed documents are included in issue 016, dated 2013-01-04, of this publication.

Title	Data module code Publication module code	Issue No.	No. of pages	Applicable to
Copyright	E2-A-72-00-00-01A-021A-A	1	1	All
Highlights	E2-A-72-00-00-00A-003A-A	16	1	All
Introduction	E2-A-72-00-00-01A-018A-A	16	4	All
72 Engine				
72-00-00 Engine general				
Engine - Description of how it is made and its function	E2-A-72-00-00-00A-040A-D	12	5	All
Engine - Performance data	E2-A-72-00-00-00A-030A-D	3	7	All
72-10-00 Reduction gear, shaft section				
Reduction gear, shaft section - Description of how it is made and its function	E2-A-72-10-00-00A-040A-D	4	8	All
Reduction gear, shaft section - Performance data	E2-A-72-10-00-00A-030A-D	3	4	All
...				

ICN-S3627-S1000D0607-003-01

Fig 16 Table of contents, hierarchical - S1000D standard page-oriented presentation, example

Markup element: <frontMatterTableOfContent>

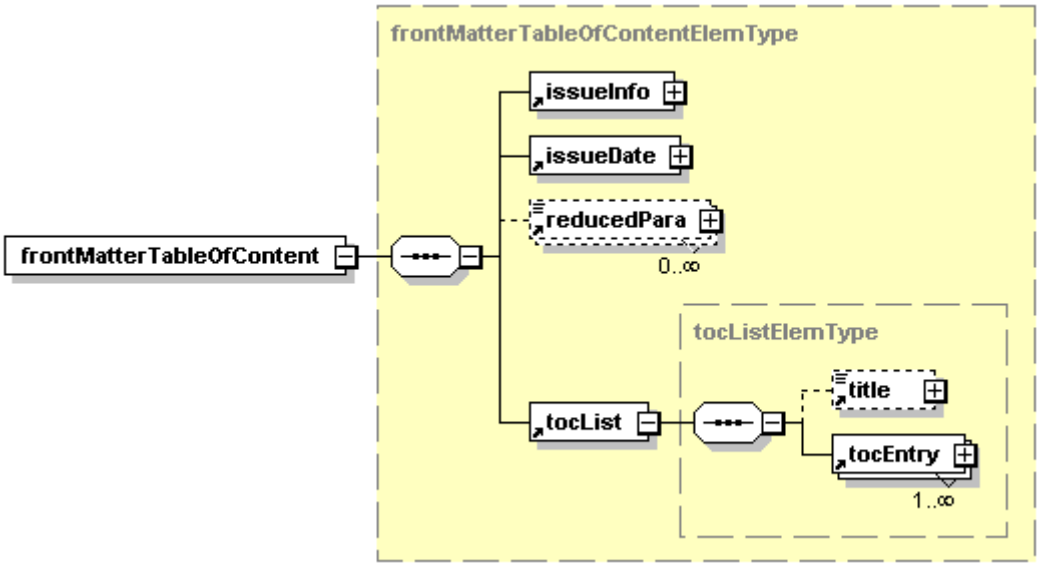

ICN-S3627-S1000D0564-001-01

Fig 17 Element <frontMatterTableOfContent>

Attributes:

– None

Child elements:

– <issueInfo>. Refer to Para 2.3.2.1.
– <issueDate>. Refer to Para 2.3.2.1.
– <reducedPara>. Refer to Para 2.3.2.2.
– <tocList>. Refer to Para 2.3.2.3.

2.3.2.1 Issue information and date

Description: The elements <issueInfo> and <issueDate> contain the issue number, the inwork number and the issue date, respectively, of the publication to be presented in the introductory paragraph and the footer of the Table of contents.

The content is authored or derived from the source publication module.

Markup element: <issueInfo> and <issueDate>. Refer to Chap 3.9.5.1.

2.3.2.2 Introductory paragraph

Description: The element <reducedPara> contains the introductory paragraph of the Table of contents.

For the S1000D standard page-oriented presentation, the following introductory paragraph is used:

"The listed documents are included in issue XXX, dated YYYY-MM-DD, of this publication."

"XXX" is the issue number given in the element <issueInfo> and "YYYY-MM-DD" is the issue date given in the element <issueDate> Refer to Para 2.3.2.1.

Markup element: <reducedPara>. Refer to Chap 3.9.5.2.1.10.

Business rule decision point BRDP-S1-00303 - Use the element <reducedPara> in the element <frontMatterTableOfContent>:


– Decide whether to use the introductory paragraph and on the wording of any standard phrase.

2.3.2.3 Table of contents list

Description: The element <tocList> contains the list of all documents (data modules, publication modules and non-S1000D publications) in the publication.

The list entries must be given in the order of appearance in the publication.

Markup element: <tocList>

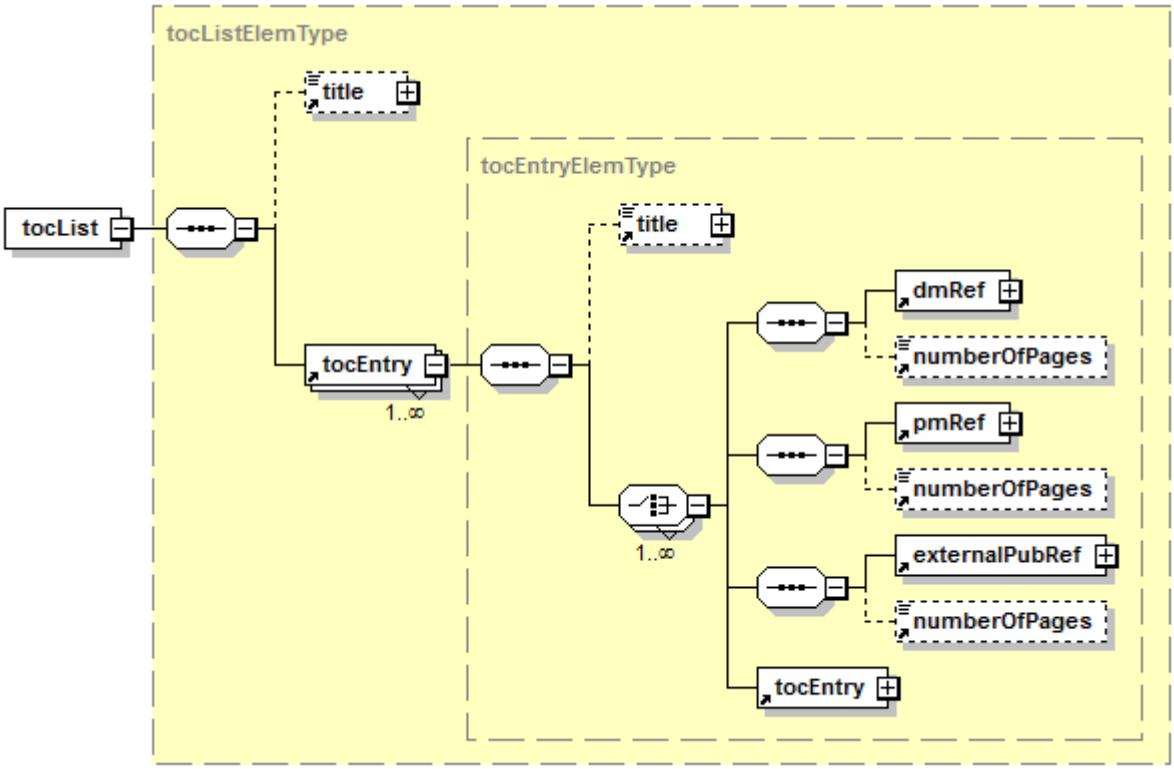

ICN-S3627-S1000D0565-001-01

Fig 18 Element <tocList>

Attributes:

– None

Child elements:

– <title>. Refer to Para 2.3.1.16.1.
– <tocEntry>. Refer to Para 2.3.2.3.2.

2.3.2.3.1 Table of contents entry title

Description: The element <title> contains the title for a group of entries in the Table of contents. The element <title> is used for the hierarchical Table of contents.

Several hierarchical levels can be included by using the element <title> in the element <tocEntry>.

The title can be derived from the element <pmEntryTitle> in the source publication module. Refer to Chap 4.9.1.

Markup element: <title>. Refer to Para 2.3.1.16.1.

2.3.2.3.2 Table of contents entry

Description: The element <tocEntry> contains the document title, document code, issue information, number of pages and applicability for each entry in the Table of contents. It is also used to build the title hierarchy by only using the elements <title> and <tocEntry>.

The content is authored or derived from the source publication module.

Note

The titles can be derived from the element <pmEntryTitle> in the source publication module and replicate the hierarchy therein.

Markup element: <tocEntry>

Attributes:

- applicRefId (O), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3.

  Note

  It is recommended not to use this attribute as the applicability for each entry (data module, publication module or non-S1000D publication) is given by the attribute applicRefId in the elements <dmRef>, <pmRef> and <externalPubRef>, respectively.

Child elements:

- <title>. Refer to Para 2.3.1.16.1.
- <dmRef>. Refer to Para 2.3.2.3.3.
- <pmRef>. Refer to Para 2.3.2.3.4.
- <externalPubRef>. Refer to Para 2.3.2.3.5.
- <numberOfPages>. Refer to Para 2.3.2.3.6.
- <tocEntry>. Refer to Para 2.3.2.3.2.

2.3.2.3.3 Data module entry

Description: The element <dmRef> contains the entry details for the data modules that are presented in the Table of contents. The following elements must (M)/can (O) be populated:

- the data module title by the elements <techName> (M) and <infoName> (M). Refer to default BREX rule BREX-S1-00120.
- the data module identifier by the elements <dmCode> (M) and <identExtension> (O)
- the issue information by the element <issueDate> (O) and/or the element <issueInfo> (O)
- the applicability by the attribute applicRefId (M)


  The attribute applicRefId is mandatory in this context (the Schema gives it as optional) and thus governed by the default BREX data module. Refer to default BREX rule BREX-S1-00121.

- the number of pages by the element <numberOfPages> (O). Refer to Para 2.3.2.3.6.

Note

The TOC must not include the Title page, LOEDM, LOEP, Change Record (CR) or TOC itself.

Markup element: <dmRef>

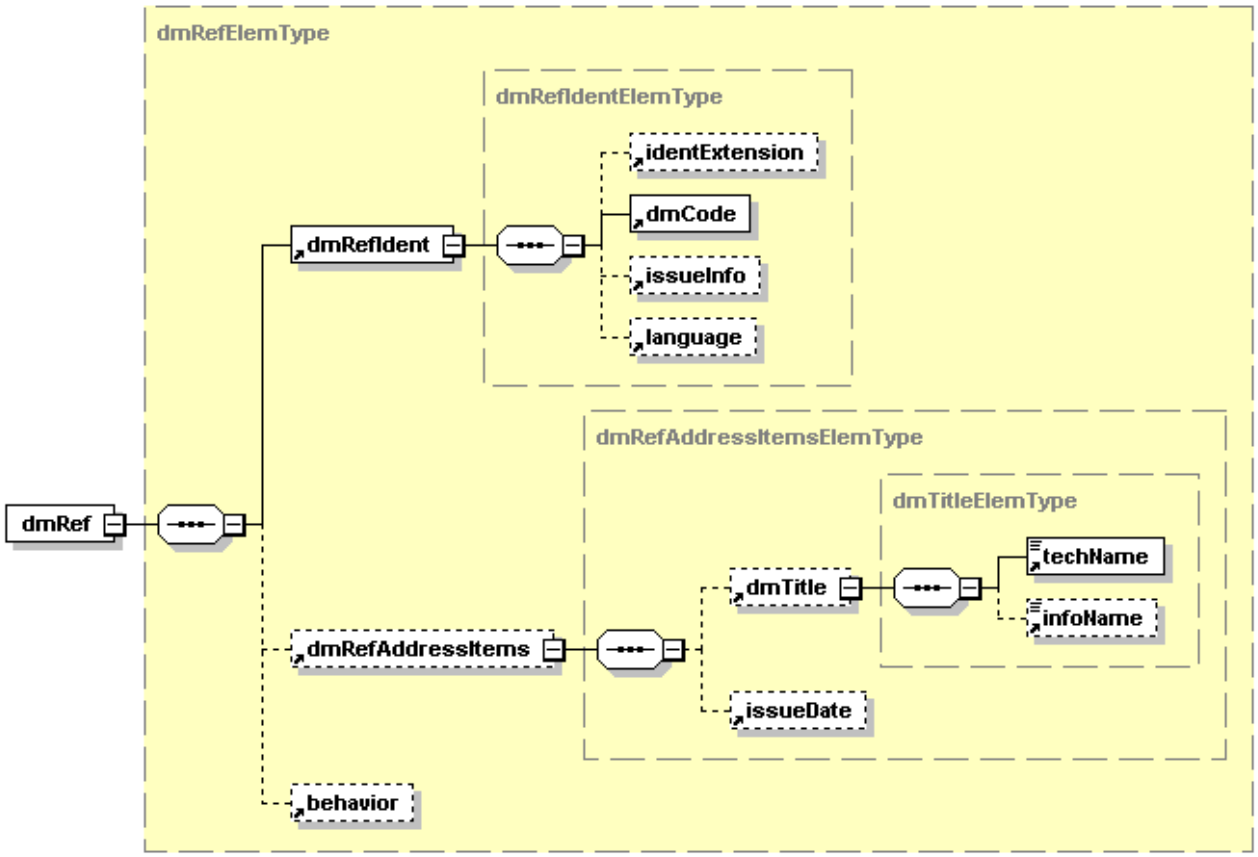

ICN-S3627-S1000D0584-001-01

Fig 19 Element <dmRef>

Attributes:

Refer to Chap 3.9.5.2.1.2 with the following exceptions:

- `applicRefId` (M), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3.

  Recommendation: It is recommended to use/present the element <displayText> when the Table of contents data module is intended for page-oriented presentation. This simplifies the complexity of the functionality of the page-layout application.

- `referredFragment`, `id`, `authorityName` and `authorityDocument` must not be used. Refer to default BREX rules BREX-S1-00122 and BREX-S1-00123.

Child elements:

Refer to Chap 3.9.5.2.1.2.

2.3.2.3.4 Publication module entry

Description: The element <pmRef> contains the entry details for the publication modules to be presented in the Table of contents. The following elements must (M)/can (O) be populated:

- the publication module title by the elements <pmTitle> (M) and <shortPmTitle> (O)


  The publication module title (<pmTitle>) must be included as it must be presented. This is governed by the default BREX data module. Refer to default BREX rule BREX-S1-00124.

- the publication module identifier by the elements <pmCode> (M) and <identExtension> (O)
- the issue information by the element <issueDate> (O) and/or the element <issueInfo> (O)
- the applicability by the attribute applicRefId (M)

  The attribute applicRefId is mandatory in this context (the Schema gives it as optional) and thus governed by the default BREX data module. Refer to default BREX rule BREX-S1-00125.

- the number of pages by the element <numberOfPages> (O). Refer to Para 2.3.2.3.6.

Markup element: <pmRef>

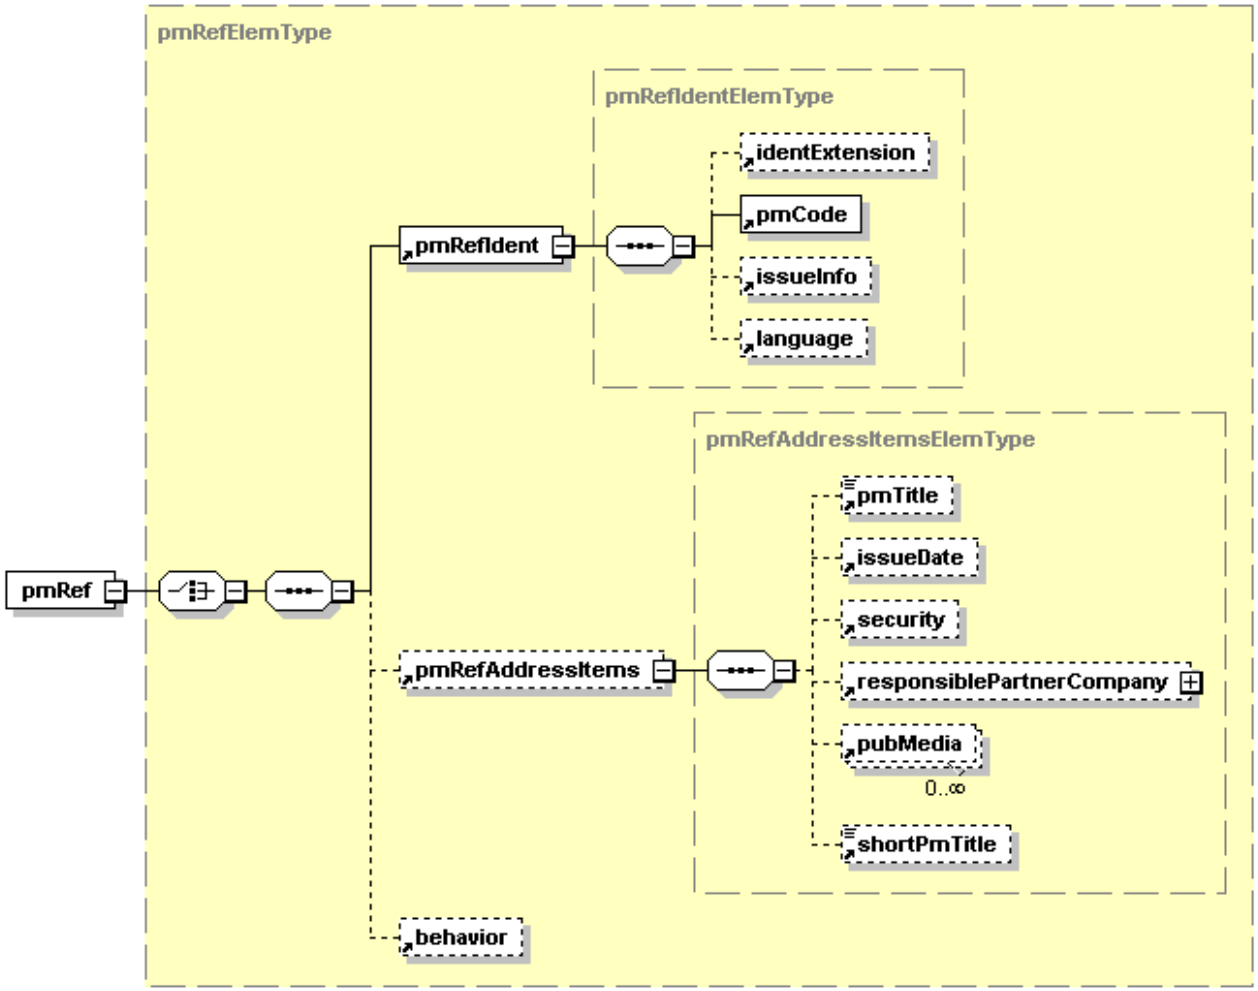

ICN-S3627-S1000D0585-001-01

Fig 20 Element <pmRef>

Attributes:

Refer to Chap 3.9.5.2.1.2 with the following exceptions:

- `applicRefId` (M), the applicability information by referencing the element <`applic`>. Refer to Chap 3.9.5.3.

  Recommendation: It is recommended to use/present the element <`displayText`> when the Table of contents data module is intended for page-oriented presentation. This simplifies the complexity of the functionality of the page-layout application.

- `id`, `authorityName` and `authorityDocument` must not be used. Refer to default BREX rule BREX-S1-00126.

Child elements:

Refer to Chap 3.9.5.2.1.2.

2.3.2.3.5 Non-S1000D publication entry (external publication entry)

Description: The element <`externalPubRef`> contains the entry details for the non-S1000D publications (external publications) to be presented in the Table of contents. The following elements must (M)/can (O) be populated:

- the non-S1000D publication title by the elements <`externalPubTitle`> (M) and <`shortExternalPubTitle`> (O)
- the non-S1000D publication identifier by the element <`externalPubCode`> (M)

  The identifier must be included as it must be presented. This is governed by the default BREX data module. Refer to default BREX rule BREX-S1-00127.

- the issue information by the element <`externalPubIssueDate`> (O) and/or the element <`externalPubIssueInfo`> (O)
- the applicability by the attribute `applicRefId` (M)


  The attribute `applicRefId` is mandatory in this context (the Schema gives it as optional) and thus governed by the default BREX data module. Refer to default BREX rule BREX-S1-00128.

- the number of pages by the element <`numberOfPages`> (O). Refer to Para 2.3.2.3.6.

Note

The classification of the elements and attributes above is based on the rules given in Chap 3.9.4.

Markup element: <externalPubRef>

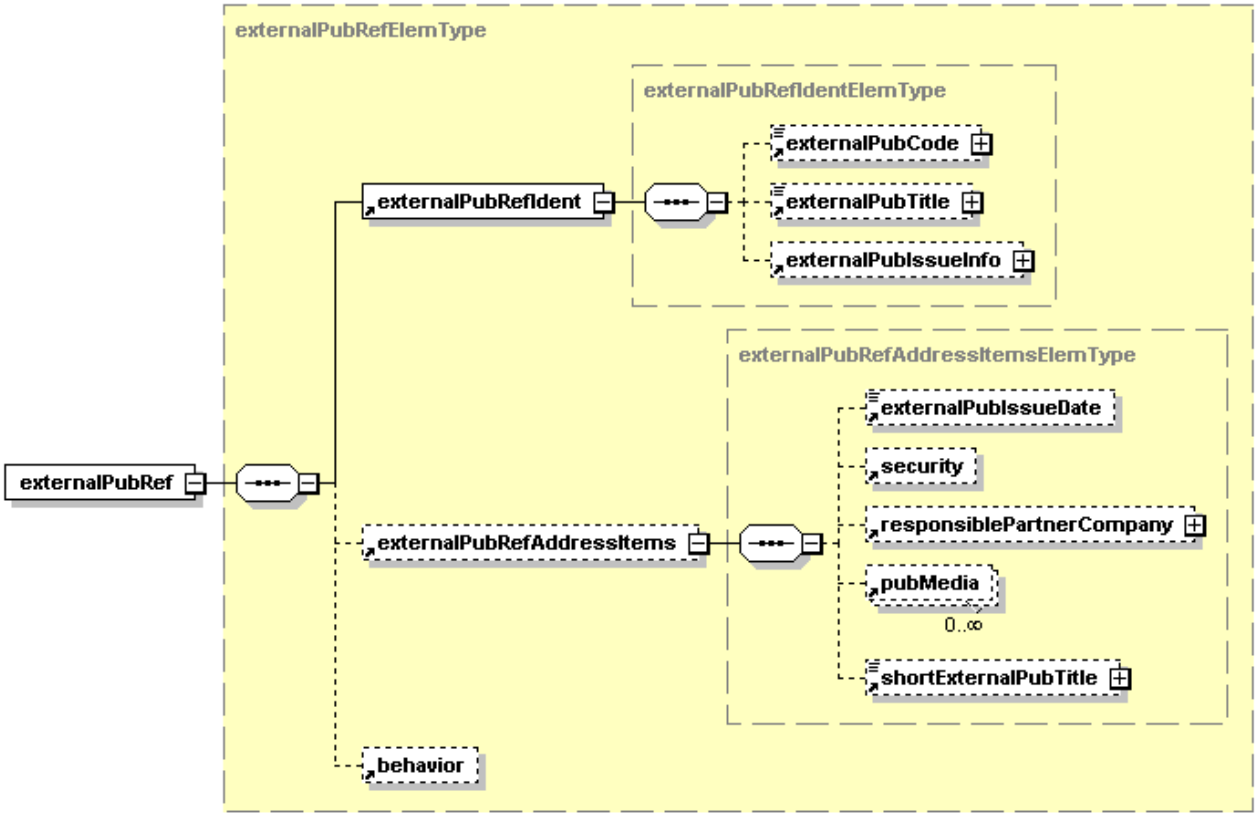

ICN-S3627-S1000D0586-001-01

Fig 21 Element <externalPubRef>

Attributes:

Refer to Chap 3.9.5.2.1.2 with the following exceptions:

- applicRefId (M), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3.

  Recommendation: It is recommended to use/present the element <displayText> when the Table of contents data module is intended for page-oriented presentation. This simplifies the complexity of the functionality of the page-layout application.

- id, authorityName and authorityDocument must not be used. Refer to default BREX rule BREX-S1-00129.

Child elements:

Refer to Chap 3.9.5.2.1.2.

2.3.2.3.6 Number of pages

Description: The element <numberOfPages> contains the number of pages in the entries for data modules, publications and non-S1000D publications in LOEDM and HIGH.

When used for LOEP this element contains the page number.

Markup element: <numberOfPages>

Attributes:

– None

Child elements:

– None

2.3.3 Front matter lists

Description: The element <frontMatterList> contains the information for the:

– List of effective pages - LOEP
– List of effective data modules - LOEDM
– Highlights - HIGH

The Schema also supports the capturing and representation of publication lists for the List of applicable publications.

List of effective pages

This publication includes the following pages after insertion of issue 004, dated 2012-12-24.

C = Changed page

N = New page

Data module code	Page		Issue date	Applicable to
X4-A-00-00-00-00A-001A-A	1	C	2012-12-24	All
X4-A-00-00-00-01A-021A-A	1	N	2012-12-24	All
X4-A-00-00-00-00A-00RA-A	1	C	2012-12-24	All
	2	C	2012-12-24	All
	3	C	2012-12-24	All
X4-A-00-00-00-00A-00TA-A	1		2002-11-01	All
X4-A-00-00-00-00A-00UA-A	1	C	2012-12-24	All
X4-A-00-00-00-00A-009A-A	1	C	2012-12-24	All
X4-A-00-00-00-01A-018A-A	1		2011-11-01	All
	2		2011-11-01	All
	3		2011-11-01	All
	4		2011-11-01	All
X4-A-00-00-00-00A-040A-A	1		2008-07-01	All

...

ICN-S3627-S1000D0608-003-01

Fig 22 LOEP - S1000D standard page-oriented presentation, example

List of effective data modules

The listed documents are included in issue 004, dated 2012-12-24, of this publication.

C = Changed data module

N = New data module

Title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Title page	X4-A-00-00-00-00A-001A-A	C	2012-12-24	1	All
Copyright	X4-A-00-00-00-01A-021A-A	N	2012-12-24	1	All
List of effective data modules	X4-A-00-00-00-00A-00SA-A	C	2012-12-24	1	All
Change record	X4-A-00-00-00-00A-00TA-A		2002-11-01	1	All
Highlights	X4-A-00-00-00-00A-00UA-A	C	2012-12-24	1	All
Introduction	X4-A-00-00-00-01A-018A-A		2011-11-01	4	All
Steamroller - Description	X4-A-00-00-00-00A-040A-A		2008-07-01	5	All
Steamroller - Description	X4-A-00-00-00-01A-040A-A		2011-11-01	7	Mk1
Steamroller - Description	X4-A-00-00-00-03A-040A-A	C	2012-12-24	8	Mk2

...

ICN-S3627-S1000D0609-003-01

Fig 23 LOEDM - S1000D standard page-oriented presentation, example

Highlights

Issue 004

The listed changes are introduced in issue 004, dated 2012-12-24, of this publication.

Data module	Reason for update
X4-A-00-00-00-01A-021A-A	Copyright and data restrictions introduced
X4-A-00-00-00-03A-040A-A	Flywheel and piston modified
X4-A-00-41-01-00A-040A-A	New

Updating instruction

Remove or insert data modules as listed in Table 1.

I = Insert data module

R = Remove data module

Table 1 Data modules to be removed or inserted


Data module code	Title		Issue date	No. of pages	Applicable to
X4-A-00-00-00-00A-001A-A	Title page	R	2011-09-30	1	All
		I	2012-12-24	1	All
X4-A-00-00-00-01A-021A-A	Copyright	I	2012-12-24	1	All
X4-A-00-00-00-00A-00SA-A	List of effective data modules	R	2011-09-30	1	All
		I	2012-12-24	1	All
X4-A-00-00-00-00A-00UA-A	Highlights	R	2011-09-30	1	All
		I	2012-12-24	1	All
X4-A-00-00-00-02A-040A-A	Steamroller - Description	R	2008-07-01	6	Mk2

...

ICN-S3627-S1000D0610-002-01

Fig 24 HIGH with updating instruction - S1000D standard page-oriented presentation, example

Markup element: <frontMatterList>

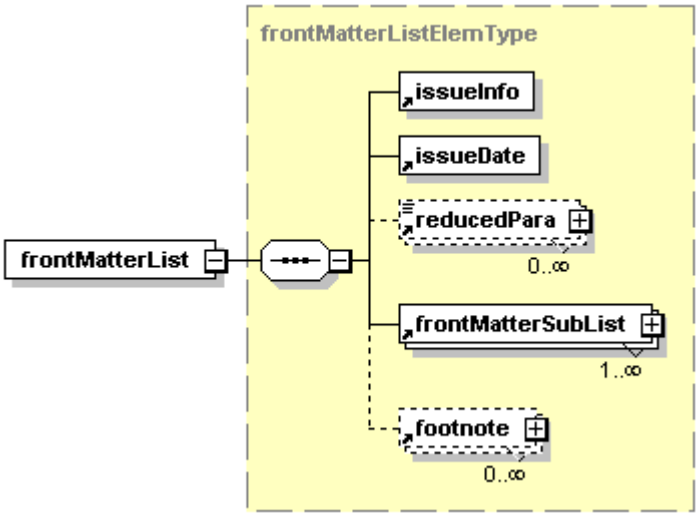

ICN-S3627-S1000D0587-001-01

Fig 25 Element <frontMatterList>

Attributes:

– frontMatterType (M), the type of Front matter (eg, HIGH, LOEDM). The values of this attribute can be used to govern the presentation of the content and also give the title of the actual Front matter. The attribute can have one of the following values:

  - "fm01" thru "fm99". Refer to Chap 3.9.6.1.

Child elements:

– <issueInfo>. Refer to Para 2.3.2.1.
– <issueDate>. Refer to Para 2.3.2.1.
– <reducedPara>. Refer to Para 2.3.3.1.
– <frontMatterSubList>. Refer to Para 2.3.3.2.
– <footnote>. Refer to Para 2.3.3.3.

2.3.3.1 Introductory paragraph

Description: The element <reducedPara> contains the introductory paragraph of the actual Front matter.

For the S1000D standard page-oriented presentation, the following introductory paragraphs are used:

LOEP (value "fm01"):

"This publication includes the following pages after insertion of issue XXX, dated YYYY-MM-DD.

C = Changed page

N = New page"

LOEP (value "fm02"):

"The listed data modules are included in issue XXX, dated YYY-MM-DD, of this publication.

C = Changed data module

N= New data module"

HIGH (value "fm03" and "fm04"):

"The listed changes are introduced in issue XXX, dated YYY-MM-DD, of this publication."

"XXX" is the issue number given the element <issueInfo> and "YYYY-MM-DD" is the issue date given in the element <issueDate> Refer to Para 2.3.1.4.

Markup element: <reducedPara>. Refer to Para 2.3.1.16.2.

Business rule decision point BRDP-S1-00309 - Use the element <reducedPara> in the element <frontMatterList>:

- Decide whether to use the introductory paragraph and on the wording of any standard phrase for each of the front matter list.

2.3.3.2 Front matter sublist

Description: The element <frontMatterSubList> contains the information for the:

- List of effective pages - LOEP. Refer to Para 2.3.3.2.1.
- List of effective data modules - LOEDM. Refer to Para 2.3.3.2.2.
- Highlights - HIGH (without and with updating instructions). Refer to Para 2.3.3.2.3 and Para 2.3.3.2.4.

The entries can be grouped in one or more front matter lists (<frontMatterSubList>) each having a title (<title>) and one or more introductory paragraphs (<reducedPara>).

2.3.3.2.1 Front matter sublist - LOEP

When used for LOEP, every data module has to be broken down to pages with each page being represented by an entry (<frontMatterDmEntry>). If, by project decision, publication modules have to be included in the LOEP they are represented in their entirety by an entry (<frontMatterPmEntry>). The same applies to non-S1000D publications.

2.3.3.2.2 Front matter sublist - LOEDM

When used for LOEDM, every data module is being represented by an entry (<frontMatterDmEntry>). If, by project decision, publication modules have to be included in the LOEP they are represented in their entirety by an entry (<frontMatterPmEntry>). The same applies to non-S1000D publications.

2.3.3.2.3 Front matter sublist - HIGH

When used for HIGH, every data module having content in the element <reasonForUpdate> has to be listed as an entry (<frontMatterDmEntry>) in the first appearance of the element <frontMatterSubList>.

This sublist is also used for Highlights with updating instructions.


2.3.3.2.4 Front matter sublist - HIGH with updating instructions

When used for Highlights with updating instructions, the second appearance of the element <frontMatterSubList> includes a fixed title and an introductory paragraph for the Updating instruction. Refer to Para 2.3.3.2.5 and Para 2.3.3.2.6 respectively.

- All data modules having a value given for the attribute issueType must have an entry (<frontMatterDmEntry>).

- All entries with attribute issueType = "revised"/"changed"/"status" (data modules to be inserted) must be preceded by an entry with attribute issueType = "deleted" of the revised/changed/status data module (data modules to be removed).
- The elements <dmCode>, <dmTitle> and <numberOfPages>, and depending on project decision, the element <issueDate> or the element <issueInfo> are populated. The attribute applicRefId is optional.

Markup element: <frontMatterSubList>

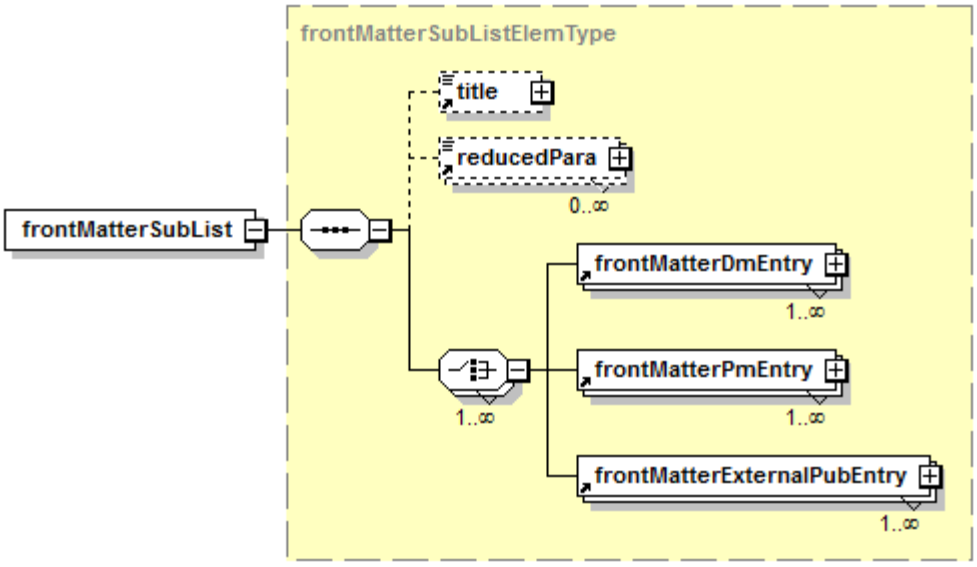

ICN-S3627-S1000D0588-001-01

Fig 26 Element <frontMatterSubList>

Attributes:

- applicRefId (O), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3.

Child elements:

- <title>. Refer to Para 2.3.3.2.5.
- <reducedPara>. Refer to Para 2.3.3.2.6.
- <frontMatterDmEntry>. Refer to Para 2.3.3.2.7.
- <frontMatterPmEntry>. Refer to Para 2.3.3.2.8.
- <frontMatterExternalPubEntry>. Refer to Para 2.3.3.2.9.

2.3.3.2.5 *Sublist title*

Description: The element <title> contains the title for a group of entries (a sublist). When used for Highlights with updating instructions the fixed title "Updating instruction" must be used in the second appearance of the of <frontMatterSubList>.

Markup element: <title>. Refer to Para 2.3.1.16.1.

2.3.3.2.6 *Introductory paragraphs to sublists, etc*

Refer to Para 2.3.1.16.2.

When used for Highlights with updating instructions (value "fm04") and S1000D standard page-oriented presentation, the following introductory paragraphs are used:

"Remove or insert data modules as listed in Table 1.


I = Insert data module

R = Remove data module"

2.3.3.2.7 Front matter data module entry

Description: The element <frontMatterDmEntry> contains the data module entry. The order of the front matter data module entries must follow structure of the publication (= TOC).

Markup element: <frontMatterDmEntry>

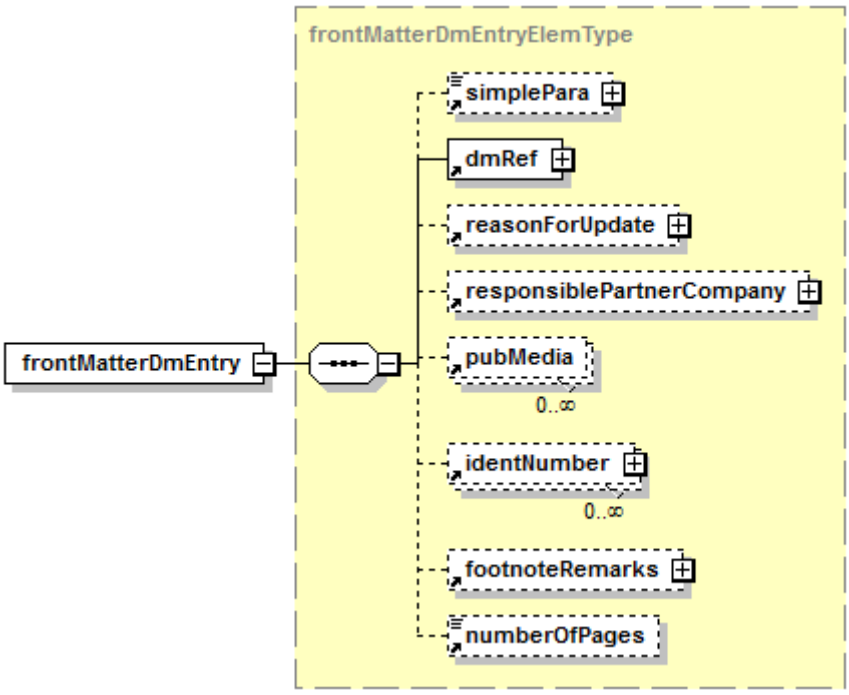

ICN-S3627-S1000D0589-001-01

Fig 27 Element <frontMatterDmEntry>

Attributes:

- issueType (O). Refer to Para 2.3.3.2.10.
- applicRefId (O), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3 and Para 2.3.3.2.11.

Child elements:

- <simplePara>. Used for simple statements. Not specifically required by any of the Front matter types. Refer to Chap 3.9.5.2.1.10.
- <dmRef>. Used for "Title", "Data module code", issue information ("Issue date" and/or "Issue No.") in LOEP, LOEDM and HIGH, and for "Language" in publication lists for the List of applicable publications (LOAP). Refer to Para 2.3.2.3.3.

Note

Para 2.3.2.3.3 gives the mandatory and optional elements related to the Table of contents.

The information is authored or derived from the source publication module.

Mandatory elements, depending on the Front matter type, are given in Chap 3.9.4. For Highlights with updating instructions, refer to Para 2.3.3.2.4.

- <reasonForUpdate>. Used for "Reason for update" in HIGH where it is mandatory. This is governed by the default BREX data module.

  The information is authored or derived from the data module referenced in the source publication module.

  Refer to Chap 3.9.5.2.1.1.

- <responsiblePartnerCompany>. Used for "Publisher" in publication lists for the List of applicable publications.

  The information is authored or derived from the data module referenced in the source publication module.

  Refer to Para 2.3.1.13.

- <pubMedia>. Used for "Media information" in publication lists for the List of applicable publications.

  The information is authored as there is no information on delivery media which can be derived from the data module referenced in the source publication module.


  Refer to Chap 4.9.1.

- <identNumber>. Refer to Para 2.3.1.6.5.
- <footnoteRemarks>. Refer to Chap 3.9.5.2.1.9.
- <numberOfPages>. The total number of pages in the data module when used for "No. of pages" in the LOEDM and the HIGH with updating procedures. The individual page number when used for "Page" in the LOEP. Refer to Para 2.3.2.3.6.

2.3.3.2.8 Front matter publication module entry

Description: The element <frontMatterPmEntry> contains the publication module entry.

Markup element: <frontMatterPmEntry>

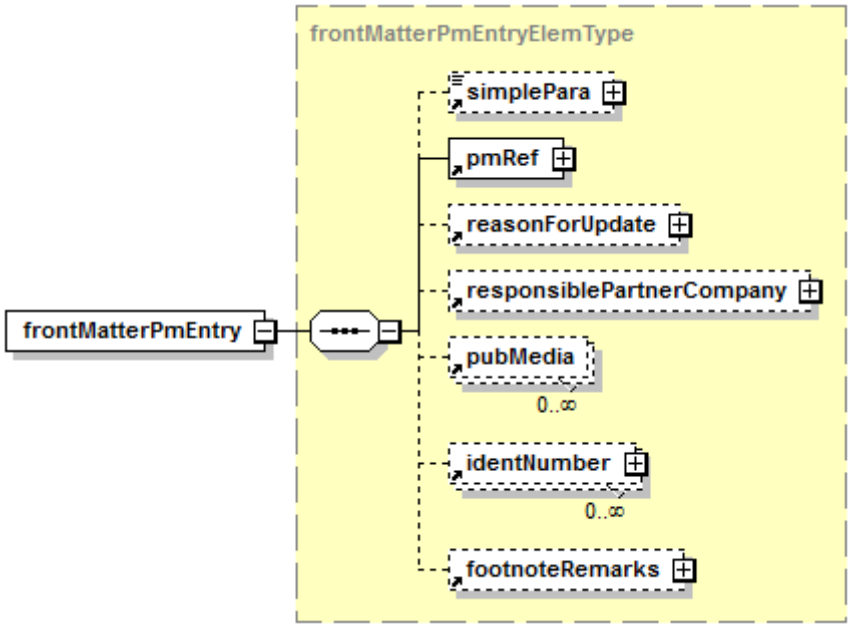

ICN-S3627-S1000D0590-001-01

Fig 28 Element <frontMatterPmEntry>

Attributes:

- issueType (O). Refer to Para 2.3.3.2.10.
- applicRefId (O), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3 and to Para 2.3.3.2.11.

Child elements:

- <simplePara>. Used for simple statements. Not specifically required by any of the Front matter types. Refer to Chap 3.9.5.2.1.10.
- <pmRef>. Used for "Title", "Publication module code", issue information "Issue date" and/or Issue No." in LOEP, LOEDM and HIGH, and for "Language" in publication lists for the List of applicable publications (LOAP). Refer to Para 2.3.2.3.4.

  Note

  Para 2.3.2.3.4 contains the mandatory and optional elements related to Table of contents.

  The information is authored or derived from the source publication module.

  Mandatory elements, depending on the Front matter type, are given in Chap 3.9.4.

- <reasonForUpdate>. Used for "Reason for update" in HIGH where it is mandatory. This is governed by the default BREX data module.

  The information is authored or derived from the publication module referenced in the source publication module.

  Refer to Chap 3.9.5.2.1.1.

- <responsiblePartnerCompany>. Used for "Publisher" in publication lists for the List of applicable publications.

  The information is authored or derived from the publication module referenced in the source publication module.

Refer to Para 2.3.1.13.

– <pubMedia>. Used for "Media information" in publication lists for the List of applicable publications.

  The information is authored or derived from the publication module referenced in the source publication module.

  Refer to Chap 4.9.1.

– <identNumber>. Refer to Para 2.3.1.6.5.
– <footnoteRemarks>. Refer to Chap 3.9.5.2.1.9. By project decision, the element can be used to store the total number of pages to be presented in LOEDM if the LOEDM includes publications.


Business rule decision point BRDP-S1-00310 - How to store total number of pages for S1000D publications:

– Decide on the use of <footnoteRemarks> to store the total number of pages for a complete S1000D publication.

2.3.3.2.9 Front matter non-S1000D publication entry

Description: The element <frontMatterExternalPubEntry> contains the non-S1000D publication (external publication) entry.

Markup element: <frontMatterExternalPubEntry>

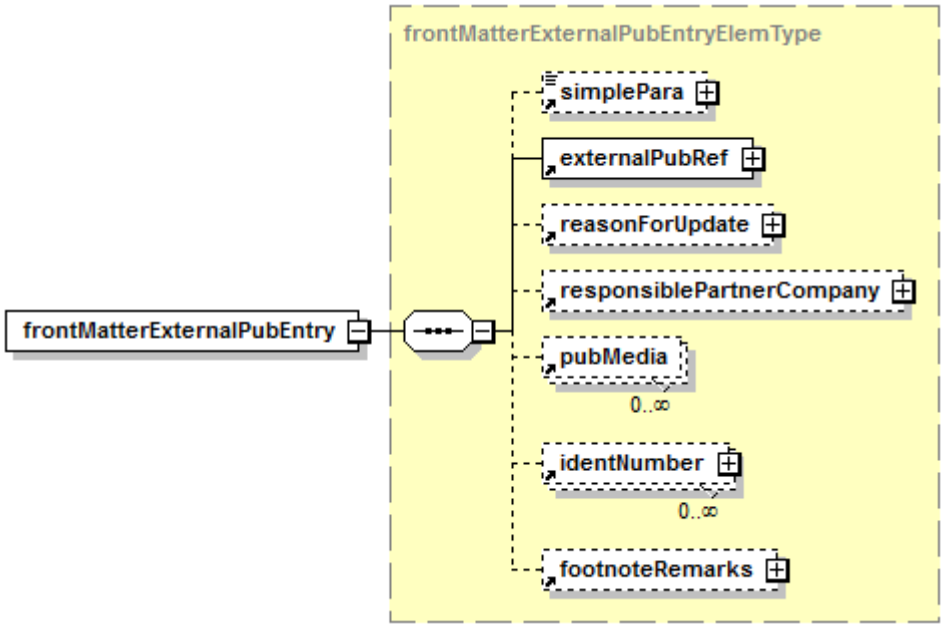

ICN-S3627-S1000D0591-001-01

Fig 29 Element <frontMatterExternalPubEntry>

Attributes:

– issueType (O). Refer to Para 2.3.3.2.10.
– applicRefId (O), the applicability information by referencing the element <applic>. Refer to Chap 3.9.5.3 and to Para 2.3.3.2.11.

Child elements:

- <simplePara>. Used for simple statements. Not specifically required by any of the Front matter types. Refer to Chap 3.9.5.2.1.10.
- <externalPubRef>. Used in LOEP, LOEDM and HIGH for:
  - "Titles" (<externalPubTitle>)
  - "Publication module code" (<externalPubCode>)
  - issue information
    - "Issue date" (<externalPubIssueDate>)

    and/or

    - "Issue No." (<externalPubIssueInfo>)

      Can also be used for "Language" in publication lists for the List of applicable publications.

  The information is authored or derived from the external publication referenced in the source publication module.

  Note
  "Language" has to be authored as it is not available in the current construct of the element <externalPubRefIdent>.

  Refer to Para 2.3.2.3.5.

  Note
  Para 2.3.2.3.5 gives the mandatory and optional related to Table of contents.

  Mandatory elements, depending on the Front matter type, are given in Chap 3.9.4.
- <reasonForUpdate>. Used for Reason for update" in HIGH where it is mandatory. This is governed by the default BREX data module.

  The information is authored or derived from the external publication referenced in the source publication module.

  Refer to Chap 3.9.5.2.1.1.
- <responsiblePartnerCompany>. Used for "Publisher" in publication lists for the List of applicable publications.

  The information is authored or derived from the external publication referenced in the source publication module.

  Refer to Para 2.3.1.13.
- <pubMedia>. Used for "Media information" in publication lists for the List of applicable publications.

  The information is authored or derived from the external publication referenced in the source publication module.

  Refer to Chap 4.9.1.
- <identNumber>. Refer to Para 2.3.1.6.5.
- <footNoteRemarks>. Refer to Chap 3.9.5.2.1.9. By project decision, the element can be used to store the total number of pages to be presented in LOEDM if the LOEDM includes publications.

Business rule decision point BRDP-S1-00311 - How to store total number of pages for non-S1000D publications:

- Decide on the use of <footnoteRemarks> to store the total number of pages for a complete non-S1000D publication.

2.3.3.2.10 Issue type

The attribute issueType contains the issue status of the entry and can be used to generate the value to be presented on the LOEP, LOEDM and HIGH.

2.3.3.2.11 Applicability of Front matter lists entries

Care must be taken on the use of the attribute applicRefId as it appears on several levels. If there is a mismatch, the lowest level must take precedence as this is the value given in the referenced data module, publication and non-S1000D publication.

2.3.3.3 Footnotes

The element <footnote> must not include any lists or make references to other footnotes. Refer to default BREX rule BREX-S1-00130.

Refer to Chap 3.9.5.2.1.10.

3 Markup examples

The markup behind Fig 3 and Fig 4 (also presented in Chap 6.2.3.1), S1000DBIKE-AAA-DA2-20-0000-00A-001A-A is given in Chap 3.9.5.2.16.1.

Markup examples of front matter data modules originated from publication module PMC -X4-B6865-AMP00-00_004-01 are given in a front matter package downloadable from www.s1000d.org. For details of front matter package, refer to Chap 3.9.5.2.16.1.