


jobid: 25793667	uid: 35712	nprocs: 128	runtime: 23.6770 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 20480.0 MiB at 876.24 MiB/s
I/O performance *estimate* (at the STDIO layer): transferred 0.0 MiB at 1.29 MiB/s



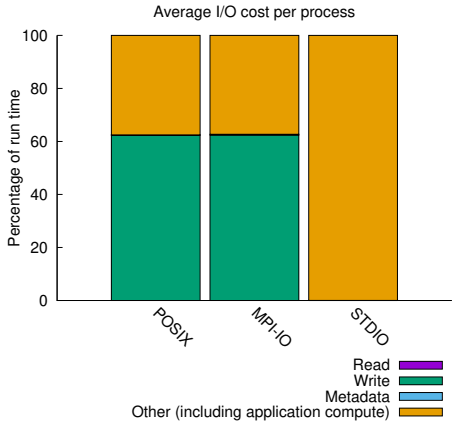

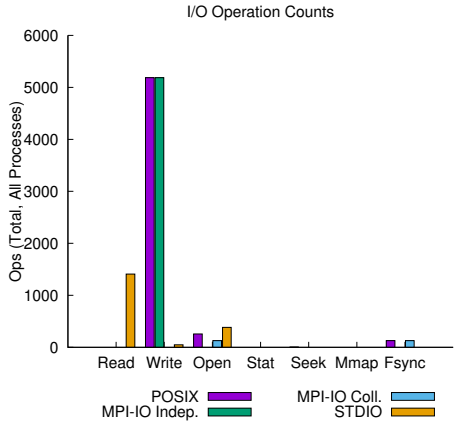

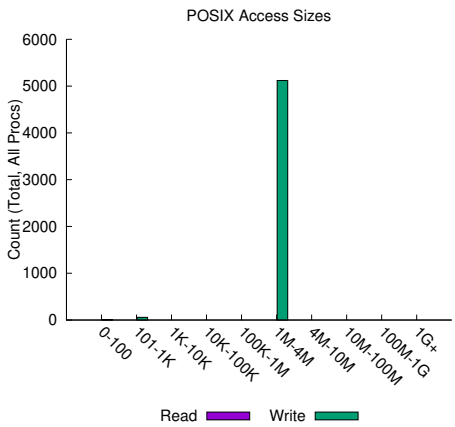


Most Common Access Sizes
(POSIX or MPI-IO)


	access size	count
POSIX	4194304	5120
	272	40
	544	5
	120	4
MPI-IO ‡	4194304	5120
	272	40
	544	5
	120	4


‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	132	156MiB	21GiB
read-only files	1	250B	250B
write-only files	3	6.7GiB	21GiB
read/write files	0	0	0
created files	3	6.7GiB	21GiB

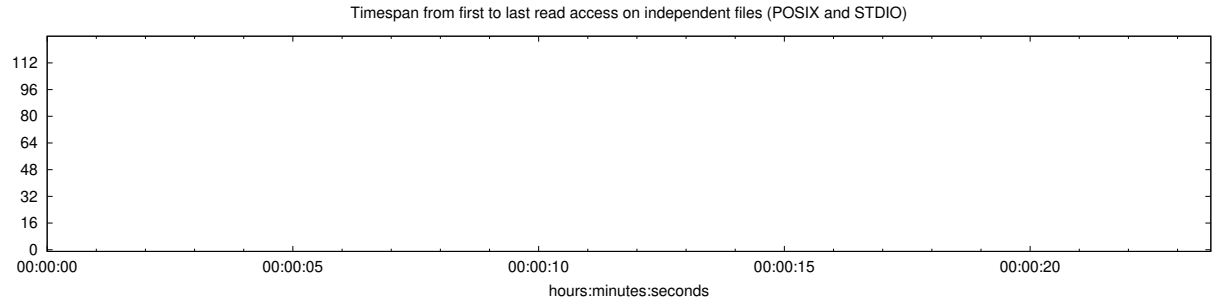

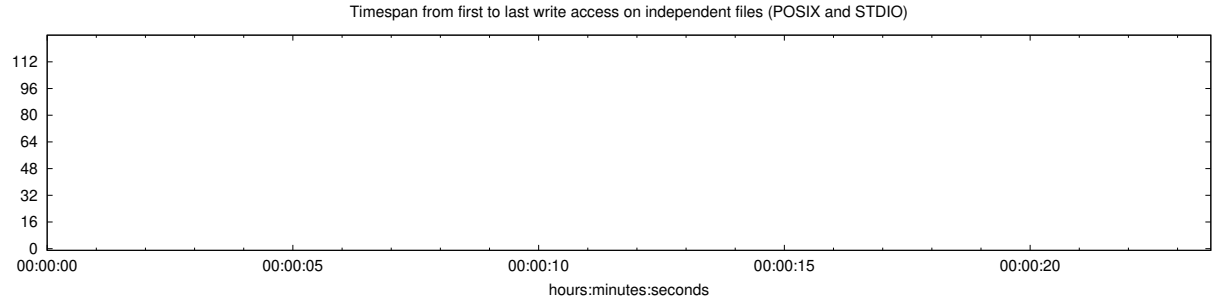

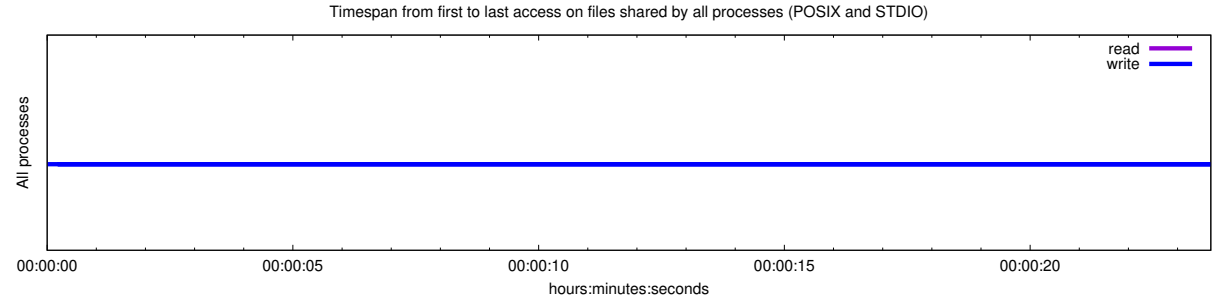


Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MiB)
Independent reads	0	0
Independent writes	0	0
Independent metadata	0.0179412734375	N/A
Shared reads	9.13203125e-05	0.000238418579101562
Shared writes	14.7703867890625	160.00014129281
Shared metadata	0.0116979765625	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
UNKNOWN	20480.01809	1.00000	0.03052	1.00000

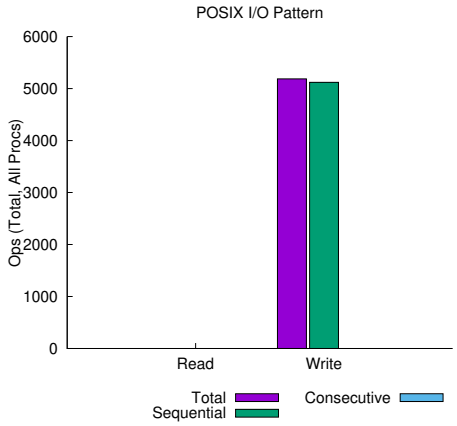

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes
...arshan_n1.h5	128	3	11.573087	161MiB	1	23.294444	161MiB	3.42	158
...ite_rep1.csv	128	7	0.000491	0	10	0.021316	0	0.00648	27.1
.../h5bench.cfg	128	44	0.000077	250B	14	0.003379	250B	0.001	0
...<STDOUT>	128	1	0.000000	0	0	0.000183	1.4KiB	0	123