


jobid: 25793667	uid: 35712	nprocs: 128	runtime: 16.3138 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 20480.0 MiB at 1266.26 MiB/s
I/O performance *estimate* (at the STDIO layer): transferred 0.0 MiB at 1.21 MiB/s



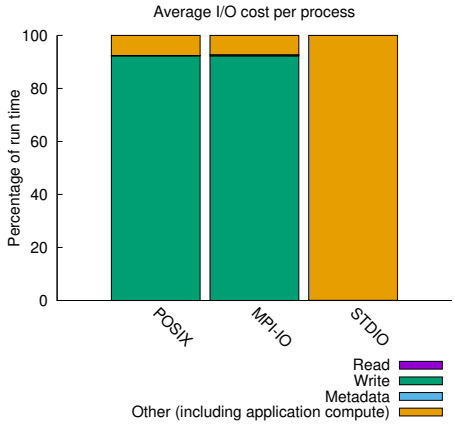

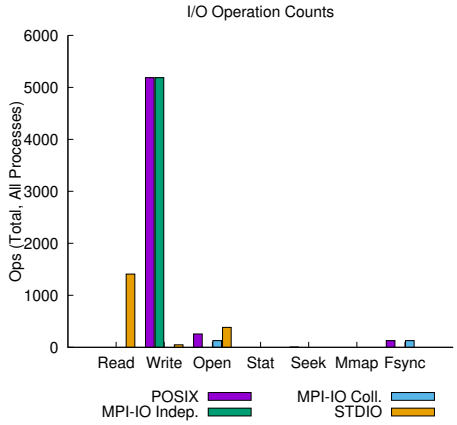

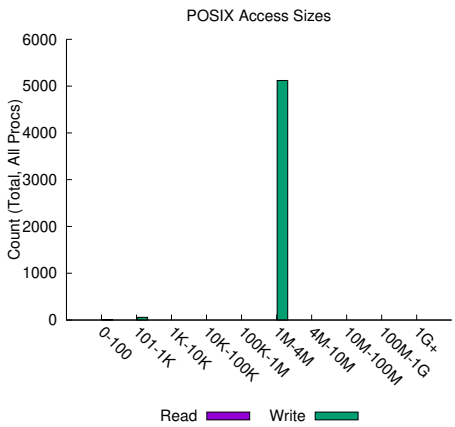


Most Common Access Sizes
(POSIX or MPI-IO)


	access size	count
POSIX	4194304	5120
	272	40
	544	5
	120	4
MPI-IO ‡	4194304	5120
	272	40
	544	5
	120	4


‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	132	156MiB	21GiB
read-only files	1	250B	250B
write-only files	3	6.7GiB	21GiB
read/write files	0	0	0
created files	3	6.7GiB	21GiB

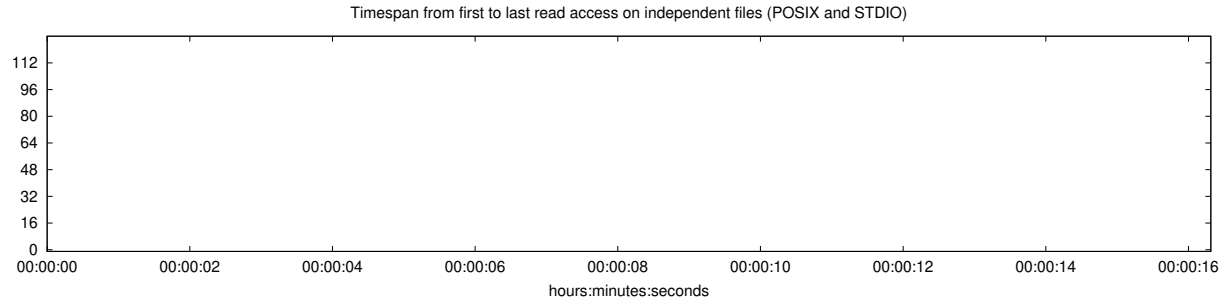

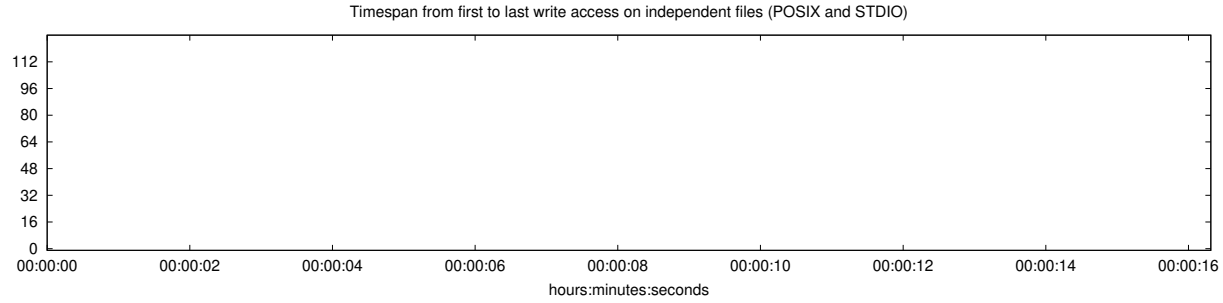

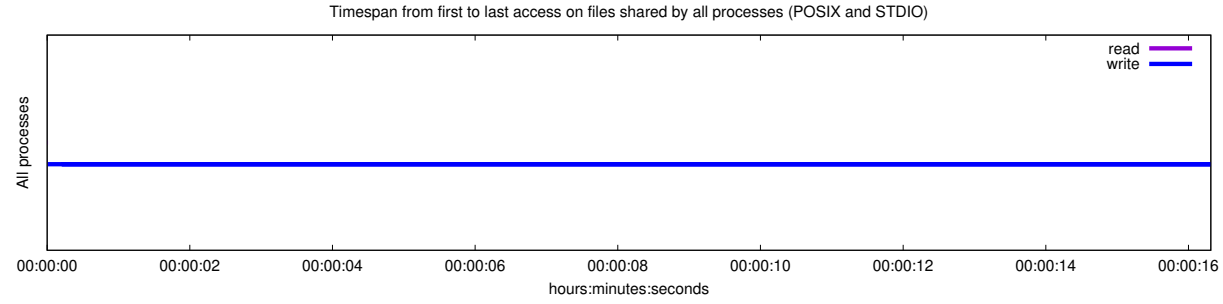


Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MiB)
Independent reads	0	0
Independent writes	0	0
Independent metadata	0.018642953125	N/A
Shared reads	8.346875e-05	0.000238418579101562
Shared writes	15.0551679296875	160.000141255558
Shared metadata	0.0123388671875	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
UNKNOWN	20480.01808	1.00000	0.03052	1.00000

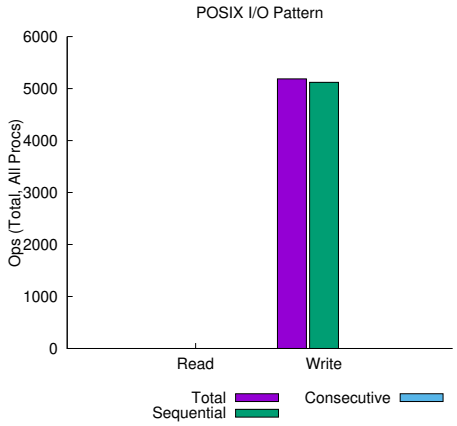

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes
...arshan_n1.h5	128	127	10.192577	160MiB	106	16.100514	160MiB	0.923	158
...ite_rep2.csv	128	17	0.000608	0	3	0.021269	0	0.00656	26.9
.../h5bench.cfg	128	51	0.000114	250B	103	0.005115	250B	0.001	0
...<STDOUT>	128	1	0.000000	0	0	0.000198	1.4KiB	0	122