



jobid: 25793668	uid: 35712	nprocs: 1024	runtime: 20.1024 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 20480.0 MiB at 1104.08 MiB/s
I/O performance *estimate* (at the STDIO layer): transferred 0.2 MiB at 0.21 MiB/s

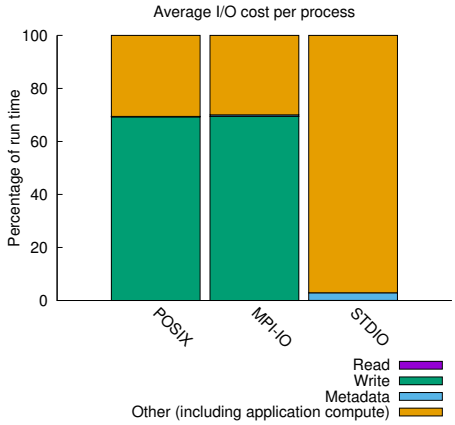

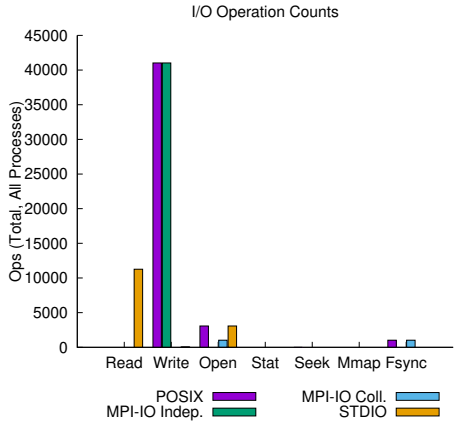

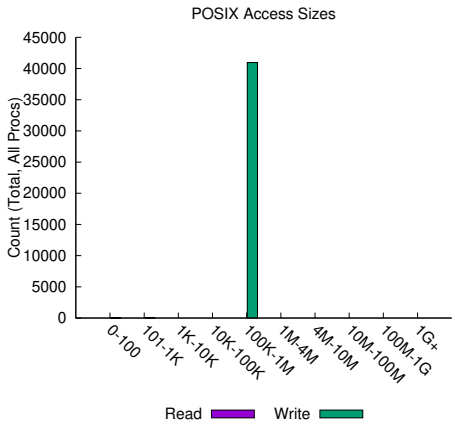

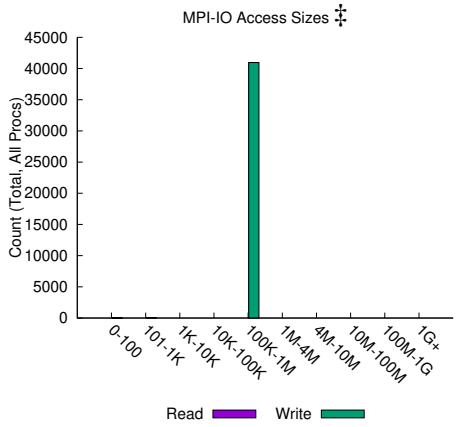


Most Common Access Sizes
(POSIX or MPI-IO)


	access size	count
POSIX	524288	40960
	272	40
	544	5
	120	4
MPI-IO ‡	524288	40960
	272	40
	544	5
	120	4


‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	1029	20MiB	21GiB
read-only files	1	249B	249B
write-only files	4	5.1GiB	21GiB
read/write files	0	0	0
created files	4	5.1GiB	21GiB

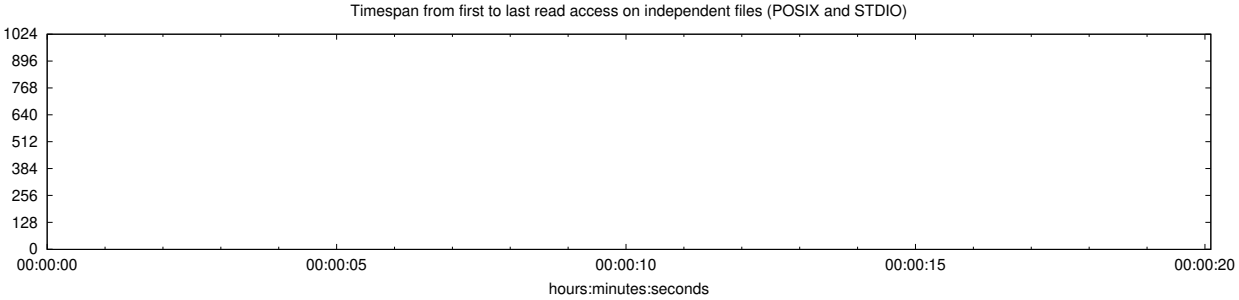

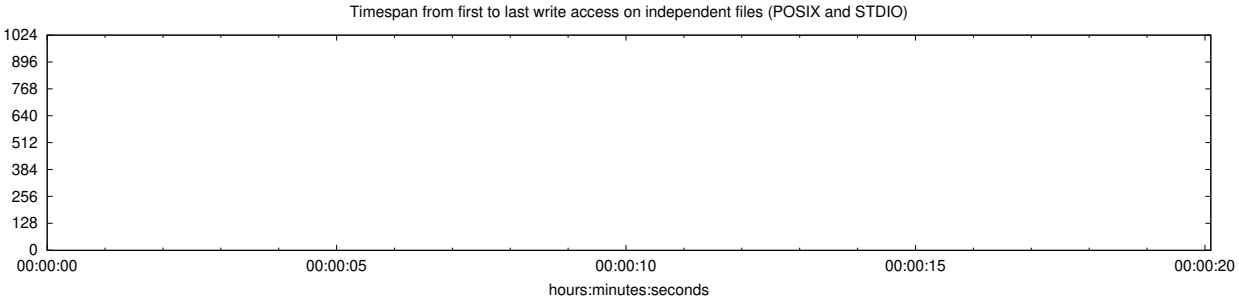

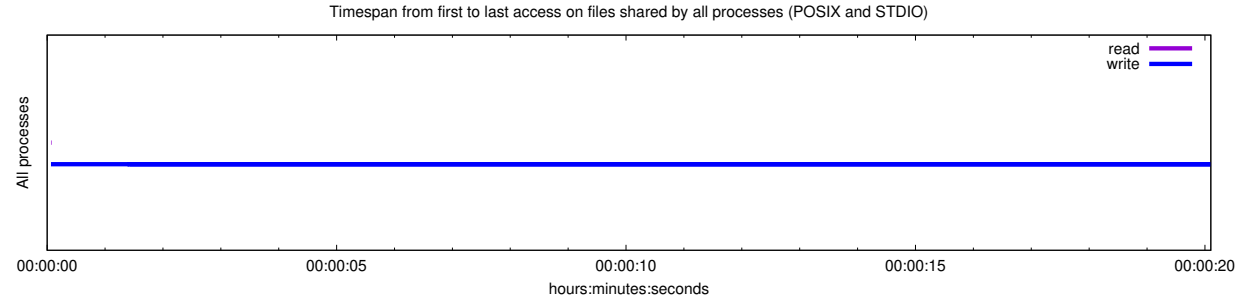


Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MiB)
Independent reads	0	0
Independent writes	0	0
Independent metadata	0.021594248046875	N/A
Shared reads	0.0045549228515625	0.000237464904785156
Shared writes	13.9230221914063	20.0000176718459
Shared metadata	0.59812745703125	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
UNKNOWN	20480.01810	1.00000	0.24316	1.00000

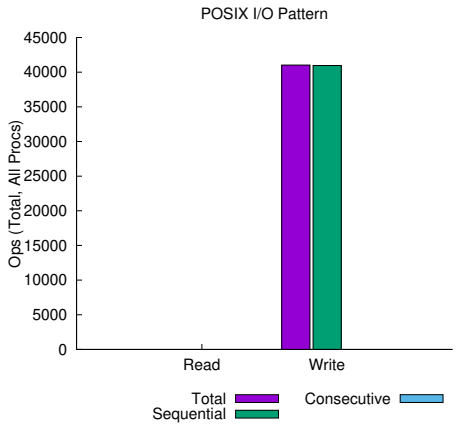

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes
...arshan_n8.h5	1024	866	0.240523	20MiB	3	18.432658	21MiB	4.3	71.4
...ite_rep1.csv	1024	117	0.000637	0	988	1.177984	0	0.356	9.59
...-3385480.loc	1024	640	0.000310	0	804	0.029052	0	0.00877	0.5
.../h5bench.cfg	1024	117	0.000122	249B	81	0.008940	249B	0.00141	0
...<STDOUT>	1024	1	0.000000	0	0	0.000182	1.4KiB	0	43.4