



jobid: 25793666	uid: 35712	nprocs: 1024	runtime: 68.3936 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 163840.0 MiB at 2525.89 MiB/s
I/O performance *estimate* (at the STDIO layer): transferred 0.2 MiB at 0.08 MiB/s

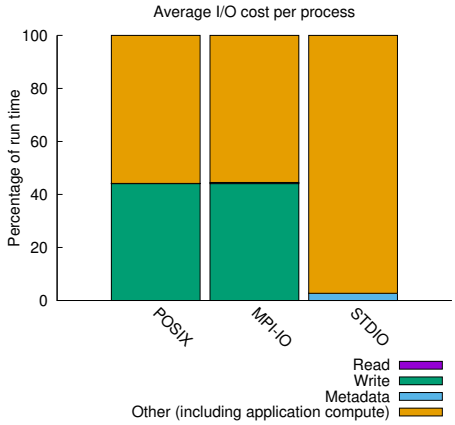

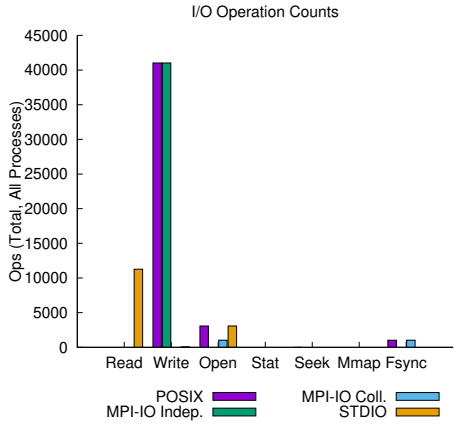

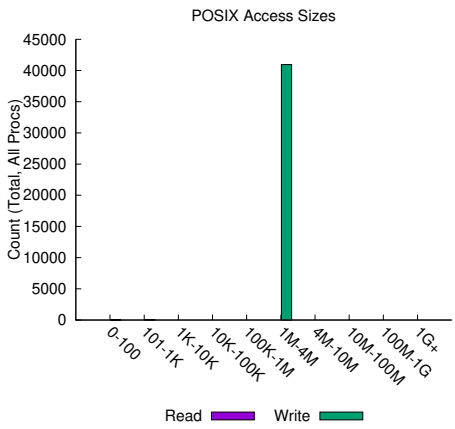

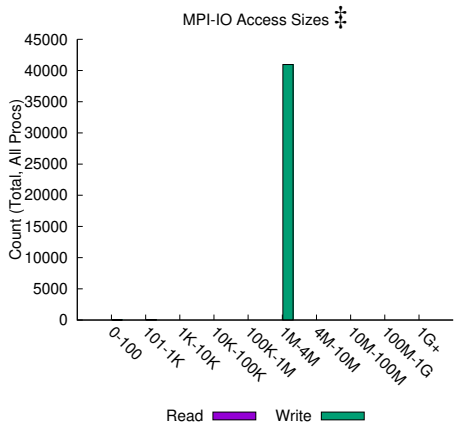


Most Common Access Sizes
(POSIX or MPI-IO)


	access size	count
POSIX	4194304	40960
	272	40
	544	5
	120	4
MPI-IO ‡	4194304	40960
	272	40
	544	5
	120	4


‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	1029	160MiB	161GiB
read-only files	1	244B	244B
write-only files	4	41GiB	161GiB
read/write files	0	0	0
created files	4	41GiB	161GiB

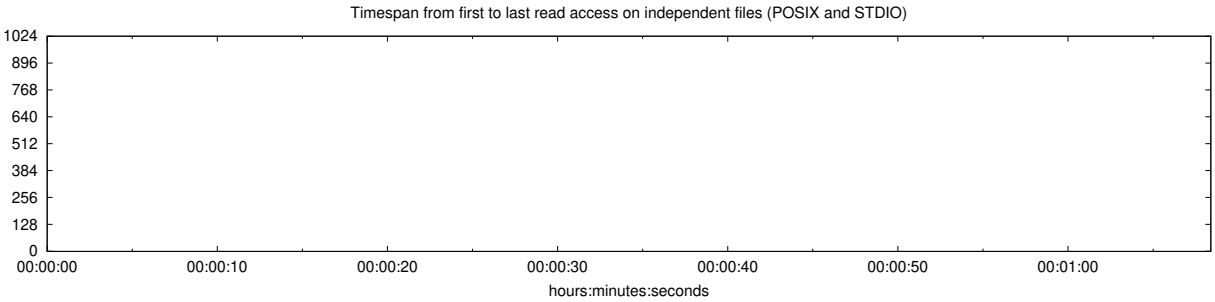

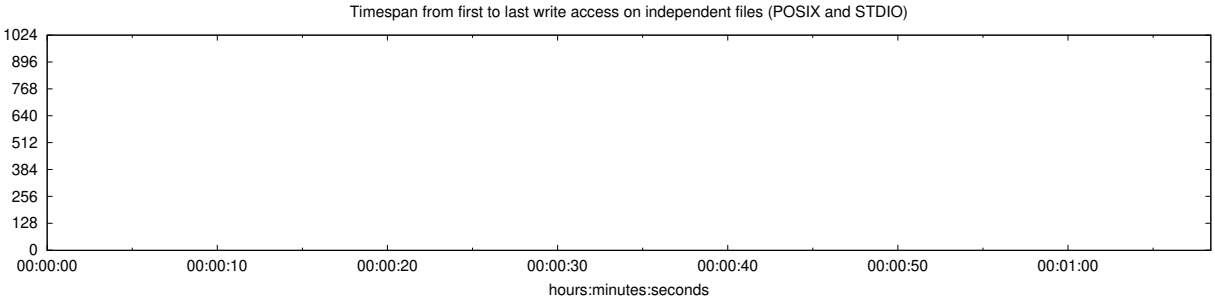

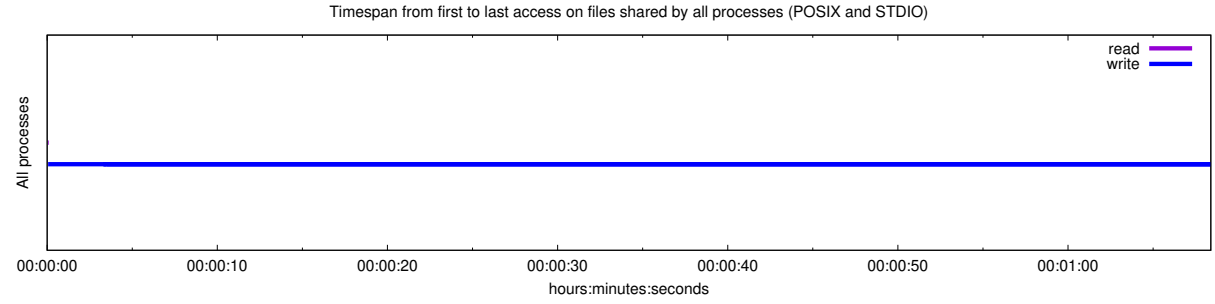


Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MiB)
Independent reads	0	0
Independent writes	0	0
Independent metadata	0.0248554384765625	N/A
Shared reads	0.006243498046875	0.000232696533203125
Shared writes	30.1587394433594	160.000017669052
Shared metadata	1.85710527929687	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
UNKNOWN	163840.01809	1.00000	0.23828	1.00000

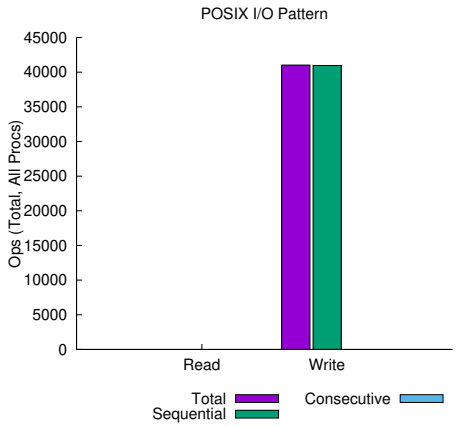

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes
...arshan_n8.h5	1024	892	3.747090	160MiB	15	64.580706	161MiB	21.1	71.4
...ite_rep2.csv	1024	440	0.000345	0	914	2.977801	0	0.854	9.62
...-2661560.loc	1024	672	0.000388	0	64	0.084190	0	0.0255	0.5
.../h5bench.cfg	1024	759	0.005506	244B	32	0.038075	244B	0.00768	0
...<STDOUT>	1024	1	0.000000	0	0	0.000195	1.4KiB	0	43.2