



jobid: 25797920	uid: 35712	nprocs: 1024	runtime: 72.0741 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 163840.0 MiB at 2365.24 MiB/s
I/O performance *estimate* (at the STDIO layer): transferred 0.2 MiB at 0.13 MiB/s

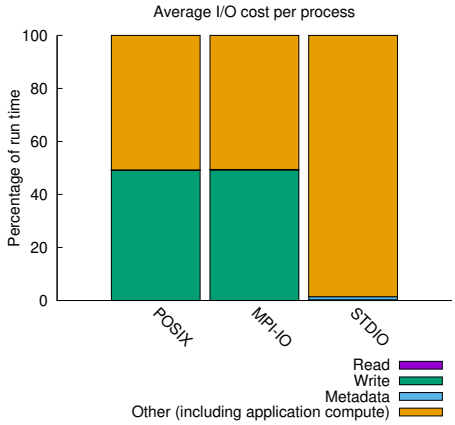

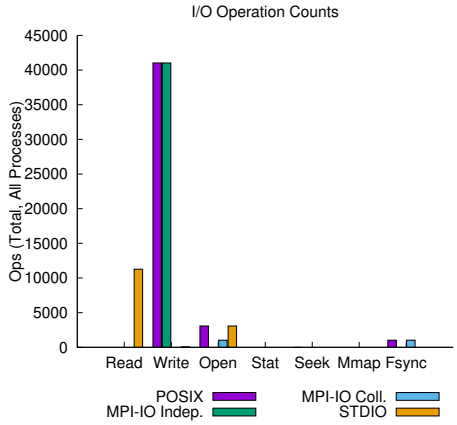

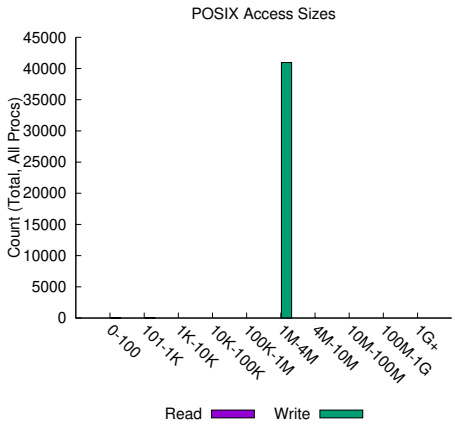

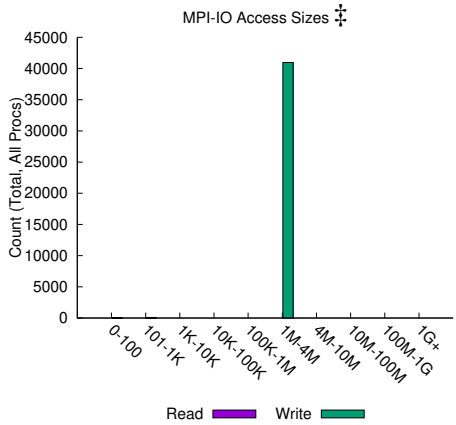


Most Common Access Sizes
(POSIX or MPI-IO)


	access size	count
POSIX	4194304	40960
	272	40
	544	5
	120	4
MPI-IO ‡	4194304	40960
	272	40
	544	5
	120	4


‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	1029	160MiB	161GiB
read-only files	1	241B	241B
write-only files	4	41GiB	161GiB
read/write files	0	0	0
created files	4	41GiB	161GiB

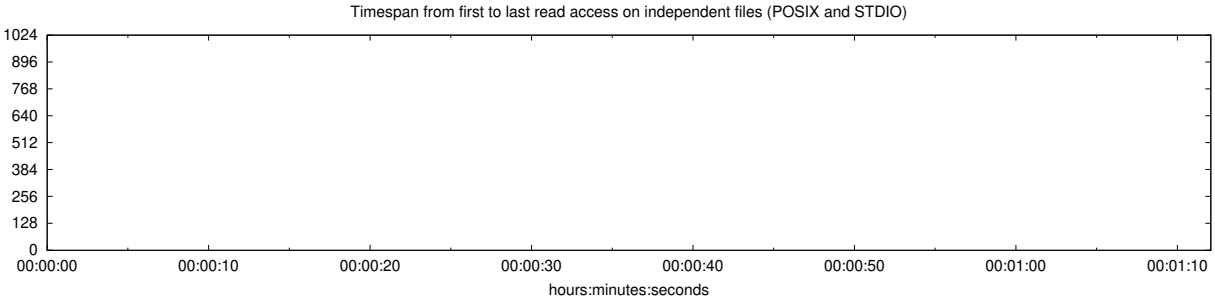

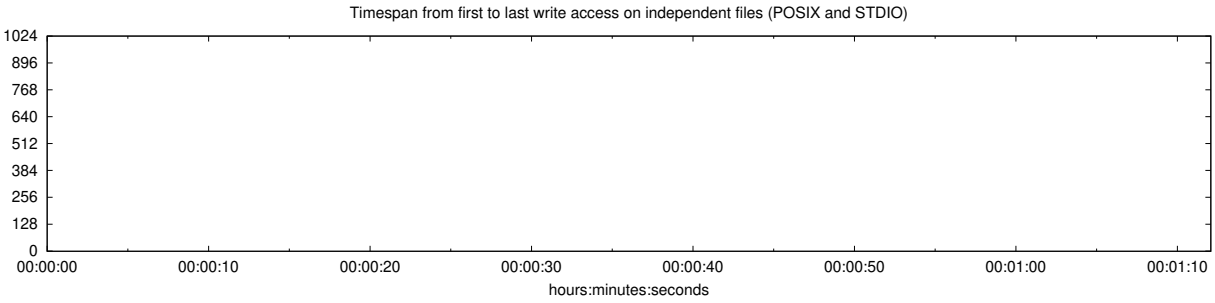

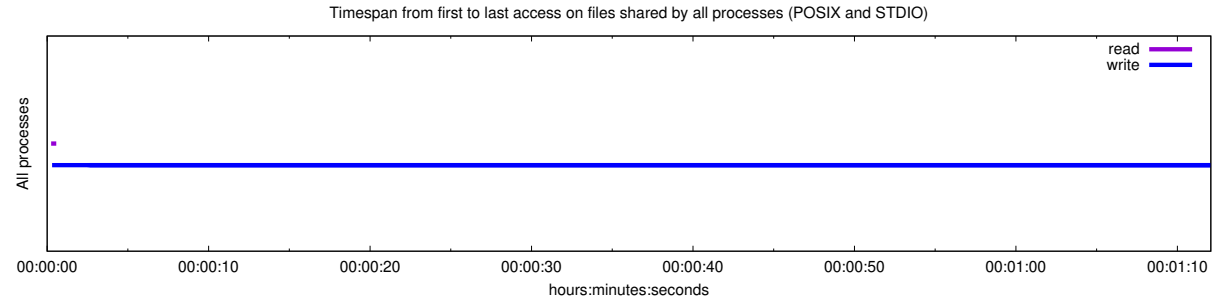


Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MiB)
Independent reads	0	0
Independent writes	0	0
Independent metadata	0.0215657021484375	N/A
Shared reads	0.197663225585937	0.000229835510253906
Shared writes	35.4720728798828	160.000017657876
Shared metadata	0.863333337890625	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
/scratch	163840.01677	1.00000	0.23535	1.00000
UNKNOWN	0.00131	0.00000	0.00000	0.00000

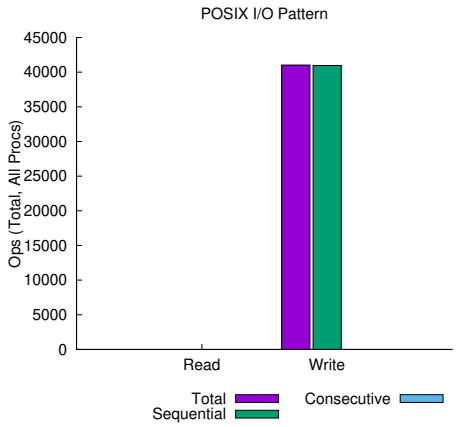

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes
...arshan_n8.h5	1024	615	2.368472	160MiB	189	69.131124	160MiB	20.8	71.4
...ite_rep1.csv	1024	10	0.000207	0	633	1.569056	0	0.455	9.62
.../h5bench.cfg	1024	76	0.000060	241B	590	0.250650	241B	0.0847	0
...-2906207.loc	1024	772	0.000322	0	228	0.029130	0	0.00889	0.5
...<STDOUT>	1024	1	0.000000	0	0	0.000224	1.4KiB	0	42.9