



jobid: 25797920	uid: 35712	nprocs: 1024	runtime: 669.5129 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 163840.0 MiB at 245.58 MiB/s
I/O performance *estimate* (at the STDIO layer): transferred 0.2 MiB at 0.16 MiB/s

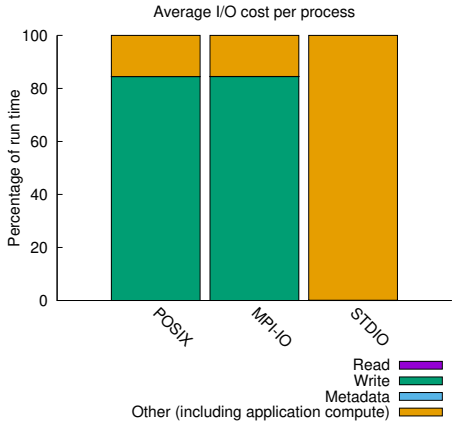

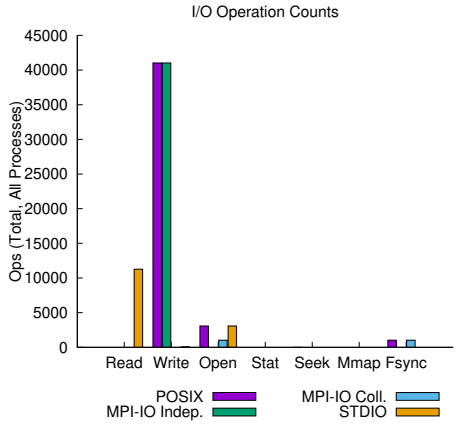

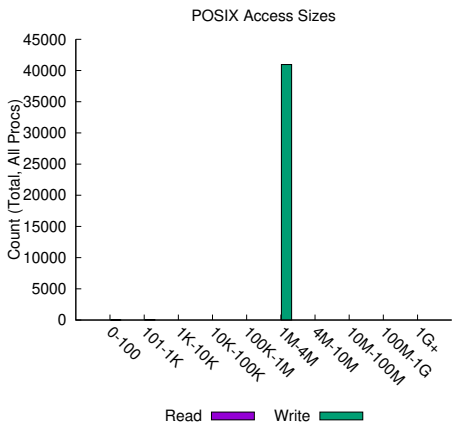

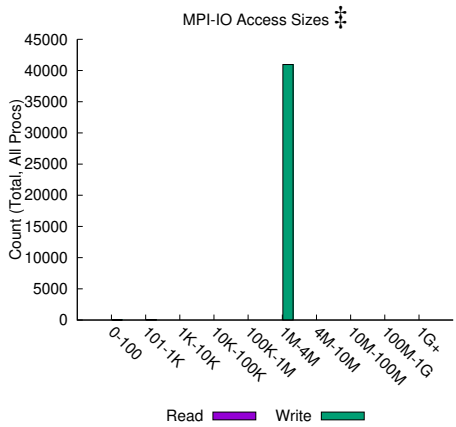


Most Common Access Sizes
(POSIX or MPI-IO)


	access size	count
POSIX	4194304	40960
	272	40
	544	5
	120	4
MPI-IO ‡	4194304	40960
	272	40
	544	5
	120	4


‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	1029	160MiB	161GiB
read-only files	1	241B	241B
write-only files	4	41GiB	161GiB
read/write files	0	0	0
created files	4	41GiB	161GiB

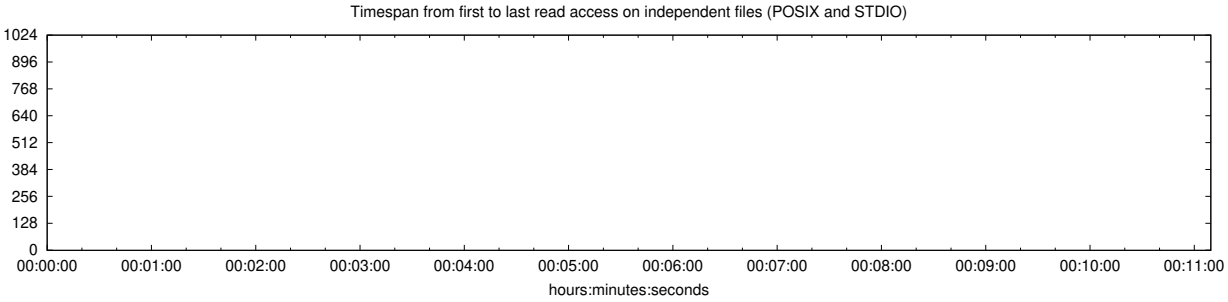

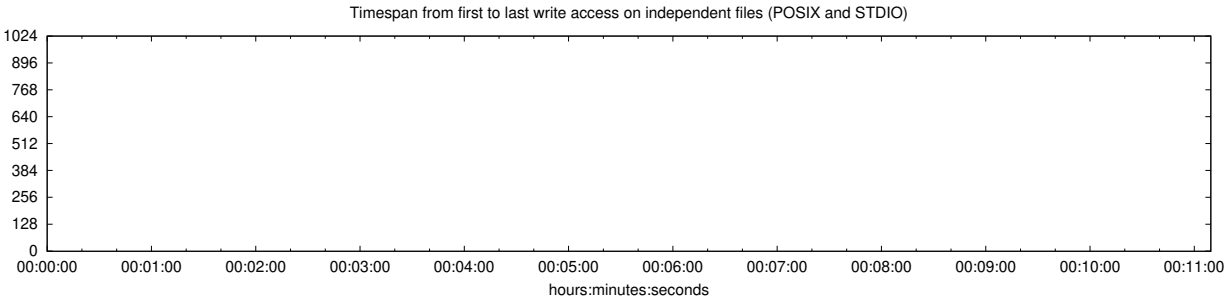

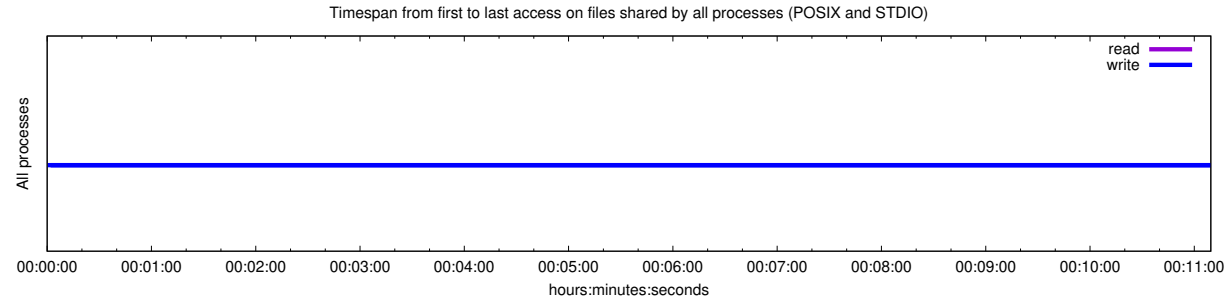


Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MiB)
Independent reads	0	0
Independent writes	0	0
Independent metadata	0.020739396484375	N/A
Shared reads	0.000171943359375	0.000229835510253906
Shared writes	565.555133135742	160.000017669052
Shared metadata	0.694149923828125	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
/scratch	163840.01678	1.00000	0.23535	1.00000
UNKNOWN	0.00131	0.00000	0.00000	0.00000

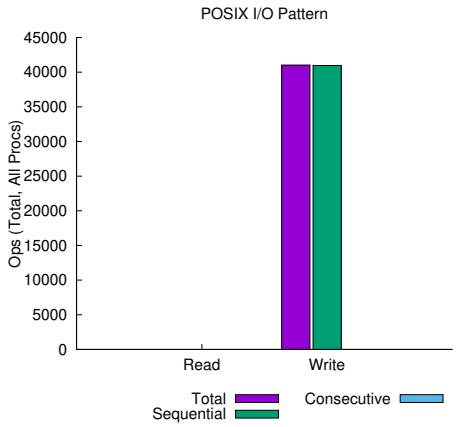

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes
...arshan_n8.h5	1024	285	4.120738	160MiB	512	666.972825	160MiB	131	71.4
...ite_rep2.csv	1024	82	0.000259	0	945	1.436294	0	0.457	9.81
...-2913398.loc	1024	619	0.000344	0	680	0.066339	0	0.00964	0.5
.../h5bench.cfg	1024	38	0.000057	241B	292	0.002821	241B	0	0
...<STDOUT>	1024	1	0.000000	0	0	0.000223	1.4KiB	0	43