


4 connect(credentials)

Step 4: connect(credentials)

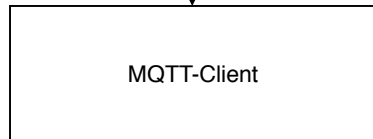

1 registerDevice()

Step 1: registerDevice()

3 return credentials


Step 3: return credentials

5 connect(credentials)

Step 5: connect(credentials)

Push Relay

The title of the right-hand section of the diagram, which represents the server-side components.

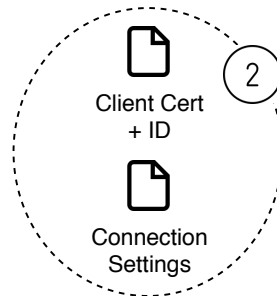

6 accept connection if credentials are valid

Step 6: accept connection if credentials are valid

