

UNIT V 8 Application Layer:

Domain Name Space, Electronic Mail, File Transfer, Web Documents and HTTP, Network Management System.

FTP

- FTP stands for File transfer protocol.
- FTP is a standard internet protocol provided by TCP/IP used for transmitting the files from one host to another.
- It is mainly used for transferring the web page files from their creator to the computer that acts as a server for other computers on the internet.
- It is also used for downloading the files to computer from other servers.


Objectives of FTP

- It provides the sharing of files.
- It is used to encourage the use of remote computers.
- It transfers the data more reliably and efficiently.

Why FTP?


Although transferring files from one system to another is very simple and straightforward, but sometimes it can cause problems. For example, two systems may have different file conventions. Two systems may have different ways to represent text and data. Two systems may have different directory structures. FTP protocol overcomes these problems by establishing two connections between hosts. One connection is used for data transfer, and another connection is used for the control connection.

Mechanism of FTP

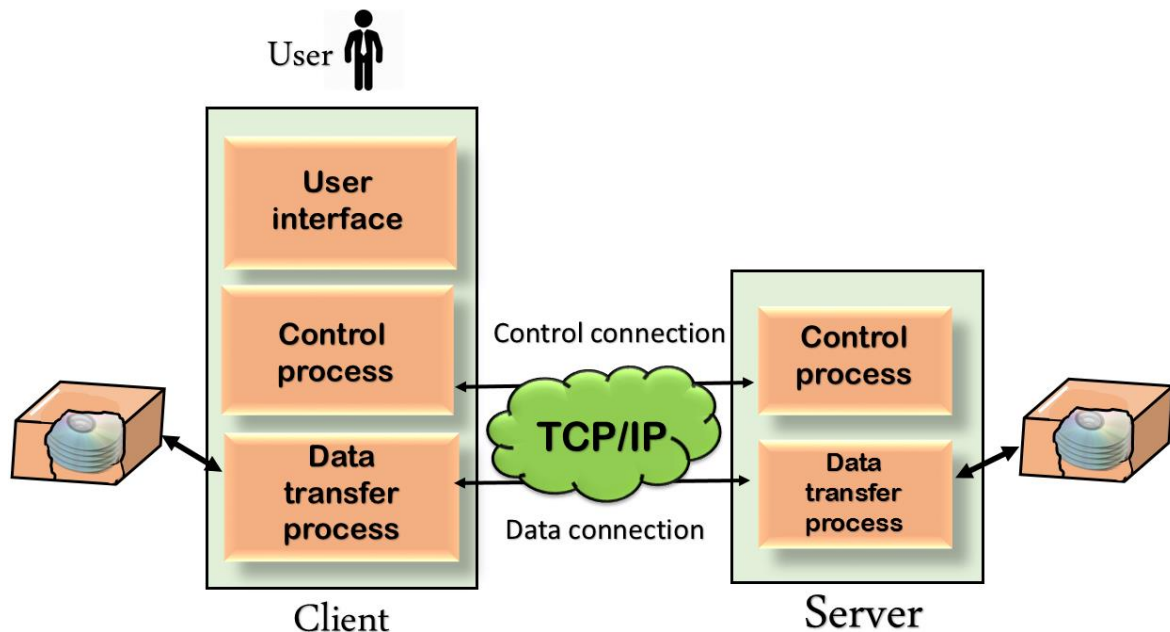

The above figure shows the basic model of the FTP. The FTP client has three components: the user interface, control process, and data transfer process. The server has two components: the server control process and the server data transfer process.

There are two types of connections in FTP:

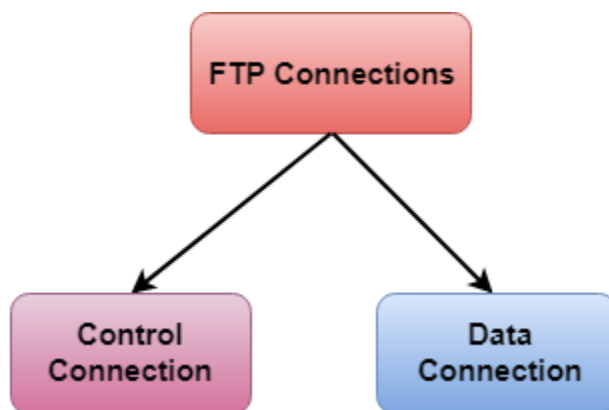

- **Control Connection:** The control connection uses very simple rules for communication. Through control connection, we can transfer a line of command or line of response at a time. The control connection is made between the control processes. The control connection remains connected during the entire interactive FTP session.
- **Data Connection:** The Data Connection uses very complex rules as data types may vary. The data connection is made between data transfer processes. The data connection opens when a command comes for transferring the files and closes when the file is transferred.

FTP Clients

- FTP client is a program that implements a file transfer protocol which allows you to transfer files between two hosts on the internet.
- It allows a user to connect to a remote host and upload or download the files.
- It has a set of commands that we can use to connect to a host, transfer the files between you and your host and close the connection.
- The FTP program is also available as a built-in component in a Web browser. This GUI based FTP client makes the file transfer very easy and also does not require to remember the FTP commands.

Advantages of FTP:

- **Speed:** One of the biggest advantages of FTP is speed. The FTP is one of the fastest way to transfer the files from one computer to another computer.
- **Efficient:** It is more efficient as we do not need to complete all the operations to get the entire file.
- **Security:** To access the FTP server, we need to login with the username and password. Therefore, we can say that FTP is more secure.
- **Back & forth movement:** FTP allows us to transfer the files back and forth. Suppose you are a manager of the company, you send some information to all the employees, and they all send information back on the same server.

Disadvantages of FTP:

- The standard requirement of the industry is that all the FTP transmissions should be encrypted. However, not all the FTP providers are equal and not all the providers offer encryption. So, we will have to look out for the FTP providers that provides encryption.
- FTP serves two operations, i.e., to send and receive large files on a network. However, the size limit of the file is 2GB that can be sent. It also doesn't allow you to run simultaneous transfers to multiple receivers.
- Passwords and file contents are sent in clear text that allows unwanted eavesdropping. So, it is quite possible that attackers can carry out the brute force attack by trying to guess the FTP password.
- It is not compatible with every system.

What are the functions of Network Management

Network Management involves monitoring and controlling a network system so that it can operate properly without downtime. So, the function performed by a network management system are categorised as follows –

Fault management

Fault management is the procedure of technology used to manage the administrator who prevents faults within a networked system so that the availability of downtime is reduced by identifying, isolating and fixing any malfunctions that occur. It can support active and passive components to disavow fault.

Configuration management

It refers to the process of initially configuring a network and then adjusting it in response to changing networks requirements. This function is important because improper configuration may cause the network to work suboptimal or may not work at all.

The configuration involves the parameters at the network interface like IP address, DHCP, DNS, server address etc.

Network management

Network management is the procedure of maintaining and organizing the active and passive network elements. It will support the services to maintain network elements and network performance monitoring and management.

It recognises the fault, Investigate, Troubleshoot, Configuration Management and OS changes to fulfil all the user requirements. It allows computers in a network to communicate with each other, control networks and allow troubleshooting or performance enhancements.

Data logging and report

Data logs record all the records and interactions that pass through a specific point in a system, between keyboard and display. If any system failure appears, the administrator can go to the log and view what might have created it.

Accounting management of network resources

To keep a record of usage of network resources known as accounting management. Like to examine and to determine how to better allocate resources. One might examine the type of traffic or level of traffic at a particular port.

It can also monitor activities of users about password & user id and authentication for the usage of resources.

Performance Management

It involves monitoring network utilization, end to end response time & performance of resources at various points in a network. For example, to keep track of switched interfaces in an Ethernet.

Network Security

It refers to the process of providing security on network and network resources. It involves managing the security services on a resource by using access control, authentication, confidentiality, integrity and non-repudiation.

HTTP


- HTTP stands for **HyperText Transfer Protocol**.
- It is a protocol used to access the data on the World Wide Web (www).
- The HTTP protocol can be used to transfer the data in the form of plain text, hypertext, audio, video, and so on.
- This protocol is known as HyperText Transfer Protocol because of its efficiency that allows us to use in a hypertext environment where there are rapid jumps from one document to another document.
- HTTP is similar to the FTP as it also transfers the files from one host to another host. But, HTTP is simpler than FTP as HTTP uses only one connection, i.e., no control connection to transfer the files.
- HTTP is used to carry the data in the form of MIME-like format.

- HTTP is similar to SMTP as the data is transferred between client and server. The HTTP differs from the SMTP in the way the messages are sent from the client to the server and from server to the client. SMTP messages are stored and forwarded while HTTP messages are delivered immediately.

Features of HTTP:

- **Connectionless protocol:** HTTP is a connectionless protocol. HTTP client initiates a request and waits for a response from the server. When the server receives the request, the server processes the request and sends back the response to the HTTP client after which the client disconnects the connection. The connection between client and server exist only during the current request and response time only.
- **Media independent:** HTTP protocol is a media independent as data can be sent as long as both the client and server know how to handle the data content. It is required for both the client and server to specify the content type in MIME-type header.
- **Stateless:** HTTP is a stateless protocol as both the client and server know each other only during the current request. Due to this nature of the protocol, both the client and server do not retain the information between various requests of the web pages.


HTTP Transactions

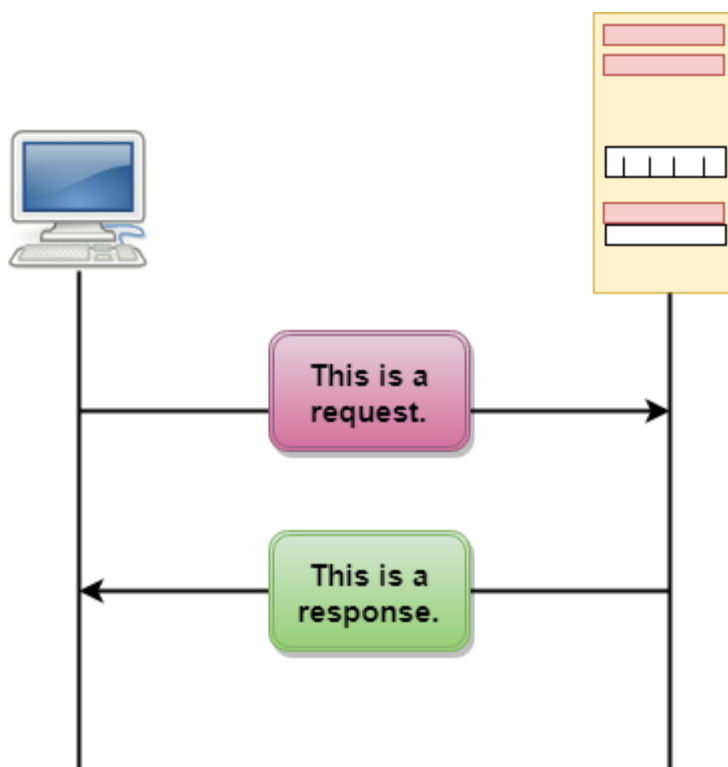


The above figure shows the HTTP transaction between client and server. The client initiates a transaction by sending a request message to the server. The server replies to the request message by sending a response message.

Messages


HTTP messages are of two types: request and response. Both the message types follow the same message format.

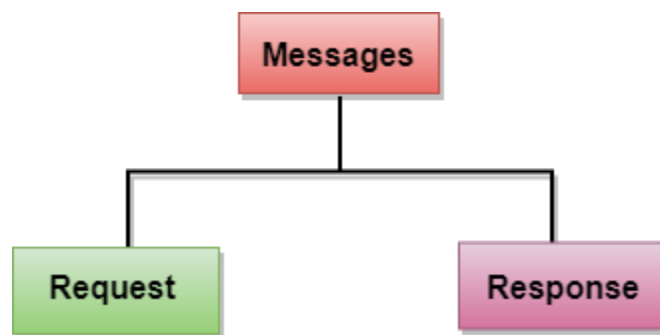

Request Message: The request message is sent by the client that consists of a request line, headers, and sometimes a body.

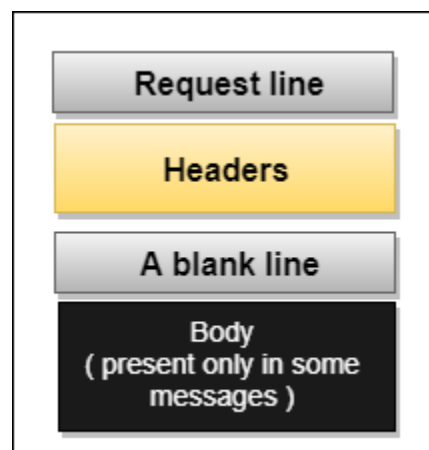

Response Message: The response message is sent by the server to the client that consists of a status line, headers, and sometimes a body.

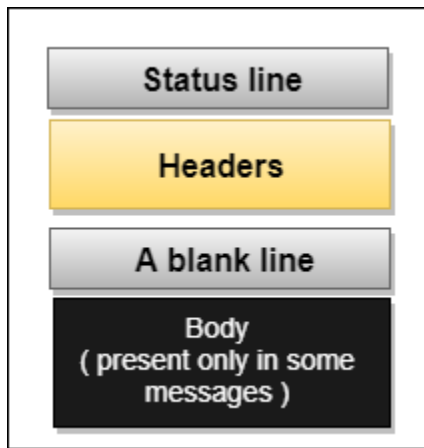

Uniform Resource Locator (URL)

- A client that wants to access the document in an internet needs an address and to facilitate the access of documents, the HTTP uses the concept of Uniform Resource Locator (URL).
- The Uniform Resource Locator (URL) is a standard way of specifying any kind of information on the internet.
- The URL defines four parts: method, host computer, port, and path.



- **Method:** The method is the protocol used to retrieve the document from a server. For example, HTTP.
- **Host:** The host is the computer where the information is stored, and the computer is given an alias name. Web pages are mainly stored in the computers and the computers are given an alias name that begins with the characters "www". This field is not mandatory.
- **Port:** The URL can also contain the port number of the server, but it's an optional field. If the port number is included, then it must come between the host and path and it should be separated from the host by a colon.
- **Path:** Path is the pathname of the file where the information is stored. The path itself contain slashes that separate the directories from the subdirectories and files.

