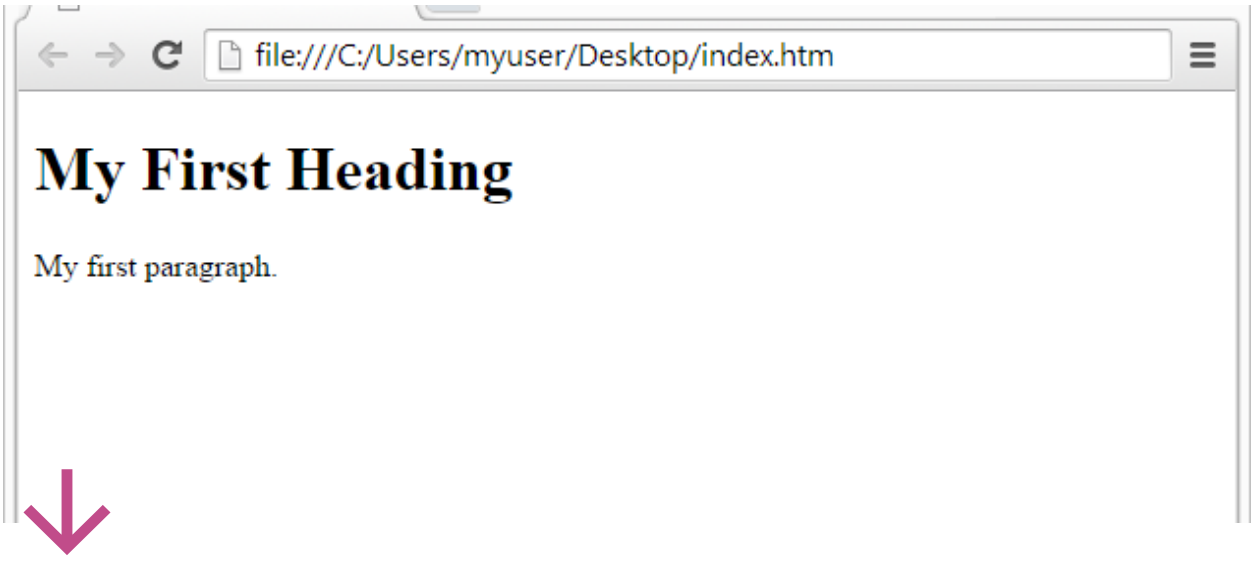


HTML

▼ **<!DOCTYPE html>**

it tells the browser what version of html we are using (html5)

▼ **<html>**

the container of web site called THE ROOT element

▼ **<head>**

it holds infos about the page but it stays invisible on the screen

and header is a visible layout tag/ symentic tag

> **<title></title>** it's the title of the web site

> **<meta charset="UTF-8">** **this instruction tells the browser to read the binary data back into letters so the user can read it**

💡 **charset is short of character , this attribute tells the browser wich specific dictionary of text characters to load**

> **<meta name="viewport" content="width=device-width, initial-scale=1.0"> this tag is what makes the web site mobile freindly**

▼ **Body**

this tag contains the content of the web site that will be visible to the users

▼ **div**

▼ **section**

Elements

☝️ Elements in Html consists of both the opening tags as well as what's inside

$$< b > thisiselement < /b >$$

Attributes

❓ define the character of an HTML element

Tags

☝️ tags are the opening parts of an HTML element

MAKINWith POST:G A FORM IN HTML

▼ structure

> **<form></form>**

☝️ **is a container that contains the package of the user data and controls how it's packaged and sent**

Attributes:

action specifies the destination where the data is sent when the user click on submit if action is set to defaults it collect the data and pair it with the name attribute (user_name=Ali)

then the browser reads the data and based of the method attribute if it's get it adds the data directly to the end of the URl

```
[website.com/contact](https://website.com/contact) to [website.com/contact?user_name=Ali](https://website.com/contact?user_name=Ali)
```

if it's **post** it packs the data inside the hidden body of the request

le corps de la requete (hidden body of the request) la partie d'un message HTTP qui contient les donnes que l'utilisateur envoie au serveur cette partie est le corps .

conclusion :

action indique l' URL ou les donnes du formulaire sont envoyee si j'utilise # c'est parce qu'on a pas de serveur pour traiter les donnes

et methode indique comment les donnes sont envoyees avec post sont envoyees au corps du requete (dans le project j'ai choisi post pour que les donnes n'apparaissent pas a la fin de l'URL et qu'il y'a pas de limite de taille pour le message la methode par defaults c'est GET

`<label>` : the text that describes a field

A label tells the user what a field is for it also makes the field easier to use: clicking the label focuses the input.

html

```
<label for="email">Email</label><input type="email" id="emai
l" name="email">
```

Attributes:

- `for` : must match the `id` of the input it describes this is what links the two

label d'ecrit le champ du formulaire est l'attribute for doit toujours avoir la meme valeur d'id c'est utile pour l'accessibilite

`<input>` : the field the user fills in

`<input>` is a selfclosing element Its behavior depends almost entirely on the `type` attribute

html

```
<input type="text" id="name" name="name" placeholder="Your na
me" required>
```

Attribute	What it does
`type`	kind of field: `text` , `email` , `password` , `number` , `date` , `checkbox` , `radio` , `file` , `tel` , `url` , `range` ... type de donnes demander
`id`	unique identifier used by `<label for="">` and by CSS/JS
`name`	the key used when the form is sent without `name` the value is **not submitted**
`placeholder`	hint text shown while the field is empty It does **not** replace a label
`required`	the form can't be submitted if the field is empty (empeche l'envoie si le champ est vide)

questions:

1 - can u use label and input tags without form in html?

- oui on peux mais les donnes ne vont pas etre envoyer au url

2 - what do we call the text after ‘?’ in urls? example https://aya.com/home?userid=1\

it’s query

3- c’est quoi http

hyper text transfer protocol helps communicate over the internet in a known way