


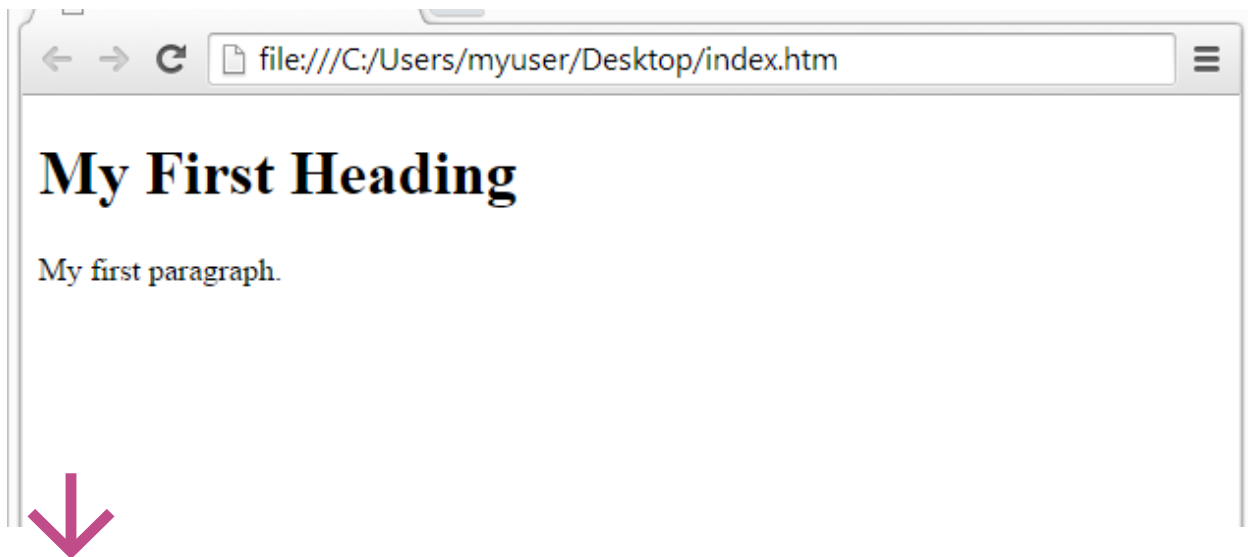

HTML

▼ **<!DOCTYPE html>**

it tells the browser what version of html we are using (html5)

▼ **<html>**

the container of web site called THE ROOT element

▼ **<head>**

it holds infos about the page but it stays invisible on the screen

and header is a visible layout tag/ symentic tag

| **<title></title>** it's the title of the web site

| **<meta charset="UTF-8">** this instruction tells the browser to read the binary data back into letters so the user can read it



charset is short of character , this attribute tells the browser wich specific dictionary of text characters to load

<meta name="viewport" content="width=device-width, initial-scale=1.0"> this tag is what makes the web site mobile freindly

▼ Body

this tag contains the content of the web site that will be visible to the users

Elements



Elements in Html consists of both the opening tags as well as what's inside

< b > *thisiselement* < /b >

Attributes



define the character of an HTML element

Tags



tags are the opening parts of an HTML element

MAKING A FORM IN HTML

▼ structure

<form></form>



is a container that contains the package of the user data and controls how it's packaged and sent

Attributes:

action specifies the destination where the data is sent when the user click on submit if action is set to defaults it collect the data and pair it with the name attribute (user_name=Ali) then the browser reads the data and based of the method attribute if it's get it adds the data directly to the end of the URI

```
[website.com/contact](https://website.com/contact) to [website.com/contact?user_name=Ali](https://website.com/contact?user_name=Ali)
```

if it's **post** it packs the data inside the hidden body of the request

<label> : the text that describes a field

A label tells the user what a field is for it also makes the field easier to use: clicking the label focuses the input.

html

```
<label for="email">Email</label><input type="email" id="email" name="email">
```

Attributes:

- for** : must match the **id** of the input it describes this is what links the two

<input> : the field the user fills in

<input> is a selfclosing element Its behavior depends almost entirely on the **type** attribute

html

```
<input type="text" id="name" name="name" placeholder="Your name" required>
```

Attribute	What it does
<code>type</code>	kind of field: <code>text</code> , <code>email</code> , <code>password</code> , <code>number</code> , <code>date</code> , <code>checkbox</code> , <code>radio</code> , <code>file</code> , <code>tel</code> , <code>url</code> , <code>range</code> ...
<code>id</code>	unique identifier used by <code><label for=""></code> and by CSS/JS
<code>name</code>	the key used when the form is sent without <code>name</code> the value is not submitted
<code>placeholder</code>	hint text shown while the field is empty It does not replace a label
<code>required</code>	the form can't be submitted if the field is empty