Damped two-stream and twin couplings in equilibrium reasoners: attractor geometry, inner loops and test-time scaling on Sudoku-Extreme

Håkon Noren

Working note, November 8, 2026

Abstract

Equilibrium Reasoners (EqR) iterate one shared block on two latent states and reach high accuracy on Sudoku-Extreme by spending test-time compute: more iterations (depth), more random starts (breadth), and Langevin noise. We replace EqR's self-reading update by two-stream *kick* and *relax* couplings in which each stream is driven only by the other, so that every update is an invertible shear followed by a constant scaling. We add a *twin* coupling, in which the low-level state is doubled into two copies that read each other; it restores EqR's inner fixed-point iteration while every update still reads only streams it does not change. We study which properties of the resulting maps decide accuracy, depth scaling, breadth and the effect of noise. On the theory side we show that (i) the force block has unit per-token RMS, so the state at a fixed point is an exact, rate-determined multiple of a unit vector, which fixes the scale against which test noise acts; (ii) the volume constraint of the coupled maps is not binding for any trained model except one with near-identity rates; (iii) symmetric relaxation without common-mode damping has an exactly neutral mode, and damping it is what makes relax work; (iv) alternating couplings have no implicit inner fixed-point problem, while EqR's inner loop does; (v) a relaxed self-map with strong negative feedback undergoes a period-doubling (flip) bifurcation; and (vi) the twin's inner loop is a lag-two recurrence on one interleaved sequence, whose fixed points are the fixed points *and* 2-cycles of the self-reading map, so a flip of the self-map becomes a symmetry-breaking pitchfork of the twins. Numerically, on 14 checkpoints we measure Jacobian spectra, path independence, selection, and escape under noise. Right answers are attracting fixed points and wrong end states are not, in every working model, so convergence-based selection is nearly perfect and accuracy is limited by *coverage*. Test noise helps by selectively destabilising wrong attractors below an arm-specific breakdown level. EqR differs from the alternating couplings in being near critical at its answers ($\rho \approx 0.93$–0.97 per outer iteration against 0.53–0.73), in being more path independent, and in an inner loop that, with training, goes through a flip bifurcation into an exact 2-cycle. After 20k training steps the twin coupling is the best test-time scaler we measured. Over three seeds it is right on $96.9 \pm 1.2\%$ of puzzles at depth 1024 and $99.0 \pm 0.5\%$ top-4 with 128 starts at depth 64, against 92.2 ± 1.8 and 94.7 ± 2.1 for EqR at 20k and 97.6, 98.6 for EqR's released 50k-step checkpoint, although it is the weakest working arm at 16 iterations and its gain comes from test noise. The common-mode damping makes no difference ($\delta = 2, 3, 10$ agree within a point for each seed), so the gain comes from the two copies, not from the cross term. Along training the twin's depth scaling at test noise 0.5 peaks at 20–25k steps and then declines, while EqR's improves until 40k: by 50k the twin's right answers are no longer fixed points. Training at noise 0.25 makes them fixed points again but slows learning, and ends level with EqR trained the same way, below EqR. Trained to 50k the twin generalises like EqR (training and test accuracy within one point, against gaps of 15–26 points for the alternating couplings, which fit the 1000 training puzzles). On a second task on the same board, Skyscrapers-7, EqR overfits 10k training puzzles and needs 100k; there the twin trails EqR by about six points at 16 iterations. Results are single-seed except where marked (three seeds for EqR and the twins at 20k).

Contents

1 Introduction **2**

2 Setting **4**
2.1 EqR . . . 4
2.2 Coupled updates . . . 4
2.3 The twin coupling . . . 5
2.4 Evaluation . . . 6

3 Theory **8**
3.1 State scale . . . 8
3.2 Volume . . . 8
3.3 The neutral mode of undamped relaxation . . . 9
3.4 Inner fixed-point problems . . . 9
3.5 Flip bifurcation of relaxed self-maps . . . 9
3.6 The twin coupling as a lag-two recurrence . . . 10
3.7 Certification and noise . . . 11

4 Accuracy and training **11**

5 Test-time scaling **15**
5.1 Round three: the twin coupling scales best at 20k . . . 15
5.2 Round four: damping, noise training and the training trajectory . . . 16

6 Dynamics of the trained maps **22**
6.1 Selection is solved; coverage is not . . . 22
6.2 Spectra at the end states . . . 22
6.3 Escape under noise . . . 23
6.4 Rounds three and four . . . 23
6.5 Inside one outer iteration . . . 25
6.6 EqR's inner loop goes through a flip bifurcation . . . 26

7 A second task: Skyscrapers-7 **31**

8 Discussion **33**

A Rates, scales and dimensionality **34**

B Reproduction **34**

1 Introduction

Looped (weight-tied, recurrent-depth) reasoners solve constraint problems such as Sudoku by iterating one block many times [8, 13, 14, 19]. Equilibrium Reasoners (EqR, [13]) add three ingredients to TRM-style recursion: random initial states, Langevin noise in the state, and an explicit view of reasoning as convergence to an attractor. At test time EqR scales *depth* (iterations), *breadth* (random starts per puzzle, with an answer chosen by convergence) and noise.

This note asks which properties of the iteration map make these work. We keep EqR's data, block, training recipe and evaluator, and replace only the state update by two-stream couplings

in the spirit of conformal symplectic integrators [7, 16] and momentum networks [18]:

$$\begin{aligned}
\textbf{kick:}\quad & L \leftarrow a\,(L + \mathcal{B}(H + x)), && H \leftarrow bH + \mathcal{B}(L + x),\\
\textbf{relax:}\quad & L \leftarrow aL + (1-a)(cH + \mathcal{B}(H + x)), && H \leftarrow bH + (1-b)(cL + \mathcal{B}(L + x)),
\end{aligned}$$

with $a = e^{-\gamma}$, $b = e^{-\alpha}$, $c = e^{-\delta}$. Each stream is driven only by the other stream, so every update is invertible with a state-independent Jacobian determinant. The price is that L, given H, is one explicit layer: EqR's inner iteration disappears (Prop. 6). The *twin* coupling (§2.3) brings it back without giving up invertibility by doubling L into two copies that read each other, L reading L' where EqR's z_L reads itself:

$$\begin{aligned}
\textbf{twin:}\quad & L \leftarrow aL + (1-a)(cL' + \mathcal{B}(L' + H + x)), \quad L' \leftarrow aL' + (1-a)(cL + \mathcal{B}(L + H + x)),\\
& H \leftarrow bH + (1-b)(cm + \mathcal{B}(m)),
\end{aligned}$$

with $m = \frac{1}{2}(L + L')$. We compare these maps with EqR in accuracy (§4), test-time scaling (§5) and a direct dynamical analysis of trained checkpoints (§6), guided by a small amount of theory (§3).

Summary of findings.

1. **Certification is easy; coverage is hard.** In every working model of rounds one and two right answers are attracting fixed points ($\rho < 1$) and wrong end states are not ($\rho > 1$); three later checkpoints keep only the weaker ordering that wrong end states are less stable than right ones, and that is enough. Convergence, the halting head and a Sudoku validity check pick the right start almost whenever one exists (AUROC ≈ 1 without noise for all 22 working checkpoints of the 26 analysed); what separates models is how often random starts land in the right basin (§6.1, §6.4).
2. **Noise acts on wrong attractors first.** Under noise σ below an arm-specific breakdown level $\sigma^\star$ right answers are never lost, while 15–33% of wrong end states are rescued (§6.3), as in Hopfield networks at finite temperature [1, 6]. $\sigma^\star$ depends on the state scale, which is fixed exactly by the rates (Prop. 2), and on how strongly the answers attract.
3. **EqR is near critical and more path independent.** EqR's right answers have $\rho \approx 0.87 \to 0.93 \to 0.97$ (20k, 50k, released) per outer iteration, matching the 0.89–0.97 reported for converged Sudoku loopers [15]; the coupled maps contract much harder (0.53–0.73). EqR's random starts reach fewer distinct answers (1.6 per puzzle at 50k against 2.6 for relax and 3.2 for kick).
4. **EqR's inner loop flips.** With z_H frozen, EqR's inner map has a stable fixed point at 20k steps but sits on an exact 2-cycle at 50k (Prop. 8); its leading Jacobian eigenvalue moves from $\approx \pm 0.6$ to ≈ -1 and, in the released checkpoint, to ≈ -2. The cycle is invisible to the readout: odd inner-loop lengths work as well as even ones.
5. **Damping matters, volume does not.** The volume bound of the coupled maps (Prop. 4) is irrelevant for all trained models except a near-identity kick; relax without common-mode damping has an exactly neutral mode (Prop. 5) and fails, and early-training accuracy improves as the merged-state retention falls from 1 to ≈ 0.2 (§4).
6. **Training length favours EqR over the alternating couplings.** At 20k steps relax ties EqR with enough test-time compute; at 50k EqR leads on every metric (depth 1024: 97.1 vs. 92.5; depth 64 with 128 starts: 98.7 vs. 96.6).
7. **Explicit inner equilibria fit the training puzzles.** At 50k the alternating couplings reach 93–97% on training batches but 71–79% on the test set, and relax $\delta = 2$ declines after 35k steps. EqR, the twin and the self-reading inner loop, the three arms with an implicit inner problem, have no such gap (§4).

8. **A twin inner loop gives the best test-time scaling at 20k.** The twin is the weakest working arm at 16 iterations (50–54% at $\sigma = 0.5$), but over three seeds it reaches $96.9 \pm 1.2\%$ at depth 1024 and $99.0 \pm 0.5\%$ top-4 with 128 starts at depth 64, against 92.2 ± 1.8 and 94.7 ± 2.1 for EqR at 20k; the second is above EqR's released 50k checkpoint (98.6), the first is not (97.6). The gain comes from test noise: at the training noise it reaches only 65% at depth 256. The damping $\delta \in \{2, 3, 10\}$ makes no difference, so the two copies, not the cross term, are what matters (§5.1).

9. **The twin's advantage belongs to early training.** At $\sigma = 0.5$ its depth-1024 error is lowest at 20–25k steps and rises after 30k, while EqR's keeps falling until 40k (seed 0). By 50k the twin's right answers are no longer fixed points (the state still moves by 5–11% per iteration at 256 noise-free iterations, and its copies have split). Noise does not remove them once reached (none of about 3850 is lost in 32 iterations at $\sigma = 0.5$), but fewer noisy runs reach them, and noise rescues the twins' wrong end states far less often than at 20k (6–25% against 42%). At $\sigma = 0.25$ every arm converges to the same 96–97%. Training at $\sigma = 0.25$ restores fixed points but costs ten points at 20k and three at 50k; at 20k its failures concentrate on puzzles that no start solves, so 128 starts leave 7.7% of puzzles without a right start instead of 0.1%. The noise-trained twin and EqR end level, below EqR trained at $\sigma = 0.01$ (§5.2, §6.4).

10. **A second task.** On Skyscrapers-7, embedded in Sudoku's 9×9 board, EqR memorises 1k and overfits 10k training puzzles (test accuracy peaks at 41% and falls) and generalises with 100k (90.4% at 20k steps, still rising); the twin reaches 84.8%. Under test-time scaling EqR stays ahead in a single run (97.1 against 94.9% at depth 1024, $\sigma = 0.5$), and with 128 starts the most converged start is right for 99.0% of puzzles for both: the twin's 20k advantage on Sudoku does not carry over (§7).

2 Setting

2.1 EqR

A puzzle is embedded as $x \in \mathbb{R}^{n \times d}$ ($n = 97$ positions: 16 puzzle-embedding slots and 81 cells; $d = 512$). The shared block $\mathcal{B} : \mathbb{R}^{n \times d} \to \mathbb{R}^{n \times d}$ is two post-norm layers, each $v \mapsto N(v + \mathrm{MLP}_t(v))$ followed by $v \mapsto N(v + \mathrm{SwiGLU}(v))$, where MLP_t mixes tokens and N is RMS normalisation *without gain*, $N(y)_i = y_i / \operatorname{rms}(y_i)$ row-wise.

Definition 1 (EqR update [13])**.** With $\lambda = 0.95$ and noise $\xi \sim \mathcal{N}(0, \sigma^2 I)$ drawn afresh after every update, one *latent recursion* is

$$z_L \leftarrow (1-\lambda) z_L + \lambda\, \mathcal{B}(z_L + z_H + x) + \xi \quad \text{(6 times)}, \qquad z_H \leftarrow (1-\lambda) z_H + \lambda\, \mathcal{B}(z_H + z_L) + \xi.$$

One *outer iteration* (one ACT step) is three recursions, i.e. 21 block evaluations; the readout decodes z_H. Training differentiates only the last recursion (7 evaluations), carries the state across outer iterations detached, starts from random states (truncated normal, std 1), and uses $\sigma = 0.01$.

2.2 Coupled updates

Definition 2 (Kick and relax)**.** Let $a = e^{-\gamma}$, $b = e^{-\alpha}$, $c = e^{-\delta} \in (0, 1]$. A *half-step* updates one stream from the other:

$$\begin{aligned} \text{kick:} \quad & L \leftarrow a\,(L + \mathcal{B}(H + x)), && H \leftarrow bH + \mathcal{B}(L + x), \\ \text{relax:} \quad & L \leftarrow aL + (1-a)(cH + \mathcal{B}(H + x)), && H \leftarrow bH + (1-b)(cL + \mathcal{B}(L + x)). \end{aligned}$$

Table 1: Arms. Rates are fixed unless stated. "Positive" kick learns $\gamma = 0.05 + \text{softplus}(\cdot)$ from $\gamma = 1$. Invertible: every update is a shear followed by a constant scaling.

arm	update	rates	invertible	round
EqR	self-read, order L^6H	$1 - \lambda = 0.05$	no	ref.
kick: fixed, learned, positive	kick	γ=α=0.005; learned; learned ≥ 0.05	yes	1
relax, $\delta \in \{0, \frac{1}{4}, 1\}$	relax	$\gamma = \alpha = 3$	yes	1
relax / kick, $x \to L$ only	no x in H's force	as above	yes	2
relax δ=1, $x \to L$, self-read	forces read own stream	$\gamma = \alpha = 3$	no	2
relax, $\delta \in \{2, 3\}$	relax	$\gamma = \alpha = 3$	yes	3
twin L, $\delta \in \{1, 2\}$	L, L' read each other, order $LL'LL'LL'H$, $x \to L$ only	$\gamma = \alpha = 3$	yes*	3
inner loop, self-read	self-read relax, order L^6H	$\gamma = \alpha = 3$, $\delta = 1$	no	3

*Every update reads only streams it does not change, so the inverse is explicit (Prop. 9); it is not implemented in code.

A recursion is the alternating sequence H, L, H, L, H, L, H (7 evaluations); three recursions form an outer iteration (21 evaluations, 7 differentiated), exactly as in EqR. The readout decodes $N(H)$. Noise is added after every half-step.

Variants (Table 1): $x \to L$ *only* drops x from H's force (EqR's choice); *self-read* adds the updated stream to its own force input ($L \leftarrow \ldots \mathcal{B}(L + H + x)$), which breaks invertibility; *inner loop* uses EqR's order (L^6H) with self-read; *twin* doubles L into L, L' that read each other (§2.3).

2.3 The twin coupling

Proposition 6 below shows what the alternating couplings give up: because L's force does not read L, repeated L updates with H fixed converge to an explicit function of H, one block evaluation, and EqR's inner iteration $z_L \leftarrow 0.05\, z_L + 0.95\, \mathcal{B}(z_L + z_H + x)$, which solves an implicit equation for z_L, is gone. Letting the force read the updated stream (the self-read and inner-loop arms) brings the iteration back but breaks invertibility. The twin coupling keeps both: it doubles L into two copies, and each copy's force reads the *other* copy where EqR's force reads z_L itself.

Definition 3 (Twin coupling)**.** The state is $(H, L, L') \in (\mathbb{R}^{n \times d})^3$. Let $a = e^{-\gamma}$, $b = e^{-\alpha}$, $c = e^{-\delta}$ and, for the current H,

$$G_H(z) = c\, z + \mathcal{B}(z + H + x).$$

The three half-steps are

$$\begin{aligned} T_L: &\quad L \leftarrow aL + (1-a)\, G_H(L') = aL + (1-a)(cL' + \mathcal{B}(L' + H + x)), \\ T_{L'}: &\quad L' \leftarrow aL' + (1-a)\, G_H(L) = aL' + (1-a)(cL + \mathcal{B}(L + H + x)), \\ T_H: &\quad H \leftarrow bH + (1-b)(cm + \mathcal{B}(m)), \qquad m = \tfrac{1}{2}(L + L'). \end{aligned}$$

A latent recursion is $T_L, T_{L'}, T_L, T_{L'}, T_L, T_{L'}, T_H$: EqR's order L^6H, with the six L-type updates alternating between the copies (Figure 1). Fresh noise $\xi \sim \mathcal{N}(0, \sigma^2 I)$ is added to the updated stream after every half-step. An outer iteration is three recursions (21 block evaluations, the last 7 differentiated) and the readout decodes $N(H)$, as for the other couplings.

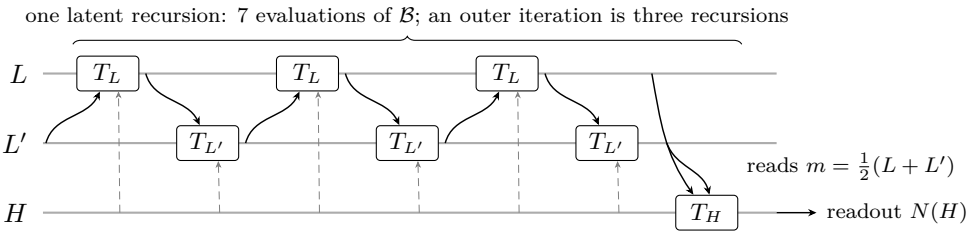


Figure 1: One latent recursion of the twin coupling. Time runs left to right; each box updates the stream on whose line it sits. Solid arrows: the copy that the update reads (its force is $\mathcal{B}(\text{copy} + H + x)$, plus the cross term $c\cdot$copy). Dashed: the current H, read by every L-type update. T_H reads only the mean of the copies. No update reads the stream it changes.

The arm with $\delta = 2$. The rates are fixed (not learned): $\gamma = \alpha = 3$ and $\delta = 2$, so $a = b = e^{-3} = 0.0498$ and $c = e^{-2} = 0.135$. Written out,

$$L \leftarrow 0.050\,L + 0.129\,L' + 0.950\,\mathcal{B}(L' + H + x), \quad H \leftarrow 0.050\,H + 0.129\,m + 0.950\,\mathcal{B}(m),$$
$$L' \leftarrow 0.050\,L' + 0.129\,L + 0.950\,\mathcal{B}(L + H + x),$$

next to EqR's $z_L \leftarrow 0.05\,z_L + 0.95\,\mathcal{B}(z_L + z_H + x)$ and $z_H \leftarrow 0.05\,z_H + 0.95\,\mathcal{B}(z_H + z_L)$. The keep-rate $a = 0.0498$ is EqR's $1 - \lambda = 0.05$ to three digits, so the twin changes EqR's update in three places only:

(i) each copy's force reads the other copy ($\mathcal{B}(L' + H + x)$ where EqR has $\mathcal{B}(z_L + z_H + x)$);

(ii) each copy also receives a cross term $(1 - a)c\,L' = 0.129\,L'$, the common-mode damping of relax (Prop. 5). If the copies coincide the update is the self-reading map $L \leftarrow rL + (1 - a)\mathcal{B}(L + H + x)$ with retention $r = a + (1 - a)c = 0.178$; with $\delta = 1$, $r = 0.40$;

(iii) H's force reads only the copies' mean, $\mathcal{B}(m)$, not H itself (EqR's reads $z_H + z_L$), plus the cross term $0.129\,m$. As in EqR, x enters only through the L updates.

Everything else is EqR's. The block $\mathcal{B}$ is EqR's L-level module (two post-norm layers, each a token-mixing MLP and a SwiGLU with expansion 4, $d = 512$, no positional encoding) with EqR's initialisation and parameter count; the input embedding, the 16 puzzle-embedding slots, the output head and the halting head are EqR's. The coupled model keeps its states in float32 and evaluates $\mathcal{B}$ in bfloat16, and its heads read $N(H)$ (RMS normalisation without gain), the only changes common to all coupled arms. The copies are stored side by side as one $z_L \in \mathbb{R}^{2n\times d}$ (concatenated along the token axis, $z_L = [L; L']$), so EqR's carry, ACT halting (at most 16 steps in training), detached carry between outer iterations, random reset and evaluator need no change; at a reset H, L and L' are drawn independently (truncated normal, std 1). Training is EqR's recipe (Adam-atan2 with $\beta = (0.9, 0.95)$, learning rate 10^{-4} constant after 2000 warm-up steps, weight decay 1.0, batch 768, EMA 0.999, halting exploration 0.1) at $\sigma = 0.01$. Per outer iteration the twin evaluates $\mathcal{B}$ 21 times on $n = 97$ tokens, exactly as EqR; it carries $3nd$ state numbers instead of $2nd$.

2.4 Evaluation

Depth D is the number of outer iterations; *breadth* B is the number of random starts per puzzle. For $B > 1$ an answer is chosen by: the most converged start (EqR's score, the logit change over the last three iterations; "converged"); the mean accuracy of the four most converged ("top-4", EqR's headline); plurality of full grids ("vote"); the largest halting logit; or a label-free *Sudoku verifier* (a grid with no rule violations that keeps the givens; Sudoku-Extreme puzzles have unique solutions, so this equals "some start is right", "any"). Test noise defaults to $\sigma = 0.5$ as in EqR's released evaluation. Sample sizes: whole test set (423k) for in-training accuracy at 16

Algorithm 1 One outer iteration (ACT step) of the twin coupling

Require: carry (H, L, L'), input embedding x, noise σ; $a = e^{-\gamma}$, $b = e^{-\alpha}$, $c = e^{-\delta}$

for $r = 1, 2, 3$ **do** ▷ latent recursions; gradients flow only through $r = 3$

  for $k = 1, 2, 3$ **do**

    $L \leftarrow aL + (1-a)\big(cL' + \mathcal{B}(L' + H + x)\big) + \xi$ ▷ $\xi \sim \mathcal{N}(0, \sigma^2 I)$, fresh each time

    $L' \leftarrow aL' + (1-a)\big(cL + \mathcal{B}(L + H + x)\big) + \xi$ ▷ reads the L just computed

  $m \leftarrow \frac{1}{2}(L + L')$

  $H \leftarrow bH + (1-b)\big(cm + \mathcal{B}(m)\big) + \xi$

return cell logits and halting logit from $N(H)$; carry (H, L, L') forward, detached

iterations, the first 2048 puzzles for depth×breadth, and the first 256 puzzles ×16 starts ×256 iterations for the dynamical analysis.

3 Theory

3.1 State scale

Lemma 1 (Unit-RMS force)**.** *Every token row of $\mathcal{B}(u)$ has RMS exactly one (up to the normalisation ϵ).*

Proof. $\mathcal{B}$ ends with N, which divides each row by its RMS and has no gain parameter. □

Proposition 2 (Fixed-point scale)**.** *At a noise-free fixed point, with f the (unit-RMS) force evaluated there:*

(a) EqR: $z_L^* = \mathcal{B}(\cdot)$, so $\mathrm{rms}(z_L^*) = 1$, and likewise z_H^*;

(b) kick: $L^* = \frac{a}{1-a} f_L$ and $H^* = \frac{1}{1-b} f_H$, so $\mathrm{rms}(L^*) = \frac{a}{1-a}$, $\mathrm{rms}(H^*) = \frac{1}{1-b}$;

(c) relax with merged streams $H^* = L^* = z^*$: $z^* = \frac{1}{1-c}\,\mathcal{B}(z^* + x)$, so $\mathrm{rms}(z^*) = \frac{1}{1-c}$; for $c = 1$ there is no fixed point unless $\mathcal{B}(z^* + x) = 0$.

Proof. Set new state equal to old state in each update and solve; e.g. for kick $L^* = a(L^* + f_L)$ gives $L^* = \frac{a}{1-a} f_L$; for merged relax $z^* = az^* + (1-a)(cz^* + f)$ gives $(1-a)(1-c)z^* = (1-a)f$. Lemma 1 gives the RMS. □

The identity is exact per token. The measured endpoint RMS matches it to within 1% for every EqR, kick and merged-relax checkpoint (Figure 4, Table 18; it does not apply to the unmerged $x \to L$ relax arms or to $\delta = 0$, which has no fixed point): e.g. kick (positive, 20k) L: predicted 0.64, measured 0.64; merged relax $\delta = 1$: 1.58 vs. 1.58; relax $\delta = \frac{1}{4}$: 4.52 vs. 4.51; kick (fixed): 200 vs. 199.8.

Corollary 3 (Relative noise)**.** *Isotropic noise σ acts on a stream of scale s as relative noise σ/s. At $\sigma = 0.5$ this is 0.5 for EqR, ≈ 0.3 for merged relax ($\delta = 1$), and ≈ 0.8 for the L stream of positive kick at 20k (whose L grows to 0.81 by 50k as γ falls).*

3.2 Volume

Proposition 4 (Volume bound)**.** *Each coupled half-step is a shear $(s, o) \mapsto (s + g(o), o)$ composed with a constant diagonal scaling, so for one outer iteration with n_L L-half-steps and n_H H-half-steps (per channel and token) $\log|\det J| = -nd\,(n_L\gamma + n_H\alpha)$. Hence the geometric mean of $|\mu|$ over the $2nd$ eigenvalues of J is $e^{-(n_L\gamma + n_H\alpha)/2}$, and in particular $\rho(J) \geq e^{-(n_L\gamma + n_H\alpha)/2}$ at every fixed point.*

Proof. A shear has unit Jacobian determinant; the scaling contributes a^{nd} or b^{nd} per half-step (for relax the cross term $(1-a)cH$ is part of the shear). Multiply over the 21 half-steps. The spectral radius is at least the geometric mean of the moduli. □

Remark 1. The shears are symplectic only if $\partial g/\partial o$ is symmetric, which a learned block is not, so the maps are volume-contracting at a constant rate but not conformal symplectic: there is no eigenvalue pairing $\mu \leftrightarrow e^{-\cdot}/\mu$ [16], only the determinant constraint.

The bound is 2×10^{-14} per outer iteration for relax (rate 3), 9×10^{-6} and 7×10^{-7} for positive kick (20k, 50k), 0.017 for learned kick, but 0.949 for fixed kick ($\gamma = \alpha = 0.005$). Only the last is constrained: it cannot contract, and indeed its end states have $\rho = 1.01$ and it keeps a right answer only 42% of the time even at $\sigma = 0.1$ (Table 12).

3.3 The neutral mode of undamped relaxation

Proposition 5 (Common mode)**.** *With the forces frozen, the linear part of the relax half-steps acting on (L, H) per channel is $M_L = \left(\begin{smallmatrix} a & (1-a)c \\ 0 & 1 \end{smallmatrix}\right)$, $M_H = \left(\begin{smallmatrix} 1 & 0 \\ (1-b)c & b \end{smallmatrix}\right)$. For $c = 1$ both are row-stochastic, so $(1,1)^\top$ is a fixed vector of every product: the common mode is exactly neutral ($\mu = 1$). For $c < 1$ the row sums are $a + (1-a)c < 1$ and $b + (1-b)c < 1$, so every product has spectral radius below one. With $a = b$ and merged streams the common mode is retained at the rate $r = a + (1-a)c$ per half-step.*

Proof. Row-stochastic matrices have eigenvalue 1 with eigenvector $\mathbf{1}$; a nonnegative matrix's spectral radius is at most its maximum row sum. □

Relax with $\delta = 0$ therefore drifts along the force (endpoint RMS $\approx 4 \times 10^3$, $\rho = 1.00$ at its end states) and reaches only 13%. Accuracy rises as the retention r falls (Figure 3); EqR's own self-retention is $1 - \lambda = 0.05$.

3.4 Inner fixed-point problems

Proposition 6 (Alternating couplings have an explicit inner equilibrium)**.** *With H frozen, repeated L half-steps converge geometrically at rate a to $\Lambda(H) = cH + \mathcal{B}(H + x)$ (relax) or $\Lambda(H) = \frac{a}{1-a}\mathcal{B}(H + x)$ (kick), each a single block evaluation. In EqR the inner equilibrium solves the implicit equation $z_L = \mathcal{B}(z_L + z_H + x)$, which takes iteration.*

Proof. The force on L does not depend on L, so the L update is affine in L with slope a. □

In the language of two-timescale iterations [4], EqR's fast variable tracks an implicitly defined equilibrium $\Lambda(z_H)$ between slow updates, whereas in the alternating couplings Λ is one explicit layer, so the coupled models are effectively single-latent maps (and relax's streams merge, $\cos(H, L) = 1.00$). EqR's and TRM's ablations put the cost of a single latent at ≈ 10 points [13, 14]. The twin coupling restores an implicit inner problem:

Proposition 7 (Twins are a two-copy doubling)**.** *Let $G(z) = cz + \mathcal{B}(z + H + x)$ for frozen H. The twin updates $L \leftarrow aL + (1-a)G(L')$, $L' \leftarrow aL' + (1-a)G(L)$ with $a < 1$ have a fixed point (p, q) if and only if $p = G(q)$ and $q = G(p)$, i.e. p is a fixed point of $G \circ G$. Thus the twins represent both fixed points ($p = q$) and period-2 orbits ($p \neq q$) of the self-reading map G as fixed points.*

Proof. At a fixed point $p = ap + (1-a)G(q)$, i.e. $p = G(q)$, and symmetrically $q = G(p)$. □

Remark 2. This is the construction used to analyse synchronous Hopfield dynamics: a synchronously updated symmetric network converges to fixed points or 2-cycles, and its two-copy bipartite version, updated sequentially, has exactly these as fixed points [5, 11].

3.5 Flip bifurcation of relaxed self-maps

Proposition 8 (Period doubling)**.** *Let $F(z) = (1-\lambda)z + \lambda\tilde{\mathcal{B}}(z)$ and let μ be a real eigenvalue of $D\tilde{\mathcal{B}}$ at a fixed point z^*. Then $1 - \lambda + \lambda\mu$ is an eigenvalue of $DF(z^*)$; the direction is stable iff $1 - \frac{2}{\lambda} < \mu < 1$. As μ decreases through $1 - \frac{2}{\lambda}$ ($= -1.105$ at $\lambda = 0.95$) the eigenvalue of DF crosses -1, and generically a period-2 orbit is born (flip bifurcation). Smaller step sizes $\lambda < 2/(1-\mu)$ restore stability.*

Proof. $DF = (1-\lambda)I + \lambda D\tilde{\mathcal{B}}$ shares eigenvectors with $D\tilde{\mathcal{B}}$. The flip-bifurcation statement is the standard normal-form result for a simple eigenvalue crossing -1. □

Strong negative feedback ($\mu < -1$) is natural for Sudoku, whose constraints are mutual exclusions. The stability region and the measured values for EqR are drawn in Figure 18; damping of this kind is also the mechanism behind the fixed-point reasoners of [17].

3.6 The twin coupling as a lag-two recurrence

Proposition 9 (Invertibility, volume and scale of the twin)**.** *For the twin coupling (Definition 3):*

(a) each half-step is invertible, with $L = (L_{\text{new}} - (1-a)G_H(L'))/a$, $L' = (L'_{\text{new}} - (1-a)G_H(L))/a$ *and* $H = (H_{\text{new}} - (1-b)(cm + \mathcal{B}(m)))/b$, *since* T_L *does not change* L' *or* H, $T_{L'}$ *does not change* L *or* H, *and* T_H *does not change* m*;*

(b) the Jacobian determinant is constant, $\log|\det J| = -nd\,(18\gamma + 3\alpha)$ *per outer iteration on the* $3nd$*-dimensional state, so the geometric mean of the eigenvalue moduli is* $e^{-(18\gamma+3\alpha)/3} = e^{-21} \approx 8 \times 10^{-10}$ *at* $\gamma = \alpha = 3$*; the volume bound (Prop. 4) is not binding;*

(c) at a noise-free fixed point with H *frozen, the copies satisfy* $p = G_H(q)$, $q = G_H(p)$, *and their per-token RMS lies in* $\left[\frac{1-2c}{1-c}, \frac{1}{1-c}\right]$, *i.e.* $[0.84, 1.16]$ *for* $\delta = 2$ *and* $[0.42, 1.58]$ *for* $\delta = 1$*; if the copies coincide it equals* $\frac{1}{1-c}$ *exactly (*1.16 *for* $\delta = 2$*), as for merged relax (Prop. 2c).*

Proof. (a) Each update is affine in the stream it changes, with slope a or b, and its other terms are functions of unchanged streams. (b) Each $T_L, T_{L'}$ scales nd coordinates by a and each T_H scales nd by b; an outer iteration has 18 of the former and 3 of the latter. (c) The fixed-point equations follow as in Proposition 7. Per token, $p = cq + f$ with $\mathrm{rms}(f) = 1$ (Lemma 1), so $|\mathrm{rms}(p) - 1| \le c\,\mathrm{rms}(q)$ and symmetrically; hence $\mathrm{rms}(p) \le 1 + c + c^2\,\mathrm{rms}(p)$, giving $\mathrm{rms}(p) \le \frac{1}{1-c}$, and then $\mathrm{rms}(p) \ge 1 - \frac{c}{1-c}$. For $p = q$, $(1-c)p = f$. □

Proposition 10 (Lag-two recurrence)**.** *Fix* H *and write the copies' values as one interleaved sequence: before a recursion* $(L, L') = (z_{-1}, z_0)$, *and the* j*-th* L*-type update writes* z_j *(into* L *for odd* j*, into* L' *for even* j*). Then the six* L*-type updates of a recursion are*

$$z_{j+1} = a\,z_{j-1} + (1-a)\,G_H(z_j), \qquad j = 0, \ldots, 5,$$

and T_H *reads* $m = \frac{1}{2}(z_5 + z_6)$*, the mean of the last two iterates. In particular:*

(a) for $a = 0$ *the inner loop is plain iteration* $z_{j+1} = G_H(z_j)$ *of the self-reading map, i.e. EqR's inner loop with* $\lambda = 1$ *and a cross term* cz*; the twin's* $a = 0.0498$ *relaxes towards the iterate* two *steps back instead of the previous one;*

(b) at a fixed point $z^* = G_H(z^*)$ *(coinciding copies), along an eigenvector of* $DG_H(z^*)$ *with real eigenvalue* μ *the per-update multipliers* s *solve* $s^2 - (1-a)\mu\,s - a = 0$*. Both roots lie in* $(-1, 1)$ *if and only if* $-1 < \mu < 1$*, and their product is* $-a$*, the volume constraint of Proposition 9(b);*

(c) at $\mu = -1$ *the roots are* -1 *and* a*. The critical mode alternates in sign along the sequence, so it is antisymmetric in the copies (*$\delta L = -\delta L'$*), and over one* $(T_L, T_{L'})$ *sweep its multiplier is* $s^2 = 1$*. The period doubling of the self-map (Prop. 8) therefore appears in the twin state as a symmetry-breaking pitchfork: the copies separate,* $(L, L') \to (p, q)$ *with* $p \ne q$ *a 2-cycle of* G_H *(Prop. 7), and* H *reads the stationary mean* $\frac{1}{2}(p + q)$*.*

Proof. The recurrence is T_L and $T_{L'}$ rewritten in the interleaved indices. (b) Linearising, $e_{j+1} = (1-a)\mu e_j + a e_{j-1}$. With $f(s) = s^2 - (1-a)\mu s - a$, $f(0) = -a < 0$, $f(1) = (1-a)(1-\mu)$ and $f(-1) = (1-a)(1+\mu)$, so there is one root in each of $(-1, 0)$ and $(0, 1)$ iff $-1 < \mu < 1$; the product of the roots is $f(0) = -a$. (c) $f(s) = (s+1)(s-a)$ at $\mu = -1$; the eigen-solution $e_j \propto (-1)^j$ puts opposite signs on consecutive iterates, i.e. on L and L'. □

The step $(z_{j-1}, z_j) \mapsto (z_j, z_{j+1})$ is the additive coupling of reversible residual networks [12] with a scaling a, and the same device that makes momentum ResNets invertible [18]: a first-order self-map that cannot be inverted is made invertible by carrying two consecutive iterates. The merged fixed point of the twin loses stability at $\mu(DG_H) = -1$, i.e. at $\mu(D\mathcal{B}) = -1 - c = -1.14$ for $\delta = 2$, close to EqR's flip threshold $1 - \frac{2}{\lambda} = -1.105$; but what forms then is a stationary

pair rather than an oscillation, and H sees both phases through m. Whether trained twins sit on the diagonal $L = L'$ or off it has not been measured yet (the dynamical analysis of §6 covers rounds one and two only).

3.7 Certification and noise

EqR bounds the distance to a fixed point by the residual under local contraction ($\|z - z^*\| \leq \|R(z)\|/(1 - L)$) and turns this into a correctness certificate when the output margin is large [13, App. A.1]. The certificate needs right answers to be contracting and wrong ones not to be; we measure exactly this in §6.2. For noise, along a normal eigen-direction with eigenvalue μ the linearised stationary variance is $\sigma^2/(1 - |\mu|^2)$: near-critical directions amplify noise, and a basin is left once the fluctuations reach its boundary. In Hopfield networks spurious mixture states lose stability at a lower temperature than retrieval states [1, 6]; noise then selects the right attractors. Section 6.3 tests this.

4 Accuracy and training

Table 2 and Figure 2 give the accuracies. Our EqR reproduces the paper (85.8 at 16 iterations and 92.1 at 64 after 50k steps, against 86.4 and 93.0 [13]). At 20k steps the two best couplings, relax $\delta = 1$ and positive kick, trail EqR by about six points at 16 iterations; the gap does not close with training (7.5 points at 50k) and widens with depth (10.5 points at 256 iterations). Fixed small rates fail (Prop. 4, 5).

Round two: input injection and self-reading. Giving x only to L (as EqR does) costs 12 points for relax and 7 for kick. For relax it separates the streams ($\cos(H, L)$ 1.00 → 0.77) but each stream is then driven only by the other. Adding self-reading recovers 10 of the 12 points (51.7 → 61.7), but only to the level of plain merged relax (63.9), which already reads itself in effect (its streams coincide). Self-reading without an inner loop is therefore not what EqR has over relax.

Round three: damping and inner loops. Tables 2, 4 and 3, Figures 2 and 3. At 20k and the training noise, lowering the merged-state retention from 0.40 ($\delta = 1$) to 0.18 ($\delta = 2$) gives the best coupled arm at 16 iterations (65.8, against 63.9), and $\delta = 3$ ($r = 0.10$) is worse again. The twins keep H apart from L ($\cos = 0.25$–0.45) but are not better than relax at 20k (62.8, 61.4), and only the inner-loop arm gains clearly with depth (65.2 → 76.0 from 16 to 256 iterations; EqR 69.5 → 75.8). Three arms were trained on to 50k, and there the order changes (Figure 2a): the twin with $\delta = 2$ rises from 62.3 at 21k to 85.0 at 49k, against EqR's 85.9, and the inner loop reaches 80.6, while relax $\delta = 2$ peaks at 74.5 at 35k and falls to 71.1. At 50k the twin's depth curve at the training noise is within 1.5 points of EqR's (84.6/90.7/93.7 against 85.8/92.1/95.0 at 16/64/256 iterations), the closest any coupling has come.

Generalisation. Table 3 and Figure 2b. The training set of Sudoku-Extreme-1k is 1000 puzzles (each with 1000 augmentations), so a model can fit it. At 48–50k the alternating couplings are right on 93–97% of training batches but on 71–79% of test puzzles, and relax $\delta = 2$ halts after 2.0 outer iterations on training puzzles, the fewest of all arms, while its test accuracy falls. EqR and the twin show gaps of about one point (87.2 against 85.9; 86.0 against 85.0) and halt after 5.4–5.6 iterations. The self-reading inner loop is right less often on training batches than on the test set (70.1 against 80.6, with 8.3 ACT steps), which says more about its halting head than about fitting. At 20k all gaps were small (EqR +1, relax $\delta = 1$ +3 points), so the gap opens with training. The arms whose inner equilibrium is a single explicit layer (Prop. 6) thus fit the training puzzles, and the three arms with an implicit inner problem (EqR,

Table 2: Accuracy at training noise ($\sigma = 0.01$), one start. Exact@16: whole test set; @64/@256: first 49,152 puzzles. O: right at 16 but wrong at 256; Δy: prediction changed between 16 and 256 (not computed for round three, last block).

arm	steps	ex@16	cell@16	ex@64	ex@256	$O_{16\to256}$	$\Delta y_{16\to256}$
EqR	20k	69.5	89.3	73.2	75.8	1.7	31.3
EqR	50k	85.8	94.7	92.1	95.0	0.4	14.8
relax, $\delta = 1$	20k	63.9	87.3	65.4	66.4	2.2	36.6
relax, $\delta = 1$	50k	78.3	91.7	81.8	84.5	1.3	23.5
kick, positive rates	20k	63.5	87.2	65.0	66.1	1.9	35.8
kick, positive rates	50k	78.2	91.7	81.7	83.9	1.4	23.2
relax, $\delta = \frac{1}{4}$	20k	46.7	82.3	47.8	48.6	3.8	32.7
kick, learned rates	20k	46.5	82.1	47.3	48.0	2.0	37.2
relax, $\delta = 0$	20k	13.2	71.0	12.8	3.5	80.3	97.3
kick, fixed rates	20k	13.5	72.6	14.7	6.2	61.3	94.6
relax, $\delta = 1$, $x \to L$ only	20k	51.7	84.0	52.2	52.7	2.7	38.6
relax, $\delta = 1$, $x \to L$, self-read	20k	61.7	86.7	63.5	64.9	1.7	35.9
kick, positive, $x \to L$ only	20k	56.2	85.1	56.7	57.8	1.9	42.0
relax, $\delta = 2$	20k	65.8	88.1	68.0	69.9	–	–
relax, $\delta = 2$	50k	70.3	88.2	72.4	74.6	–	–
relax, $\delta = 3$	20k	63.5	87.4	65.2	66.7	–	–
twin L, $\delta = 1$	20k	62.8	87.1	65.6	67.5	–	–
twin L, $\delta = 2$	20k	61.4	86.8	63.6	65.2	–	–
twin L, $\delta = 2$	50k	84.6	94.3	90.7	93.7	–	–
inner loop, self-read, $\delta = 1$	20k	65.2	87.8	72.0	76.0	–	–
inner loop, self-read, $\delta = 1$	50k	81.0	93.1	90.0	94.0	–	–

twin, inner loop) do not. Round four adds two twins trained to 50k: $\delta = 3$ and 10 have gaps of 4.9 and 3.6 points (88.3 against 83.4; 87.8 against 84.2) at 5.2 ACT steps, larger than $\delta = 2$'s one point but far below the alternating couplings' 15–26. (The noise-trained twin and EqR show 1.8 and 0 points, but their training batches run at $\sigma = 0.25$.) This is a correlation across eight single-seed runs, not a controlled test.

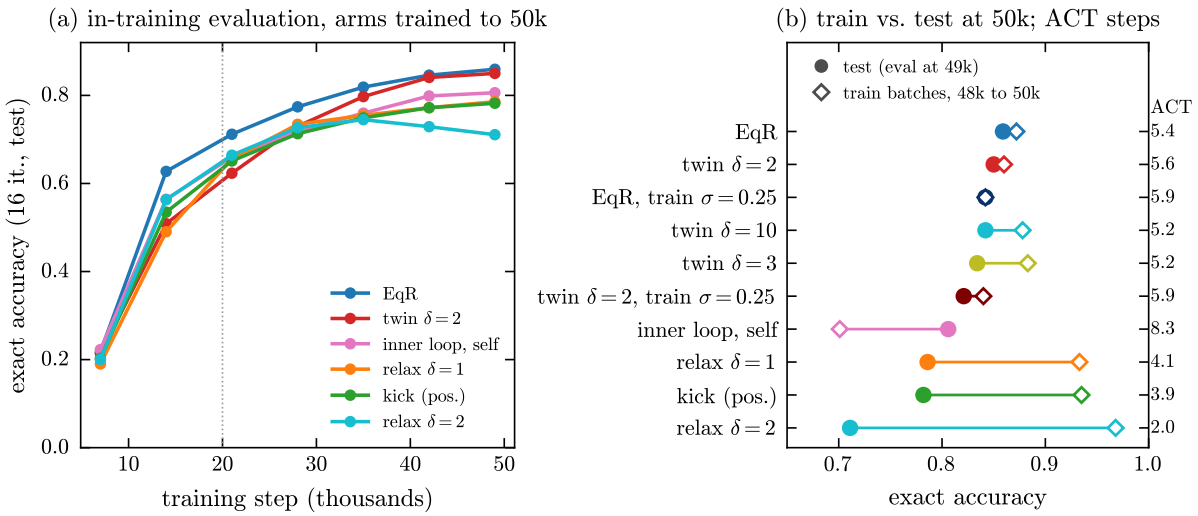


Figure 2: (a) In-training evaluation (whole test set, 16 iterations, $\sigma = 0.01$) of the six round-one to round-three arms trained to 50k steps. The twin ($\delta = 2$) starts slowly and nearly reaches EqR; relax $\delta = 2$ peaks at 35k. (b) Test accuracy at 49k (filled) against training-batch accuracy averaged over steps 48–50k (open), with the mean number of ACT steps on training batches at the right, for all ten arms trained to 50k (round four included; the noise-trained arms' training batches run at $\sigma = 0.25$).

Table 3: Generalisation at 50k (W&B). Test: in-training evaluation (whole test set, 16 iterations, $\sigma = 0.01$) at 49k and its maximum over the evaluations every 7k steps. Train: exact accuracy of training batches averaged over steps 48–50k; it counts sequences that halt, so it depends on the halting head. ACT: mean outer iterations per training sequence. $\cos(H, L)$ over the same window. Last four rows: round four (seed 0); the noise-trained arms' training batches run at their training noise $\sigma = 0.25$, so their train column is not comparable with the others'.

arm	test 49k	best test	train 48–50k	train−test	ACT	$\cos(H, L)$
EqR	85.9	85.9	87.2	+1.3	5.4	0.50
relax, $\delta = 1$	78.6	78.6	93.3	+14.7	4.1	0.99
kick, positive rates	78.2	78.2	93.5	+15.3	3.9	0.75
relax, $\delta = 2$	71.1	74.5 (35k)	96.8	+25.7	2.0	0.98
twin L, $\delta = 2$	85.0	85.0	86.0	+1.0	5.6	0.41
inner loop, self-read, $\delta = 1$	80.6	80.6	70.1	−10.5	8.3	0.71
twin L, $\delta = 3$	83.4	84.0 (42k)	88.3	+4.9	5.2	0.41
twin L, $\delta = 10$	84.2	84.2	87.8	+3.6	5.2	0.39
twin L, $\delta = 2$, train $\sigma = 0.25$	82.1	82.1	84.0	+1.9	5.9	0.45
EqR, train $\sigma = 0.25$	84.2	84.2	84.2	+0.0	5.9	0.51

Table 4: Round three at 20k (W&B). Eval: whole test set, 16 iterations, at 14k. Train: training-batch exact accuracy averaged over 18–20k (depends on halting). $\cos(H, L)$ and mean ACT steps over the same window.

arm	eval@14k	train 18–20k	$\cos(H, L)$	ACT steps
EqR	62.7	72.0	0.41	7.9
relax, $\delta = 1$	49.0	68.4	1.00	8.2
kick, positive rates	53.5	64.8	0.58	8.8
relax, $\delta = \frac{1}{4}$	34.1	44.9	1.00	11.1
relax, $\delta = 2$	56.3	74.2	1.00	7.3
relax, $\delta = 3$	54.1	70.6	1.00	7.9
twin L, $\delta = 1$	50.4	62.4	0.45	9.3
twin L, $\delta = 2$	50.8	65.1	0.25	8.9
inner loop, self-read, $\delta = 1$	56.4	59.0	0.72	9.9

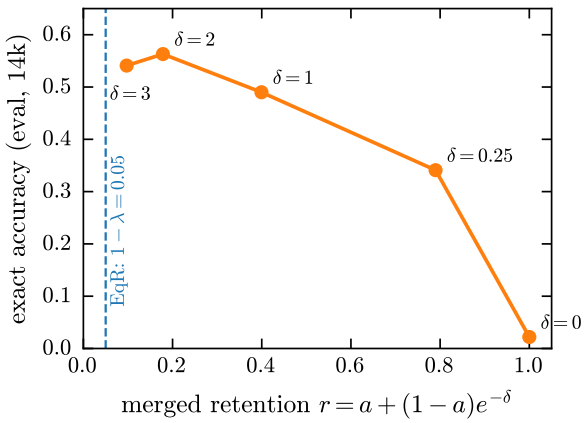


Figure 3: Relax, rate 3: accuracy at 14k against the retention r of the merged state (Prop. 5).

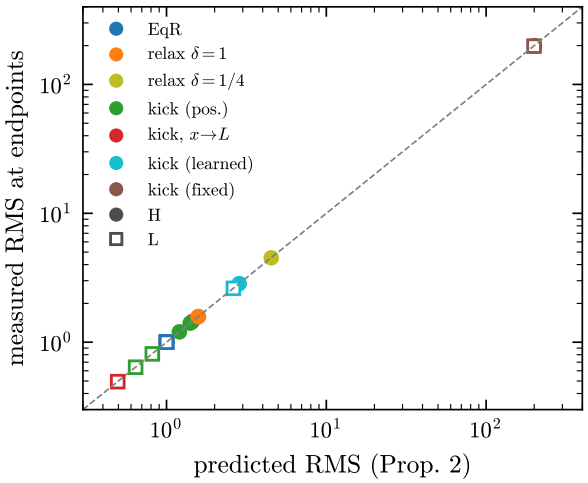


Figure 4: Endpoint state RMS against Prop. 2 (H filled, L open); all trained arms with a fixed point.

5 Test-time scaling

Figure 5 and Table 5 (upper block). All working models improve steadily with depth. At 20k, relax ties EqR once compute is large (depth 1024: 90.4 vs. 91.4; depth 64 with 128 starts, most converged: 95.9 vs. 95.7). At 50k EqR leads everywhere. Relax's error decays like $D^{-0.39}$ without saturating, so it would need more than an order of magnitude more iterations to match EqR at 50k. Round three, and the twin in particular, is in §5.1.

Positive kick at 20k is the outlier (Figure 6): at $\sigma = 0.5$ a single run is right only 37% of the time, yet some start is right for 99.1% of puzzles and a plurality vote over 128 starts reaches 96.8%, the best of the round-one 20k models. Its relative noise is about 1.6 times EqR's (Corollary 1), which pushes it into a high-diversity regime; at noise 0.25 its single run is 69%. By 50k its L stream has grown (Prop. 2) and the regime is gone (any 93.8, vote 87.9).

5.1 Round three: the twin coupling scales best at 20k

Figure 7 and the lower block of Table 5 (seed 0). At 20k the twin with $\delta = 2$ has the worst single run at 16 iterations of all working arms (52.3%) and the steepest depth curve we have measured: error 47.7% → 20.4% → 7.4% → 1.8% at depths 16, 64, 256 and 1024, a power law with exponent −0.78 (EqR at 20k: −0.31; the released EqR: −0.56; relax $\delta = 1$: −0.35). In EqR's headline setting, depth 64 with 128 starts, some start is right for 99.9% of puzzles, and convergence finds it (99.6% top-4).

Three seeds. Table 6. Seed 0 was the best of three seeds for every twin, 1.3–2.0 points above the mean at depth 1024, so the seed-0 figures above overstate the twin. Over seeds 0–2 the twin with $\delta = 2$ is right on 96.9 ± 1.2% at depth 1024 and 99.0 ± 0.5% top-4 at depth 64 with 128 starts; EqR at 20k gives 92.2 ± 1.8 and 94.7 ± 2.1. The twin's lead over EqR at 20k is therefore about five points at depth 1024 and four with 128 starts, larger than the seed spread of either arm (sd 0.5–2.1). Against EqR's released 50k checkpoint the twin at 20k is ahead with 128 starts (99.0 against 98.6 top-4, 99.3 against 98.7 by vote) but behind at depth 1024 (96.9 against 97.6). At the training noise it is seven points behind EqR at 16 iterations (61.5 ± 1.2 against 68.6 ± 1.8). With 128 starts the twin's advantage is coverage, not the single run: at depth 64 and $\sigma = 0.5$ its single run is no better than EqR's (72–80% over the nine twin runs with $\delta \in \{2, 3, 10\}$, against 79–81% for EqR's three), but some start is right for 99.3–100% of puzzles against 95.5–98.7%, and for both arms the most converged start loses at most 0.3 points of that.

Damping does not matter beyond $\delta = 2$. Twins with $\delta = 2$, 3 and 10 agree within one point at every setting of Table 6; for a given seed they agree within 0.7 points at depth 1024 (98.2, 98.9, 98.4 for seed 0; 95.8, 95.3, 95.1 for seed 1; 96.6, 96.4, 96.4 for seed 2), while seeds differ by up to 3.6. At $\delta = 10$ the cross term $c = e^{-10}$ is negligible, and with merged copies the update is EqR's own, $L \leftarrow 0.05L + 0.95\,\mathcal{B}(L' + H + x)$ with L' in place of L inside the force. What the twin adds to EqR is therefore the two alternating copies, not the relaxation. The twin with $\delta = 1$ (seed 0 only) is worse: 91.6% at depth 1024 and 95.5% top-4. For relax under test noise it does not: at depth 1024, $\delta = 1, 2, 3$ give 90.4, 88.3 and 78.4%, with depth exponents −0.35, −0.30 and −0.20, although $\delta = 2$ was the best relax arm at the training noise.

The gain comes from test noise. Table 7 and Figure 8. At the training noise the 20k twin is a weak model (65.2% at depth 256, below relax $\delta = 2$); at $\sigma = 0.5$ it is right on 92.6% at the same depth, a gain of 27 points, the largest we have measured. Twin $\delta = 1$ and relax $\delta = 1$ gain about 18 points, EqR 12. The noise does not help the self-reading inner loop at all (76.0 against 75.8), so that arm's strong depth scaling at the training noise (§4) does not carry over

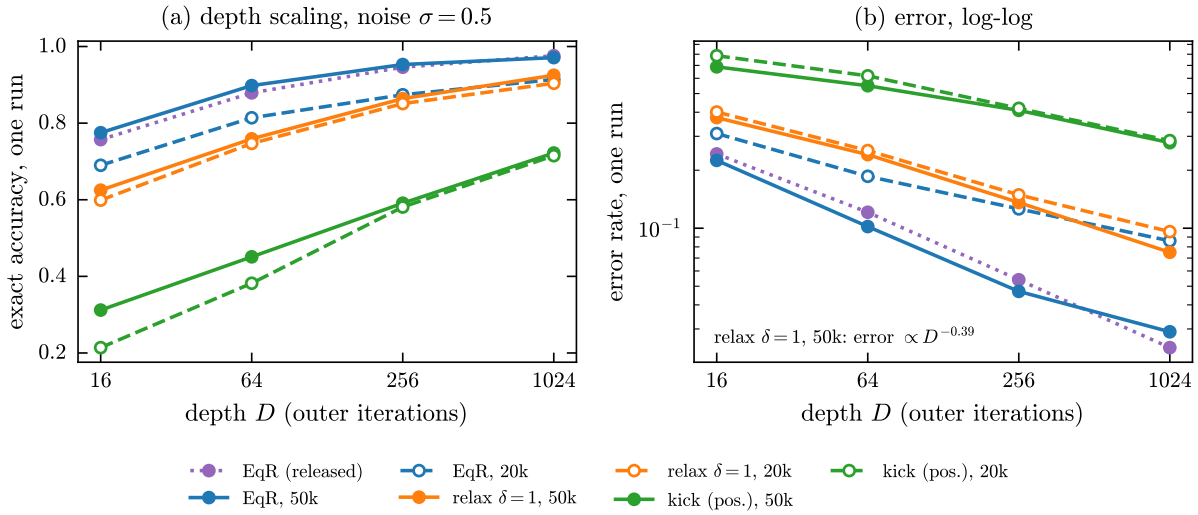


Figure 5: One-run accuracy against depth at $\sigma = 0.5$ (first 2048 test puzzles). Dashed/open: 20k steps; solid/filled: 50k; dotted: EqR's released checkpoint. (b) The error of relax falls like a power of depth; EqR's falls faster and then flattens near 3%.

to EqR's protocol: at $\sigma = 0.5$ it is the second-weakest round-three arm (81.8% at depth 1024). Positive kick loses from noise at every checkpoint. By the escape analysis (§6.3), noise below an arm's breakdown level $\sigma^\star$ destabilises wrong end states without losing right ones; a gain as large as the twin's means that at 20k many of its wrong end states are shallow while its right ones survive $\sigma = 0.5$. The escape analysis of the twin checkpoints confirms this (Table 12): at 20k the twin keeps every right answer at $\sigma = 0.5$ and 32 noisy iterations rescue 42% of its wrong end states, the highest rate of any checkpoint (EqR at 20k: 30%). The inner loop rescues 9%, which is why noise does not help it.

Longer training removes the need for noise. At 50k every arm is accurate at the training noise, and $\sigma = 0.5$ helps EqR by 0.3 points and hurts all others: the twin by 3.1, the inner loop by 3.7, kick by 25, and relax $\delta = 2$ collapses (2.6% exact at every depth), the collapse that relax $\delta = 1$ showed at $\sigma = 0.75$ (Figure 10) now at a lower noise. The 50k twin is better than the 20k twin at short depth (68.0 against 52.3% at 16 iterations, seed 0) but worse at large depth (95.4 against 98.2% at 1024, and against the three-seed mean 96.9; most converged of 16 starts at depth 64: 96.0 against 98.3%), and EqR at 50k leads it at every depth. A fixed σ is a different test for each checkpoint (Corollary 1 and §6.3). At $\sigma = 0.25$ the 50k twin recovers: 96.3% at depth 1024, level with EqR at the same noise (96.3), though below EqR's 97.1 at $\sigma = 0.5$ (Table 8).

5.2 Round four: damping, noise training and the training trajectory

Round four trains twins with $\delta = 3$ and 10, and the twin ($\delta = 2$) and EqR at training noise $\sigma = 0.25$ instead of 0.01, straight to 50k steps with a checkpoint every 5k, so that test-time scaling can be followed along training (Table 8, Figure 9). All four are seed 0; the twins with $\delta = 3$ and 10 also have seeds 1 and 2 at 20k (Table 6).

Damping. At 20k the three twins are equal (§5.1). At 50k they differ at $\sigma = 0.5$ (95.4, 89.6 and 93.3% at depth 1024 for $\delta = 2, 3, 10$) but not at $\sigma = 0.25$ (96.3, 95.7, 96.2), so the difference is in how they tolerate noise, not in what they have learned. At the training noise $\delta = 2$ and 10 are level (84.6, 84.3% at 16 iterations) and $\delta = 3$ is 1.4 points lower. The larger δ also removes most of the twin's high residual at depth 256 (51 for $\delta = 2$, 23 and 29 for $\delta = 3$, 10).

Table 5: Test-time scaling at $\sigma = 0.5$, first 2048 test puzzles. Left: one start at depth D. Right: depth 64 with 128 starts, by selection rule (best non-oracle rule in bold; "any" is the oracle). The released EqR gives 98.6 top-4, as in EqR's README. Lower block: round three. Seed 0 throughout; three-seed means at 20k are in Table 6, round four in Table 8.

		one run, depth D				depth 64, 128 starts			
arm	steps	16	64	256	1024	converged	top-4	vote	any
EqR	20k	69.0	81.4	87.4	91.4	**95.7**	94.0	94.3	95.9
EqR	50k	77.5	89.8	95.3	97.1	**98.7**	98.0	98.0	98.8
EqR (released)	50k	75.7	87.9	94.6	97.6	**99.2**	98.6	98.7	99.2
relax, $\delta = 1$	20k	59.9	74.7	85.1	90.4	**95.9**	93.4	93.8	96.0
relax, $\delta = 1$	50k	62.5	75.9	86.4	92.5	**96.6**	95.3	95.6	96.7
kick, positive rates	20k	21.4	38.2	58.1	71.5	86.3	85.1	**96.8**	99.1
kick, positive rates	50k	31.2	45.1	59.1	72.2	**93.7**	88.5	87.9	93.8
relax, $\delta = 2$	20k	59.3	72.5	82.2	88.3	**95.0**	92.4	92.4	95.0
relax, $\delta = 2$	50k	2.6	2.6	2.6	2.7	–	–	–	–
relax, $\delta = 3$	20k	49.4	62.3	71.2	78.4	**87.9**	84.0	84.4	88.0
twin L, $\delta = 1$	20k	58.3	75.8	85.9	91.6	**97.3**	95.5	96.3	97.5
twin L, $\delta = 2$	20k	52.3	79.6	92.6	98.2	99.6	99.6	**99.8**	99.9
twin L, $\delta = 2$	50k	68.0	81.1	90.6	95.4	**98.6**	97.9	97.9	98.7
inner loop, self-read, $\delta = 1$	20k	54.2	67.7	75.8	81.8	**88.7**	85.6	86.6	89.4
inner loop, self-read, $\delta = 1$	50k	70.0	83.8	90.3	93.3	**95.6**	94.9	95.4	96.2

Table 6: Three seeds at 20k steps (mean ± sd). Depth 16 at the training noise on the whole test set (for the twins with $\delta = 3$ and 10 seeds 1–2 only: seed 0 was trained straight to 50k without an evaluation at 20k); test-time scaling at $\sigma = 0.5$ on the first 2048 test puzzles: one run at depth 256 and 1024, and depth 64 with 128 starts by selection rule. Last row: EqR's released 50k checkpoint.

		$\sigma = 0.01$	one run, $\sigma = 0.5$		depth 64, 128 starts, $\sigma = 0.5$			
arm	seeds	depth 16	depth 256	depth 1024	converged	top-4	vote	any
EqR	3	68.6 ± 1.8	87.5 ± 1.2	92.2 ± 1.8	96.5 ± 1.9	94.7 ± 2.1	95.0 ± 2.2	96.7 ± 1.8
twin L, $\delta = 2$	3	61.5 ± 1.2	90.3 ± 2.0	96.9 ± 1.2	99.5 ± 0.1	99.0 ± 0.5	99.3 ± 0.4	99.7 ± 0.2
twin L, $\delta = 3$	3	61.7 ± 0.0	90.5 ± 2.5	96.9 ± 1.8	99.5 ± 0.3	98.8 ± 0.8	99.1 ± 0.6	99.6 ± 0.3
twin L, $\delta = 10$	3	62.4 ± 1.2	89.7 ± 2.9	96.6 ± 1.7	99.7 ± 0.3	99.0 ± 0.7	99.2 ± 0.6	99.7 ± 0.3
EqR (released, 50k)	1	–	94.6	97.6	99.2	98.6	98.7	99.2

The training trajectory. Figure 9. At $\sigma = 0.5$ the twins' error falls from about 23% at 10k to 1.1–1.8% at 20k and stays below 2.6% until 30k, then rises to 4.6–10.4% at 50k, most for $\delta = 3$. EqR's error is not monotone early (6.1% at 10k, 9.5% at 15k, 8.6% at 20k) and then falls steadily to 2.6% at 40k. At $\sigma = 0.25$ all four arms follow nearly the same curve, from 33–58% error at 10k to 3.3–4.7% at 40–50k. Early in training $\sigma = 0.5$ is far better than 0.25 for every arm (EqR at 10k: 93.9 against 67.4%); for EqR it stays the better noise to 50k, for the twins 0.25 overtakes it at 35–40k. So the best test noise falls with training, and faster for the twins. Since seed 0 is the twins' best seed (Table 6), the fair comparison of the peaks is the 20k mean, 96.6–96.9%, against EqR's 97.4% at 40k: the twin comes within a point of EqR's best depth scaling in half the training steps, and with 128 starts it exceeds it (99.0 ± 0.5 top-4 at 20k against 98.0 for EqR at 50k).

Why the twin loses its depth scaling. Table 9. At 50k the plain twins answer correctly without noise (84–89% at 256 iterations, as many as EqR) but most of their end states are not fixed points: for $\delta = 2$ none of the 768 puzzles has a relative step below 10^{-2}, the median step is 10.8% per outer iteration and the spectral radius is 1.17; for $\delta = 10$ the step is 4.5% and

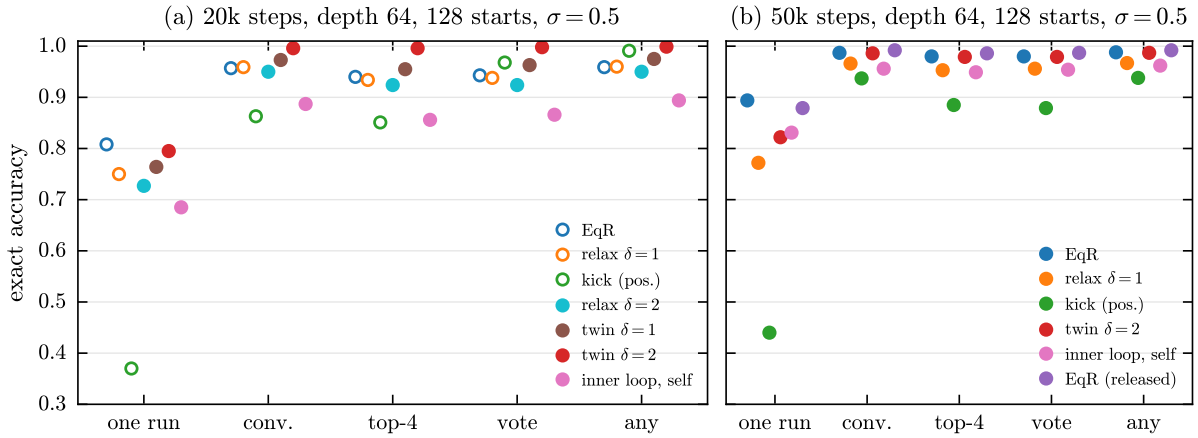


Figure 6: Depth 64, 128 starts, $\sigma = 0.5$: accuracy by selection rule (conv.: most converged start; top-4: mean of the four most converged; any: some start right). (a) 20k, round-one arms open, round-three arms filled: the twin with $\delta = 2$ is best under every selection rule (EqR has the better single run). Among the round-one arms positive kick has the best vote and "any" but the worst single run and convergence selection; (b) by 50k this has reversed, and the twin ($\delta = 2$) and the inner loop at 50k (filled) are below EqR under every rule.

2% are at a fixed point; $\delta = 3$ is the most converged of the three (31%, step 1.1%). In relax ($\delta = 1$) and the noise-trained arms the fixed-point share equals or nearly equals the exact share. Convergence alone does not order the twins, however: $\delta = 3$ converges best and loses most at $\sigma = 0.5$.

The map analysis of these checkpoints (§6.4, Table 14, Figure 15) shows what happens. At 20k the copies of every right end state coincide (median $|L - L'|/(|L| + |L'|) = 2 \cdot 10^{-7}$, none split) and right answers contract strongly ($\rho = 0.27$), while 94% of wrong end states have split copies. At 50k every end state of the $\delta = 2$ twin is split, right ones included (median cosine 0.97, separation 0.12), and its right answers no longer contract ($\rho = 1.20$): the twin has crossed the symmetry-breaking instability of Prop. 10. But test noise does not remove these answers. Started from the noise-free end states, all three 50k twins keep every right answer through 32 iterations at $\sigma = 0.5$ (none of about 3850 is lost; Table 12). What changes is the way in. From random starts under $\sigma = 0.5$ the 50k twins end right less often than without noise (91.2, 84.4 and 91.3% against 94.7, 93.6 and 94.1% for $\delta = 2, 3, 10$ at depth 256; EqR 96.2 against 96.3) and reach more distinct answers ($\delta = 3$: 3.5 per puzzle against 2.0), and noise moves their wrong end states to the right answer far less often than at 20k (25, 6 and 10% against 42%). The rescue rate orders the twins as their noise tolerance does: $\delta = 3$, the most converged, has the wrong end states that noise rescues least, and loses most at $\sigma = 0.5$ (89.6% at depth 1024, against 93.3 for $\delta = 10$ and 95.4 for $\delta = 2$). EqR's end states at 50k are near critical ($\rho = 0.98$, median over right and wrong) with 22% at a fixed point, and lose little to noise.

Noise training. The lower block of Table 8. Training at $\sigma = 0.25$ makes the answers fixed points (fixed-point share 80.5% against 82.9% exact for the twin, 84.2% against 84.2% for EqR) with stronger contraction ($\rho = 0.76$, 0.30), and the noise-trained twin keeps them at $\sigma = 0.5$ (96.3% at depth 1024 against 95.4 for the plain twin). But it costs three points at the training noise, slows learning (at 20k the noise-trained twin is eleven points behind the plain twin at depth 1024, 87.1 against 98.2%, and the noise-trained EqR four behind EqR, 87.7 against 91.4%; seed 0), and ends below plain EqR (96.3 against 97.1 at depth 1024; 97.4 against 98.0 top-4). It also erases the difference between the architectures: the noise-trained twin and EqR are within one point at every test-time setting. What it costs early is coverage rather than the single run. At 20k, depth 64 and $\sigma = 0.5$, the noise-trained twin's single run is about as good as the plain

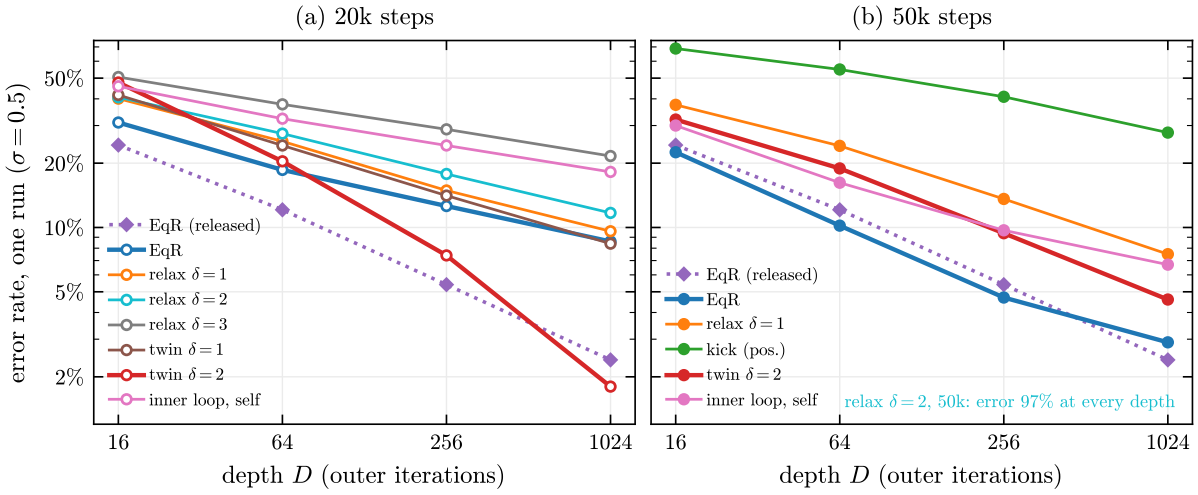


Figure 7: Round three: one-run error against depth at $\sigma = 0.5$ (first 2048 test puzzles), log–log. Dotted: EqR's released 50k checkpoint in both panels. Seed 0. (a) At 20k the twin with $\delta = 2$ starts worst and ends best: its error falls 26-fold from depth 16 to 1024 ($D^{-0.78}$), against 3.6-fold for EqR at 20k and 10-fold for the released checkpoint. (b) At 50k the twin is faster at short depth but its curve flattens ($D^{-0.47}$); EqR at 50k leads at every depth.

twin's (77.7 against 79.5%, seed 0), but some of its 128 starts is right for only 92.3% of puzzles against 99.9%, so the gain from breadth (any minus single) falls from 20 to 15 points; for EqR it falls from 15 to 13 (92.3 against 95.9% any, single runs 79.2 and 80.8%). At 50k both twins cover about 98%, the plain one from a weaker single run (16.5 points of breadth gain against 9.7). The map analysis (§6.4) shows that the noise-trained twin's starts do not agree more: at $\sigma = 0.5$ they reach more distinct answers than the plain twin's (3.4 against 2.0 per puzzle at depth 256). Its failures instead concentrate on puzzles that no start solves (7.8% of puzzles without a right start among 16, against 0.8%), where the plain twin's failures depend on the start. Noise in training thus buys stable answers at the price of the fast early learning, and of the start-to-start variation that breadth exploits, that made the twin worth having.

Table 7: Exact accuracy (%) of one run at the training noise $\sigma = 0.01$ (Table 2; depth 16 on the whole test set, depth 256 on 49,152 puzzles) and at the test noise $\sigma = 0.5$ (Table 5; first 2048 puzzles). Δ: effect of the test noise at depth 256. The puzzle sets differ, so differences below about one point are not meaningful.

		depth 16		depth 256			depth 1024
arm	steps	$\sigma = 0.01$	0.5	$\sigma = 0.01$	0.5	Δ	$\sigma = 0.5$
EqR	20k	69.5	69.0	75.8	87.4	+11.6	91.4
EqR	50k	85.8	77.5	95.0	95.3	+0.3	97.1
relax, $\delta = 1$	20k	63.9	59.9	66.4	85.1	+18.7	90.4
relax, $\delta = 1$	50k	78.3	62.5	84.5	86.4	+1.9	92.5
kick, positive rates	20k	63.5	21.4	66.1	58.1	−8.0	71.5
kick, positive rates	50k	78.2	31.2	83.9	59.1	−24.8	72.2
relax, $\delta = 2$	20k	65.8	59.3	69.9	82.2	+12.3	88.3
relax, $\delta = 2$	50k	70.3	2.6	74.6	2.6	−72.0	2.7
relax, $\delta = 3$	20k	63.5	49.4	66.7	71.2	+4.5	78.4
twin L, $\delta = 1$	20k	62.8	58.3	67.5	85.9	+18.4	91.6
twin L, $\delta = 2$	20k	61.4	52.3	65.2	92.6	+27.4	98.2
twin L, $\delta = 2$	50k	84.6	68.0	93.7	90.6	−3.1	95.4
inner loop, self-read, $\delta = 1$	20k	65.2	54.2	76.0	75.8	−0.2	81.8
inner loop, self-read, $\delta = 1$	50k	81.0	70.0	94.0	90.3	−3.7	93.3

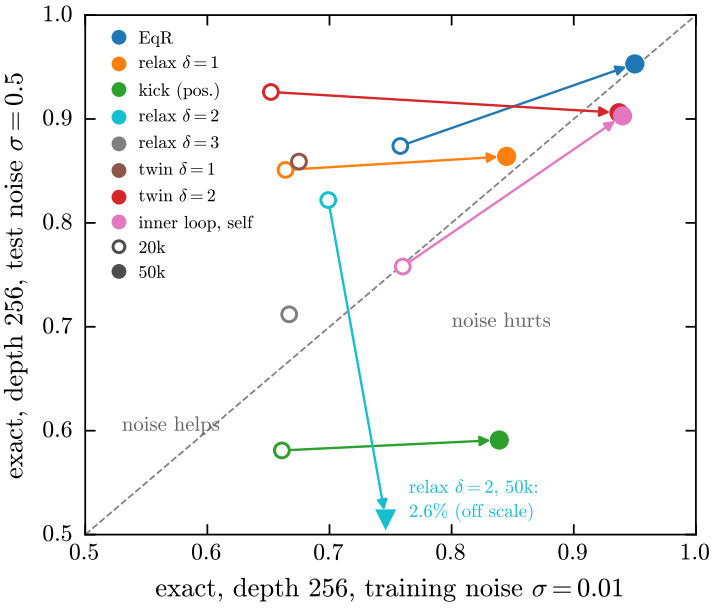


Figure 8: Depth-256 accuracy at the training noise against the test noise $\sigma = 0.5$; open: 20k, filled: 50k, arrows join the two checkpoints of one arm. Above the diagonal noise helps. At 20k the twins and relax $\delta = 1$ gain most; by 50k every arm is near or below the diagonal, and relax $\delta = 2$ collapses (off scale).

Table 8: Round four and its references at 50k steps (seed 0). Left: training noise $\sigma = 0.01$ (depth 16 on the whole test set, depth 256 on 49,152 puzzles, and EqR's residual $\|z_{256} - z_{255}\|$, not scale-normalised). Then one run at depth 1024 at 20k, and at 50k one run at depth 1024 and the top-4 of B starts at depth 64, at test noise 0.25 and 0.5 (first 2048 test puzzles). EqR's released checkpoint: 97.6 and 98.6 at $\sigma = 0.5$.

	$\sigma = 0.01$			20k, $\sigma = 0.5$	$\sigma = 0.25$		$\sigma = 0.5$	
arm	depth 16	256	resid.	depth 1024	1024	64×16	1024	64×128
EqR	85.8	95.0	15.8	91.4	96.3	95.7	97.1	98.0
twin L, $\delta = 2$	84.6	93.7	51.4	98.2	96.3	95.3	95.4	97.9
twin L, $\delta = 3$	83.2	91.7	22.8	98.9	95.7	94.2	89.6	96.2
twin L, $\delta = 10$	84.3	93.4	28.9	98.4	96.2	95.2	93.3	96.5
inner loop, self-read, $\delta = 1$	81.0	94.0	16.9	81.8	94.2	–	93.3	94.9
twin L, $\delta = 2$, train $\sigma = 0.25$	81.4	90.5	23.5	87.1	94.4	92.8	96.3	97.4
EqR, train $\sigma = 0.25$	83.2	92.3	15.3	87.7	94.4	93.3	96.2	97.6

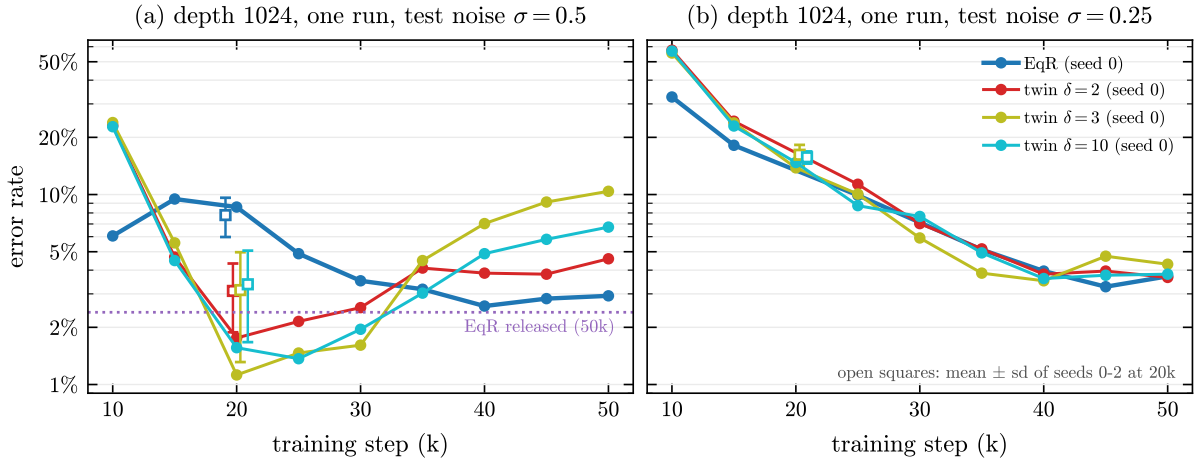


Figure 9: One-run error at depth 1024 (first 2048 test puzzles) for the checkpoints of one training run every 5k steps, seed 0, at test noise (a) 0.5 and (b) 0.25. Open squares: mean ± sd over seeds 0–2 at 20k (offset for legibility). At $\sigma = 0.5$ the twins are best at 20–25k and lose accuracy afterwards while EqR improves until 40k; at $\sigma = 0.25$ all four arms follow one curve.

Table 9: Noise-free dynamics (`dynamics_eqr.py`; 768 test puzzles iterated to $r = 256$ without noise, spectral radius of one outer iteration at $r = 256$ on 32 of them, median over puzzles, right and wrong together). Exact: share right at $r = 256$. Fixed point: share with relative step $\|s_r - s_{r-1}\|/\|s_r\| < 10^{-2}$ at $r = 256$ (none reaches 10^{-3}). Step: median relative step. $\cos(L, L')$: mean per-token cosine between the twin copies. For the twins with $\delta = 3$ and 10 at 20k seeds 1–2 only.

arm	steps	seeds	exact (%)	fixed point (%)	step (%)	ρ	$\cos(L, L')$
EqR	20k	3	64.8 ± 3.1	42.1 ± 31.7	3.2 ± 4.3	1.02 ± 0.58	–
EqR	50k	1	88.2	22.1	2.4	0.98	–
relax, $\delta = 1$	50k	1	78.8	78.9	0.4	0.58	–
inner loop, self-read, $\delta = 1$	50k	1	85.0	49.1	1.0	0.97	–
twin L, $\delta = 2$	20k	3	54.3 ± 2.4	38.3 ± 25.7	2.0 ± 2.4	0.62 ± 0.57	0.985 ± 0.002
twin L, $\delta = 2$	50k	1	85.7	0.0	10.8	1.17	0.965
twin L, $\delta = 3$	20k	2	53.3 ± 0.5	53.3 ± 0.5	0.8 ± 0.1	0.45 ± 0.03	0.976 ± 0.000
twin L, $\delta = 3$	50k	1	84.2	30.6	1.1	0.89	0.983
twin L, $\delta = 10$	20k	2	54.6 ± 2.6	52.3 ± 4.7	1.0 ± 0.2	0.67 ± 0.17	0.966 ± 0.009
twin L, $\delta = 10$	50k	1	88.9	1.6	4.5	0.96	0.982
twin L, $\delta = 2$, train $\sigma = 0.25$	50k	1	82.9	80.5	0.9	0.76	0.977
EqR, train $\sigma = 0.25$	50k	1	84.2	84.2	0.7	0.30	–

6 Dynamics of the trained maps

All quantities in this section use the noise-free map unless stated, in float32, on the first 256 test puzzles with 16 random starts and 256 outer iterations, at the checkpoints' EMA weights, seed 0. Sections 6.1–6.3 start from the round-one and round-two checkpoints; the round-three and round-four checkpoints (twins, inner loop, relax $\delta \in \{2, 3\}$, the noise-trained arms) are added to Tables 11 and 12 and treated in §6.4.

6.1 Selection is solved; coverage is not

Table 10. For EqR and relax at $\sigma \leq 0.5$, the most converged start, the start with the largest halting logit and the verifier all agree with "any": whenever some start is right, each rule finds it, and the convergence score separates right from wrong runs with AUROC 0.98–1.00 (Figure 14). The exceptions are informative: relax $\delta = \frac{1}{4}$ at $\sigma = 0$ (AUROC 0.53; its right end states are not contracting, $\rho = 1.16$) and positive kick at 20k under $\sigma = 0.5$ (AUROC 0.86), the regime of its vote advantage. The differences between models are in *coverage* and in single-run accuracy, and these track path independence: at 50k EqR's starts reach 1.6 distinct answers per puzzle, relax's 2.6 and kick's 3.2 (Figure 10c).

6.2 Spectra at the end states

Observation 1 (Right answers attract, wrong end states do not)**.** In every working model of rounds one and two the median spectral radius at right end states is below one and at wrong end states above one (Table 11, Figure 11). Wrong end states after 256 iterations are therefore not stable fixed points but slow transients or unstable sets, which is why convergence certifies correctness (§6.1) and why per-instance path independence separates right from wrong answers [2]. Of the twelve round-three and round-four checkpoints, nine follow the same ordering and three do not: the right end states of the self-reading inner loop at 20k ($\rho = 1.04$) and of the $\delta = 2$ twin at 50k (1.20) do not contract, and the wrong end states of the $\delta = 1$ twin at 20k do (0.97). Convergence still selects right starts for all three (AUROC ≥ 0.997 without noise, Table 13), so what certifies an answer is that wrong end states are less stable than right ones, not that right ones are fixed points.

EqR's right answers sit close to criticality and move closer with training ($0.87 \to 0.93 \to 0.97$), as reported for converged Sudoku loopers [15] and in line with the drift of equilibrium models toward critical stability [3]. The coupled maps contract much harder (0.53–0.73). Leading eigenvalues at right answers are complex for EqR and relax at 20k (88%) but real at 50k (13%, 0%), and real for positive kick throughout (Figure 12): kick is *not* oscillatory at its answers, contrary to a momentum (underdamped) picture [10].

One caveat qualifies the comparison. For the coupled maps the spectral radius is almost the same at every right end state ($q_{10} \approx q_{90}$ in Table 11, e.g. $[0.53, 0.53]$ for relax at 20k), whereas EqR's varies from puzzle to puzzle. A puzzle-independent mode of the coupled update, rather than the puzzle's own constraint dynamics, may therefore set the coupled maps' ρ; the leading Ritz values (Figure 12) are real and tightly clustered, consistent with this. Identifying that mode is left open.

Rounds three and four (lower block of Table 11, right of the dotted line in Figure 11) extend the picture. At 20k the twins and relax $\delta = 3$ contract their right answers harder than any round-one or round-two arm ($\rho = 0.27$–0.38; the noise-trained twin 0.22). At 50k the twins' right answers are near critical, as EqR's are (0.93 and 0.89 for $\delta = 3$ and 10), or not contracting (1.20 for $\delta = 2$, whose end states are not fixed points, Table 9), and their wrong end states have become far more unstable (ρ from 2.2 at 20k to 7.0–10.2). Noise training keeps the twin's right answers contracting at 50k (0.82) and gives EqR its most contracting right answers of any checkpoint (0.28 against 0.93).

Table 10: Multistart (256 puzzles, 16 starts, depth 256). "conv.": most converged; "q": largest halting logit; verifier: valid Sudoku keeping the givens. AUROC of EqR's convergence score for right vs. wrong runs. "answers": mean number of distinct final grids per puzzle.

arm	steps	single	any	vote	conv.	q	verifier	AUROC	answers	ΔPI
test noise $\sigma = 0$										
EqR	20k	73.5	83.2	79.3	83.2	83.2	83.2	0.984	4.5	0.038
EqR	50k	96.3	98.8	98.4	98.8	98.8	98.8	1.000	1.6	0.027
EqR (released)	50k	96.9	99.6	99.2	99.6	99.6	99.6	1.000	1.5	0.020
relax, $\delta = 1$	20k	64.1	70.7	68.8	70.7	70.7	70.7	1.000	5.2	0.043
relax, $\delta = 1$	50k	89.7	94.1	93.4	94.1	94.1	94.1	0.999	2.6	0.033
kick, positive rates	20k	63.4	70.3	66.8	70.3	70.3	70.3	0.998	4.0	0.036
kick, positive rates	50k	85.4	92.2	90.2	92.2	92.2	92.2	1.000	3.2	0.040
relax, $\delta = \frac{1}{4}$	20k	48.4	52.0	49.2	50.8	52.0	52.0	0.532	2.3	0.020
test noise $\sigma = 0.5$										
EqR	20k	89.4	97.3	96.9	97.3	97.3	97.3	0.999	2.7	0.050
EqR	50k	96.2	99.2	98.8	99.2	99.2	99.2	0.995	1.6	0.030
EqR (released)	50k	95.9	99.6	99.6	99.6	99.6	99.6	1.000	1.6	0.034
relax, $\delta = 1$	20k	82.6	94.1	91.4	94.1	94.1	94.1	0.997	3.7	0.075
relax, $\delta = 1$	50k	88.1	99.2	98.4	98.4	99.2	99.2	0.995	2.9	0.083
kick, positive rates	20k	63.0	97.7	91.8	85.2	71.5	97.7	0.864	6.8	0.236
kick, positive rates	50k	64.1	89.5	82.8	89.1	89.5	89.5	0.997	6.6	0.140
relax, $\delta = \frac{1}{4}$	20k	56.7	65.6	62.1	65.6	64.8	65.6	0.996	7.6	0.034

6.3 Escape under noise

Table 12 and Figure 13. Up to an arm-specific level $\sigma^\star$ right answers are kept with probability one while 15–33% of wrong end states are rescued; rescue peaks just below $\sigma^\star$. This is the selective destabilisation of spurious attractors known from Hopfield networks [1, 6], and it matches the published observation that noise lowers single-path quality but raises best-of-N [9]. $\sigma^\star$ is above 1 for EqR at 50k and relax at 20k, between 0.75 and 1 for EqR at 20k, the released EqR and kick at 20k, and between 0.5 and 0.75 for relax and kick at 50k. The best test noise for breadth is just below $\sigma^\star$, so it must be chosen per checkpoint: relax tolerated $\sigma = 0.75$ at 20k and collapses there at 50k (single run 3.7%), although its state scale is unchanged; its right answers attract less strongly at 50k (ρ 0.53 → 0.68). Relax $\delta = \frac{1}{4}$ rescues almost nothing: its wrong attractors are deep, which is why breadth does not help it.

The lower block of Table 12 measures what §5.1 inferred from accuracies. At 20k the twin ($\delta = 2$) keeps every right answer up to $\sigma = 0.5$ and rescues 42% of wrong end states there, more than any other checkpoint (EqR at 20k 30%, the released EqR 23%); at $\sigma = 0.75$ it begins to lose right answers (5%). At 50k all three twins still keep every right answer at $\sigma = 0.5$, and $\delta = 2$ and 3 at $\sigma = 0.75$ as well, but rescue far fewer wrong ones (25, 6 and 10% for $\delta = 2, 3, 10$). Under noise their wrong end states almost always change answer (the same wrong answer survives in under 1% of runs) but rarely to the right one. The self-reading inner loop rescues 9–15% at $\sigma = 0.5$. Noise training moves the twin's breakdown above $\sigma = 0.75$ at both checkpoints, and at 20k its rescue rate stays high up to 0.75 (37 and 42% at $\sigma = 0.5$ and 0.75).

6.4 Rounds three and four

Tables 13 and 14, Figure 15; same protocol as above. Selection remains free: for every checkpoint, noise-free and at $\sigma = 0.5$, the most converged start and the verifier are within 0.4 points of "any" and the largest halting logit within 0.7, and the convergence score separates right from wrong runs with AUROC 0.975–1.000.

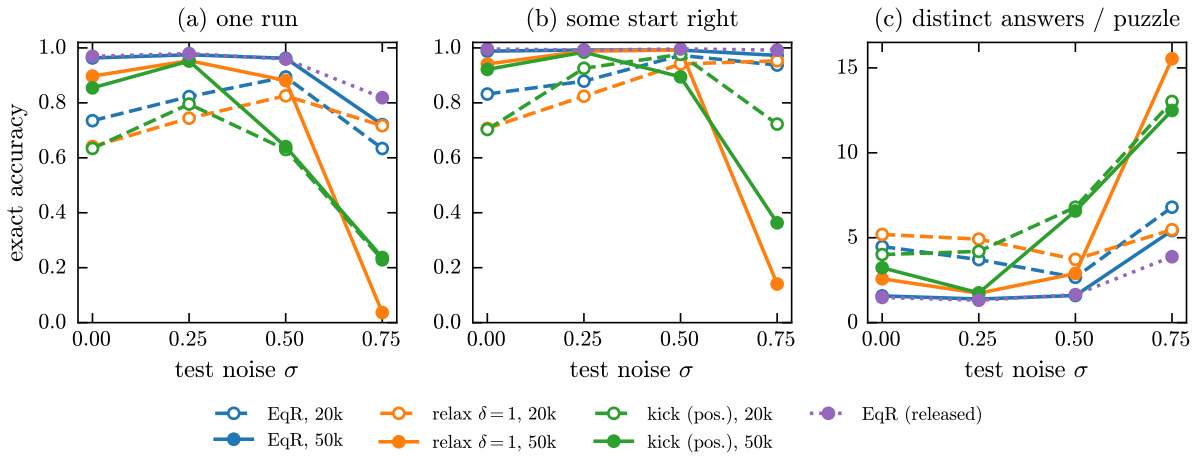


Figure 10: Multistart against test noise (256 puzzles, 16 starts, depth 256). (a) one run; (b) some start right; (c) distinct answers per puzzle. Relax at 50k collapses at $\sigma = 0.75$ although it tolerated it at 20k.

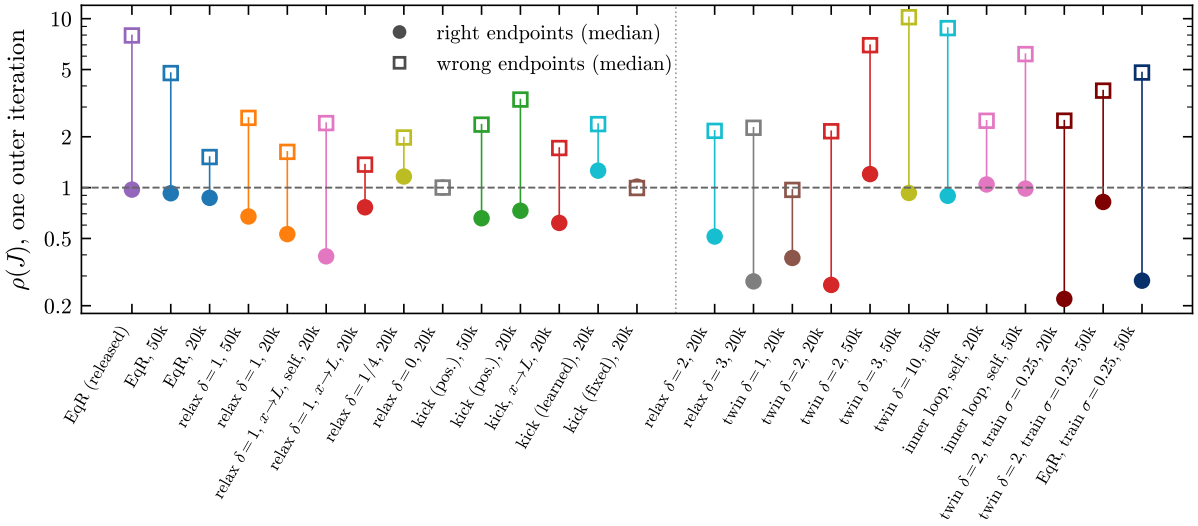


Figure 11: Median spectral radius of one outer iteration at right (filled) and wrong (open) end states. Dashed: $\rho = 1$. Right of the dotted line: rounds three and four (seed 0).

The twin at 20k. Without noise the twin is weaker than EqR at 20k (62.8% single, 68.4% any, against 73.5 and 83.2) and its starts reach as many distinct answers (4.6 per puzzle against 4.5). At $\sigma = 0.5$ its single run gains 31 points (to 93.7%; EqR +16 to 89.4%), some start is right for 99.2% of puzzles (EqR 97.3%), and its starts reach fewer distinct answers than EqR's (2.0 against 2.7). Noise moves the twin's runs off wrong answers onto the right one more effectively than EqR's, as the escape rates show (42 against 30%, §6.3). The copies separate right from wrong (Table 14): for all three 20k twins ($\delta = 1$, 2 and the noise-trained one) the copies of every right end state coincide to about 10^{-7}, and 94–96% of wrong end states are split, as Prop. 10 allows: merged copies are the fixed points of the self-reading map, split ones its 2-cycles.

The twins at 50k. The $\delta = 2$ twin's copies are split at every end state, right ones included (cosine 0.972, separation 0.12); $\delta = 3$ and 10 split 53 and 75% of their right end states with smaller separation (0.03, 0.05), and the noise-trained twin all of them, less far apart (0.08). At 50k the split no longer marks wrong answers, and the fully split $\delta = 2$ twin is the one whose right answers do not contract ($\rho = 1.20$). Under noise from random starts the 50k twins lose single-run accuracy and gain distinct answers (Figure 15a, c; $\delta = 3$: 93.6 → 84.4% and 2.0 → 3.5

Table 11: Spectral radius of one outer iteration's Jacobian at noise-free end states (16 right and 16 wrong per arm, power iteration on JVPs), and the share of complex leading Ritz values (Arnoldi, 30 steps). Lower block: rounds three and four (seed 0).

		right end states				wrong end states	
arm	steps	ρ	$[q_{10}, q_{90}]$	$\mathbb{C}$ top-1	$\mathbb{C}$ top-10	ρ	$\mathbb{C}$ top-1
EqR	20k	0.87	[0.81, 0.87]	88	85	1.52	25
EqR	50k	0.93	[0.90, 1.60]	12	71	4.76	44
EqR (released)	50k	0.97	[0.96, 0.99]	6	39	7.96	31
relax, $\delta = 1$	20k	0.53	[0.53, 0.53]	88	79	1.63	50
relax, $\delta = 1$	50k	0.67	[0.67, 0.67]	0	59	2.59	56
relax, $\delta = 1$, $x \to L$, self-read	20k	0.39	[0.39, 0.39]	0	40	2.41	38
relax, $\delta = \frac{1}{4}$	20k	1.16	[0.82, 2.35]	44	61	1.98	38
relax, $\delta = 0$	20k	1.00	[1.00, 1.00]	0	51	1.00	6
kick, positive rates	20k	0.73	[0.73, 0.74]	0	32	3.32	62
kick, positive rates	50k	0.66	[0.66, 0.66]	0	9	2.36	31
kick, learned rates	20k	1.26	[1.04, 1.72]	94	76	2.38	38
kick, fixed rates	20k	1.01	[0.99, 1.04]	0	46	0.99	0
relax, $\delta = 2$	20k	0.51	[0.41, 0.77]	0	26	2.17	50
relax, $\delta = 3$	20k	0.28	[0.28, 0.28]	0	1	2.26	50
twin L, $\delta = 1$	20k	0.38	[0.38, 0.39]	0	63	0.97	31
twin L, $\delta = 2$	20k	0.27	[0.26, 0.27]	0	30	2.16	38
twin L, $\delta = 2$	50k	1.20	[1.10, 1.40]	50	71	6.97	44
twin L, $\delta = 3$	50k	0.93	[0.93, 0.93]	100	61	10.20	25
twin L, $\delta = 10$	50k	0.89	[0.89, 0.90]	0	52	8.79	38
inner loop, self-read, $\delta = 1$	20k	1.04	[0.96, 1.19]	19	75	2.49	19
inner loop, self-read, $\delta = 1$	50k	0.99	[0.92, 1.08]	62	66	6.17	19
twin L, $\delta = 2$, train $\sigma = 0.25$	20k	0.22	[0.22, 0.22]	0	12	2.49	25
twin L, $\delta = 2$, train $\sigma = 0.25$	50k	0.82	[0.81, 0.94]	69	45	3.75	44
EqR, train $\sigma = 0.25$	50k	0.28	[0.28, 0.28]	44	69	4.80	25

answers from $\sigma = 0$ to 0.5), while EqR at 50k does not (96.3 $\to$ 96.2%, 1.6 answers), and their wrong end states are rescued less often than at 20k (panel d). §5.2 draws the consequence for test-time scaling.

Noise training. At 20k and $\sigma = 0.5$ the noise-trained twin is right on 84.8% of single runs and some start is right for 92.2% of puzzles, against 93.7 and 99.2% for the plain twin, although its starts reach more distinct answers (3.4 against 2.0) and fewer puzzles have mixed outcomes (14.8 against 18.8%). Its failures concentrate on puzzles that no start solves; the plain twin's depend on the start. At 50k the noise-trained arms have the largest noise-free fixed-point shares of all checkpoints (93% for EqR, all of its right answers, and 83% for the twin; relative step below 10^{-4}), and they keep more single-run accuracy at $\sigma = 0.75$ (80 and 85%, against 47–62% for the plain twins and 72% for EqR).

6.5 Inside one outer iteration

Figure 16. EqR at 20k shows HRM's *hierarchical convergence* [19]: within each recursion the L change falls roughly by half per update, then H moves and L restarts. The coupled maps have no such structure (Prop. 6); every update changes the state by a similar amount, and the second of two consecutive H updates at each recursion boundary changes almost nothing, so 2 of the 21 evaluations per outer iteration are nearly wasted by the alternating schedule.

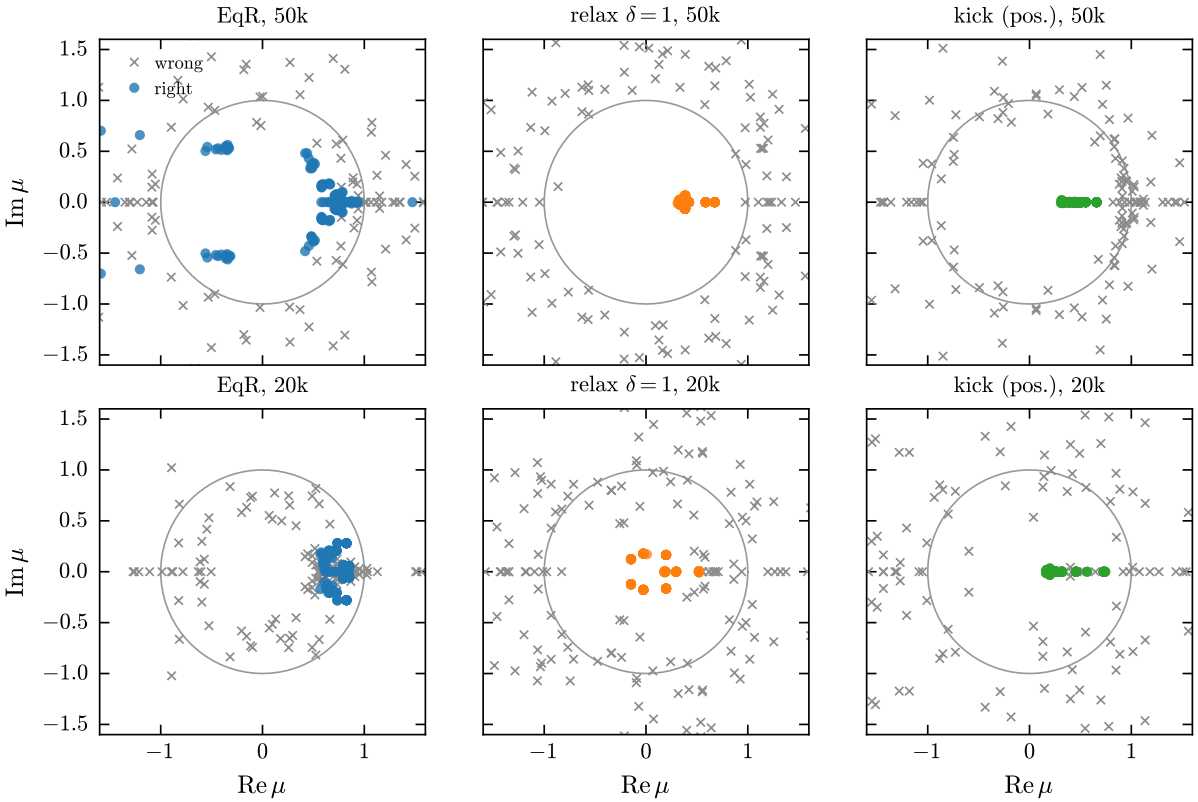


Figure 12: Leading Ritz values (top 10 per end state) of one outer iteration's Jacobian. Coloured: right end states; grey crosses: wrong end states; circle: $|\mu| = 1$.

6.6 EqR's inner loop goes through a flip bifurcation

Figures 17 and 18. At 20k the inner fixed point is stable (leading eigenvalues of DF near ± 0.6 for right puzzles; wrong puzzles sit at -1.00 to -1.03). At 50k a cluster of real eigenvalues sits at -0.93 to -1.07, and in the released checkpoint the leading eigenvalue is ≈ -1.9 to -2.0, i.e. $\mu \approx -2.1$ for the block. The inner fixed point is then unstable and z_L lives on a stable 2-cycle (two-step Jacobian eigenvalues 0.91–0.99). Because six inner updates are an even number, z_H always reads the same phase; in the released model z_H is then stationary to 4×10^{-7}.

The cycle carries no information the readout uses: odd inner-loop lengths, which make z_H read alternating phases, are as accurate as even ones (Table 15; ± 2.5 points at 128 puzzles). We read the period doubling as a by-product of strong negative feedback in the block combined with EqR's light damping, not as a computational mechanism. By Propositions 7 and 10 a twin coupling holds such a cycle as a fixed point with $L \neq L'$; the cosine between the copies is therefore a direct readout of whether the twin arms learn the same structure. They do, late in training: at 20k the copies of right end states coincide, at 50k every end state of the $\delta = 2$ twin is split and its right answers no longer contract (§6.4).

Table 12: From noise-free end states, $K = 32$ iterations at noise σ: $P(\text{keep} \mid \text{right})$ / $P(\text{right} \mid \text{wrong})$. Lower block: rounds three and four (seed 0).

arm	steps	$\sigma = 0.1$	0.25	0.5	0.75	1.0
EqR	20k	1.00 / 0.03	1.00 / 0.13	1.00 / 0.30	0.92 / 0.15	0.04 / 0.00
EqR	50k	1.00 / 0.07	1.00 / 0.16	1.00 / 0.27	1.00 / 0.04	0.98 / 0.03
EqR (released)	50k	1.00 / 0.06	1.00 / 0.14	1.00 / 0.23	0.99 / 0.11	0.08 / 0.00
relax, $\delta = 1$	20k	1.00 / 0.05	1.00 / 0.12	1.00 / 0.23	1.00 / 0.14	1.00 / 0.05
relax, $\delta = 1$	50k	1.00 / 0.07	1.00 / 0.24	1.00 / 0.15	0.04 / 0.00	0.02 / 0.00
kick, positive rates	20k	1.00 / 0.08	1.00 / 0.23	1.00 / 0.17	1.00 / 0.02	0.03 / 0.00
kick, positive rates	50k	1.00 / 0.07	1.00 / 0.33	1.00 / 0.17	0.33 / 0.00	0.01 / 0.00
relax, $\delta = \frac{1}{4}$	20k	1.00 / 0.02	1.00 / 0.06	1.00 / 0.07	1.00 / 0.05	1.00 / 0.04
relax, $\delta = 0$	20k	0.75 / 0.00	0.76 / 0.00	0.76 / 0.00	0.74 / 0.00	0.75 / 0.00
kick, fixed rates	20k	0.41 / 0.00	0.42 / 0.00	0.42 / 0.00	0.42 / 0.00	0.42 / 0.00
relax, $\delta = 2$	20k	1.00 / 0.04	1.00 / 0.13	1.00 / 0.28	1.00 / 0.07	0.99 / 0.01
relax, $\delta = 3$	20k	1.00 / 0.03	1.00 / 0.12	1.00 / 0.17	1.00 / 0.07	0.57 / 0.00
twin L, $\delta = 1$	20k	1.00 / 0.06	1.00 / 0.17	1.00 / 0.29	1.00 / 0.18	0.98 / 0.03
twin L, $\delta = 2$	20k	1.00 / 0.03	1.00 / 0.25	1.00 / 0.42	0.95 / 0.06	0.01 / 0.00
twin L, $\delta = 2$	50k	1.00 / 0.08	1.00 / 0.18	1.00 / 0.25	1.00 / 0.05	0.34 / 0.00
twin L, $\delta = 3$	50k	1.00 / 0.04	1.00 / 0.10	1.00 / 0.06	1.00 / 0.01	0.92 / 0.02
twin L, $\delta = 10$	50k	1.00 / 0.06	1.00 / 0.11	1.00 / 0.10	0.90 / 0.03	0.02 / 0.00
inner loop, self-read, $\delta = 1$	20k	1.00 / 0.02	1.00 / 0.05	1.00 / 0.09	1.00 / 0.10	1.00 / 0.02
inner loop, self-read, $\delta = 1$	50k	1.00 / 0.10	1.00 / 0.13	1.00 / 0.15	1.00 / 0.05	1.00 / 0.01
twin L, $\delta = 2$, train $\sigma = 0.25$	20k	1.00 / 0.01	1.00 / 0.13	1.00 / 0.37	1.00 / 0.42	0.59 / 0.09
twin L, $\delta = 2$, train $\sigma = 0.25$	50k	1.00 / 0.05	1.00 / 0.08	1.00 / 0.12	1.00 / 0.16	0.98 / 0.05
EqR, train $\sigma = 0.25$	50k	1.00 / 0.03	1.00 / 0.07	1.00 / 0.20	1.00 / 0.10	1.00 / 0.06

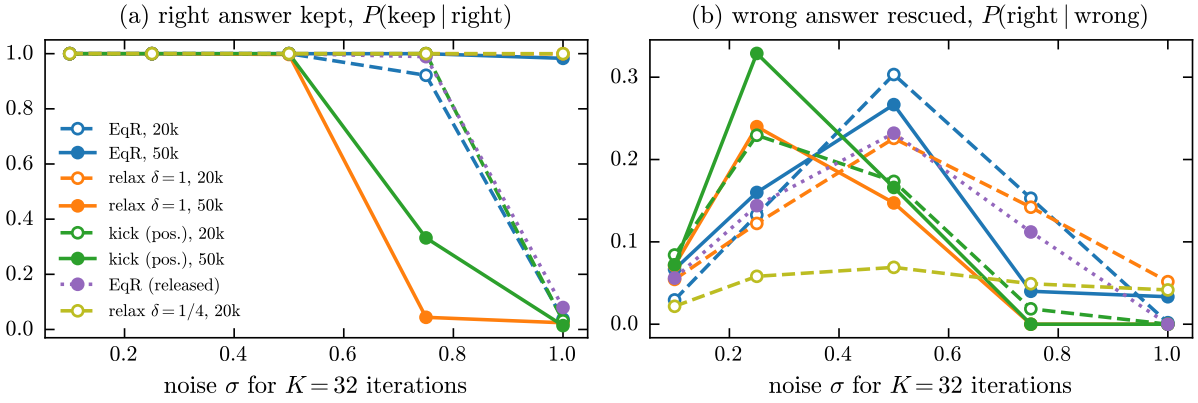


Figure 13: Escape from noise-free end states after $K = 32$ noisy iterations. (a) right answers kept; (b) wrong answers rescued.

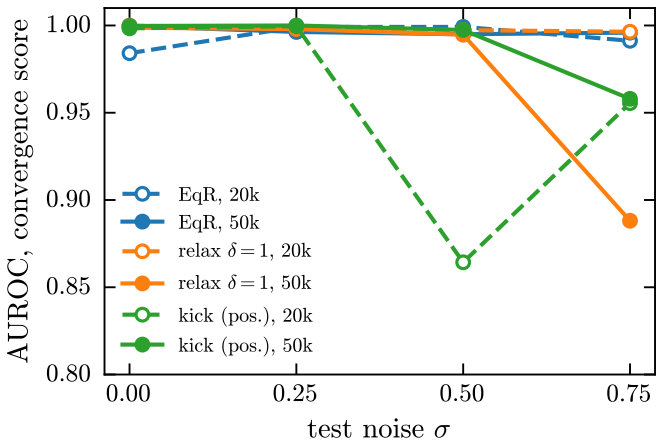


Figure 14: AUROC of EqR's convergence score for right vs. wrong runs, against test noise.

Table 13: Multistart of the round-three and round-four checkpoints, as Table 10 (256 puzzles, 16 starts, depth 256, seed 0), with EqR as reference.

arm	steps	single	any	vote	conv.	q	verifier	AUROC	answers	ΔPI
test noise $\sigma = 0$										
EqR	20k	73.5	83.2	79.3	83.2	83.2	83.2	0.984	4.5	0.038
EqR	50k	96.3	98.8	98.4	98.8	98.8	98.8	1.000	1.6	0.027
relax, $\delta = 2$	20k	70.2	77.3	75.8	77.3	77.3	77.3	1.000	5.1	0.044
relax, $\delta = 3$	20k	63.7	71.9	69.1	71.9	71.9	71.9	0.999	5.7	0.034
twin L, $\delta = 1$	20k	65.2	73.4	69.5	73.4	73.0	73.4	0.999	3.9	0.050
twin L, $\delta = 2$	20k	62.8	68.4	66.0	68.4	68.4	68.4	0.999	4.6	0.023
twin L, $\delta = 2$	50k	94.7	98.4	98.0	98.4	98.4	98.4	1.000	1.8	0.033
twin L, $\delta = 3$	50k	93.6	98.0	96.5	98.0	98.0	98.0	1.000	2.0	0.019
twin L, $\delta = 10$	50k	94.1	98.0	96.5	98.0	98.0	98.0	1.000	1.9	0.029
inner loop, self-read, $\delta = 1$	20k	73.4	79.7	76.6	79.3	79.7	79.7	0.997	4.7	0.029
inner loop, self-read, $\delta = 1$	50k	96.4	99.6	99.2	99.2	99.6	99.6	0.979	1.6	0.030
twin L, $\delta = 2$, train $\sigma = 0.25$	20k	60.7	70.7	64.8	70.7	70.7	70.7	1.000	4.5	0.038
twin L, $\delta = 2$, train $\sigma = 0.25$	50k	90.6	95.7	94.5	95.7	95.7	95.7	0.992	2.4	0.030
EqR, train $\sigma = 0.25$	50k	93.3	97.7	97.3	97.7	97.7	97.7	1.000	2.0	0.023
test noise $\sigma = 0.5$										
EqR	20k	89.4	97.3	96.9	97.3	97.3	97.3	0.999	2.7	0.050
EqR	50k	96.2	99.2	98.8	99.2	99.2	99.2	0.995	1.6	0.030
relax, $\delta = 2$	20k	84.4	93.4	92.6	93.4	93.4	93.4	1.000	3.4	0.069
relax, $\delta = 3$	20k	71.5	84.8	81.6	84.8	84.8	84.8	1.000	5.4	0.069
twin L, $\delta = 1$	20k	89.1	98.0	96.1	98.0	97.3	98.0	0.990	2.7	0.062
twin L, $\delta = 2$	20k	93.7	99.2	98.0	98.8	98.8	99.2	0.981	2.0	0.052
twin L, $\delta = 2$	50k	91.2	97.7	96.9	97.7	97.7	97.7	0.997	2.4	0.061
twin L, $\delta = 3$	50k	84.4	95.7	94.5	95.7	95.7	95.7	0.999	3.4	0.084
twin L, $\delta = 10$	50k	91.3	98.0	97.3	98.0	98.0	98.0	0.999	2.4	0.047
inner loop, self-read, $\delta = 1$	20k	75.8	87.9	85.2	87.9	87.5	87.9	0.991	4.8	0.076
inner loop, self-read, $\delta = 1$	50k	92.9	98.8	97.7	98.4	98.4	98.8	0.975	2.1	0.035
twin L, $\delta = 2$, train $\sigma = 0.25$	20k	84.8	92.2	89.8	92.2	92.2	92.2	0.998	3.4	0.042
twin L, $\delta = 2$, train $\sigma = 0.25$	50k	93.6	98.8	98.4	98.8	98.4	98.8	0.979	2.0	0.043
EqR, train $\sigma = 0.25$	50k	95.2	99.2	98.0	99.2	99.2	99.2	1.000	1.8	0.027

Table 14: The twin copies at the noise-free end states (256 puzzles, 16 starts, depth 256): median cosine and separation $|L - L'|/(|L| + |L'|)$ over the whole state, share of runs with some token separated by more than 0.1, and the spectral radius of one outer iteration (Table 11), for right and wrong runs.

		right end states				wrong end states			
arm	steps	cos	sep.	split (%)	ρ	cos	sep.	split (%)	ρ
twin L, $\delta = 1$	20k	1.000	$9 \cdot 10^{-8}$	0	0.38	0.986	0.08	94	0.97
twin L, $\delta = 2$	20k	1.000	$2 \cdot 10^{-7}$	0	0.27	0.966	0.13	94	2.16
twin L, $\delta = 2$	50k	0.972	0.12	100	1.20	0.931	0.19	100	6.97
twin L, $\delta = 3$	50k	0.998	0.03	53	0.93	0.925	0.19	100	10.20
twin L, $\delta = 10$	50k	0.995	0.05	75	0.89	0.895	0.23	100	8.79
twin L, $\delta = 2$, train $\sigma = 0.25$	20k	1.000	$2 \cdot 10^{-7}$	0	0.22	0.968	0.13	96	2.49
twin L, $\delta = 2$, train $\sigma = 0.25$	50k	0.988	0.08	100	0.82	0.938	0.18	100	3.75

Table 15: Inner-loop length at test time (128 puzzles, one start, 32 outer iterations, local float32): exact accuracy at $\sigma = 0$ / $\sigma = 0.5$. Six is the trained value.

checkpoint	L=4	5	6	7	8
EqR 20k	75.0 / 81.2	75.0 / 80.5	71.1 / 79.7	73.4 / 79.7	72.7 / 78.1
EqR 50k	86.7 / 87.5	91.4 / 89.1	92.2 / 88.3	90.6 / 86.7	90.6 / 86.7
EqR released	90.6 / 89.1	94.5 / 85.9	94.5 / 84.4	93.0 / 88.3	94.5 / 85.2

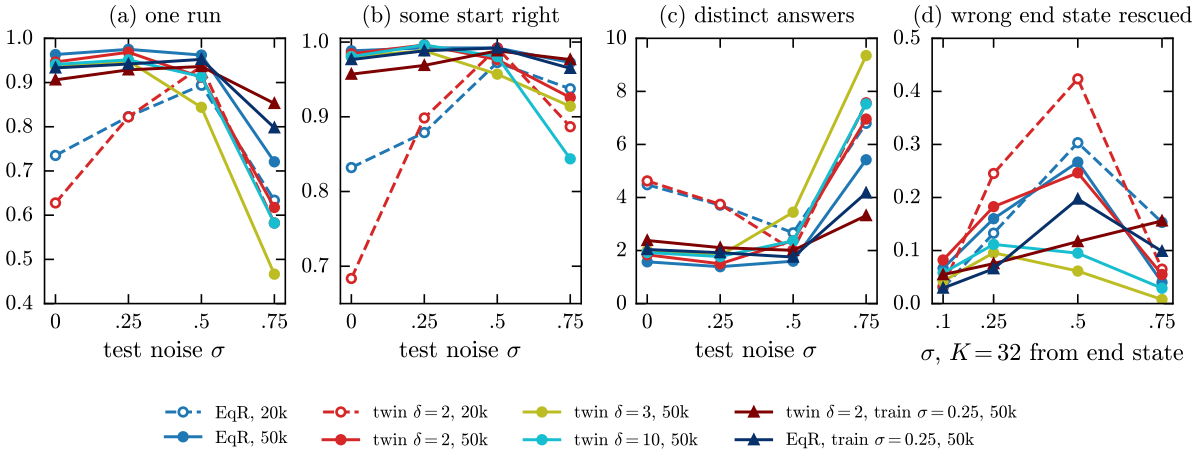


Figure 15: Twins and EqR under test noise (seed 0). (a)–(c) Multistart from random starts with noise during all 256 iterations (256 puzzles, 16 starts): one run right, some start right, distinct answers per puzzle. (d) Wrong end states rescued by $K = 32$ noisy iterations from the noise-free end state. Open/dashed: 20k; filled: 50k; triangles: trained at $\sigma = 0.25$.

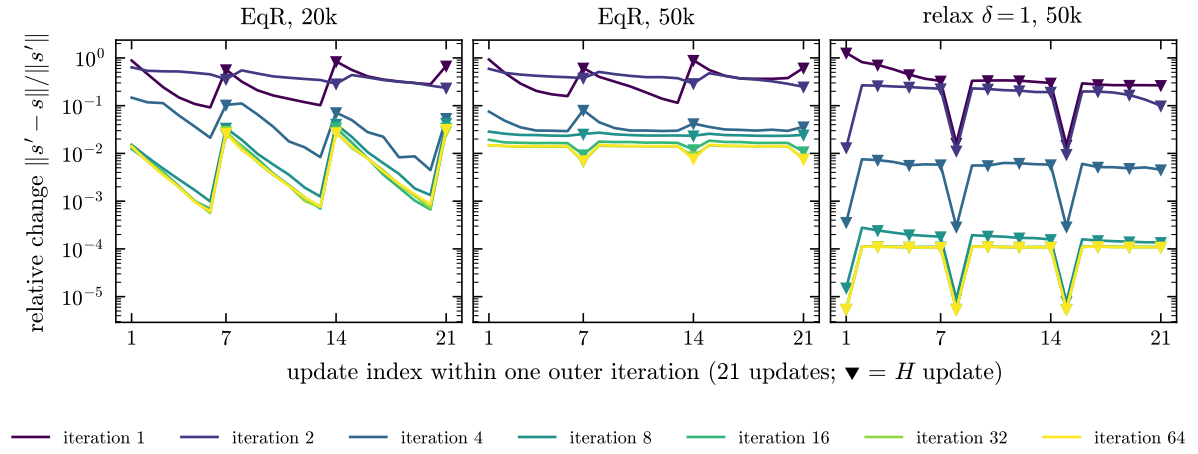


Figure 16: Median relative change per update inside one outer iteration (21 updates, ▼ = H updates), at outer iterations $1, \ldots, 64$ from a random start (64 puzzles). EqR at 20k shows hierarchical convergence: L settles within each recursion and is reset by H. At 50k the L changes no longer decay (the 2-cycle of §6.6). For relax the dips are the second of two consecutive H updates at recursion boundaries; the floor near 10^{-4} is TF32 round-off on the GPU.

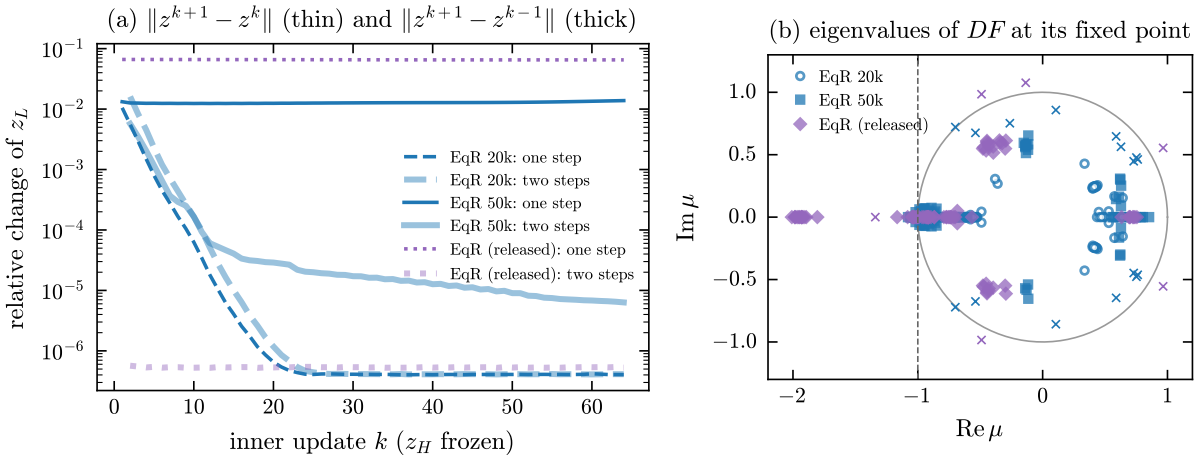


Figure 17: EqR's inner map $F(z_L) = 0.05 z_L + 0.95\mathcal{B}(z_L + z_H + x)$ with z_H frozen at an end state (16 puzzles, local float32). (a) Median one-step (thin) and two-step (thick) relative change over 64 inner updates: at 20k both vanish (fixed point); at 50k and in the released model the one-step change stays at 1% and 6% while the two-step change drops to round-off (exact 2-cycle). (b) Leading eigenvalues of DF at its fixed point (found by damped iteration); crosses: wrong puzzles.

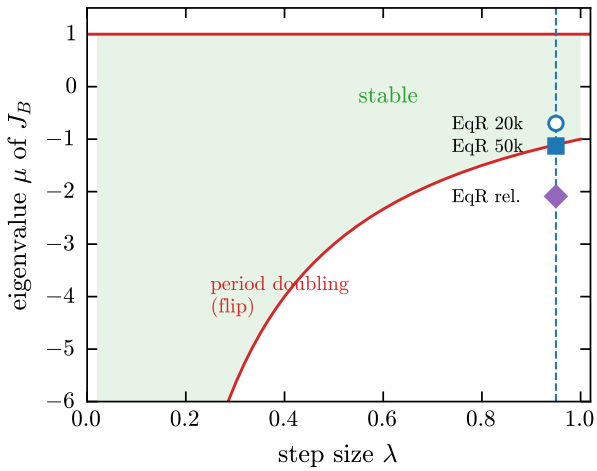


Figure 18: Stability of $F = (1-\lambda)z + \lambda\tilde{\mathcal{B}}(z)$ along a real eigen-direction μ of $D\tilde{\mathcal{B}}$ (Prop. 8). Markers: most negative leading eigenvalue of DF at the inner fixed point (median over right puzzles), mapped to μ at EqR's $\lambda = 0.95$.

7 A second task: Skyscrapers-7

Every result above is on one dataset. As a second task of the same size we use Skyscrapers on a 7×7 grid, embedded in Sudoku's 9×9 board so that EqR's model, sequence length and recipe are unchanged (`looped/eqr/skyscrapers.py`). The grid holds a Latin square of building heights 1..7 (rows and columns are permutations, as in Sudoku without boxes); the 28 border cells hold visibility clues, the number of buildings seen from that side of the line (a building is seen if it is taller than all in front of it). A clue constrains the order of a whole line, not pairs of cells. Inputs use 9 tokens (padding, blank, heights); the loss and exact accuracy are over the 49 grid cells. Puzzles are unique and minimal: from a random solution with all 28 clues, givens are added until the solution is unique, and then clues and givens are deleted in random order while it stays unique. Uniqueness is checked by propagating every line to generalised arc consistency over the 5040 permutations and branching on the cell with fewest candidates; the median puzzle needs 4 branching nodes (90th percentile 14, maximum 970) and 18% are solved by propagation alone. One test set of 10,000 puzzles is shared; training sets of 1k, 10k and 100k puzzles are nested and augmented by the 8 symmetries of the square. Heights cannot be relabelled as Sudoku's digits can, so 10k puzzles give 80k distinct training examples where Sudoku-Extreme-1k with its 1000 augmentations per puzzle gives about one million.

Training-set size. Table 16 and Figure 19. With 1k puzzles EqR memorises the training set (99.1% on training batches, 0.1% on the test set) and halts after about one step. With 10k it learns for 10k steps (test 40.7%) and then overfits: the test accuracy falls to 34.3% while the training accuracy reaches 94.2% at 1.6 ACT steps, the memorisation signature of §4. With 100k puzzles (800k examples, close to Sudoku's) the gap is gone: 90.4% test against 89.6% train at 20k, five ACT steps, and the test accuracy is still rising. Skyscrapers-7 is therefore learnable by EqR at Sudoku's scale, but only with Sudoku's number of distinct training examples.

Twin against EqR. On 100k puzzles the twin ($\delta = 3$) trails EqR by 5–7 points throughout (84.8 against 90.4% at 20k), with a four-point gap between training and test accuracy that EqR does not have. On Sudoku the twin also trailed EqR at 16 iterations and the training noise (Table 6) and led under test-time scaling.

Final evaluation and test-time scaling. Table 17. On all 10,000 test puzzles at the training noise EqR on 100k puzzles is right on 90.3, 93.6 and 95.3% at depth 16, 64 and 256, and the twin on 85.3, 88.1 and 90.3%; with 10k puzzles EqR reaches 34.3–38.1% and with 1k nothing. Under test noise both 100k runs improve with depth, and here the twin does not overtake EqR: one run at depth 1024 is right on 97.1 against 94.9% at $\sigma = 0.5$ and 98.0 against 97.7% at $\sigma = 0.25$ (the lower noise is better for both, as for the Sudoku checkpoints late in training). With 128 starts at depth 64 the most converged start is right on 99.0% for both, with some start right on 99.6 and 99.2%, so selection is as free as on Sudoku and the difference is again coverage. Without noise EqR's runs end at a fixed point for 86.6% of puzzles (95.4% right at 256 iterations) and the twin's for 79.7% (88.0%), with $\rho = 0.64$ and 0.60 (median over right and wrong); the twin's copies stay close (cosine 0.978). At 20k on Skyscrapers the twin behaves like EqR with a weaker single run, not like the 20k Sudoku twin.

Table 16: Skyscrapers-7, seed 0, EqR's recipe, 20k steps (W&B). Test: exact accuracy on the 10,000 test puzzles at 16 iterations and the training noise, evaluated during training; cell: per-cell accuracy at 20k. Train: training-batch exact accuracy and ACT steps averaged over steps 18–20k.

		test exact at step					test cell	train, 18–20k	
puzzles	arm	8k	10k	14k	20k	best	20k	exact	ACT
1k	EqR	0.2	0.1	0.1	0.1	0.2 (8k)	48.9	99.1	1.1
10k	EqR	30.2	40.7	37.9	34.3	40.7 (10k)	73.3	94.2	1.6
100k	EqR	45.0	68.2	83.5	90.4	90.4 (20k)	96.1	89.6	5.0
100k	twin L, $\delta = 3$	37.8	62.0	78.6	84.8	84.8 (20k)	94.0	89.1	5.1

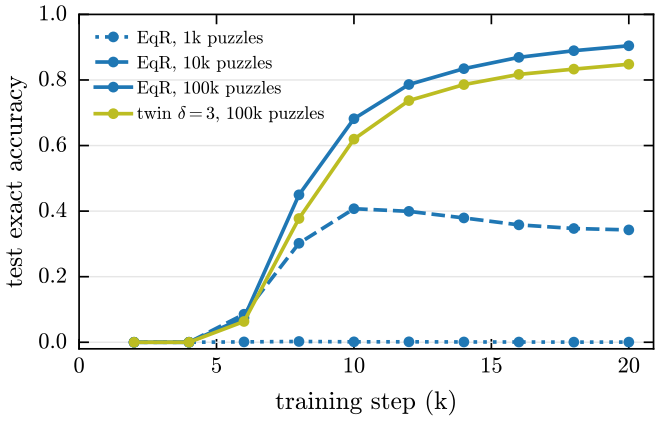


Figure 19: Skyscrapers-7: test exact accuracy at 16 iterations during training, by training-set size.

Table 17: Skyscrapers-7 at 20k steps, seed 0, from the run roots. Training noise: `evaluate.py` on all 10,000 test puzzles, one run at depth 16, 64 and 256. Test noise: first 2048 test puzzles, one run at depth 1024, and depth 64 with 128 starts at $\sigma = 0.5$ by selection rule (no vote: EqR's vote counts the untrained border tokens, which differ between starts, so identical answers do not pool). Fixed point and ρ: noise-free dynamics (Table 9), 768 puzzles. Test-time scaling and dynamics exist for the 100k runs only.

		$\sigma = 0.01$			depth 1024		64×128, $\sigma = 0.5$				
puzzles	arm	16	64	256	$\sigma = 0.25$	0.5	conv.	top-4	any	fixed pt. (%)	ρ
1k	EqR	0.0	0.0	0.0	–	–	–	–	–	–	–
10k	EqR	34.3	36.2	38.1	–	–	–	–	–	–	–
100k	EqR	90.3	93.6	95.3	98.0	97.1	99.0	98.9	99.6	86.6	0.64
100k	twin L, $\delta = 3$	85.3	88.1	90.3	97.7	94.9	99.0	98.1	99.2	79.7	0.60

8 Discussion

Which properties matter.

1. *Attracting right answers and non-attracting wrong ones.* Every working model of rounds one and two has it, and it makes selection by convergence or halting essentially free. Models without it (relax $\delta = 0$, $\frac{1}{4}$; fixed and learned kick) also lose the certificate. Three later checkpoints (the inner loop at 20k, the twins with $\delta = 1$ at 20k and $\delta = 2$ at 50k) have only the weaker property that wrong end states are less stable than right ones, and selection is still free for them.
2. *Large, dominant basins for right answers (path independence).* This is where EqR leads, and it grows with training for every arm. It is not an advantage under breadth: at 20k the twin's single runs are no more accurate than EqR's, but its starts cover 99.3–100% of puzzles against 95.5–98.7% (three seeds each), and training noise lowers coverage by making failures depend on the puzzle rather than on the start (§6.4).
3. *A margin between the noise that breaks wrong attractors and the noise that breaks right ones.* It exists for all working models; its location $\sigma^\star$ is set by the state scale (exactly predictable, Prop. 2) and by contraction strength, and it moves with training.
4. *Damping of the common mode*, not the volume constraint. The undamped mode of relax is fatal; strong but not maximal damping is best.
5. *An implicit inner equilibrium problem.* EqR has one; the alternating couplings, whose inner equilibrium is a single explicit layer, fit the 1000 training puzzles and stop improving on the test set (train−test gaps of 15–26 points at 50k). Restoring the inner problem without self-reading, by the twin's two copies, removes the gap (one point at 50k) and brings the twin to within 1–1.5 points of EqR at the training noise. This suggests that invertibility is not what costs the alternating couplings accuracy, and that the missing inner loop is.
6. *Noise-driven exploration that pays off with depth*, which depends on the checkpoint. At 20k the twin gains 27 points from test noise at depth 256 and, over three seeds, leads EqR at 20k by five points at depth 1024 and beats EqR's released 50k checkpoint with 128 starts; the self-reading inner loop, which also has an implicit inner problem, gains nothing. The twin's gain does not depend on its damping, so it comes from the two alternating copies, and the escape analysis measures it: at 20k noise rescues 42% of the twin's wrong end states without losing right ones. It is largest early in training: as the twin trains on, its right answers split into the antisymmetric branch of Prop. 10 and stop being fixed points; noise still keeps them once reached, but rescues wrong end states far less often (6–25% at 50k) and fewer noisy runs reach the right ones, while EqR's improve until 40k. Training with noise restores fixed points but removes the early advantage, both in depth and in coverage. On Skyscrapers-7 at 20k the twin shows no such advantage.

Limitations. Three seeds exist only for EqR and the twins at 20k; everything else, including the training trajectory of Figure 9 and all of round four at 50k, is seed 0, which was the twins' best seed at 20k by 1.3–2 points. Test-time numbers use 2048 puzzles (±0.5 points; ±0.2 near 99%) and the dynamical analysis 256 puzzles (±1–2 points). Spectra use 16 right and 16 wrong end states per arm, and Ritz values from 30 Arnoldi steps approximate only the leading spectrum. GPU traces ran with TF32 matrix multiplies (round-off $\approx 10^{-4}$); the inner-loop analysis was redone locally in float32. The map analysis of §6 covers seed 0 only, for every arm. Most test-time comparisons use EqR's $\sigma = 0.5$, which is not the best noise for every checkpoint (§5.2). Skyscrapers-7 has one seed per arm, test-time scaling and dynamics for the two 100k runs only, and no map analysis; its majority vote is not usable (EqR's vote counts the untrained

border tokens). Training-batch accuracy depends on halting, so the generalisation gaps are indicative.

Next. (i) A noise switch: train the twin ($\delta = 10$, the simplest) and EqR at $\sigma = 0.01$ to 20k and continue at $\sigma = 0.25$, to keep the twin's fast early learning and make its answers stable. (ii) Seeds 1 and 2 of the training trajectory, to place the twin's peak without seed-0 bias. (iii) The map analysis of seeds 1 and 2 at 20k, to check that the twin's merged right answers and high rescue rate are not seed-0 properties. (iv) On Skyscrapers-7: training beyond 20k (EqR's test accuracy was still rising), the twin at 50k, further seeds, and a vote that ignores the border tokens.

A Rates, scales and dimensionality

Table 18: Rates, the volume bound per outer iteration (Prop. 4), predicted vs. measured endpoint RMS of H / L (Prop. 2), and participation ratios $(\sum \ell_i)^2 / \sum \ell_i^2$ of the per-token state covariance.

arm	steps	γ	α	δ	vol. bound	RMS pred.	RMS meas.	PR H / L
EqR	20k	$1-\lambda = 0.05$ (self-read)			–	1.00 / 1.00	1.00 / 1.00	11.2 / 14.2
EqR	50k	$1-\lambda = 0.05$ (self-read)			–	1.00 / 1.00	1.00 / 1.00	10.5 / 14.4
EqR (released)	50k	$1-\lambda = 0.05$ (self-read)			–	1.00 / 1.00	1.00 / 1.00	10.1 / 12.5
relax, $\delta = 1$	20k	3.00	3.00	1.00	2.1×10^{-14}	1.58 / 1.58	1.58 / 1.58	14.3 / 14.3
relax, $\delta = 1$	50k	3.00	3.00	1.00	2.1×10^{-14}	1.58 / 1.58	1.58 / 1.58	12.8 / 12.8
relax, $\delta = \frac{1}{4}$	20k	3.00	3.00	0.25	2.1×10^{-14}	4.52 / 4.52	4.51 / 4.51	14.1 / 14.1
relax, $\delta = 0$	20k	3.00	3.00	–	2.1×10^{-14}	∞ / ∞	4028 / 4027	12.2 / 12.2
kick, positive rates	20k	0.94	1.24	–	8.5×10^{-6}	1.41 / 0.64	1.41 / 0.64	14.1 / 13.3
kick, positive rates	50k	0.80	1.77	–	6.5×10^{-7}	1.20 / 0.82	1.20 / 0.81	13.3 / 14.3
kick, learned rates	20k	0.32	0.43	–	1.7×10^{-2}	2.85 / 2.62	2.85 / 2.62	14.3 / 17.5
kick, fixed rates	20k	0.005	0.005	–	9.5×10^{-1}	201 / 200	200 / 198	28.5 / 36.9
kick, positive, $x \to L$ only	20k	1.11	1.18	–	6.0×10^{-6}	1.45 / 0.50	1.44 / 0.49	14.0 / 13.6

B Reproduction

- Training and evaluation: `jobs/looped/sudoku_eqr.slurm` (which also runs the test-time scaling of `jobs/looped/eqr_scaling.sh` after training), `jobs/looped/sudoku_scaling.slurm`, `jobs/looped/sudoku_dynamics.slurm`; summary tables: `looped/eqr/summarize_sudoku.py`.
- Skyscrapers-7: `looped/eqr/skyscrapers.py`, `looped/eqr/build_skyscrapers_dataset.py`; `sudoku_eqr.slurm` with `TASK=skyscrapers`.
- Dynamical analysis: `looped/eqr/export_for_analysis.py`, `looped/eqr/analyze_maps.py` (GPU job `jobs/looped/sudoku_maps.slurm`), `looped/eqr/summarize_maps.py`.
- This note: `looped/eqr/paper/make_figures.py` and `make_tables.py`, from the data in `looped/eqr/paper/data/`; the seed-resolved `runs_*.csv` there are written by `looped/eqr/paper/export_results.py` from the pulled Sudoku run root, `sky_runs_*.csv` by the same script from the Skyscrapers-7 run roots (`-prefix sky_runs -puzzles-from-root`), `maps/*.json` by `analyze_maps.py`, and `wandb_curves.json` and `sky_wandb.json` from W&B.

References

[1] Daniel J. Amit, Hanoch Gutfreund, and H. Sompolinsky. Storing infinite numbers of patterns in a spin-glass model of neural networks. *Physical Review Letters*, 55(14):1530–1533, 1985.

[2] Cem Anil, Ashwini Pokle, Kaiqu Liang, Johannes Treutlein, Yuhuai Wu, Shaojie Bai, J. Zico Kolter, and Roger Grosse. Path independent equilibrium models can better exploit test-time computation. In *Advances in Neural Information Processing Systems*, 2022. arXiv:2211.09961.

[3] Shaojie Bai, Vladlen Koltun, and J. Zico Kolter. Stabilizing equilibrium models by Jacobian regularization. In *International Conference on Machine Learning*, 2021. arXiv:2106.14342.

[4] Vivek S. Borkar. Stochastic approximation with two time scales. *Systems & Control Letters*, 29(5):291–294, 1997.

[5] Jehoshua Bruck. On the convergence properties of the Hopfield model. *Proceedings of the IEEE*, 78(10):1579–1585, 1990.

[6] A. C. C. Coolen. Statistical mechanics of recurrent neural networks I. Statics. *arXiv preprint cond-mat/0006010*, 2000.

[7] Guilherme França, Jeremias Sulam, Daniel P. Robinson, and René Vidal. Conformal symplectic and relativistic optimization. *Journal of Statistical Mechanics: Theory and Experiment*, 2020. arXiv:1903.04100.

[8] Jonas Geiping, Sean McLeish, Neel Jain, John Kirchenbauer, Siddharth Singh, Brian R. Bartoldson, Bhavya Kailkhura, Abhinav Bhatele, and Tom Goldstein. Scaling up test-time compute with latent reasoning: A recurrent depth approach. *arXiv preprint arXiv:2502.05171*, 2025.

[9] Alexi Gladstone, Ganesh Nanduru, Md Mofijul Islam, Peixuan Han, Hyeonjeong Ha, Aman Chadha, Yilun Du, Heng Ji, Jundong Li, and Tariq Iqbal. Energy-based transformers are scalable learners and thinkers. *arXiv preprint arXiv:2507.02092*, 2025.

[10] Gabriel Goh. Why momentum really works. *Distill*, 2017. https://distill.pub/2017/momentum/.

[11] Eric Goles and Jorge Olivos. Comportement périodique des fonctions à seuil binaires et applications. *Discrete Applied Mathematics*, 3(2):93–105, 1981.

[12] Aidan N. Gomez, Mengye Ren, Raquel Urtasun, and Roger B. Grosse. The reversible residual network: Backpropagation without storing activations. In *Advances in Neural Information Processing Systems*, 2017. arXiv:1707.04585.

[13] Benhao Huang, Zhengyang Geng, and Zico Kolter. Equilibrium reasoners: Learning attractors enables scalable reasoning. *arXiv preprint arXiv:2605.21488*, 2026.

[14] Alexia Jolicoeur-Martineau. Less is more: Recursive reasoning with tiny networks. *arXiv preprint arXiv:2510.04871*, 2025.

[15] Asher Labovich. Stability and generalization in looped transformers. *arXiv preprint arXiv:2604.15259*, 2026.

[16] Robert McLachlan and Matthew Perlmutter. Conformal Hamiltonian systems. *Journal of Geometry and Physics*, 39(4):276–300, 2001.

[17] Sajad Movahedi, Vera Milovanović, Shlomo Libo Feigin, Alexander Theus, Thomas Hofmann, Valentina Boeva, T. Konstantin Rusch, and Antonio Orvieto. Fixed-point reasoners: Stable and adaptive deep looped transformers. *arXiv preprint arXiv:2606.18206*, 2026.

[18] Michael E. Sander, Pierre Ablin, Mathieu Blondel, and Gabriel Peyré. Momentum residual neural networks. In *International Conference on Machine Learning*, 2021. arXiv:2102.07870.

[19] Guan Wang, Jin Li, Yuhao Sun, Xing Chen, Changling Liu, Yue Wu, Meng Lu, Sen Song, and Yasin Abbasi Yadkori. Hierarchical reasoning model. *arXiv preprint arXiv:2506.21734*, 2025.