
**LINUX LABORATORY**

# Question 4

## Q.4. Configure file permissions and ownership.


### Step 1 – Create permission.txt and verify the file

We created permission.txt using touch and used ls to verify that the file was created successfully.

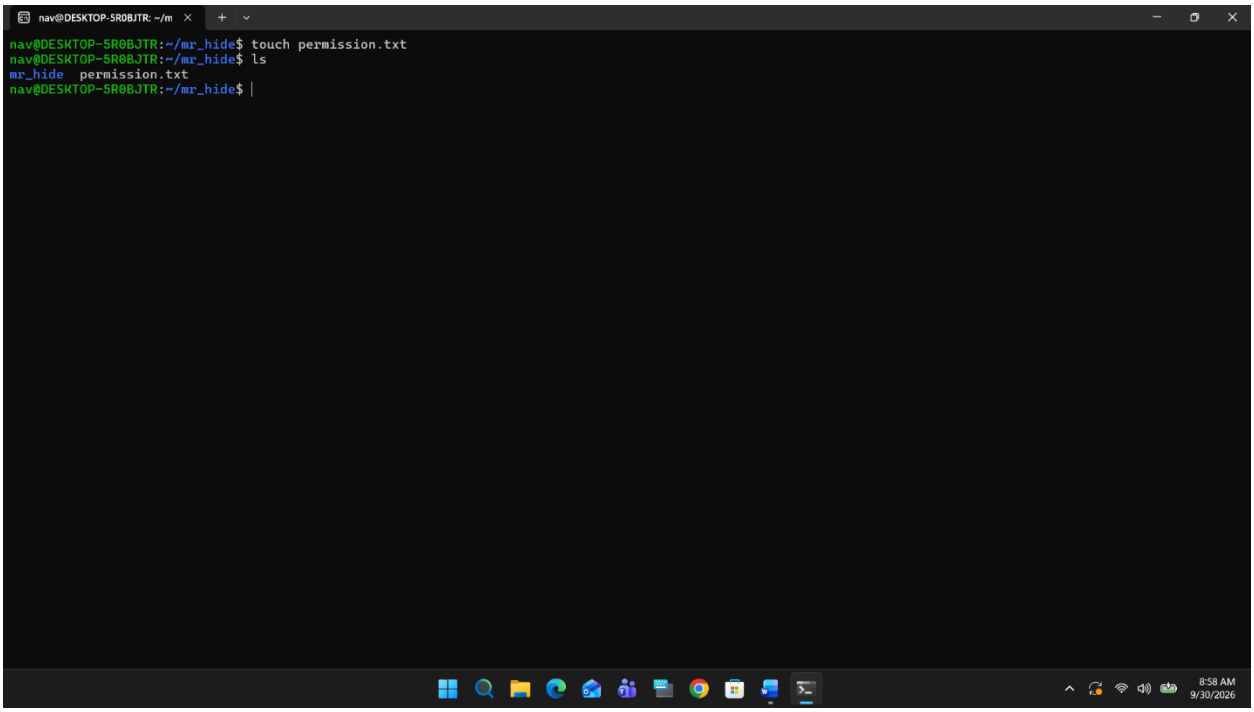


**Step 2 – View the initial file permissions**

We used ls -l to display the initial permissions, owner, group, size and other file details for permission.txt.

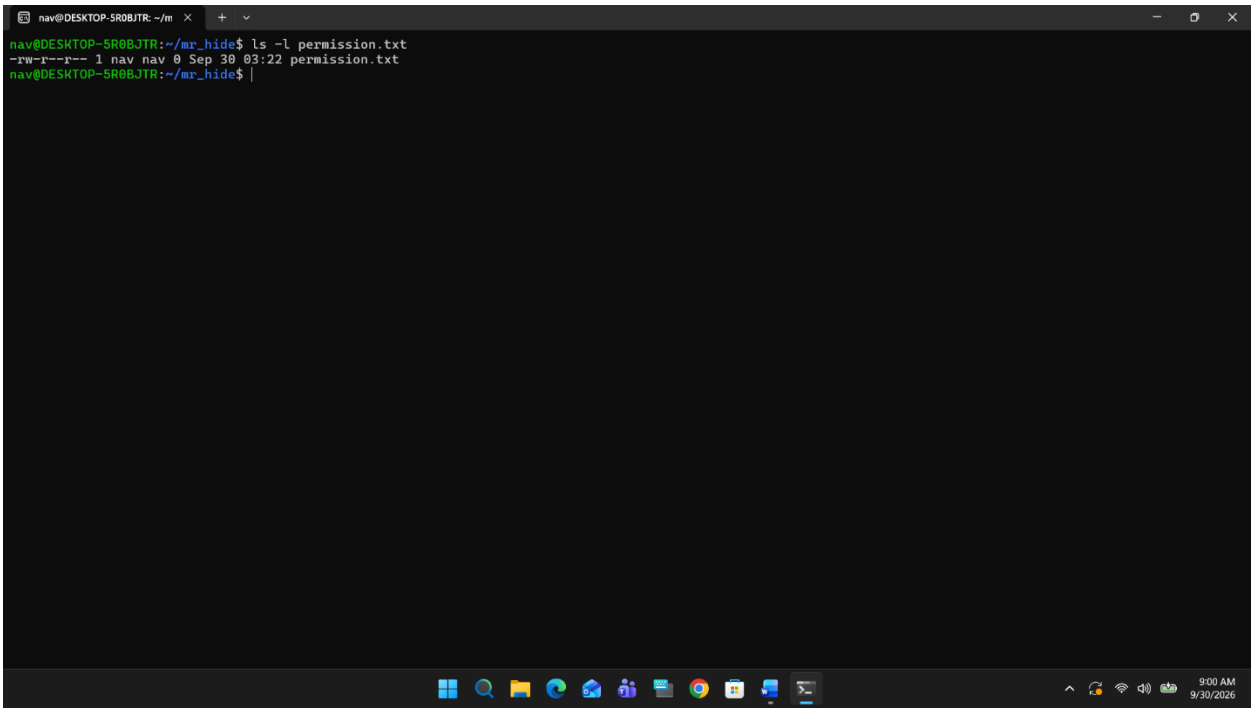


**Step 3 – Change permissions to 755**

We changed the permissions of permission.txt to 755 using chmod and then verified the new permissions with ls -l.

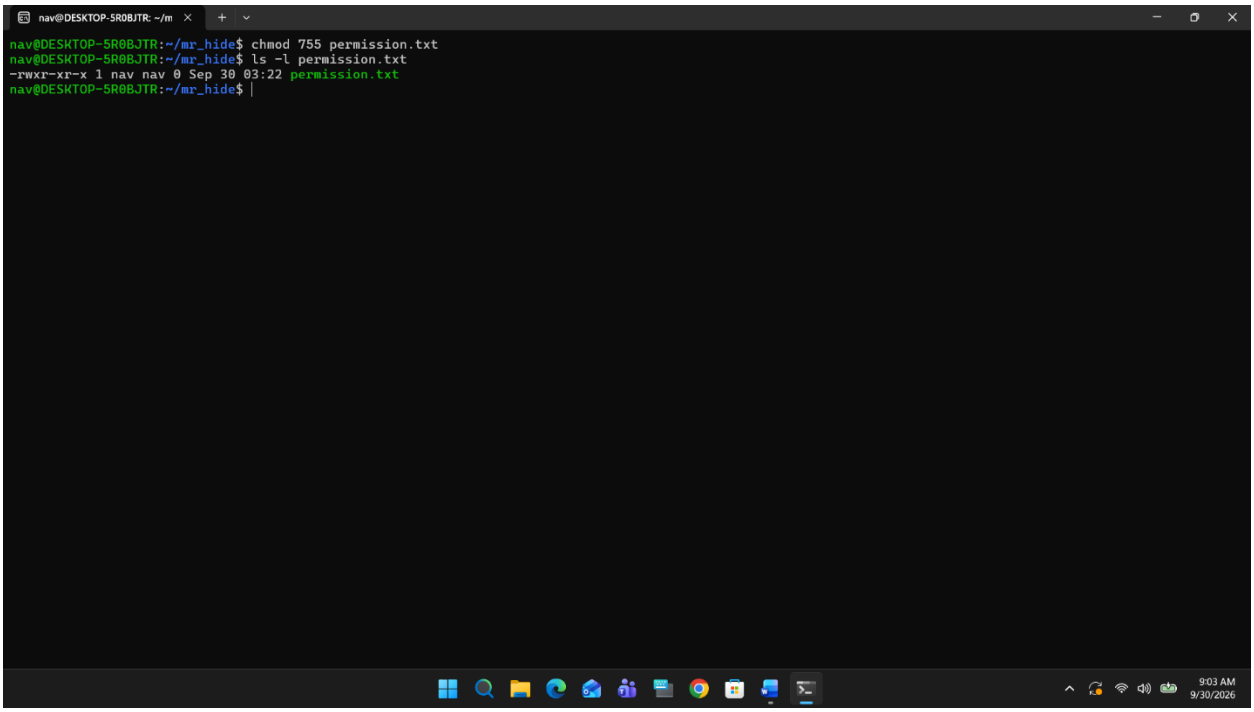


**Step 4 – Change permissions to 644**

We changed the permissions back to 644 using chmod and verified the result with ls -l.

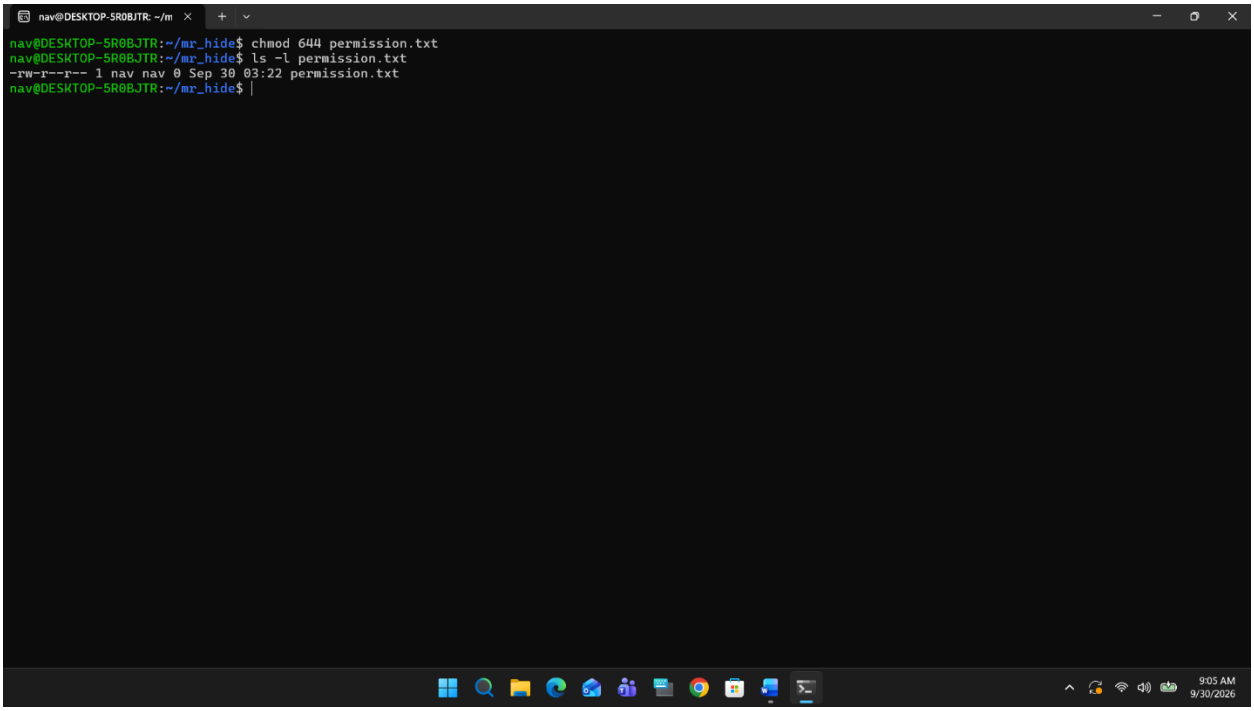


**Step 5 – View detailed file information**

We used stat to view detailed information about permission.txt, including its permissions, owner, group, size and timestamps.

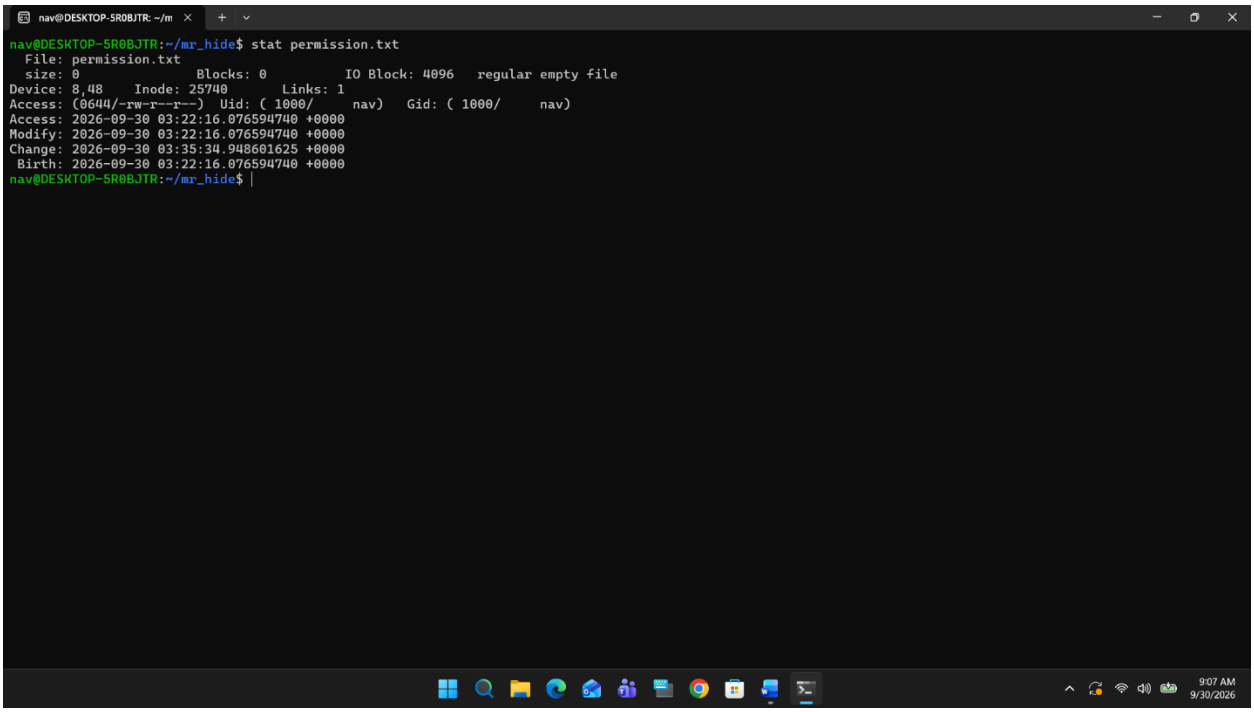

**Step 6 – Change file ownership**

We used chown to set the owner and group of permission.txt to ironman and then used ls -l to verify the ownership.

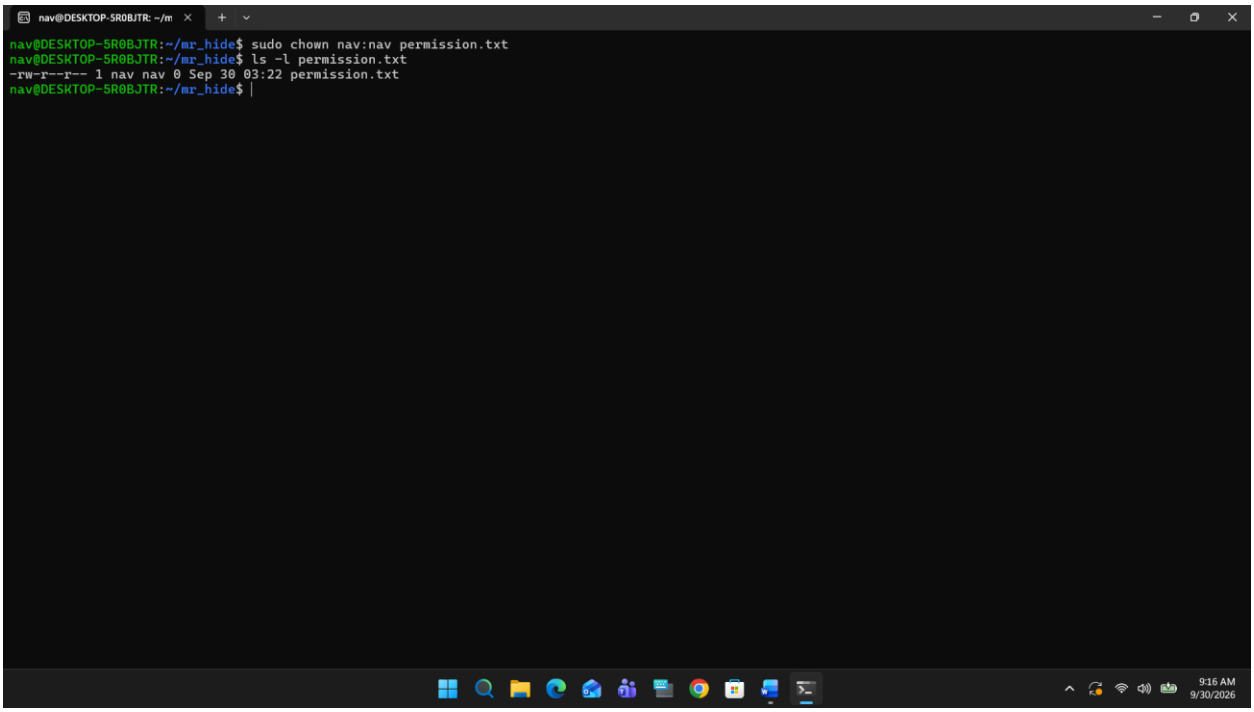

**Step 7 – Verify the file information again**

We ran stat again to verify the detailed metadata of permission.txt after the ownership operation.

