
Question 6

Create and manage users/groups: useradd, adduser, passwd, usermod, userdel, groupadd, groupmod, groupdel, groups, id, whoami.

Step 1 – Create and verify the group

Commands used: sudo groupadd devteam, getent group devteam.


The devteam group was already present from the initial execution. The groupadd command reported that it already existed, and getent confirmed the group.

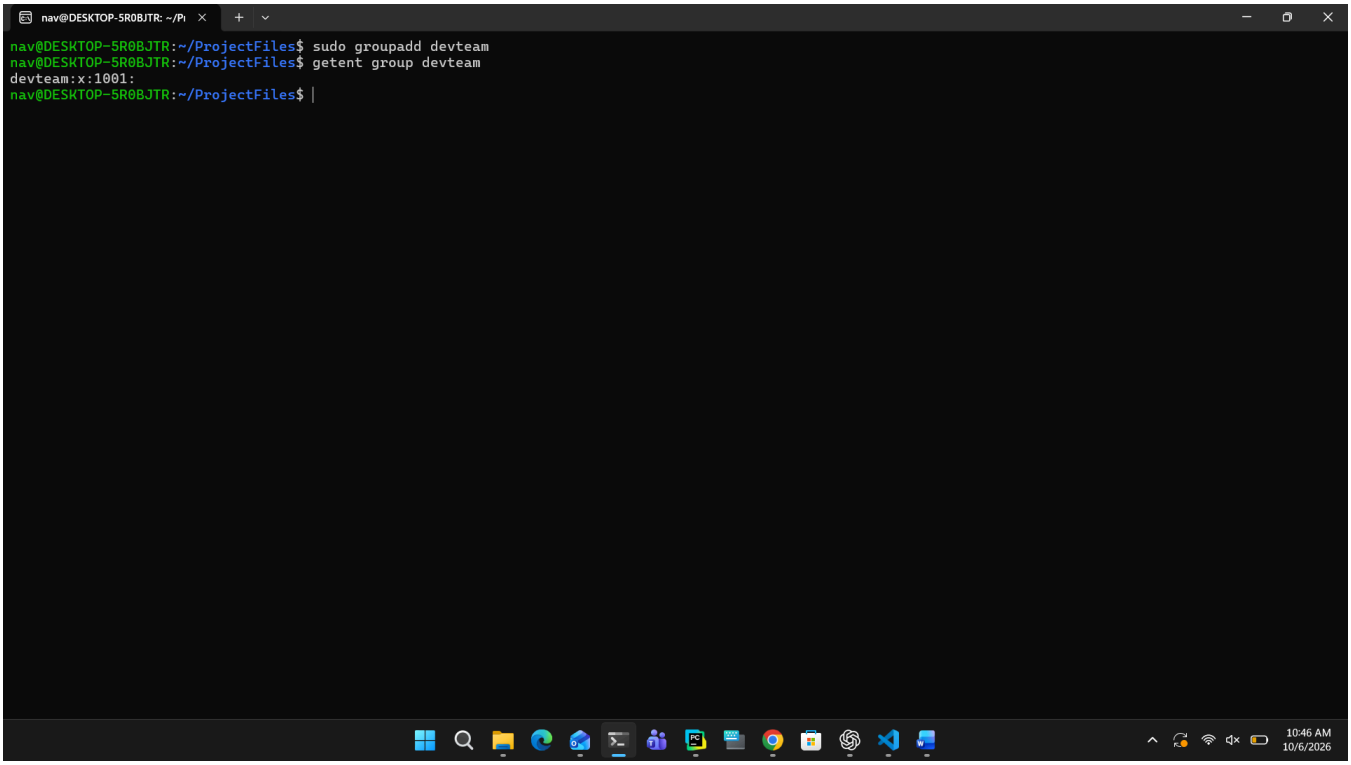

Step 2 – Create the user

Commands used: sudo useradd -m -g devteam testuser1, id testuser1.


We created testuser1 with a home directory and assigned devteam as the primary group. id confirmed the user's UID, GID and group membership.

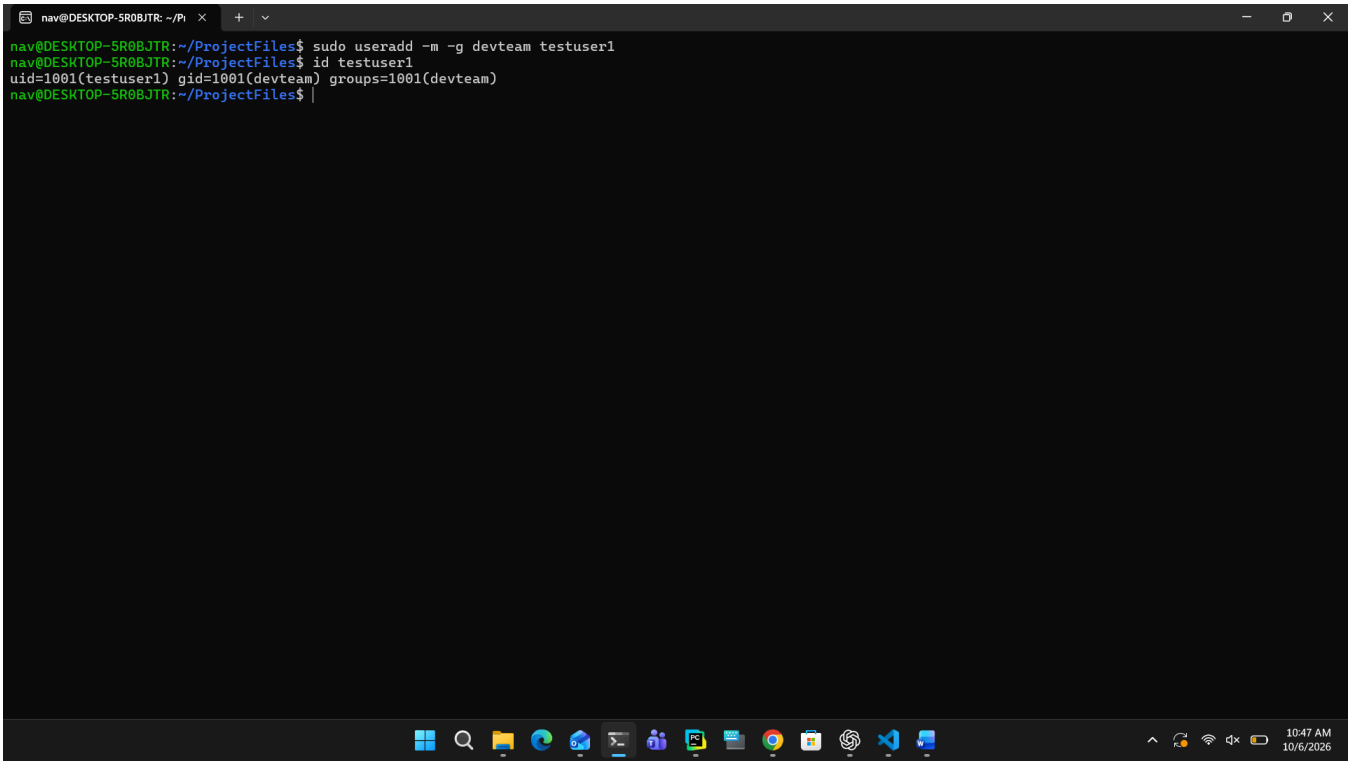

Step 3 – Set the user password

Commands used: sudo passwd testuser1.


We assigned a password to testuser1. The password command completed successfully and displayed the password-updated confirmation.

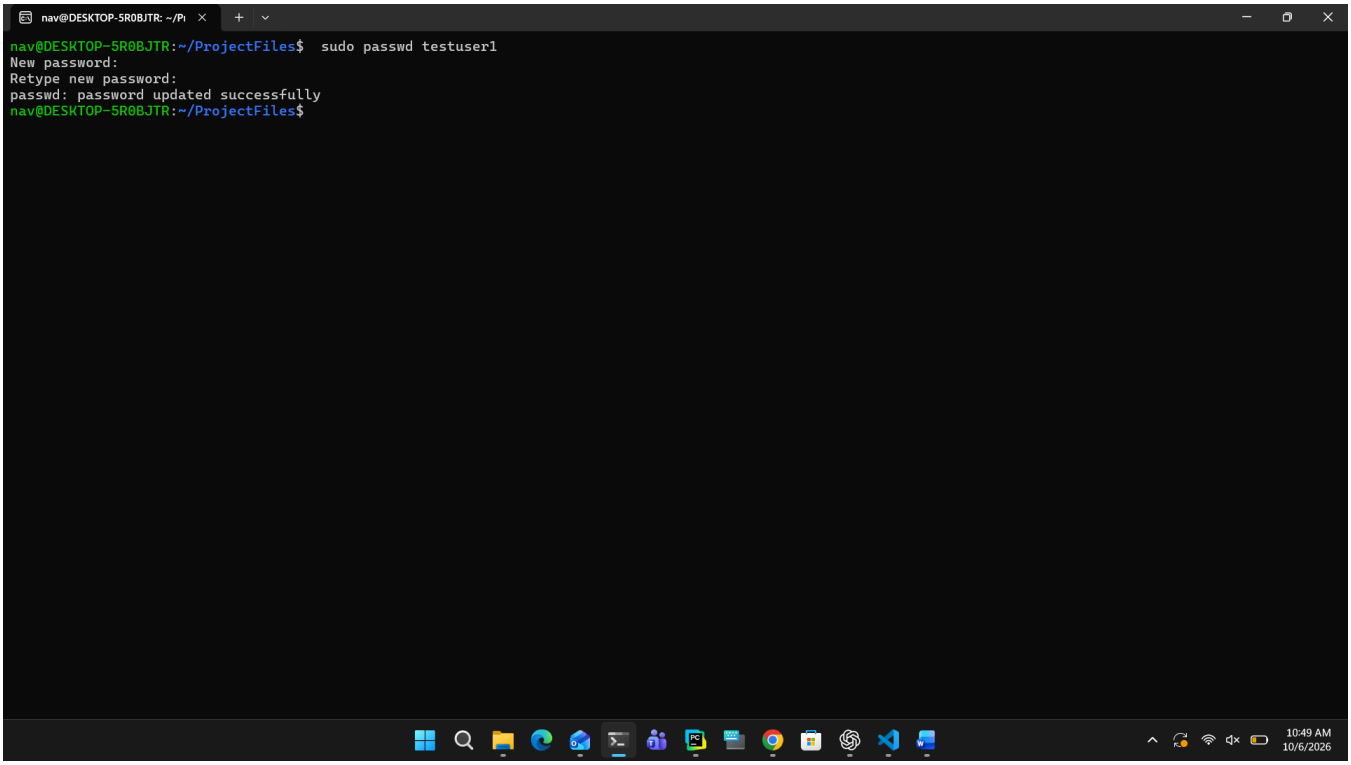

Step 4 – Modify the user's group membership

Commands used: sudo usermod -aG sudo testuser1, id testuser1.


We added testuser1 to the sudo group as a secondary group. The id output confirmed membership in both devteam and sudo.

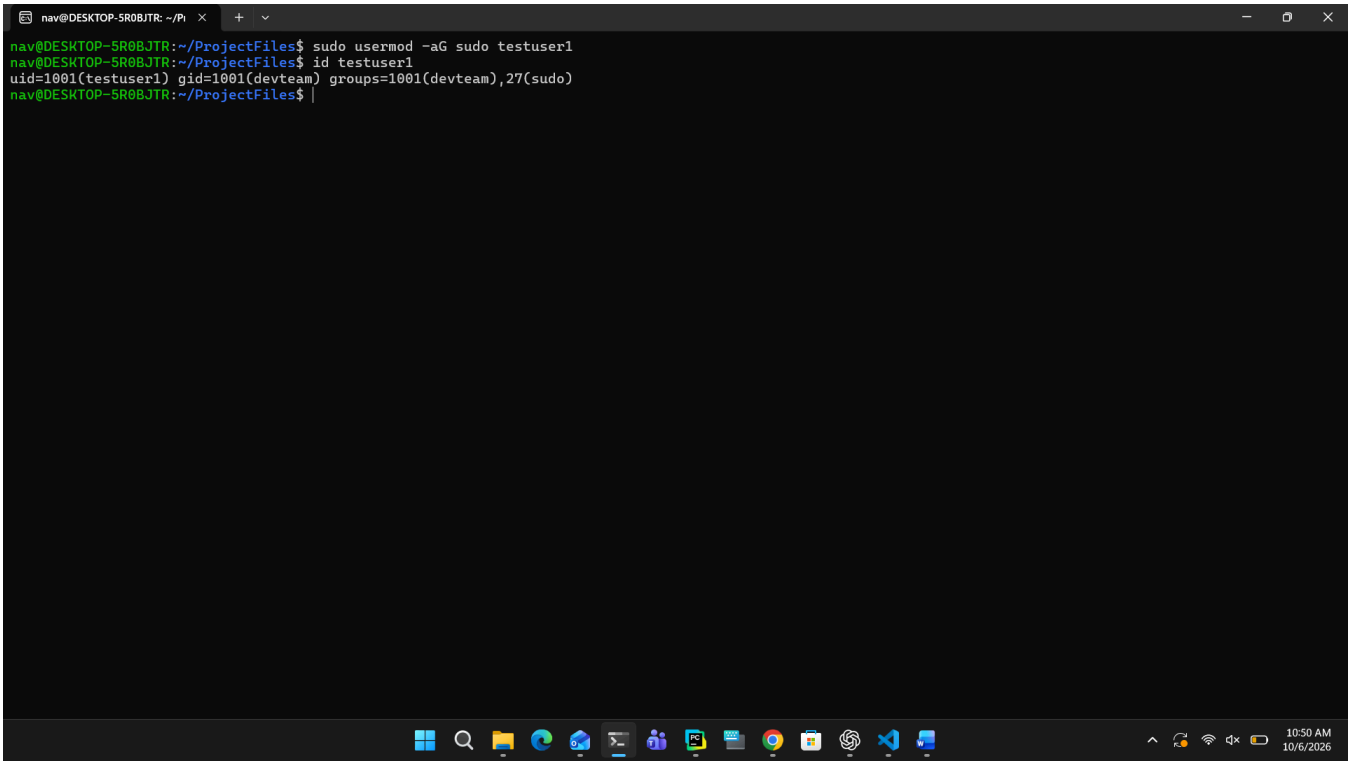

Step 5 – Display group memberships

Commands used: groups testuser1.


We used groups to display the groups associated with testuser1. The output confirmed membership in devteam and sudo.

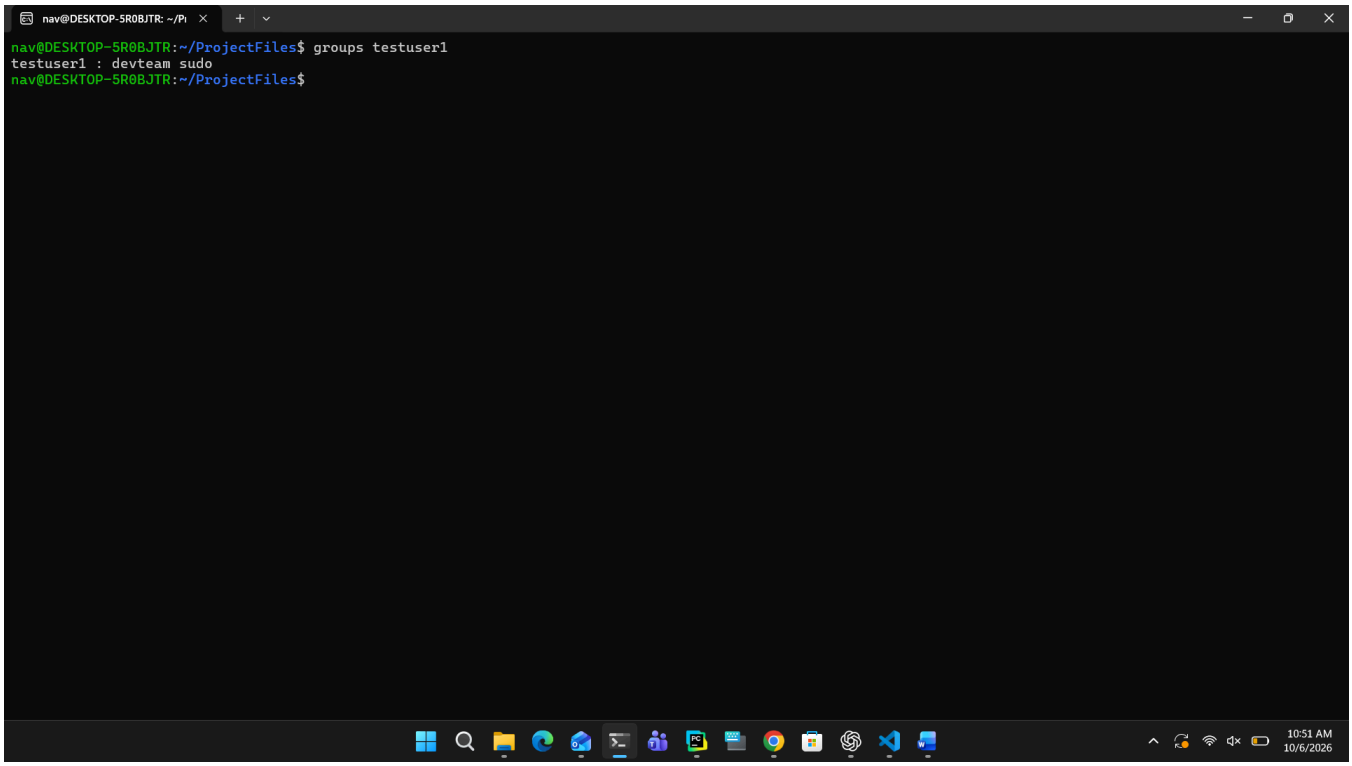

Step 6 – Display the current user

Commands used: whoami.


We used whoami to display the username of the current terminal session. The output shows the currently logged-in user.

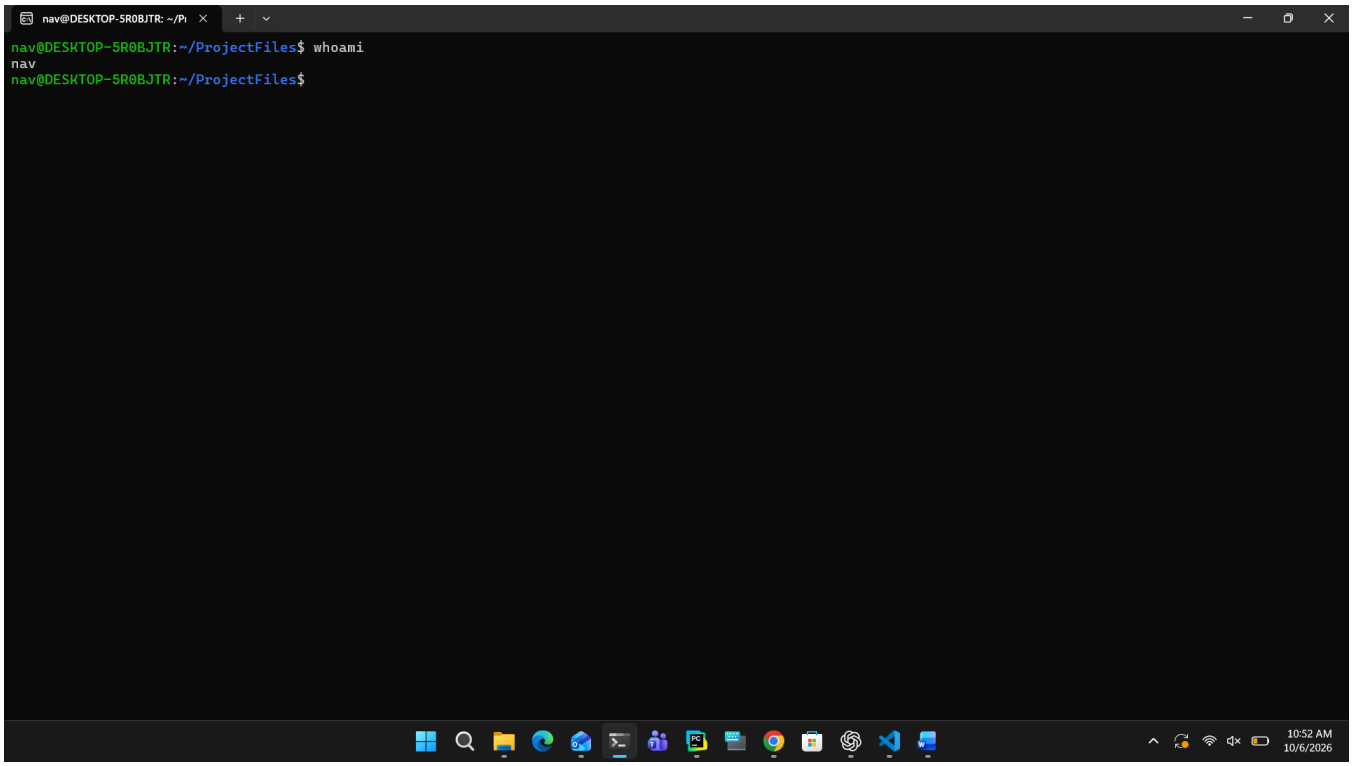

Step 7 – Delete the test user and verify

Commands used: sudo userdel -r testuser1, id testuser1.

We removed testuser1 and its home directory using userdel -r. The final id check confirmed that the user no longer exists.

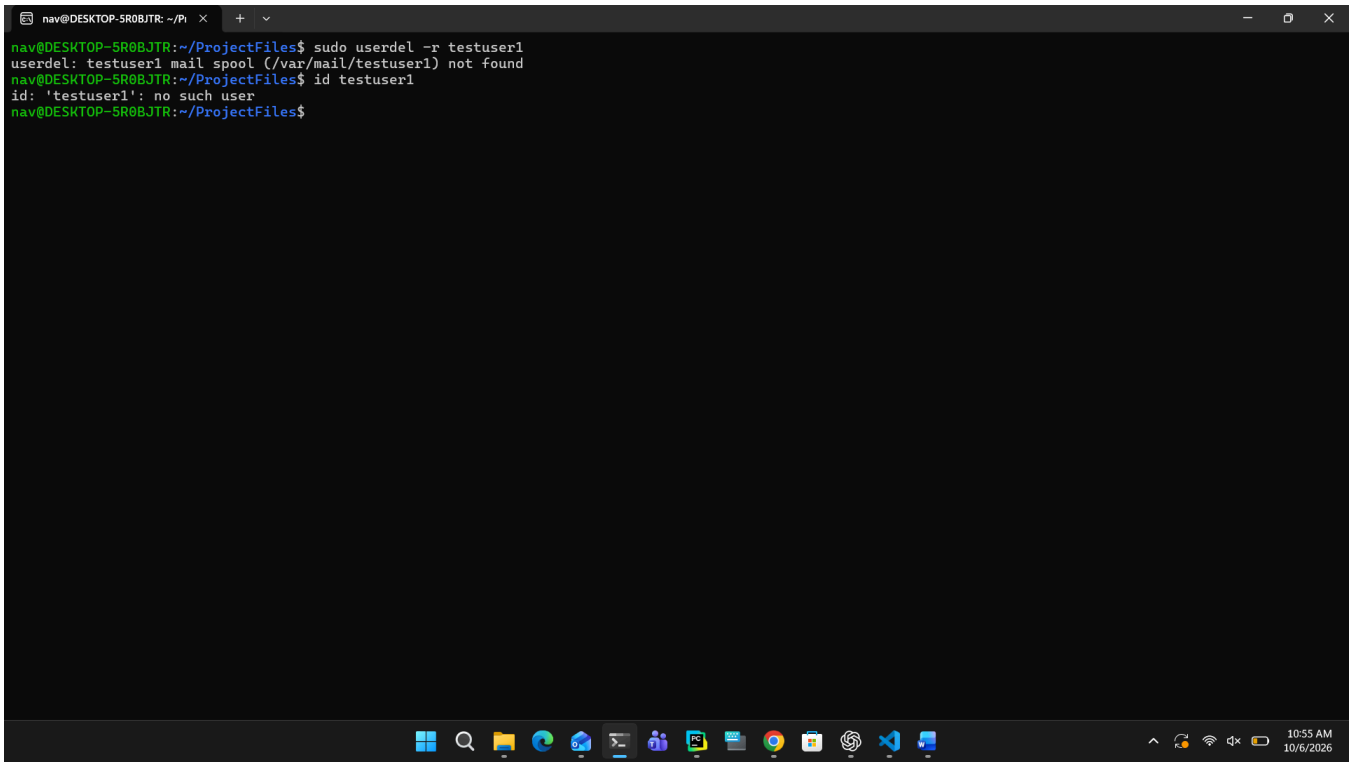
nav@DESKTOP-5R0BJTR: ~/Pr
nav@DESKTOP-5R0BJTR:~/ProjectFiles$ sudo userdel -r testuser1
userdel: testuser1 mail spool (/var/mail/testuser1) not found
nav@DESKTOP-5R0BJTR:~/ProjectFiles$ id testuser1
id: 'testuser1': no such user
nav@DESKTOP-5R0BJTR:~/ProjectFiles$
10:55 AM
10/6/2026