

hrbrmstr / hrbrthemes

<> Code

! Issues 19

🔗 Pull requests 1

🎮 Actions

📁 Projects 1

🔖

🔗 master ▾

Go to file

Add file ▾

Code ▾

	hrbrmstr Merge pull request ...	... ✓ on Jul 26	🕒 145
📁 .github	Create FUNDING.yml		13 months ago
📁 R	update README		2 months ago
📁 README_f...	README		14 months ago
📁 docs	updated pkgdown		2 years ago
📁 inst	Goldman Sans		2 months ago
📁 man	update README		2 months ago
📁 tests	cran try 2		2 years ago
📁 vignettes	Fix vignette typo		3 years ago
📄 .Rbuildign...	vignette		6 months ago
📄 .gitignore	doc tweaks		6 months ago
📄 .travis.yml	travis		6 months ago
📄 CONDUC...	initial commit (that also, mi...		4 years ago
📄 CRAN-RE...	pre-merge		2 months ago
📄 DESCRIPT...	update README		2 months ago
📄 LICENSE	some basic tests, LICENSE...		4 years ago
📄 NAMESPA...	Goldman Sans		2 months ago
📄 NEWS.md	x/y scales update to confo...		6 months ago

About

 Opinionated, typographic-centric ggplot2 themes and theme components

 [cinc.rud.is/web...](#)

- #r #rstats
- #ggplot2
- #datavisualization
- #visualization
- #data-visualization
- #ggplot2-themes
- #ggplot-extension
- #ggplot2-scales

 Readme

 View license

Releases 5

 Free U... Latest
on Mar 5

+ 4 releases

	README....	Goldman Sans	2 months ago
	README....	Fixed missing end quote m...	last month
	cran-com...	pre-merge	2 months ago
	hrbrthem...	Fixes #20 (and actually get...	3 years ago

README.md

repo status

Active

Keybase

Verified

Signed Commits

100%

build

passing



codecov

31%

CRAN

OK

CRAN

0.8.0

R>=

3.4.0

License

MIT

downloads

270K

DOI

10.5281/zenodo.2545422

hrbrthemes

Additional Themes and Theme Components for 'ggplot2'

This is a very focused package that provides typography-centric themes and theme components for ggplot2. It's a an extract/riff of `hrbrmisc` created by request.

The core theme: `theme_ipsum` ("ipsum" is Latin for "precise") uses Arial Narrow which should be installed on practically any modern system, so it's "free"-ish. This font is condensed, has solid default kerning pairs and geometric numbers. That's what I consider the "font trifecta" must-have for charts. An additional quality for fonts for charts is that they have a diversity of weights. Arial Narrow (the one on most systems, anyway) does not have said diversity but this quality is not (IMO) a "must have".

Sponsor this project


 [patreon.com/...](#)

Learn more about [GitHub Sponsors](#)

Packages

No packages published

Contributors 12



Languages

-  R 95.8%
-  HTML 2.4%
-  CSS 1.8%

The following functions are implemented/objects are exported:

Themes:

- `theme_ipsum` : Arial Narrow
- `theme_ipsum_gs` : Goldman Sans Condensed
- `theme_ipsum_es` : Econ Sans Condensed
- `theme_ipsum_rc` : Roboto Condensed
- `theme_ipsum_ps` : IBM Plex Sans font
- `theme_ipsum_pub` : Public Sans
- `theme_ipsum_tw` : Titilium Web
- `theme_modern_rc` : Roboto Condensed dark theme
- `theme_ft_rc` : Dark theme based on FT's dark theme (Roboto Condensed)

Scales (that align with various themes):

- `scale_color_ipsum` : Discrete color & fill scales based on the ipsum palette
- `scale_colour_ipsum` : Discrete color & fill scales based on the ipsum palette
- `scale_fill_ipsum` : Discrete color & fill scales based on the ipsum palette
- `scale_color_ft` : Discrete color & fill scales based on the FT palette
- `scale_colour_ft` : Discrete color & fill scales based on the FT palette
- `scale_fill_ft` : Discrete color & fill scales based on the FT palette
- `scale_x_comma` : X & Y scales with opinionated presets for percent & comma label formats
- `scale_x_percent` : X & Y scales with opinionated presets for percent & comma label formats

- `scale_y_comma` : X & Y scales with opinionated presets for percent & comma label formats
- `scale_y_percent` : X & Y scales with opinionated presets for percent & comma label formats

Palettes/Named Colors:

- `ipsum_pal` : A muted, qualitative color palette
- `ft_cols` : FT color palette
- `ft_pal` : A bright qualitative color palette
- `ft_text_col` : FT color palette

Fonts:

- `font_an` : Arial Narrow font name R variable aliases
- `font_es` : Econ Sans font name R variable aliases
- `font_es_bold` : Econ Sans font name R variable aliases
- `font_es_light` : Econ Sans font name R variable aliases
- `font_rc` : Roboto Condensed font name R variable aliases
- `font_rc_light` : Roboto Condensed font name R variable aliases
- `font_pub` : Public Sans font name R variable aliases
- `font_pub_bold` : Public Sans font name R variable aliases
- `font_pub_light` : Public Sans font name R variable aliases
- `font_pub_thin` : Public Sans font name R variable aliases
- `font_ps` : PlexSans font name R variable aliases
- `font_ps_light` : PlexSans font name R variable

aliases

- `font_tw` : Titillium Web font name R variable aliases
- `font_tw_bold` : Titillium Web font name R variable aliases
- `font_tw_light` : Titillium Web font name R variable aliases

R Markdown:

- `ipsum` : ipsum R markdown template
- `ipsum_pdf` : ipsum R markdown template for PDF output

Utilities:

- `flush_ticks` : Makes axis text labels flush on the ends
- `ft_geom_defaults` : Change geom defaults from black to custom lights for the FT theme
- `gg_check` : Spell check ggplot2 plot labels
- `import_econ_sans` : Import Econ Sans Condensed font for use in charts
- `import_plex_sans` : Import IBM Plex Sans font for use in charts
- `import_roboto_condensed` : Import Roboto Condensed font for use in charts
- `import_titillium_web` : Import Titillium Web font for use in charts
- `modern_geom_defaults` : Change geom defaults from black to white for the modern theme
- `update_geom_font_defaults` : Update matching font defaults for text geoms

Installation

```
install.packages("hrbrthemes") # NOTE: CRAN ver
# or
install.packages("hrbrthemes", repos = c("https
# or
remotes::install_git("https://git.rud.is/hrbrms
# or
remotes::install_git("https://git.sr.ht/~hrbrms
# or
remotes::install_gitlab("hrbrmstr/hrbrthemes")
# or
remotes::install_bitbucket("hrbrmstr/hrbrthemes
# or
remotes::install_github("hrbrmstr/hrbrthemes")
```

NOTE: To use the 'remotes' install options you will need to have the `{remotes}` package installed.

Usage

```
library(hrbrthemes)
library(gcookbook)
library(tidyverse)


# current verison
packageVersion("hrbrthemes")
## [1] '0.8.6'
```

Base theme (Arial Narrow)

```
ggplot(mtcars, aes(mpg, wt)) +
  geom_point() +
  labs(x="Fuel efficiency (mpg)", y="Weight (tc
  title="Seminal ggplot2 scatterplot exampl
  subtitle="A plot that is only useful for
  caption="Brought to you by the letter 'g
  theme_ipsum()
```

Seminal ggplot2 scatterplot example

A plot that is only useful for demonstration purposes

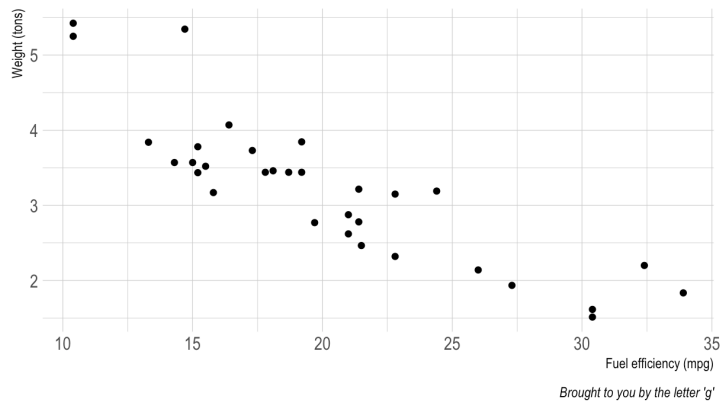


Roboto Condensed

```
ggplot(mtcars, aes(mpg, wt)) +  
  geom_point() +  
  labs(x="Fuel efficiency (mpg)", y="Weight (tons)",  
        title="Seminal ggplot2 scatterplot example",  
        subtitle="A plot that is only useful for demonstration purposes",  
        caption="Brought to you by the letter 'g'") +  
  theme_ipsum_rc()
```


Seminal ggplot2 scatterplot example

A plot that is only useful for demonstration purposes

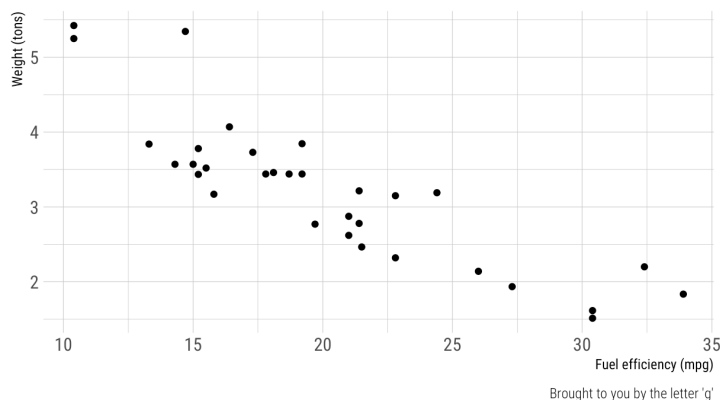

New FT Theme!

```
ggplot(mtcars, aes(mpg, wt)) +
  geom_point(color = ft_cols$yellow) +
  labs(x="Fuel efficiency (mpg)", y="Weight (tons)",
        title="Seminal ggplot2 scatterplot example",
        subtitle="A plot that is only useful for demonstration purposes",
        caption="Brought to you by the letter 'g'") +
  theme_ft_rc()
```

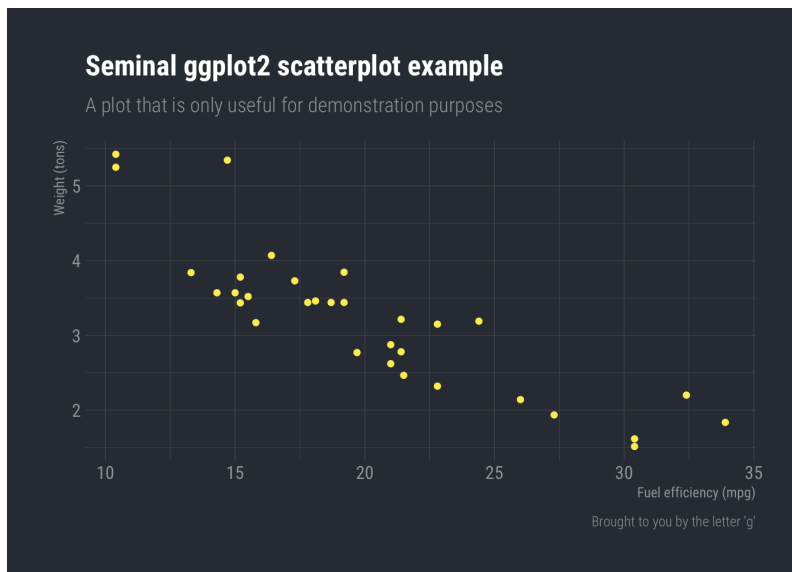

IBM Plex Sans


```
ggplot(mpg, aes(displ, hwy)) +
  geom_jitter(aes(color=class, fill=class), size=10) +
  scale_x_continuous(expand=c(0,0), limits=c(1, 20)) +
  scale_y_continuous(expand=c(0,0), limits=c(10, 40)) +
  scale_color_ipsum() +
  scale_fill_ipsum() +
  facet_wrap(~class, scales="free") +
  labs(
    title="IBM Plex Sans Test",
    subtitle="This is a subtitle to see the how",
    caption="Source: hrbrthemes & IBM"
  ) +
  theme_ipsum_ps(grid="XY", axis="xy") +
  theme(legend.position="none") -> gg
```



```
flush_ticks(gg)
## theme(axis.text.x=element_text(hjust=c(0, re
## theme(axis.text.y=element_text(vjust=c(0, re
```

IBM Plex Sans Test

This is a subtitle to see the how it looks in IBM Plex Sans

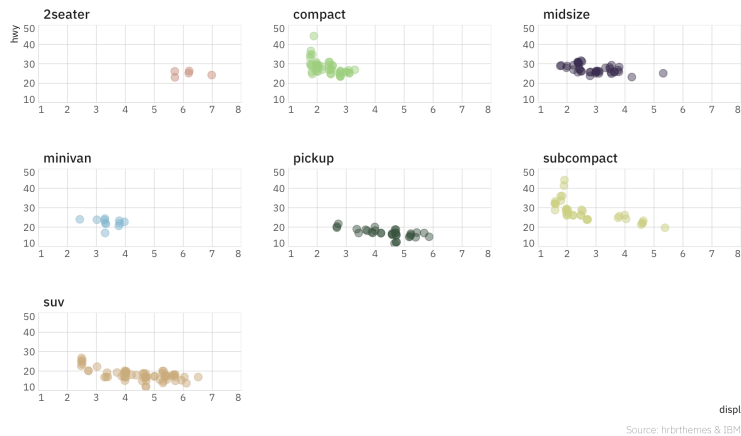


Titillium Web

```
ggplot(mpg, aes(displ, hwy)) +
  geom_jitter(aes(color=class, fill=class), siz
  scale_x_continuous(expand=c(0,0), limits=c(1,
  scale_y_continuous(expand=c(0,0), limits=c(10
  scale_color_ipsum() +
  scale_fill_ipsum() +
  facet_wrap(~class, scales="free") +
  labs(
    title="Titillium Web",
    subtitle="This is a subtitle to see the how
    caption="Source: hrbrthemes & Google"
  ) +
  theme_ipsum_tw(grid="XY", axis="xy") +
  theme(legend.position="none") -> gg
```

```
flush_ticks(gg)
## theme(axis.text.x=element_text(hjust=c(0, re
## theme(axis.text.y=element_text(vjust=c(0, re
```

Titillium Web


This is a subtitle to see the how it looks in Titillium Web

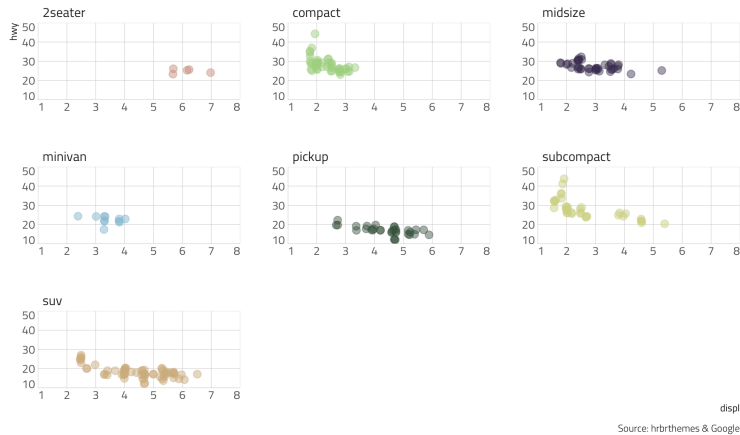**Scales (Color/Fill)**

```
ggplot(mtcars, aes(mpg, wt)) +
  geom_point(aes(color=factor(carb))) +
  labs(x="Fuel efficiency (mpg)", y="Weight (tons)",
       title="Seminal ggplot2 scatterplot example",
       subtitle="A plot that is only useful for demonstration purposes",
       caption="Brought to you by the letter 'g'") +
  scale_color_ipsum() +
  theme_ipsum_rc()
```

Seminal ggplot2 scatterplot example

A plot that is only useful for demonstration purposes

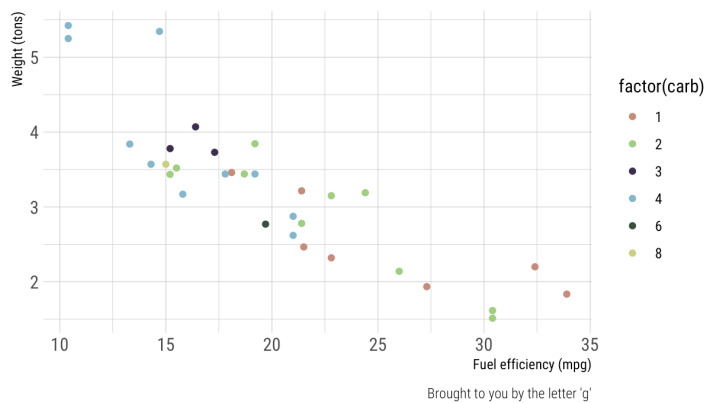


Scales (Axis)


```
count(mpg, class) %>%
  mutate(pct=n/sum(n)) %>%
  ggplot(aes(class, pct)) +
  geom_col() +
  scale_y_percent() +
  labs(x="Fuel efficiency (mpg)", y="Weight (tc
        title="Seminal ggplot2 column chart exam
        subtitle="A plot that is only useful for
        caption="Brought to you by the letter 'g'
  theme_ipsum(grid="Y")
```

Seminal ggplot2 column chart example with percents

A plot that is only useful for demonstration purposes

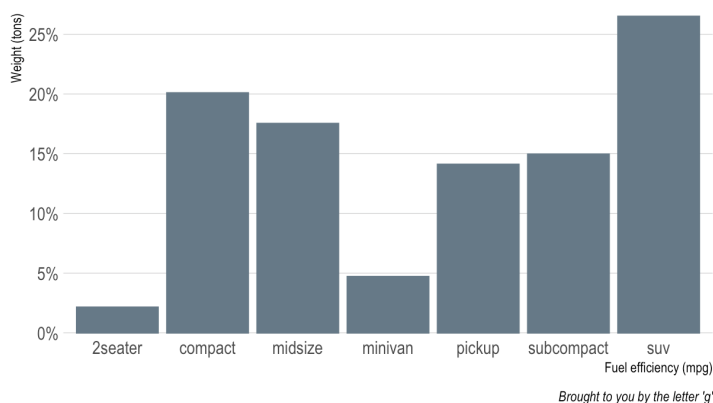

```
ggplot(uspopage, aes(x=Year, y=Thousands, fill=
  geom_area() +
  scale_fill_ipsum() +
  scale_x_continuous(expand=c(0,0)) +
  scale_y_comma() +
  labs(title="Age distribution of population in
        subtitle="Example data from the R Graphi
        caption="Source: R Graphics Cookbook") +
  theme_ipsum_rc(grid="XY") +
  theme(axis.text.x=element_text(hjust=c(0, 0.5
  theme(legend.position="bottom")
```

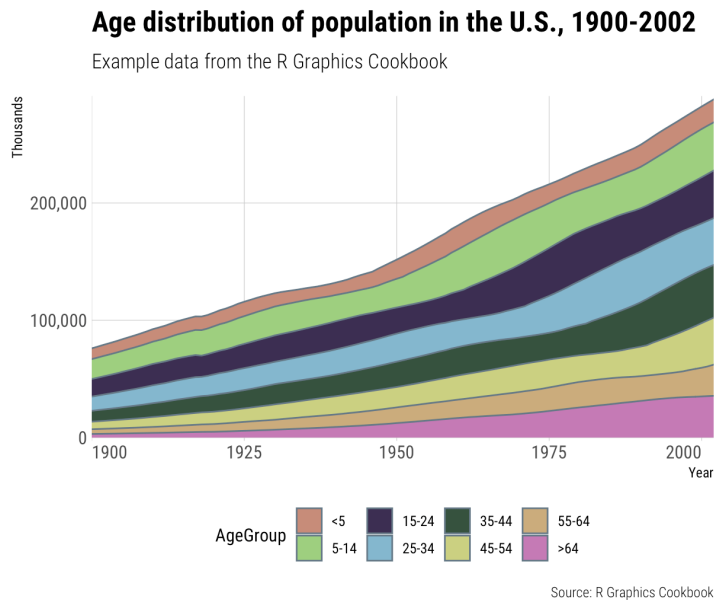


```
update_geom_font_defaults(font_rc_light)
```

```
count(mpg, class) %>%
  mutate(n=n*2000) %>%
  arrange(n) %>%
  mutate(class=factor(class, levels=class)) %>%
  ggplot(aes(class, n)) +
  geom_col() +
  geom_text(aes(label=scales::comma(n)), hjust=
scale_y_comma(limits=c(0,150000)) +
coord_flip() +
labs(x="Fuel efficiency (mpg)", y="Weight (tc
  title="Seminal ggplot2 column chart exam
  subtitle="A plot that is only useful for
  caption="Brought to you by the letter 'g
  theme_ipsum_rc(grid="X")
```

Seminal ggplot2 column chart example with commas

A plot that is only useful for demonstration purposes, esp since you'd never really want direct labels and axis labels

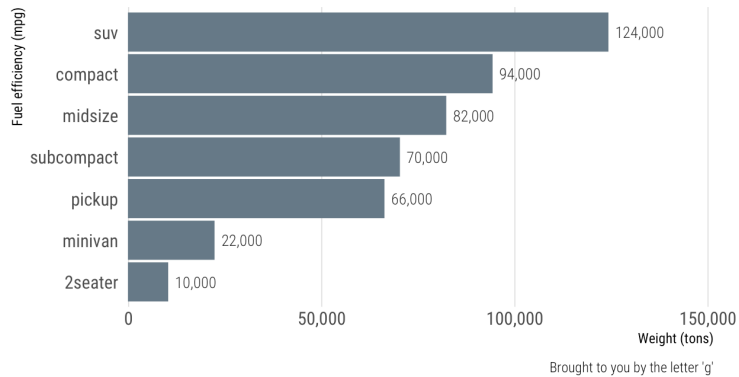


Spellcheck ggplot2 labels

```
df <- data.frame(x=c(20, 25, 30), y=c(4, 4, 4),
```

```
ggplot(mtcars, aes(mpg, wt)) +
  geom_point() +
  labs(x="This is some txt", y="This is more te
    title="Thisy is a tittle",
    subtitle="This is a subtitle",
    caption="This is a captien") +
  theme_ipsum_rc(grid="XY") -> gg
```

```
gg_check(gg)
## Possible misspelled words in [title]: (Thisy
## Possible misspelled words in [subtitle]: (su
## Possible misspelled words in [caption]: (cap
```

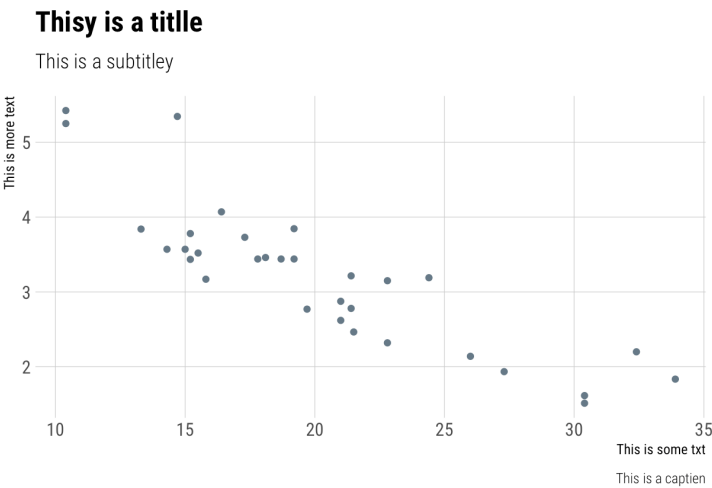

hrbrthemes Metrics

Lang	# Files	(%)	LoC	(%)	Blank lines
R	24	0.89	1724	0.80	327
HTML	1	0.04	297	0.14	32
Rmd	2	0.07	129	0.06	98

Code of Conduct

Please note that this project is released with a Contributor Code of Conduct. By participating in this project you agree to abide by its terms.