
CS 442: Mobile Applications Development Assignment 4 – Civil Advocacy App (400 pts)

Uses: Location Services, Internet, Google APIs, Images, Picasso Library, Implicit Intents, TextView Links

App Highlights:

- This app will acquire and display an interactive list of political officials that represent the current location (or a specified location) at each level of government.
- Android Fused Location Provider services will be used to determine the user's current location.
- The <u>Google Civic Information API</u> will be used to acquire the government official data (via REST service and JSON results).
- You will need to use a different layout for landscape orientation for **2** of the activities in this application. Those details are specified later in the document.
- Clicking on an official's list entry opens a detailed view of that individual government representative.
- Clicking on the photo of an official will display a Photo Activity, showing a larger version of the photo.
- An "About" activity will show application information (Author, Copyright data & Version)
- Your manifest should add permissions for ACCESS_FINE_LOCATION (and ACCESS_COARSE_LOCATION) and INTERNET
- The application is made up of 4 activities, shown below:

1) Main Activity

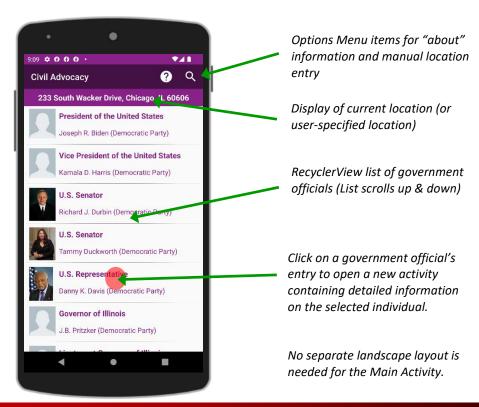


© Christopher Hield 1 of 14

ILLINOIS INSTITUTE OF TECHNOLOGY

CS 442 Mobile Applications Development (Android Section)

2) Official Activity

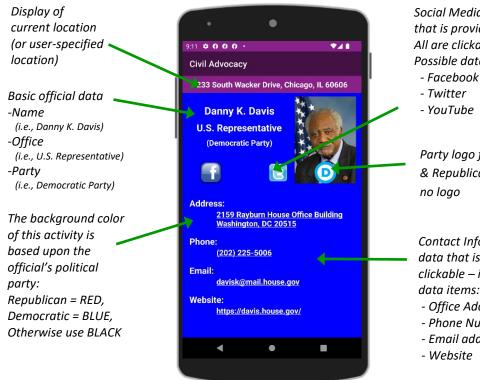

Social Media (only display data that is provided).

All are clickable – implicit intents. Possible data items:

Party logo for Democratic & Republican. Otherwise,

Contact Information (only display data that is provided). All are clickable – implicit intents. Possible data items:

- Office Address
- Phone Number
- Email address
- Photo of official (where available). NOTE, a default image should be displayed when a photo is not specified (see below, middle)
- Error image should be displayed if the provided image URL doesn't exist.
- Clicking on the photo opens Photo Detail Activity







ILLINOIS INSTITUTE OF TECHNOLOGY

CS 442 Mobile Applications Development (Android Section)

3) Photo Detail Activity

Display of current location (or user-specified location)

The background color of this activity is based upon the official's political party: Republican = RED,

Democratic = BLUE, Otherwise use BLACK

Party logo for Democratic & Republican. Otherwise,* no logo Civil Advocacy
233 South Wacker Drive, Chicago, IL 60606

Richard J. Durbin


U.S. Senator

Basic official data

- 1) Name (i.e., Richard J. Durbin)
- 2) Office (i.e., U.S. Senator)

"Full-sized" image of official (where available).


NOTE: This activity should <u>not</u> open if the representative's image is not specified.

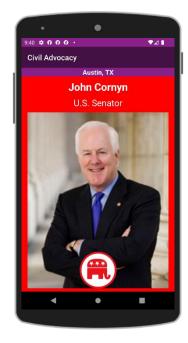





4) About Activity

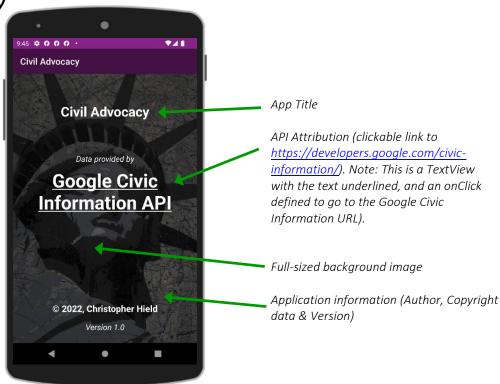

Required Landscape Layouts

Official Activity



Photo Activity



© Christopher Hield 4 of 14

Internet Data:

Downloading data for the government officials requires a download via the <u>Google Civic Information API</u>. The Civic Information API lets you enter an address, a city/state, or a zip code to look up the data properties for the elected officials in those districts.

NOTE: You MUST sign up with Google to get an API key. Your API KEY must be supplied with all Google Civic Information API queries. You can get a free API key by following the instructions at:

https://developers.google.com/civic-information/docs/using_api

Follow the instructions for "Acquiring and using an API key". The type of credential you need to create is "API Key" (not "OAuth client ID" and not "Service account key"). This is a very quick and easy process. The API key will be a long string of characters. The results of Civic Information API calls are returned in JSON format. The content of the returned results is described later in this section.

Query Format: https://www.googleapis.com/civicinfo/v2/representatives?key=Your-API-Key&address=address

For example, if your API Key was "ABC123xyz" and the address was "1600 N Wells St, Chicago, IL", your full URL would be:

https://www.googleapis.com/civicinfo/v2/representatives?key=ABC123xyz&address=1600 W North Ave, Chicago, IL

For example, if your API Key was "ABC123xyz" and the address was "Denver, CO", your full URL would be: https://www.googleapis.com/civicinfo/v2/representatives?key=ABC123xyz&address=Denver, CO

NOTE: Internet calls must be made using Android Volley

Google Civic Information API Results Example:

The JSON Object results you receive contains 4 sections, described in detail below. The *normalizedInput* section contains location details for the results provided. The *divisions* section lists political geographic divisions, like a country, state, county, or legislative district (we do not need this section for our application). The *offices* section lists the political positions governing the specified location. The *officials* section lists people presently serving in the offices specified in the *offices* section.

High-level view of JSON Object results:

© Christopher Hield 5 of 14

JSON Section Details (omitting those sections we will not use):

1) The "normalizedInput" JSONObject contains the following:

```
"normalizedInput": {

"line1": "1350 N Wells St",  
We want this for the location display in our activities

"city": "Chicago",  
We want this for the location display in our activities

"state": "IL",  
We want this for the location display in our activities

"zip": "60610"  
We want this for the location display in our activities

We want this for the location display in our activities

**Not the location display in our activities**

**We want this for the location display in our activities**

**Not the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**

**We want this for the location display in our activities**
```

2) The "offices" JSONArray contains the following:

```
"<mark>offices</mark>": [
                                                                  We want this, the "office" title
   "name": "President of the United States",
   "divisionId": "ocd-division/country:us",
   "levels": [
    "country"
                                         We want this, it is the index into the "officials" JSONArray (see
    'roles": [
    "headOfState",
                                         the next section) which contains the details of the person that
    "headOfGovernment"
                                         holds this office.
    <mark>'officialIndic<u>es":</u></mark>
                                         NOTE: There can be more than one index as time offices have
    0
                                         multiple representatives.
                                                              - We want this, the "office" title
    'name": "United States Senate",
   "divisionId": "ocd-division/country:us/state:il",
   "levels": [
    "country"
   "roles": [
    "legislatorUpperBody"
                                       We want this, it is the index into the "officials" JSONArray (see
                                       the next section) which contains the details of the person that
    officialIndices": [
                                       holds this office.
                                       NOTE: There can be more than one index as time offices have
                                       multiple representatives.
      The above sections repeat many times, once per government office
],
```

© Christopher Hield 6 of 14

ILLINOIS INSTITUTE OF TECHNOLOGY

CS 442 Mobile Applications Development (Android Section)

3) The "officials" JSONArray contains the following:

```
This is the first JSONObject is the first official (index 0). This index
"<mark>officials</mark>": [
                                                           corresponds to the "officialIndices" we found in the "offices"
    "<mark>name</mark>": "<mark>Joseph R. Biden</mark>",
                                                            This is the name of the person that holds this office.
    "<mark>address</mark>": [
                                                            This is the Address (check for possible line1, line2 & line3 -
      "line1": "The White House", <
                                                           concatenate them into one String), City, State & Zip Code of this
      "line2": "1600 Pennsylvania Avenue NW"
                                                           person's office
      "city": "Washington",
      "state": "DC",
                                                            This is the political party of this person: "Republican",
      "zip": "20500"
                                                            "Democratic/Democrat", or "Unknown". Note this section might
                                                            also be omitted - consider that as party "Unknown".
    "party": "Democratic Party",
                                                            This person's office phone number. There may be more than one
    "<mark>phones</mark>": [
                                                           - just use the first entry. Note this section might also be
     "(202) 456-1111" 4
   ],
    "<mark>urls</mark>": [
                                                           This person's office web site. There may be more than one – just
     "http://www.whitehouse.gov/"
                                                            use the first entry. Note this section might also be omitted.
   ],
    "emails": [
                                                           This person's office email address. There may be more than one
     "email@address.com" <</pre>
                                                           - use only the first entry. Note this section might also be
    "photoUrl": "https://www.whitehouse.gov/sites/whitehouse.gov/files/images/45/SomePhoto.jpg",
    "channels": [
                                                     This is the URL to the person's photo. Note this section might also be
                                                     omitted. In this case, use a "place holder" photo.
      "<mark>type</mark>": "<mark>Facebook</mark>",
      "id": "whitehouse"
                                                     These are the user ids for the related social media channels. There will
     },
                                                     be up to three entries. Possible entries are:
      "<mark>type</mark>": "<mark>Twitter</mark>",
                                                              Facebook
      "id": "whitehouse"
                                                              Twitter
     },
                                                              YouTube
      "<mark>type</mark>": "<mark>YouTube</mark>",
                                                     Some or all of these 3 social channel items might be omitted.
      "id": "whitehouse"
   ]
  },
  {
       ... The above section repeats many times, once per government official. Remember – the first
               official in the JSONArray is index 0. The second official in this JSONArray is index 1, the third
               second official in this JSONArray is index 2, and so on.
```

ILLINOIS INSTITUTE OF TECHNOLOGY

CS 442 Mobile Applications Development (Android Section)

Use a Photo Library for Photo Downloads

Downloading the photos of the officials in the Official Activity and the Photo Activity must use either the Glide or Picasso libraries (as was discussed in class).

Social Media Implicit Intent Examples

The following are examples of how you should code the social-media implicit intents (some of these have been seen already in class examples):

Twitter (define an onClick image to execute the Twiter implied intent as used in class examples)

Facebook (define an onClick image to execute the Facebook implied intent as used in class examples):

YouTube (example onClick method to be associated with the YouTube ImageView icon):

```
public void youTubeClicked(View v) {
    String name = <the official's youtube id from download>;
    Intent intent = null;
    try {
        intent = new Intent(Intent.ACTION VIEW);
        intent.setPackage("com.google.android.youtube");
        intent.setData(Uri.parse("https://www.youtube.com/" + name));
        startActivity(intent);
    } catch (ActivityNotFoundException e) {
        startActivity(new Intent(Intent.ACTION_VIEW,
                                Uri.parse("https://www.youtube.com/" + name)));
    }
```

Provided Icons

To insure a consistent and professional appearance of our application, the following image files are being provided to you for use in this assignment. You can simply download them, add them to your Android Studio project, and use them with your ImageViews.

Bad photo URL image

Separator Image (to add to the end of your list entry layout)

About Activity Background



Default Official Image





Twitter icon



YouTube icon



Launcher Icon



Democratic Party Logo




Republican Party Logo



Application Behavior Diagrams:



On startup, the application should use the device's current location zip code to populate the list with officials.

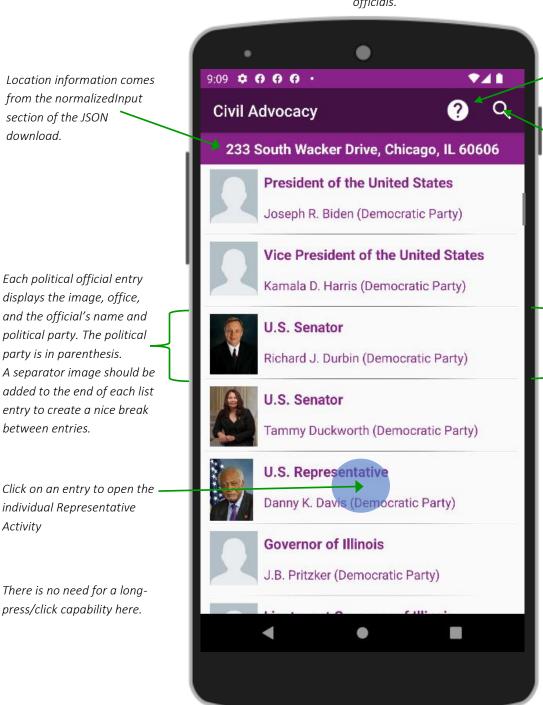


The "info" options menu item opens the "About" activity.

The "Location" options menu item opens an alert dialog that allows the user to enter a city/state or zip code manually.


RecyclerView list entries have their own layout

© Christopher Hield 9 of 14

2) Manually setting the location

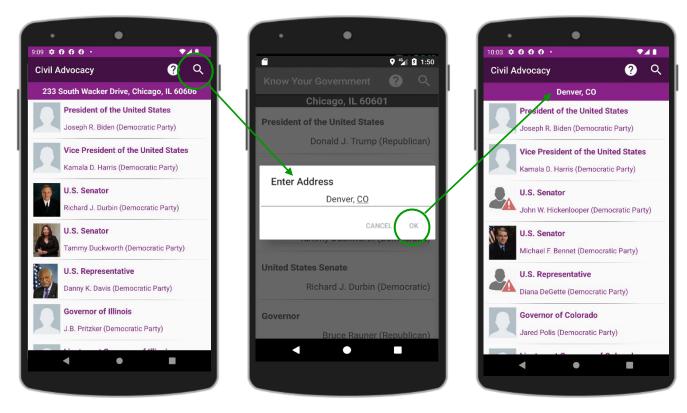


3) Opening the About Activity

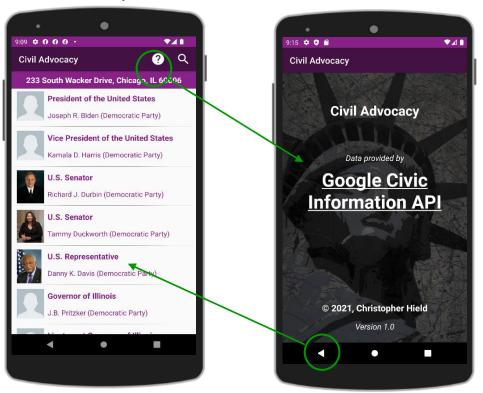


© Christopher Hield 10 of 14

4) Viewing an Individual Official

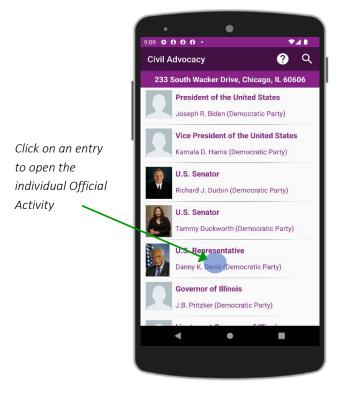

5) Interactive links on the official's activity:



Click on the phone number (where available) to open the Phone App with the phone number preloaded)

Click on the Email Address (where available) to open the email app with this address pre-loaded in the new message

> Click on the Website address (where available) to open the website in a browser.



Click on the photo (where available) to open the Photo Activity

Click the Party Logo when present to go to the political party's website:

Dem: https://democrats.org
Rep: https://www.gop.com

Social media links. Where supplied, the official's social media links will be displayed using the social media's icon. If available, the icon is present - if not it is absent (the icon should not be displayed).









Clicking on these will open the related app (if installed) or will default to opening the site in a web browser.

© Christopher Hield 11 of 14

6) Viewing an individual Official's Photo Activity:

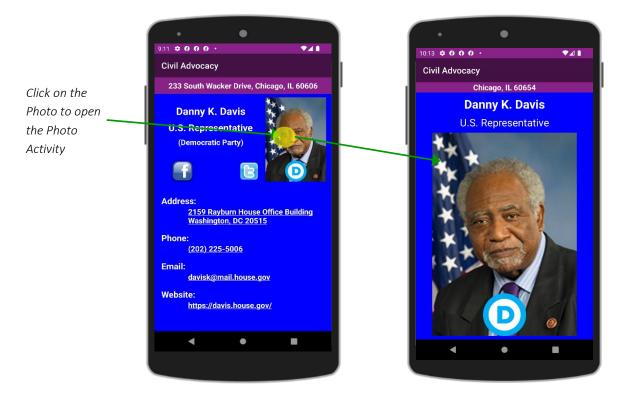

7) If no location or no internet connection:

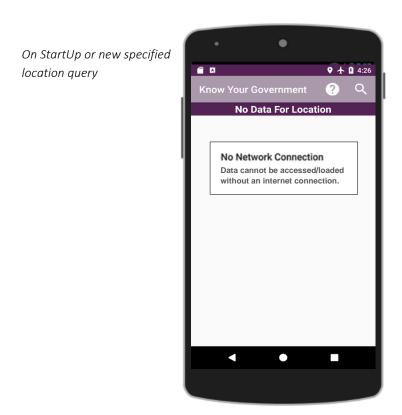

© Christopher Hield 12 of 14

Development Plan

- 1) Create the base app:
 - a. MainActivity with RecyclerView
 - b. Official Class
 - c. RecyclerView Adapter
 - d. RecyclerView ViewHolder
 - e. Create fake "dummy" officials to populate the list in the MainActivity onCreate.
 - f. Add the onClick methods. The onClick can open a Toast message for now.
 - g. Address options-menu item opens the dialog, on entry you can open a Toast message for now.
 - h. Create the About Activity opens when MainActivity "About" options menu item is selected.
- 2) Add the location code.
 - a. Add the location code that determines the device's zip code (this happens in onCreate).
 - b. Instead of using that zip code to make the Google API call, you can open a Toast message that displays the zip code for now.
- 3) Add the Official Activity:
 - a. This activity opens when an entry in the list of elected officials is clicked on.
 - b. You can use the data in your test (dummy) "official" objects to test this activity.
 - c. Any test data you don't have (i.e., missing data) should be properly handled in your activity.
 - d. The social media ImageView onClick's should open a Toast message that displays the name of the social media for now.
 - e. Remember to create the separate layout for landscape orientation.
- 4) Add the Google Civic Information API elements:
 - a. Create the Volley Google Civic Information API calls and parse the data creating a list of "official" objects.
 - b. Remove the use of dummy data from your app (now you will have real data).
 - c. Remove the location Toast message. Instead, here you use the device's zip code (or a manually entered location) to make the API call.
 - d. This should result in a populated list of Official objects in your MainActivity that is then displayed in the RecyclerView.
 - e. Add the Photo Activity, opened when an official's photo is clicked in the Official Activity
 - f. Remember to create the separate layout for landscape orientation.
- 5) Test the app very thoroughly and review your implementation against all requirements multiple times.

© Christopher Hield 13 of 14



Assignment Assistance

The TAs for our course are available to assist you with your assignment if needed. Questions on assignment requirements and course concepts can be sent to the instructor.

Submissions & Grading

- 1) Submissions must consist of your zipped project folder (please execute Build =>Clean Project before generating the zip file).
- 2) Submissions should reflect the concepts and practices we cover in class, and the requirements specified in this document.
- 3) Late submissions up to 1 week will be penalized by 10% (i.e., from one second late to 1 week late: 10% penalty). NO SUBMISSIONS CAN BE MADE BEYOND 1 WEEK LATE.
- 4) Grading will be based upon the presence and proper functionality of all features and behaviors described in this document. NOTE: All descriptions and images constitute the requirements for this assignment.
- 5) Grading will be performed with the following SDK details:
 - Project Compile & Target SDK Version: 30
 - o Project Minimum SDK Version: 25
- 6) Grading will be performed on emulator devices with the following characteristics:

Resolution	Details	Example Emulators
1080 x 1920	With Playstore	Pixel, Pixel 2, Nexus 5, Nexus 5X
1080 x 2220 or 2280	With Playstore	Pixel 3a, Pixel 4

If you do not understand anything in this handout, please ask.

Otherwise the assumption is that you understand the content.

Unsure? Ask!

© Christopher Hield 14 of 14