

Scenario


An alert from the Intrusion Detection System (IDS) flagged suspicious lateral movement activity involving PsExec. This indicates potential unauthorized access and movement across the network. As a SOC Analyst, your task is to investigate the provided PCAP file to trace the attacker's activities. Identify their entry point, the machines targeted, the extent of the breach, and any critical indicators that reveal their tactics and objectives within the compromised environment.

Task # 01

To effectively trace the attacker's activities within our network, can you identify the IP address of the machine from which the attacker initially gained access?

As PsExec is used over smb, so we can filter for traffic using the filter given below. Then, we can identify for the IP accessing shares like IPC\$ and ADMIN\$:

smb2

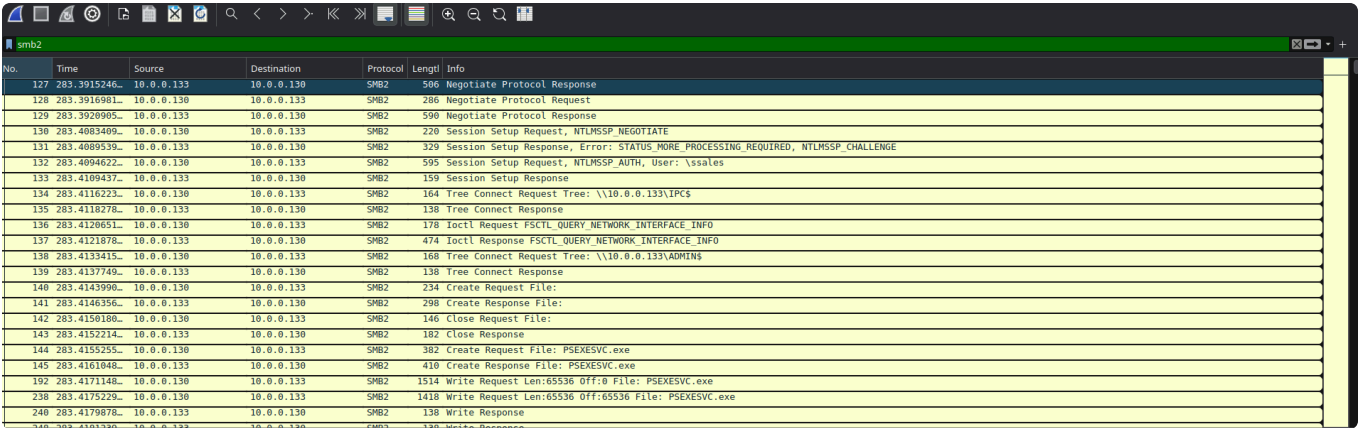

No.	Time	Source	Destination	Protocol	Length	Info
127	283.3915246..	10.0.0.133	10.0.0.130	SMB2	506	Negotiate Protocol Response
128	283.3916961..	10.0.0.130	10.0.0.133	SMB2	286	Negotiate Protocol Request
129	283.3920905..	10.0.0.133	10.0.0.130	SMB2	590	Negotiate Protocol Response
130	283.4083409..	10.0.0.130	10.0.0.133	SMB2	220	Session Setup Request, NTLMSSP_NEGOTIATE
131	283.4089539..	10.0.0.133	10.0.0.130	SMB2	329	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
132	283.4094622..	10.0.0.130	10.0.0.133	SMB2	595	Session Setup Request, NTLMSSP_AUTH, User: \ssales
133	283.4109437..	10.0.0.133	10.0.0.130	SMB2	159	Session Setup Response
134	283.4116223..	10.0.0.130	10.0.0.133	SMB2	164	Tree Connect Request Tree: \\10.0.0.133\IPC\$
135	283.4118278..	10.0.0.133	10.0.0.130	SMB2	138	Tree Connect Response
136	283.4120651..	10.0.0.130	10.0.0.133	SMB2	178	Ioctl Request FSCTL_QUERY_NETWORK_INTERFACE_INFO
137	283.4121878..	10.0.0.133	10.0.0.130	SMB2	474	Ioctl Response FSCTL_QUERY_NETWORK_INTERFACE_INFO
138	283.4133415..	10.0.0.130	10.0.0.133	SMB2	168	Tree Connect Request Tree: \\10.0.0.133\ADMIN\$
139	283.4137740..	10.0.0.133	10.0.0.130	SMB2	138	Tree Connect Response
140	283.4143990..	10.0.0.130	10.0.0.133	SMB2	234	Create Request File:
141	283.4146356..	10.0.0.133	10.0.0.130	SMB2	298	Create Response File:
142	283.4150180..	10.0.0.130	10.0.0.133	SMB2	146	Close Request File:
143	283.4152314..	10.0.0.133	10.0.0.130	SMB2	182	Close Response
144	283.4155255..	10.0.0.130	10.0.0.133	SMB2	382	Create Request File: PSEXESVC.exe
145	283.4161048..	10.0.0.133	10.0.0.130	SMB2	410	Create Response File: PSEXESVC.exe
192	283.4171148..	10.0.0.130	10.0.0.133	SMB2	1514	Write Request Len:65536 Offset:0 File: PSEXESVC.exe
238	283.4175229..	10.0.0.130	10.0.0.133	SMB2	1418	Write Request Len:65536 Offset:65536 File: PSEXESVC.exe
240	283.4179878..	10.0.0.133	10.0.0.130	SMB2	138	Write Response
340	303.4161340..	10.0.0.133	10.0.0.130	SMB2	138	Write Response


Answer: 10.0.0.130

Task # 02

To fully understand the extent of the breach, can you determine the machine's hostname to which the attacker first pivoted?

To find the hostname of the attacker, we can filter traffic for NTLM protocol and view the NTLM properties of 10.0.0.130 IP authentication over ntlm.

ntlmssp

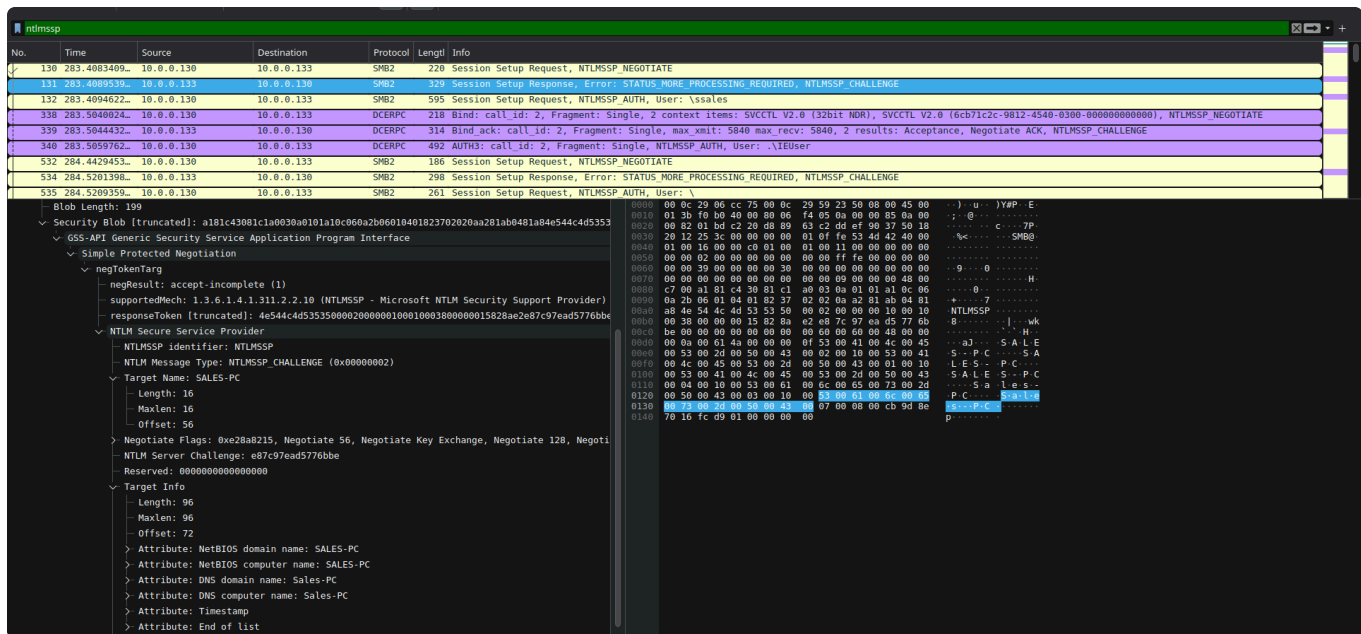

Answer: sales-pc

Task # 03

Knowing the username of the account the attacker used for authentication will give us insights into the extent of the breach. What is the username utilized by the attacker for authentication?

From the ntlm authentication packets we can clearly see the username.

Answer: ssales

Task # 04

After figuring out how the attacker moved within our network, we need to know what they did on the target machine. What's the name of the service executable the attacker set up on the target?

For this task, we filtered traffic originating from attacker and smb traffic which only contains filenames being accessed.

ip.src == 10.0.0.130 and smb2.filename

No.	Time	Source	Destination	Protocol	Length	Info
140	283.4143998	10.0.0.130	10.0.0.133	SMB2	234	Create Request File:
144	283.4155255	10.0.0.130	10.0.0.133	SMB2	382	Create Request File: PSEXESVC.exe
364	283.7094870	10.0.0.130	10.0.0.133	SMB2	494	Create Request File: PSEXEC-HR-PC-1C6C5D14.key
371	283.7386375	10.0.0.130	10.0.0.133	SMB2	194	Create Request File: PSEXESVC
389	283.7497255	10.0.0.130	10.0.0.133	SMB2	414	Create Request File: PSEXEC-HR-PC-1C6C5D14.key
499	283.8066464	10.0.0.130	10.0.0.133	SMB2	228	Create Request File: PSEXESVC-HR-PC-7980-stdin
505	283.8081116	10.0.0.130	10.0.0.133	SMB2	230	Create Request File: PSEXESVC-HR-PC-7980-stdout
511	283.8091991	10.0.0.130	10.0.0.133	SMB2	230	Create Request File: PSEXESVC-HR-PC-7980-stderr
537	284.5609702	10.0.0.130	10.0.0.133	SMB2	354	Create Request File: PSEXESVC.exe;getInfo Request FILE_INFO/SMB2_FILE_NORMALIZED_NAME_INFO
545	284.6933342	10.0.0.130	10.0.0.133	SMB2	354	Create Request File: PSEXESVC.exe;getInfo Request FILE_INFO/SMB2_FILE_NORMALIZED_NAME_INFO
38472	510.8506472	10.0.0.130	10.0.0.133	SMB2	382	Create Request File: PSEXESVC.exe
38480	510.8544729	10.0.0.130	10.0.0.133	SMB2	414	Create Request File: PSEXEC-HR-PC-1C6C5D14.key
38541	536.5094533	10.0.0.130	10.0.0.131	SMB2	234	Create Request File:
38545	536.5105890	10.0.0.130	10.0.0.131	SMB2	382	Create Request File: PSEXESVC.exe
38765	536.8054872	10.0.0.130	10.0.0.131	SMB2	494	Create Request File: PSEXEC-HR-PC-8FF87B23.key
38773	536.8308529	10.0.0.130	10.0.0.131	SMB2	194	Create Request File: PSEXESVC
38792	536.8454124	10.0.0.130	10.0.0.131	SMB2	414	Create Request File: PSEXEC-HR-PC-8FF87B23.key
38900	536.8989033	10.0.0.130	10.0.0.131	SMB2	228	Create Request File: PSEXESVC-HR-PC-4080-stdin
38906	536.9001635	10.0.0.130	10.0.0.131	SMB2	230	Create Request File: PSEXESVC-HR-PC-4080-stdout
38912	536.9013188	10.0.0.130	10.0.0.131	SMB2	230	Create Request File: PSEXESVC-HR-PC-4080-stderr
39051	536.9644734	10.0.0.130	10.0.0.131	SMB2	382	Create Request File: PSEXESVC.exe

Answer: psexesvc.exe

Task # 05

We need to know how the attacker installed the service on the compromised machine to understand the attacker's lateral movement tactics. This can help identify other affected systems. Which network share was used by PsExec to install the service on the target machine?

For this task, we filtered the traffic using `sm2.cmd == 3` which filters SMB2 *TREE_CONNECT* packets (share connection requests/responses). With these packets, shares being accessed can be found.

`ip.src == 10.0.0.130 and smb2.cmd == 3`

No.	Time	Source	Destination	Protocol	Length	Info
134	283.4116223	10.0.0.130	10.0.0.133	SMB2	164	Tree Connect Request Tree: \\10.0.0.133\IPC\$
138	283.4133415	10.0.0.130	10.0.0.133	SMB2	168	Tree Connect Request Tree: \\10.0.0.133\ADMIN\$
38470	510.8491305	10.0.0.130	10.0.0.133	SMB2	168	Tree Connect Request Tree: \\10.0.0.133\ADMIN\$
38537	536.5078928	10.0.0.130	10.0.0.131	SMB2	168	Tree Connect Request Tree: \\10.0.0.131\ADMIN\$
38771	536.8293835	10.0.0.130	10.0.0.131	SMB2	164	Tree Connect Request Tree: \\10.0.0.131\IPC\$
39114	548.0934592	10.0.0.130	10.0.0.131	SMB2	168	Tree Connect Request Tree: \\10.0.0.131\ADMIN\$
39354	548.3709215	10.0.0.130	10.0.0.131	SMB2	164	Tree Connect Request Tree: \\10.0.0.131\IPC\$
39702	554.5651506	10.0.0.130	10.0.0.131	SMB2	168	Tree Connect Request Tree: \\10.0.0.131\ADMIN\$
39938	554.8236207	10.0.0.130	10.0.0.131	SMB2	164	Tree Connect Request Tree: \\10.0.0.131\IPC\$

As PsExec uses ADMIN\$ and IPC\$ shares we can confirm this with filter given below.

`ip.src == 10.0.0.130 and smb2.tree contains "ADMIN$"`

No.	Time	Source	Destination	Protocol	Length	Info
138	283.4133415	10.0.0.130	10.0.0.133	SMB2	168	Tree Connect Request Tree: \\10.0.0.133\ADMIN\$
140	283.4143996	10.0.0.130	10.0.0.133	SMB2	234	Create Request File:
142	283.4150188	10.0.0.130	10.0.0.133	SMB2	146	Close Request File:
144	283.4155255	10.0.0.130	10.0.0.133	SMB2	382	Create Request File: PSEXESVC.exe
192	283.4171148	10.0.0.130	10.0.0.133	SMB2	1514	Write Request Len:65536 Off:0 File: PSEXESVC.exe
238	283.4195229	10.0.0.130	10.0.0.133	SMB2	1418	Write Request Len:65536 Off:65536 File: PSEXESVC.exe
287	283.4188227	10.0.0.130	10.0.0.133	SMB2	1514	Write Request Len:65536 Off:131072 File: PSEXESVC.exe
321	283.4194802	10.0.0.130	10.0.0.133	SMB2	570	Write Request Len:480 Off:241064 File: PSEXESVC.exe
323	283.4197747	10.0.0.130	10.0.0.133	SMB2	162	GetInfo Request FILE_INFO/SMB2_FILE_NETWORK_OPEN_INFO File: PSEXESVC.exe
325	283.4201728	10.0.0.130	10.0.0.133	SMB2	146	Close Request File: PSEXESVC.exe
364	283.7994678	10.0.0.130	10.0.0.133	SMB2	494	Create Request File: PSEXEC-HR-PC-1C6C5D14.key
366	283.7112228	10.0.0.130	10.0.0.133	SMB2	178	Write Request Len:8 Off:0 File: PSEXEC-HR-PC-1C6C5D14.key
368	283.7118672	10.0.0.130	10.0.0.133	SMB2	178	Write Request Len:8 Off:8 File: PSEXEC-HR-PC-1C6C5D14.key
377	283.7415697	10.0.0.130	10.0.0.133	SMB2	158	Lease Break Acknowledgment
381	283.7474654	10.0.0.130	10.0.0.133	SMB2	158	Lease Break Acknowledgment
385	283.7484913	10.0.0.130	10.0.0.133	SMB2	162	GetInfo Request FILE_INFO/SMB2_FILE_NETWORK_OPEN_INFO File: PSEXEC-HR-PC-1C6C5D14.key
387	283.7489619	10.0.0.130	10.0.0.133	SMB2	146	Close Request File: PSEXEC-HR-PC-1C6C5D14.key
389	283.7497255	10.0.0.130	10.0.0.133	SMB2	414	Create Request File: PSEXEC-HR-PC-1C6C5D14.key
537	284.5609702	10.0.0.130	10.0.0.133	SMB2	354	Create Request File: PSEXESVC.exe;GetInfo Request FILE_INFO/SMB2_FILE_NORMALIZED_NAME_INFO
539	284.5931846	10.0.0.130	10.0.0.133	SMB2	146	Close Request File: PSEXESVC.exe
545	284.6933342	10.0.0.130	10.0.0.133	SMB2	354	Create Request File: PSEXESVC.exe;GetInfo Request FILE_INFO/SMB2_FILE_NORMALIZED_NAME_INFO

Answer: ADMIN\$

Task # 06

We must identify the network share used to communicate between the two machines. Which network share did PsExec use for communication?

PsExec uses ADMIN\$ to copy its service component and IPC\$ to send commands and for input/output and errors.

ip.src == 10.0.0.130 and smb2.tree contains "IPC\$"

No.	Time	Source	Destination	Protocol	Length	Info
134	283.4116223	10.0.0.130	10.0.0.133	SMB2	164	Tree Connect Request Tree: \\10.0.0.133\IPC\$
136	283.4120651	10.0.0.130	10.0.0.133	SMB2	178	Ioctl Request FSCTL_QUERY_NETWORK_INTERFACE_INFO
371	283.7386375	10.0.0.130	10.0.0.133	SMB2	194	Create Request File: PSEXESVC
373	283.7401746	10.0.0.130	10.0.0.133	SMB2	162	GetInfo Request FILE_INFO/SMB2_FILE_STANDARD_INFO File: PSEXESVC
375	283.7409196	10.0.0.130	10.0.0.133	SMB2	730	Ioctl Request FSCTL_PIPE_TRANSCEIVE File: PSEXESVC
391	283.7799349	10.0.0.130	10.0.0.133	SMB2	174	Write Request Len:4 Off:0 File: PSEXESVC
438	283.7807229	10.0.0.130	10.0.0.133	SMB2	1465	Write Request Len:65535 Off:0 File: PSEXESVC
485	283.7814133	10.0.0.130	10.0.0.133	SMB2	1465	Write Request Len:65535 Off:0 File: PSEXESVC
490	283.7819733	10.0.0.130	10.0.0.133	SMB2	824	Write Request Len:2114 Off:0 File: PSEXESVC
493	283.7824081	10.0.0.130	10.0.0.133	SMB2	171	Read Request Len:4 Off:0 File: PSEXESVC
495	283.7826869	10.0.0.130	10.0.0.133	SMB2	171	Read Request Len:16 Off:0 File: PSEXESVC
497	283.8059861	10.0.0.130	10.0.0.133	SMB2	242	Ioctl Request FSCTL_PIPE_WAIT Pipe: PSEXESVC-HR-PC-7980-stdin
499	283.8066464	10.0.0.130	10.0.0.133	SMB2	228	Create Request File: PSEXESVC-HR-PC-7980-stdin
501	283.8072307	10.0.0.130	10.0.0.133	SMB2	162	GetInfo Request FILE_INFO/SMB2_FILE_STANDARD_INFO File: PSEXESVC-HR-PC-7980-stdin
503	283.8076325	10.0.0.130	10.0.0.133	SMB2	244	Ioctl Request FSCTL_PIPE_WAIT Pipe: PSEXESVC-HR-PC-7980-stdout
505	283.8081116	10.0.0.130	10.0.0.133	SMB2	230	Create Request File: PSEXESVC-HR-PC-7980-stdout
507	283.8084413	10.0.0.130	10.0.0.133	SMB2	162	GetInfo Request FILE_INFO/SMB2_FILE_STANDARD_INFO File: PSEXESVC-HR-PC-7980-stdout
509	283.8088465	10.0.0.130	10.0.0.133	SMB2	244	Ioctl Request FSCTL_PIPE_WAIT Pipe: PSEXESVC-HR-PC-7980-stderr
511	283.8091901	10.0.0.130	10.0.0.133	SMB2	238	Create Request File: PSEXESVC-HR-PC-7980-stderr
513	283.8096478	10.0.0.130	10.0.0.133	SMB2	162	GetInfo Request FILE_INFO/SMB2_FILE_STANDARD_INFO File: PSEXESVC-HR-PC-7980-stderr
515	283.8115564	10.0.0.130	10.0.0.133	SMB2	171	Read Request Len:4 Off:0 File: PSEXESVC-HR-PC-7980-stderr

Answer: IPC\$

Task # 07

Now that we have a clearer picture of the attacker's activities on the compromised machine, it's important to identify any further lateral movement. What is the hostname of the second machine the attacker targeted to pivot within our network?

As seen in traffic in task 2, we saw that there was second machine the attacker authenticated to too.

Hostname can be viewed similarly as task 2.

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

ntlmssp

No.	Time	Source	Destination	Protocol	Length	Info
542	284.6764726	10.0.0.133	10.0.0.130	SMR2	298	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
543	284.6772735	10.0.0.130	10.0.0.133	SMR2	261	Session Setup Request, NTLMSSP_AUTH, User: \
549	284.7228112	10.0.0.130	10.0.0.133	SMR2	186	Session Setup Request, NTLMSSP_NEGOTIATE
550	284.7546093	10.0.0.133	10.0.0.130	SMR2	298	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
551	284.7553240	10.0.0.130	10.0.0.133	SMR2	261	Session Setup Request, NTLMSSP_AUTH, User: \
554	284.8037721	10.0.0.130	10.0.0.133	SMR2	186	Session Setup Request, NTLMSSP_NEGOTIATE
555	284.8480401	10.0.0.133	10.0.0.130	SMR2	298	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
556	284.8488051	10.0.0.130	10.0.0.133	SMR2	261	Session Setup Request, NTLMSSP_AUTH, User: \
38448	510.8414892	10.0.0.130	10.0.0.133	DCERPC	218	Bind: call_id: 2, Fragment: Single, 2 context items: SVCCTL V2.0 (32bit NDR), SVCCTL V2.0 (6cb71c2c-9b12-4540-0300-000000000000), NTLMSSP_NEGOTIATE
38449	510.8418513	10.0.0.133	10.0.0.130	DCERPC	314	Bind.ack: call_id: 2, Fragment: Single, max_xmit: 5840 max_recv: 5840, 2 results: Acceptance, Negotiate ACK, NTLMSSP_CHALLENGE
38450	510.8426722	10.0.0.130	10.0.0.133	DCERPC	492	AUTH3: call_id: 2, Fragment: Single, NTLMSSP_AUTH, User: \IEUser
38513	534.4410447	10.0.0.130	10.0.0.131	SMR2	228	Session Setup Request, NTLMSSP_NEGOTIATE
38514	534.4416601	10.0.0.131	10.0.0.130	SMR2	369	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
38515	534.4421012	10.0.0.130	10.0.0.131	SMR2	623	Session Setup Request, NTLMSSP_AUTH, User: \jdoe
38533	536.5049816	10.0.0.130	10.0.0.131	SMR2	228	Session Setup Request, NTLMSSP_NEGOTIATE
38534	536.5053666	10.0.0.131	10.0.0.130	SMR2	369	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
38535	536.5057792	10.0.0.130	10.0.0.131	SMR2	629	Session Setup Request, NTLMSSP_AUTH, User: \IEUser
38741	536.6075737	10.0.0.130	10.0.0.131	DCERPC	218	Bind: call_id: 2, Fragment: Single, 2 context items: SVCCTL V2.0 (32bit NDR), SVCCTL V2.0 (6cb71c2c-9b12-4540-0300-000000000000), NTLMSSP_NEGOTIATE
38742	536.6100570	10.0.0.131	10.0.0.130	DCERPC	354	Bind.ack: call_id: 2, Fragment: Single, max_xmit: 5840 max_recv: 5840, 2 results: Acceptance, Negotiate ACK, NTLMSSP_CHALLENGE
38743	536.6113626	10.0.0.130	10.0.0.131	DCERPC	524	AUTH3: call_id: 2, Fragment: Single, NTLMSSP_AUTH, User: \IEUser
39064	537.5158892	10.0.0.130	10.0.0.131	SMR2	186	Session Setup Request, NTLMSSP_NEGOTIATE

ntlmssp

No.	Time	Source	Destination	Protocol	Length	Info
542	284.6764726	10.0.0.133	10.0.0.130	SMR2	298	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
543	284.6772735	10.0.0.130	10.0.0.133	SMR2	261	Session Setup Request, NTLMSSP_AUTH, User: \
549	284.7228112	10.0.0.130	10.0.0.133	SMR2	186	Session Setup Request, NTLMSSP_NEGOTIATE
550	284.7546093	10.0.0.133	10.0.0.130	SMR2	298	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
551	284.7553240	10.0.0.130	10.0.0.133	SMR2	261	Session Setup Request, NTLMSSP_AUTH, User: \
554	284.8037721	10.0.0.130	10.0.0.133	SMR2	186	Session Setup Request, NTLMSSP_NEGOTIATE
555	284.8480401	10.0.0.133	10.0.0.130	SMR2	298	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
556	284.8488051	10.0.0.130	10.0.0.133	SMR2	261	Session Setup Request, NTLMSSP_AUTH, User: \
38448	510.8414892	10.0.0.130	10.0.0.133	DCERPC	218	Bind: call_id: 2, Fragment: Single, 2 context items: SVCCTL V2.0 (32bit NDR), SVCCTL V2.0 (6cb71c2c-9b12-4540-0300-000000000000), NTLMSSP_NEGOTIATE
38449	510.8418513	10.0.0.133	10.0.0.130	DCERPC	314	Bind.ack: call_id: 2, Fragment: Single, max_xmit: 5840 max_recv: 5840, 2 results: Acceptance, Negotiate ACK, NTLMSSP_CHALLENGE
38450	510.8426722	10.0.0.130	10.0.0.133	DCERPC	492	AUTH3: call_id: 2, Fragment: Single, NTLMSSP_AUTH, User: \IEUser
38513	534.4410447	10.0.0.130	10.0.0.131	SMR2	228	Session Setup Request, NTLMSSP_NEGOTIATE
38514	534.4416601	10.0.0.131	10.0.0.130	SMR2	369	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
38515	534.4421012	10.0.0.130	10.0.0.131	SMR2	623	Session Setup Request, NTLMSSP_AUTH, User: \jdoe
38533	536.5049816	10.0.0.130	10.0.0.131	SMR2	228	Session Setup Request, NTLMSSP_NEGOTIATE
38534	536.5053666	10.0.0.131	10.0.0.130	SMR2	369	Session Setup Response, Error: STATUS_MORE_PROCESSING_REQUIRED, NTLMSSP_CHALLENGE
38535	536.5057792	10.0.0.130	10.0.0.131	SMR2	629	Session Setup Request, NTLMSSP_AUTH, User: \IEUser
38741	536.6075737	10.0.0.130	10.0.0.131	DCERPC	218	Bind: call_id: 2, Fragment: Single, 2 context items: SVCCTL V2.0 (32bit NDR), SVCCTL V2.0 (6cb71c2c-9b12-4540-0300-000000000000), NTLMSSP_NEGOTIATE
38742	536.6100570	10.0.0.131	10.0.0.130	DCERPC	354	Bind.ack: call_id: 2, Fragment: Single, max_xmit: 5840 max_recv: 5840, 2 results: Acceptance, Negotiate ACK, NTLMSSP_CHALLENGE
38743	536.6113626	10.0.0.130	10.0.0.131	DCERPC	524	AUTH3: call_id: 2, Fragment: Single, NTLMSSP_AUTH, User: \IEUser
39064	537.5158892	10.0.0.130	10.0.0.131	SMR2	186	Session Setup Request, NTLMSSP_NEGOTIATE

Maxlen: 24
Offset: 56
> Negotiate Flags: 0xe28a8215, Negotiate 56, Negotiate Key Exchange, Negotiate 128, Negotiate 10.0 (Build 19041); NTLM Current Revision 15
NTLM Server Challenge: d3ed497fa223e78a
Reserved: 0000000000000000
Target Info
Length: 128
Maxlen: 128
Offset: 80
> Attribute: NetBIOS domain name: MARKETING-PC
> Attribute: NetBIOS computer name: MARKETING-PC
> Attribute: DNS domain name: Marketing-PC
> Attribute: DNS computer name: Marketing-PC
> Attribute: Timestamp
> Attribute: End of list
> Version 10.0 (Build 19041); NTLM Current Revision 15

0000 00 0c 29 06 cc 75 00 0c 29 84 0f 0f 08 00 45 00u.....E
0010 01 63 2c f0 40 00 00 06 b7 a0 0a 00 00 83 0a 00c.....P
0020 00 02 01 0d c2 25 00 00 15 1a 05 0c 92 a7 50 10A.....P
0030 20 12 51 f0 00 00 00 00 01 37 fe 53 4d 42 40 00Q.....7-SMB
0040 01 00 16 00 00 c0 01 00 01 00 11 00 00 00 00 00
0050 00 00 02 00 00 00 00 00 00 00 ff fe 00 00 00 00
0060 00 00 01 00 00 00 00 2c 00 00 00 00 00 00 00
0070 00 00 00 00 00 00 00 00 00 00 09 00 00 48 00H
0080 ef 00 a1 01 ec 30 01 e9 a0 03 0a 01 01 a1 0c 06
0090 0a 2b 06 01 04 01 82 37 02 02 0a a2 91 d3 04 817.....
00a0 d0 4e 54 4c 4d 53 53 50 00 02 00 00 00 18 00NTLMSSP.....
00b0 00 00 00 00 15 82 0a e2 d3 ed 40 71 a2 23 07
00c0 0a 00 00 00 00 00 00 00 00 00 00 00 50 00 00P
00d0 00 0a 00 61 4a 00 00 00 0f 4d 08 41 00 52 00 4ba.....MARK
00e0 00 45 00 54 00 49 00 4e 00 47 00 2d 00 50 00 43E.....G-P-C
00f0 00 02 00 18 00 4d 00 41 00 52 00 4b 00 45 00 54MARKET
0100 00 49 00 4e 00 47 00 2d 00 50 00 43 00 01 00 18ING-P-C
0110 00 4d 00 41 00 52 00 4b 00 45 00 54 00 40 00 4eMARKETING
0120 00 47 00 2d 00 50 00 43 00 04 00 18 00 44 00 61G-P-C-Ma
0130 00 72 00 6b 00 65 00 74 00 69 00 6a 00 67 00 2drket ing-
0140 00 50 00 43 00 03 00 18 00 44 00 61 00 72 00 6bP-C-Mark
0150 00 65 00 74 00 69 00 6a 00 67 00 2d 00 50 00 43eting-P-C
0160 00 07 00 08 00 0e 06 13 06 17 fc d9 01 00 00 00
0170 00

Answer: marketing-pc