TEWE DIARY

Who's watching?



Member

Rate films, My ratings



Trusted

Plus create and edit on Manage



Admin

Plus delete on Manage



Browse without a profile

Anonymous: browse, search, trailers

Focused: Member. Press Enter to continue.

Demo identity, not authentication. Choosing a profile asks Identity.Api for a token with that tier's claims. Anyone can mint an Admin token, so this build must not be deployed publicly.

This product uses the TMDB API but is not endorsed by TMDB.

TEWE DIARY Home Browse My ratings Manage Trusted

details.backdropUrl (w1280) · muted trailer iframe sits here (D8)

FEATURED · 1 OF 5

Arrival

2016 · 1h 56m · Drama, Science Fiction, Mystery

Why are they here?

▶ Play ⓘ More info ⏸

Newest

POSTER
Dune: Part Two
2024

POSTER
Anatomy of a Fall
2023

POSTER
Oppenheimer
2023

POSTER
Past Lives
2023

POSTER
The Holdovers
2023

POSTER
Aftersun
2022


POSTER
Everything Everywhere All at Once
2022

POSTER
Top Gun: Maverick
2022

NO POSTER
Women Talking
2022

Past Lives 2023 · Drama, Romance ★ 4.4

This product uses the TMDB API but is not endorsed or certified by TMDB.

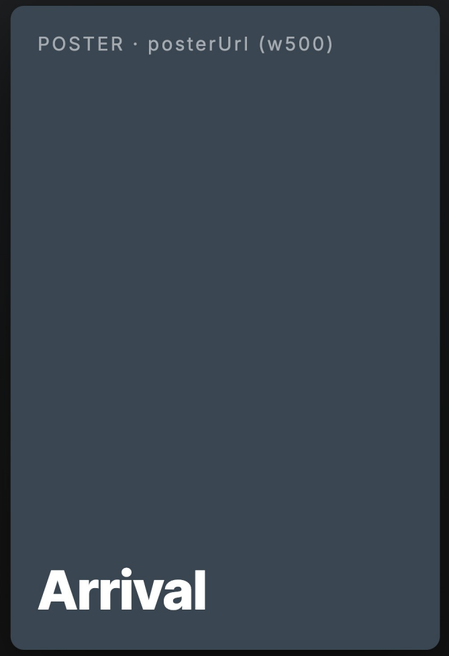

Arrival

2016 · 1h 56m · Drama · Science Fiction · Mystery

Why are they here?

When twelve spacecraft settle over sites around the world, linguist Louise Banks is brought in to work out how to talk to whoever is inside, before suspicion between nations turns into war.

Director Denis Villeneuve | **Writers** Eric Heisserer (Screenplay), Ted Chiang (Story)

▶ Play trailer

YOUR RATING ★ ★ ★ ★ ☆

AVERAGE **4.3** / 5

Remove my rating

Left and right change the rating. The average can trail by up to a minute (G9).

Cast

AA	JR	FW	MS	MO	TM
Amy Adams	**Jeremy Renner**	**Forest Whitaker**	**Michael Stuhlbarg**	**Mark O'Brien**	**Tzi Ma**
Louise Banks	Ian Donnelly	Colonel Weber	Agent Halpern	Captain Marks	General Shang

This product uses the TMDB API but is not endorsed or certified by TMDB.

backdropUrl · muted trailer behind


Arrival

2016 · 1h 56m · Drama, Science Fiction, Mystery


Why are they here?

Play More info

Newest

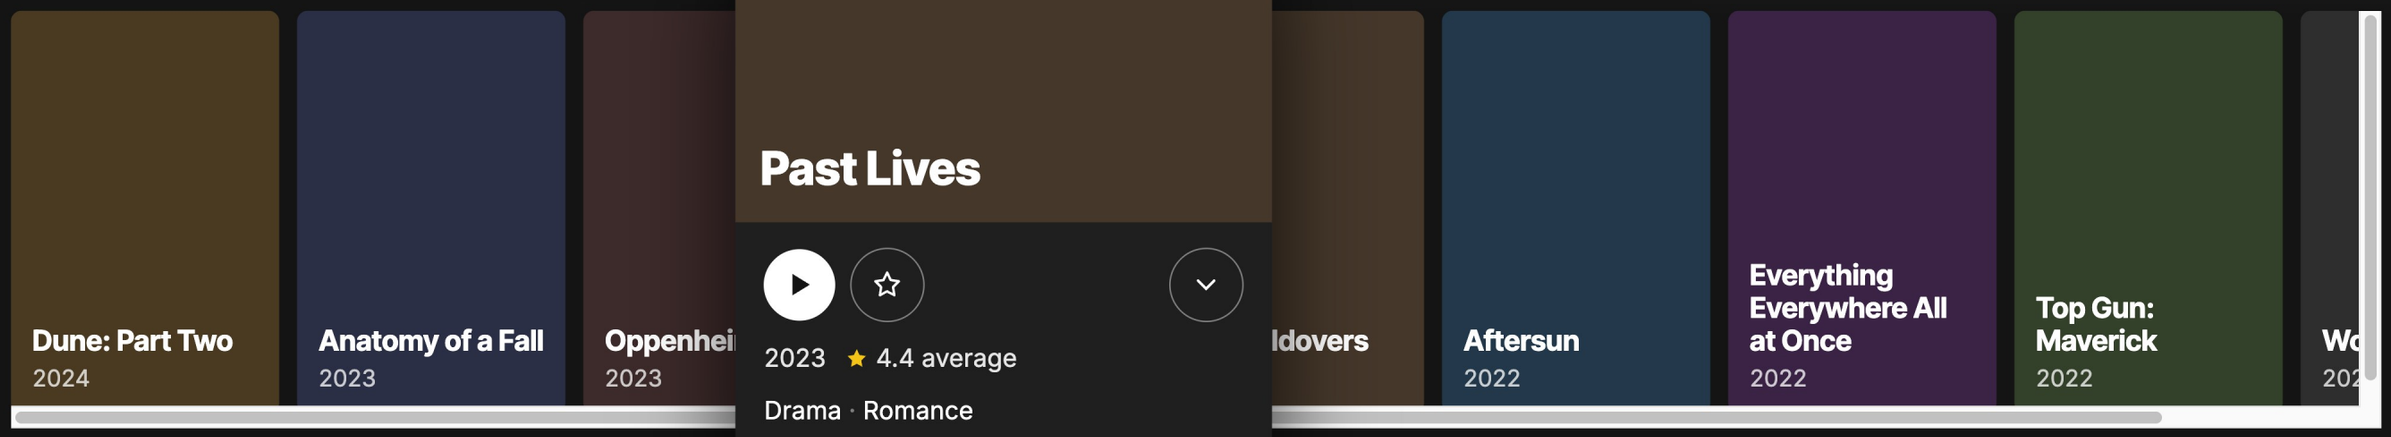

A to Z

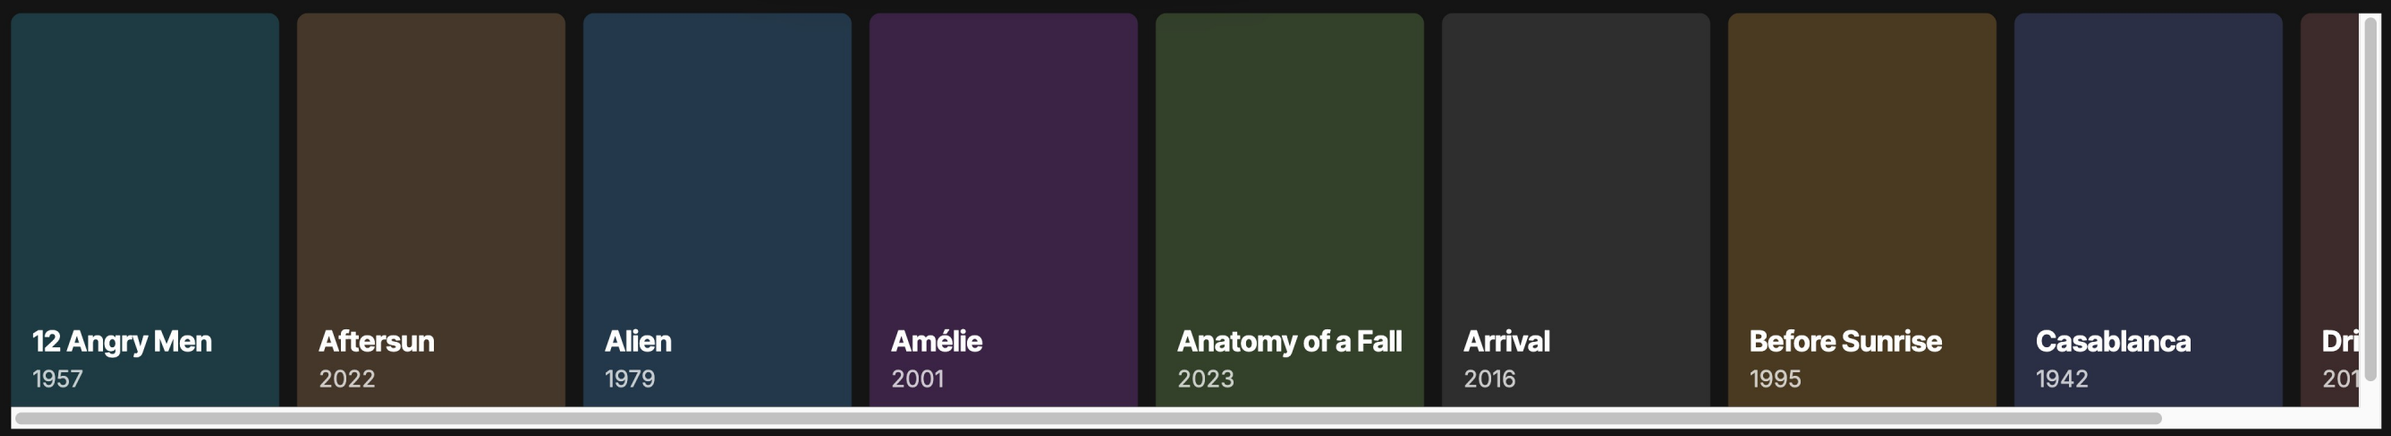

This product uses the TMDB API but is not endorsed or certified by TMDB.

details.backdropUrl

Arrival

▶ Play trailer

Edit Delete

2016 1h 56m HD

Why are they here?

When twelve spacecraft settle over sites around the world, linguist Louise Banks is brought in to work out how to talk to whoever is inside, before suspicion between nations turns into war.

Cast	Amy Adams, Jeremy Renner, Forest Whitaker, more
Genres	Drama, Science Fiction, Mystery
Director	Denis Villeneuve
Writers	Eric Heisserer (Screenplay), Ted Chiang (Story)

YOUR RATING ★★★★☆ AVERAGE **4.3** / 5 Remove

Cast

AA	JR	FW	MS	MO
Amy Adams	**Jeremy Renner**	**Forest Whitaker**	**Michael Stuhlbarg**	**Mark O'Brien**
Louise Banks	Ian Donnelly	Colonel Weber	Agent Halpern	Captain Marks

TM

Tzi Ma

General Shang

Also from 2016

GET /api/v2/movies?year=2016. 'More like this' needs genre data from the richer v2.

La La Land 2016

Moonlight 2016

Paterson 2016

Hell or High Water 2016

This product uses the TMDB API but is not endorsed or certified by TMDB.

TITLE

Search titles

YEAR

Any

SORT

Title, A to Z

Clear

/browse?page=1

20 films (sample data; the API pages 25 at a time)

12 Angry Men
1957 · Drama

Aftersun
2022 · Drama

Alien
1979 · Horror, Sci-Fi

Amélie
2001 · Comedy, Romance

Anatomy of a Fall
2023 · Crime, Drama

Arrival
2016 · Drama, Sci-Fi

Before Sunrise
1995 · Drama, Romance

Casablanca
1942 · Drama, Romance

Drive
2011 · Crime, Drama

Dune: Part Two
2024 · Sci-Fi, Adventure

Heat
1995 · Crime, Action

La La Land
2016 · Comedy, Music

Moonlight
2016 · Drama

Oppenheimer
2023 · Drama, History

Paddington 2
2017 · Comedy, Family

Parasite
2019 · Comedy, Thriller

Past Lives
2023 · Drama, Romance

Spirited Away
2001 · Animation, Fantasy

The Holdovers
2023 · Comedy, Drama


Whiplash
2014 · Drama, Music

Previous Page 1 Next

This product uses the TMDB API but is not endorsed or certified by TMDB.

My ratings

8 films rated

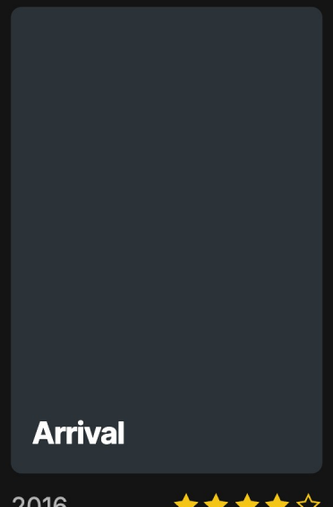


2016 ★★★★☆



2023 ★★★★★



1995 ★★★★★

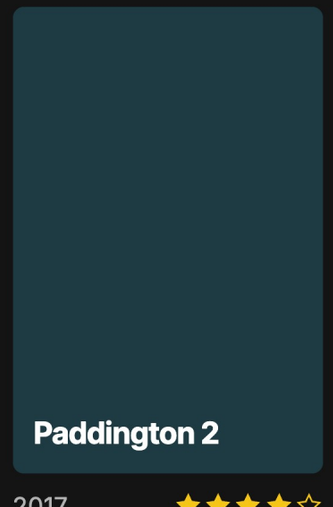

2017 ★★★★☆



2023 ★★★☆☆



2001 ★★★★★



2011 ★★★☆☆



2023 ★★★★☆

This product uses the TMDB API but is not endorsed or certified by TMDB.

Manage films

+ New film

arr

TITLE	YEAR	GENRES	SOURCE	
Arrival	2016	Drama, Science Fiction, Mystery	TMDB	Editing
The Arrival Lounge	2026	Comedy	Manual	Delete this film? Delete Cancel
Dune: Part Two	2024	Science Fiction, Adventure	TMDB	Edit Delete

Delete shows for Admin only. Trusted sees Edit and New film. Member and anonymous never reach this route (D13, FR-13).

Edit film

Fix 2 fields before saving.

Title

'Title' must not be empty.

Year of release

2099

'Year Of Release' must be less than or equal to '2026'.

Genres

Drama × Science Fiction ×

Add genre

The slug is built from title and year. Saving a change to either opens the film at its new address and refreshes the cached rows.

Save Cancel

This product uses the TMDB API but is not endorsed or certified by TMDB.

Components, props and the API behind them

Phase 1 reads only what `/api/v2` serves today. Prompt names map as EntryRow to MovieRow, EntryCard to MovieCard and EntryModal to MovieModal.

COMPONENT	PROPS	DATA	NOTES
Navbar	`profile: Profile | null` `active: RouteId`	`auth context (claims)`	Transparent over the hero, solid once scrolled. Manage link only for Trusted and Admin (FR-13).
ProfilePicker	`profiles: DemoProfile[]` `onChoose(p): void`	`POST /identity/token`	Stable user id per profile in localStorage; JWT in memory only (D4). Switching clears the query cache.

HeroBanner	`slides: HeroSlide[]`
	`paused: boolean`
	`onPlay(slug) · onMoreInfo(slug)`
		`heroSlugs.ts`
		`GET /movies/{slug} × ≤5`
		`top-up: GET /movies?sortBy=-yearofrelease`
			Muted trailer after idle; never under reduced motion or Save-Data; visible pause control (D8, D11).

MovieRow	`row: RowDefinition` `focusRowIndex: number`	`GET /movies?sortBy=…&pageSize=25&page=n`	Registry entry; phase 2 rows carry requires: "B9" and stay off (D12). Loads the next page near the end.

MovieCard	`movie: MovieResponse`
	`focused: boolean`
	`onSelect(slug)`
		`list item (details: null)`	Fixed 2:3 box, lazy image, text fallback when posterUrl is null. Reads backdropUrl and ratingCount if present (FR-17).

HoverPreview	`movie: MovieResponse` `anchorRect: DOMRect`	`list item only`	Desktop only. Shows year, genres, average; no extra request.
MovieModal / MoviePage	`slug: string` `canEdit · canDelete: boolean`	`GET /movies/{slug}`	Manual films have details: null, so no Play, tagline or cast. Unknown slug renders not-found (FR-7).
RatingStars	`value: number | null` `onChange(n) · onClear()`	`PUT / DELETE /movies/{id}/ratings`	Radio group; left and right arrows. Shows userRating at once; the average may trail 60 s (G9).
TrailerPlayer	`trailer: TrailerResponse` `returnFocusTo: HTMLElement`	`details.trailer.embedUrl`	Close button takes focus first; the iframe swallows Escape (D16).
BrowseFilters + Grid	`params: BrowseParams`	`GET /movies?title&year&sortBy&page`	URL is the state (D5). Debounced title. Shows the 400 message on a bad year.
RatingsPage	`(none)`	`GET /ratings/me` `then GET /movies/{slug} each`	One request per rated film until /me/ratings returns cards (G6).
ManageTable + MovieForm	`movie?: MovieResponse` `onSaved(slug)`	`POST · PUT · DELETE /movies`	errors mapped by propertyName to fields. Delete needs Admin; a 403 shows a plain message.
useFocusNav	`register(rowId, index, el)` `dispatch(action)`	`none`	Actions up, down, left, right, select, back. Keyboard and mouse adapters; gamepad later (D10).

api/types.ts (hand-written, D6)

```
export interface MovieResponse {
  id: string; slug: string; title: string;
  yearOfRelease: number; genres: string[];
  rating: number | null;      // average
  userRating: number | null;  // caller only
  posterUrl: string | null;
  details: MovieDetails | null;
  links?: HalLink[];
  backdropUrl?: string;       // phase 2, B1
  ratingCount?: number;       // phase 2, B8
}

export interface MovieDetails {
  tmdbId: number; imdbId: string | null;
  overview: string | null; tagline: string | null;
  runtimeMinutes: number | null;
  backdropUrl: string | null;
  trailer: TrailerResponse | null;
  directors: Credit[]; writers: Credit[];
  cast: Credit[];             // up to 10
}

export interface TrailerResponse {
  site: string;               // "YouTube" or "Vimeo"
  key: string; name: string | null;
  url: string; embedUrl: string;
}

export interface Credit {
  tmdbPersonId: number; name: string;
  role: string | null; profileUrl: string | null;
}

export interface PagedResponse<T> {
  items: T[]; page: number; pageSize: number;
  total: number; hasNextPage: boolean;
}

export interface MovieRatingResponse {
  movieId: string; slug: string; rating: number;
}

export interface ValidationFailureResponse {
  errors: { propertyName: string; message: string }[];
}
```

Tailwind v4 snippets

This amends PRD decision D2 from plain CSS to Tailwind v4 through `@tailwindcss/vite`. Everything else in D2 holds: no component library, no state library, no spatial-navigation library. Because spacing is in rem and the root scales with the viewport, one set of classes serves 1080p TV and desktop (D15).

src/index.css

Design tokens, root scale, shared utilities

```
@import "tailwindcss";

@theme {
  --color-ink: #141414;
  --color-ink-deep: #0f0f0f;
  --color-surface: #1f1f1f;
  --color-surface-raised: #262626;
  --color-accent: #e50914;
  --color-muted: #b3b3b3;
  --color-subtle: #808080;
  --color-star: #f5c518;
  --font-sans: "Inter", system-ui, sans-serif;
  --font-display: "Inter Tight", "Inter", sans-serif;
}

/* D15: 1rem = 24px at 1920 wide, 16px at 1280 */
html { font-size: max(12px, calc(100vw / 80)); }
body { @apply bg-ink font-sans text-white antialiased; }

/* 5% safe margin (NFR-10) */
@utility safe-x { padding-inline: 5vw; }

@utility focus-ring {
  @apply outline-none focus-visible:outline-4
         focus-visible:outline-offset-4 focus-visible:outline-white;
}
@utility btn-primary {
  @apply focus-ring inline-flex items-center gap-2 rounded-md
         bg-white px-7 py-3 font-bold text-ink hover:bg-white/85;
}
@utility btn-secondary {
  @apply focus-ring inline-flex items-center gap-2 rounded-md
         bg-zinc-500/70 px-6 py-3 font-semibold hover:bg-zinc-500/50;
}
```

vite.config.ts

Tailwind plugin plus the D1 proxy

```
import { defineConfig } from "vite";
import react from "@vitejs/plugin-react";
import tailwindcss from "@tailwindcss/vite";

// D1: same origin, no CORS. Plain HTTP keeps the dev cert
// away from the browser.
export default defineConfig({
  plugins: [react(), tailwindcss()],
  server: {
    port: 5173,
    proxy: {
      "/api": { target: "http://localhost:5001" },
      "/identity": {
        target: "http://localhost:5003",
        rewrite: (p) => p.replace(/^\/identity/, ""),
      },
    },
  },
});
```

src/home/MovieCard.tsx

Focus ring and scale on data-focused

```
import { forwardRef } from "react";
import type { MovieResponse } from "../api/types";

type Props = {
  movie: MovieResponse;
  focused: boolean;
  onSelect: (slug: string) => void;
  onHover: () => void; // D10: hover moves focus
};

export const MovieCard = forwardRef<HTMLButtonElement, Props>(
  function MovieCard({ movie, focused, onSelect, onHover }, ref) {
    return (
      <button
        ref={ref}
        type="button"
        data-focused={focused || undefined}
        aria-label={movie.title + ", " + movie.yearOfRelease}
        onClick={() => onSelect(movie.slug)}
        onMouseEnter={onHover}
        className="relative aspect-[2/3] w-[7.5rem] shrink-0 overflow-hidden
          rounded-md bg-surface outline-none transition duration-200
          ease-out motion-reduce:transition-none
          data-[focused]:z-10 data-[focused]:scale-110
          data-[focused]:shadow-2xl data-[focused]:ring-4
          data-[focused]:ring-white data-[focused]:ring-offset-4
          data-[focused]:ring-offset-ink"
      >
        {movie.posterUrl ? (
          <img src={movie.posterUrl} alt="" loading="lazy"
            className="size-full object-cover" />
        ) : (
          <span className="flex size-full flex-col justify-end gap-1
            border-2 border-dashed border-subtle/60 p-3 text-left">
            <span className="font-display text-sm font-bold leading-tight">
              {movie.title}
            </span>
            <span className="text-xs text-muted">{movie.yearOfRelease}</span>
          </span>
        )}
      </button>
    );
  },
);
```

src/home/rows.ts

Row registry

```
// D12: a registry. Phase 2 rows stay registered but off.
export type RowDefinition = {
  id: string;
  title: string;
  query: { sortBy?: string; genre?: string };
  requires?: "B3" | "B5" | "B9" | "B11";
  enabled: boolean;
};

export const rows: RowDefinition[] = [
  { id: "newest", title: "Newest",
    query: { sortBy: "-yearofrelease" }, enabled: true },
  { id: "a-z", title: "A to Z",
    query: { sortBy: "title" }, enabled: true },
  { id: "top-rated", title: "Top rated",
    query: { sortBy: "-rating" }, requires: "B9", enabled: false },
  { id: "popular", title: "Popular",
    query: { sortBy: "-popular" }, requires: "B9", enabled: false },
];
```

src/home/MovieRow.tsx

Paged row, skeletons, error retry

```
export function MovieRow({ row, rowIndex }: Props) {
  const navigate = useNavigate();
  const query = useInfiniteQuery({
    queryKey: ["row", row.id],
    queryFn: ({ pageParam }) =>
      fetchMovies({ ...row.query, page: pageParam, pageSize: 25 }),
    initialPageParam: 1,
    getNextPageParam: (last) =>
      last.hasNextPage ? last.page + 1 : undefined,
  });
  const movies = query.data?.pages.flatMap((p) => p.items) ?? [];
  const { focusedIndex, register, setFocus, nearEnd } =
    useFocusRow(rowIndex, movies.length);

  useEffect(() => {
    if (nearEnd && query.hasNextPage && !query.isFetchingNextPage) {
```

src/shell/Navbar.tsx

Transparent to solid on scroll; role-aware links

```
export function Navbar({ profile }: { profile: Profile | null }) {
  const scrolled = useScrolled(8); // true once window.scrollY > 8
  return (
    <header className={
      "fixed inset-x-0 top-0 z-40 transition-colors duration-300 " +
      "motion-reduce:transition-none " +
      (scrolled ? "bg-ink-deep"
                : "bg-linear-to-b from-black/75 to-transparent")}>
      <nav aria-label="Main" className="safe-x flex flex-wrap items-center
        gap-x-7 gap-y-2 py-4">
        <Link to="/" className="focus-ring flex items-center gap-2
          font-display text-lg font-extrabold tracking-[0.14em]">
          <LogoMark className="size-6" /> TEWE DIARY
        </Link>
        <NavItem to="/">Home</NavItem>
        <NavItem to="/browse">Browse</NavItem>
        {profile && <NavItem to="/ratings">My ratings</NavItem>}
        {profile?.canManage && <NavItem to="/manage">Manage</NavItem>}
        <span className="flex-1" />
        <Link to="/browse" aria-label="Search" className="focus-ring">
          <SearchIcon className="size-6" />
        </Link>
        <ProfileMenu profile={profile} />
      </nav>
    </header>
  );
}

function NavItem({ to, children }: { to: string; children: ReactNode }) {
  return (
    <NavLink to={to} end className={({ isActive }) =>
      "focus-ring text-sm transition-colors hover:text-white " +
      (isActive ? "font-semibold text-white" : "text-muted")}>
      {children}
    </NavLink>
  );
}
```

src/home/HeroBanner.tsx

D8, D11, FR-5, WCAG 2.2.2 pause

```
export function HeroBanner({ slides }: { slides: HeroSlide[] }) {
  const [index, setIndex] = useState(0);
  const [paused, setPaused] = useState(false);
  const allowMotion = useAllowMotion(); // reduced motion, Save-Data
  const visible = useHeroVisible();     // tab shown and in view
  const slide = slides[index];
  const next = () => setIndex((i) => (i + 1) % slides.length);
  const playTrailer =
    allowMotion && visible && !paused && slide.trailer != null;

  // FR-5: advance after 20 s when no trailer is playing
  useEffect(() => {
    if (paused || playTrailer) return;
    const t = window.setTimeout(next, 20_000);
    return () => window.clearTimeout(t);
  }, [index, paused, playTrailer]);

  return (
    <section aria-roledescription="carousel" aria-label="Featured"
      className="relative h-[70vh] min-h-[28rem] overflow-hidden">
      {slide.backdropUrl && (
        <img src={slide.backdropUrl} alt=""
          className="absolute inset-0 size-full object-cover" />
      )}
      {playTrailer && (
        <HeroTrailer trailer={slide.trailer!} onEnded={next} />
      )}
      <div className="absolute inset-0 bg-linear-to-r from-ink
        via-ink/70 to-transparent" />
      <div className="absolute inset-x-0 bottom-0 h-1/3
        bg-linear-to-t from-ink to-transparent" />

      <div key={slide.id} aria-live="polite"
        aria-atomic="true" aria-hidden={paused}
        inert={paused}
        tabIndex={-1}
        onFocus={() => setPaused(true)}
        onBlur={() => setPaused(false)}
        onMouseEnter={() => setPaused(true)}
        onMouseLeave={() => setPaused(false)}
        onKeyDown={(e) => {
          if (e.key === "Escape") setPaused(true);
        }}
        onPointerDown={() => setPaused(true)}
        onTouchStart={() => setPaused(true)}
        onClick={() => setPaused(true)}
        onKeyUp={() => setPaused(true)}
        onScroll={() => setPaused(true)}
        onWheel={() => setPaused(true)}
        onTouchMove={() => setPaused(true)}
        onTouchEnd={() => setPaused(true)}
        onTouchCancel={() => setPaused(true)}
        onPointerUp={() => setPaused(true)}
        onPointerCancel={() => setPaused(true)}
        onPointerMove={() => setPaused(true)}
        onPointerEnter={() => setPaused(true)}
        onPointerLeave={() => setPaused(true)}
        onPointerOut={() => setPaused(true)}
        onPointerOver={() => setPaused(true)}
        onPointerEnterCapture={() => setPaused(true)}
        onPointerLeaveCapture={() => setPaused(true)}
        onPointerOutCapture={() => setPaused(true)}
        onPointerOverCapture={() => setPaused(true)}
        onPointerMoveCapture={() => setPaused(true)}
        onPointerUpCapture={() => setPaused(true)}
        onPointerCancelCapture={() => setPaused(true)}
        onPointerDownCapture={() => setPaused(true)}
        onTouchStartCapture={() => setPaused(true)}
        onTouchMoveCapture={() => setPaused(true)}
        onTouchEndCapture={() => setPaused(true)}
        onTouchCancelCapture={() => setPaused(true)}
        onScrollCapture={() => setPaused(true)}
        onWheelCapture={() => setPaused(true)}
        onKeyDownCapture={() => setPaused(true)}
        onKeyUpCapture={() => setPaused(true)}
        onFocusCapture={() => setPaused(true)}
        onBlurCapture={() => setPaused(true)}
        onMouseEnterCapture={() => setPaused(true)}
        onMouseLeaveCapture={() => setPaused(true)}
        onMouseOverCapture={() => setPaused(true)}
        onMouseOutCapture={() => setPaused(true)}
        onMouseMoveCapture={() => setPaused(true)}
        onMouseDownCapture={() => setPaused(true)}
        onMouseUpCapture={() => setPaused(true)}
        onClickCapture={() => setPaused(true)}
        onContextMenuCapture={() => setPaused(true)}
        onDoubleClickCapture={() => setPaused(true)}
        onDragCapture={() => setPaused(true)}
        onDragEndCapture={() => setPaused(true)}
        onDragEnterCapture={() => setPaused(true)}
        onDragExitCapture={() => setPaused(true)}
        onDragLeaveCapture={() => setPaused(true)}
        onDragOverCapture={() => setPaused(true)}
        onDragStartCapture={() => setPaused(true)}
        onDropCapture={() => setPaused(true)}
        onMouseDown={() => setPaused(true)}
        onMouseUp={() => setPaused(true)}
        onContextMenu={() => setPaused(true)}
        onDoubleClick={() => setPaused(true)}
        onDrag={() => setPaused(true)}
        onDragEnd={() => setPaused(true)}
        onDragEnter={() => setPaused(true)}
        onDragExit={() => setPaused(true)}
        onDragLeave={() => setPaused(true)}
        onDragOver={() => setPaused(true)}
        onDragStart={() => setPaused(true)}
        onDrop={() => setPaused(true)}
        onMouseOver={() => setPaused(true)}
        onMouseOut={() => setPaused(true)}
        onMouseMove
```