
INTERACTIVE END-OF-CHAPTER EXERCISES

TCP SEQUENCE AND ACK NUMBERS WITH SEGMENT LOSS

Consider the figure below in which a TCP sender and receiver communicate over a connection in which the sender->receiver segments may be lost. The TCP sender sends an initial window of 5 segments. Suppose the initial value of the sender->receiver sequence number is 311 and the first 5 segments *each* contain 214 bytes. The delay between the sender and receiver is 7 time units, and so the first segment arrives at the receiver at t=8. As shown in the figure below, 3 of the 5 segment(s) are lost between the segment and receiver.

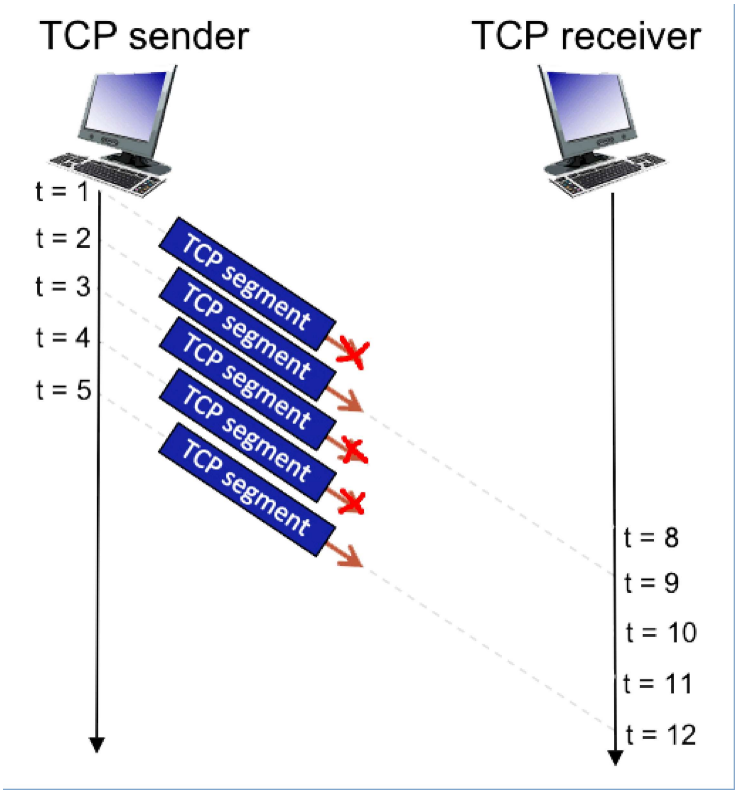

QUESTION LIST

1. Give the sequence numbers associated with each of the 5 segments sent by the sender. Format your answer as: a,b,c,...

2. Give the ACK numbers the receiver sends in response to each of the segments. If a segment never arrives use 'x' to denote it, and format your answer as: a,b,c,...

SOLUTION

1. The sender's sequence numbers are: 311,525,739,953,1167

2. The receiver's ACKs are: x,311,x,x,311

QUESTION 1 OF 2

Give the sequence numbers associated with each of the 5 segments sent by the sender. Format your answer as: a,b,c,...

Answer

CHECK HINT SKIP

We gratefully acknowledge the programming and problem design work of John Broderick (UMass '21), which has really helped to substantially improve this site.

Copyright © 2010-2022 J.F. Kurose, K.W. Ross
Comments welcome and appreciated: kurose@cs.umass.edu