
Introduction to Java Programming and Data Structures

Thirteenth Edition

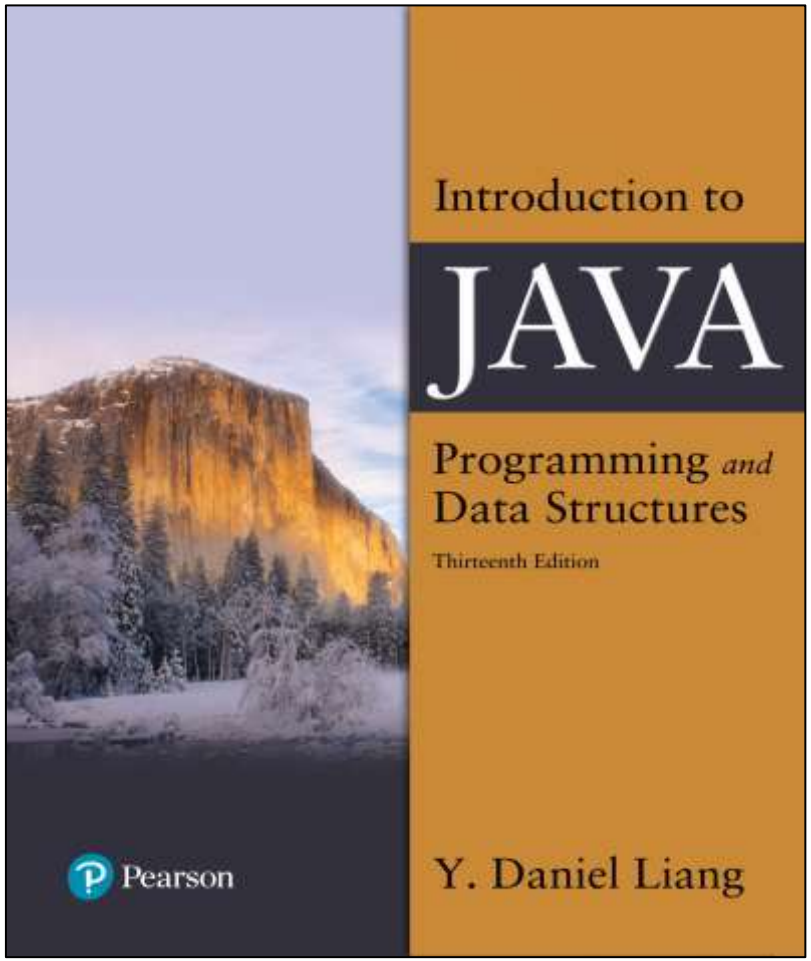

Chapter 8

Multidimensional Arrays

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Motivations (1 of 2)

Thus far, you have used one-dimensional arrays to model linear collections of elements. You can use a two-dimensional array to represent a matrix or a table. For example, the following table that describes the distances between the cities can be represented using a two-dimensional array.

Distance Table (in miles)

	Chicago	Boston	New York	Atlanta	Miami	Dallas	Houston
Chicago	0	983	787	714	1375	967	1087
Boston	983	0	214	1102	1763	1723	1842
New York	787	214	0	888	1549	1548	1627
Atlanta	714	1102	888	0	661	781	810
Miami	1375	1763	1549	661	0	1426	1187
Dallas	967	1723	1548	781	1426	0	239
Houston	1087	1842	1627	810	1187	239	0

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Motivations (2 of 2)

```
double[][] distances = {
    {0, 983, 787, 714, 1375, 967, 1087},
    {983, 0, 214, 1102, 1763, 1723, 1842},
    {787, 214, 0, 888, 1549, 1548, 1627},
    {714, 1102, 888, 0, 661, 781, 810},
    {1375, 1763, 1549, 661, 0, 1426, 1187},
    {967, 1723, 1548, 781, 1426, 0, 239},
    {1087, 1842, 1627, 810, 1187, 239, 0},
};
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Objectives (1 of 2)

8.1 To give examples of representing data using two-dimensional arrays (§8.1).

8.2 To declare variables for two-dimensional arrays, create arrays, and access array elements in a two-dimensional array using row and column indexes (§8.2).

8.3 To program common operations for two-dimensional arrays (displaying arrays, summing all elements, finding the minimum and maximum elements, and random shuffling) (§8.3).

8.4 To pass two-dimensional arrays to methods (§8.4).

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Objectives (2 of 2)

8.5 To write a program for grading multiple-choice questions using two-dimensional arrays (§8.5).

8.6 To solve the closest-pair problem using two-dimensional arrays (§8.6).

8.7 To check a Sudoku solution using two-dimensional arrays (§8.7).

8.8 To use multidimensional arrays (§8.8).

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Declare/Create Two-Dimensional Arrays

```
// Declare array ref var
dataType[][] refVar;
// Create array and assign its reference to
variable
refVar = new dataType[10][10];
// Combine declaration and creation in one
statement
dataType[][] refVar = new dataType[10][10];
// Alternative syntax
dataType refVar[][] = new dataType[10][10];
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Declaring Variables of Two-Dimensional Arrays and Creating Two-Dimensional Arrays

```
int[][] matrix = new int[10][10];
```

or

```
int matrix[][] = new int[10][10];

matrix[0][0] = 3;

for (int i = 0; i < matrix.length; i++)

   for (int j = 0; j < matrix[i].length; j++)


    matrix[i][j] = (int)(Math.random() *
    1000);

double[][] x;
```


Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved


Two-Dimensional Array Illustration

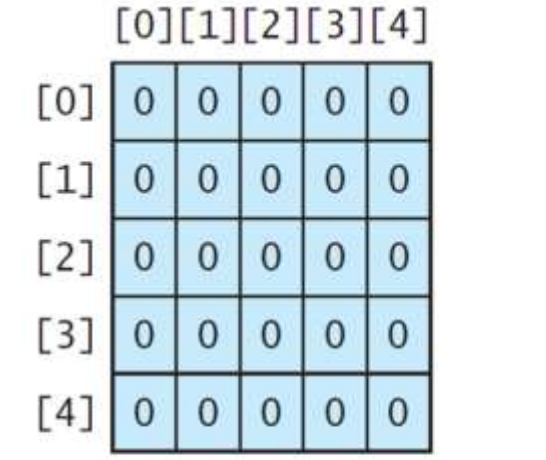

(a)

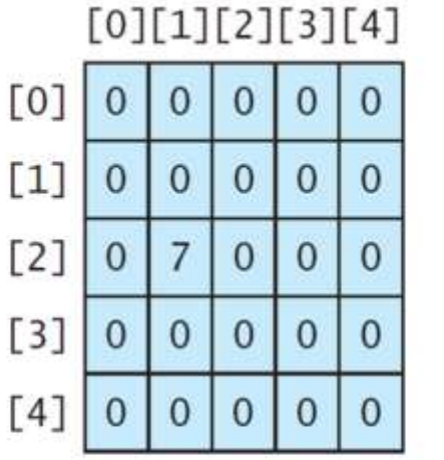

(b)

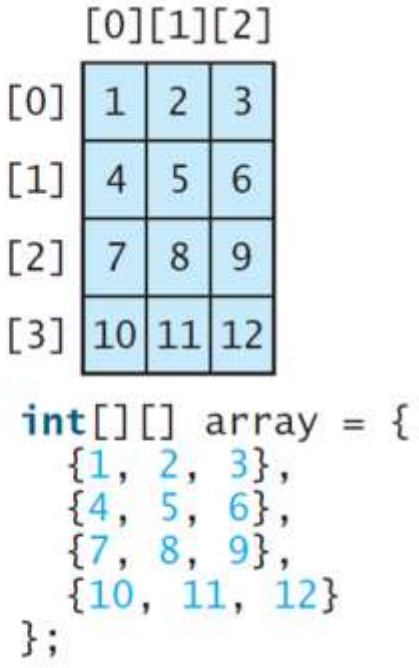

(c)

`matrix.length? 5`

`matrix[0].length? 5`

`array.length? 4`

`array[0].length? 3`

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Declaring, Creating, and Initializing Using Shorthand Notations

You can also use an array initializer to declare, create and initialize a two-dimensional array. For example,

```
int[][] array = {
  {1, 2, 3},
  {4, 5, 6},
  {7, 8, 9},
  {10, 11, 12}
};
```

Same as


```
int[][] array = new int[4][3];
array[0][0] = 1; array[0][1] = 2; array[0][2] = 3;
array[1][0] = 4; array[1][1] = 5; array[1][2] = 6;
array[2][0] = 7; array[2][1] = 8; array[2][2] = 9;
array[3][0] = 10; array[3][1] = 11; array[3][2] = 12;
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Lengths of Two-Dimensional Arrays (1 of 2)

```
int[][] x = new int[3][4];
```

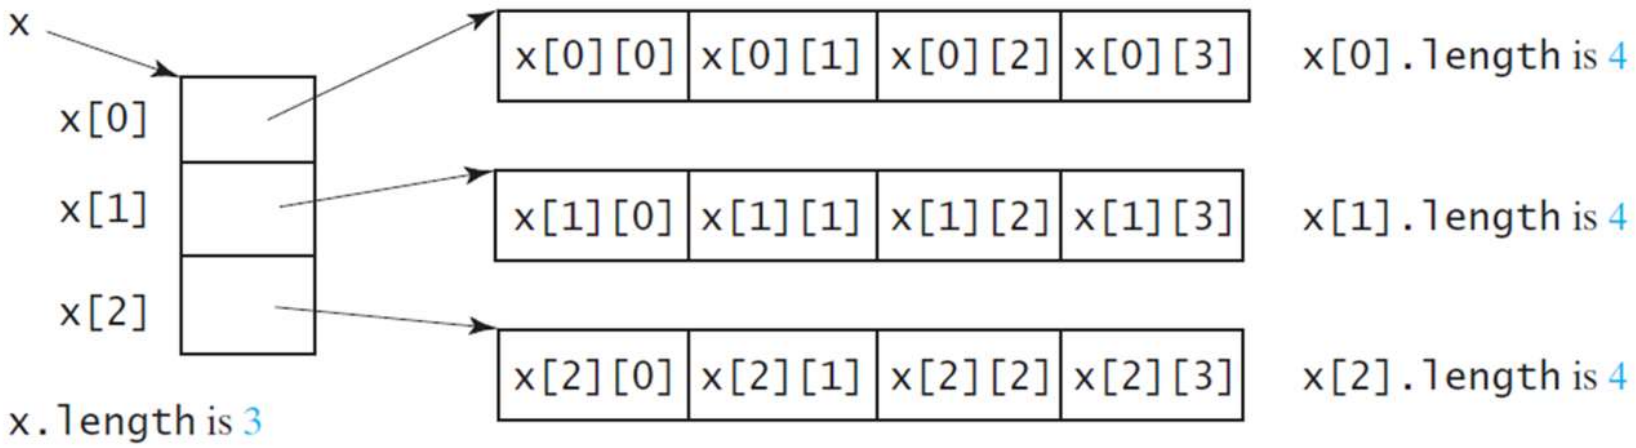

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Lengths of Two-Dimensional Arrays (2 of 2)

```
int[][] array = {
  {1, 2, 3},
  {4, 5, 6},
  {7, 8, 9},
  {10, 11, 12}
};
```

```
array.length
array[0].length
array[1].length
array[2].length
array[3].length
```

`array[4].length` ArrayIndexOutOfBoundsException

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Ragged Arrays (1 of 2)

Each row in a two-dimensional array is itself an array. So, the rows can have different lengths. Such an array is known as a **ragged array**. For example,

```
int[][] matrix = {
{1, 2, 3, 4, 5},
 {2, 3, 4, 5},
 {3, 4, 5},
 {4, 5},
 {5}
};
```

`matrix.length` is 5

`matrix[0].length` is 5

`matrix[1].length` is 4

`matrix[2].length` is 3

`matrix[3].length` is 2


`matrix[4].length` is 1

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Ragged Arrays (2 of 2)

```
int[][] triangleArray = {
   {1, 2, 3, 4, 5},
   {2, 3, 4, 5},
   {3, 4, 5},
   {4, 5},
   {5}
};
```

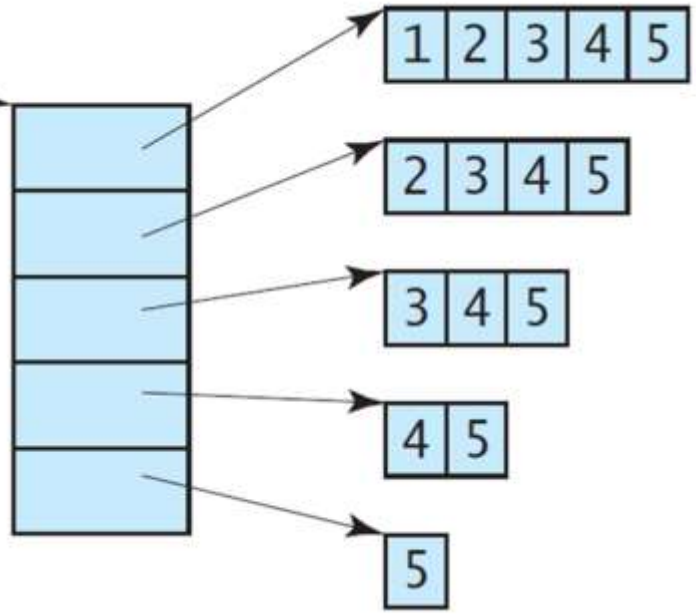

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Processing Two-Dimensional Arrays

See the examples in the text.

1. (Initializing arrays with input values)
2. (Printing arrays)
3. (Summing all elements)
4. (Summing all elements by column)
5. (Which row has the largest sum)
6. (Finding the smallest index of the largest element)
7. (**Random shuffling**)

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Initializing Arrays With Input Values

```
java.util.Scanner input = new Scanner(System.in);
System.out.println("Enter " + matrix.length + " rows and " +
  matrix[0].length + " columns: ");
for (int row = 0; row < matrix.length; row++) {
  for (int column = 0; column < matrix[row].length; column++) {
    matrix[row][column] = input.nextInt();
  }
}
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Initializing Arrays With Random Values

```
for (int row = 0; row < matrix.length; row++) {

  for (int column = 0; column < matrix[row].length;
  column++) {

    matrix[row][column] = (int)(Math.random() * 100);

  }

}
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Printing Arrays

```
for (int row = 0; row < matrix.length; row++) {

  for (int column = 0; column < matrix[row].length;
  column++) {

    System.out.print(matrix[row][column] + " ");

  }

  System.out.println();

}
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Summing All Elements

```
int total = 0;

for (int row = 0; row < matrix.length; row++) {

  for (int column = 0; column < matrix[row].length;
  column++) {

    total += matrix[row][column];

  }

}
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Summing Elements by `Column`

```
for (int column = 0; column < matrix[0].length; column++) {
  int total = 0;
  for (int row = 0; row < matrix.length; row++)
    total += matrix[row][column];
  System.out.println("Sum for column " + column + " is "
    + total);
}
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Random Shuffling

```
for (int i = 0; i < matrix.length; i++) {
  for (int j = 0; j < matrix[i].length; j++) {
    int i1 = (int)(Math.random() * matrix.length);
    int j1 = (int)(Math.random() * matrix[i].length);
    // Swap matrix[i][j] with matrix[i1][j1]
    int temp = matrix[i][j];
    matrix[i][j] = matrix[i1][j1];
    matrix[i1][j1] = temp;
  }
}
```

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Passing Tow-Dimensional Arrays to Methods

PassTwoDimensionalArray

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Problem: Grading Multiple-Choice Test

Students' answer

	0	1	2	3	4	5	6	7	8	9
Student 0	A	B	A	C	C	D	E	E	A	D
Student 1	D	B	A	B	C	A	E	E	A	D
Student 2	E	D	D	A	C	B	E	E	A	D
Student 3	C	B	A	E	D	C	E	E	A	D
Student 4	A	B	D	C	C	D	E	E	A	D
Student 5	B	B	E	C	C	D	E	E	A	D
Student 6	B	B	A	C	C	D	E	E	A	D
Student 7	E	B	E	C	C	D	E	E	A	D

Objective: write a program that grades multiple-choice test.

Key to the Questions:


	0	1	2	3	4	5	6	7	8	9
Key	D	B	D	C	C	D	A	E	A	D

PassTwoDimensionalArray

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Problem: Finding Two Points Nearest to Each Other

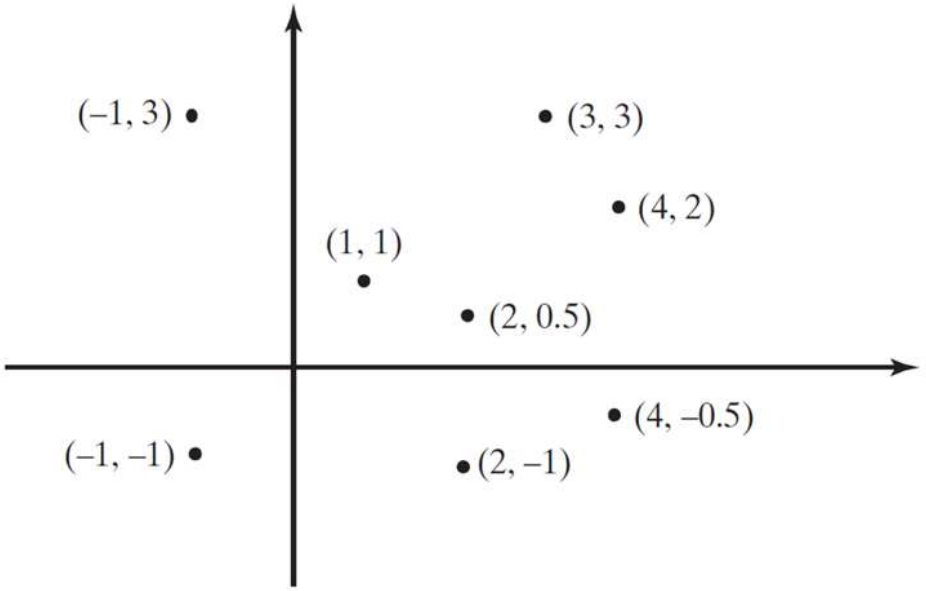

	x	y
0	–1	3
1	–1	–1
2	1	1
3	2	0.5
4	2	–1
5	3	3
6	4	2
7	4	–0.5

https://liveexample.pearsoncmg.com/dsanimation/ClosestPaireBook.html

PassTwoDimensionalArray

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

What is Sudoku?

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6							
			4	1	9			5
				8			7	9


https://liveexample.pearsoncmg.com/dsanimation/Sudoku.html

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Every Row Contains the Numbers 1 to 9

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6							
			4	1	9			5
				8			7	9

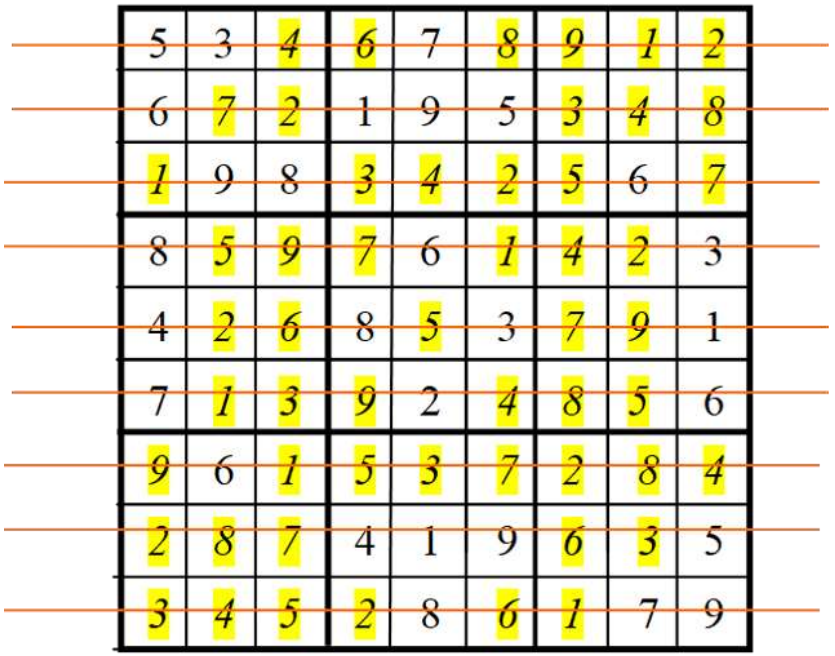


Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Every Column Contains the Numbers 1 to 9

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6							
			4	1	9			5
				8			7	9

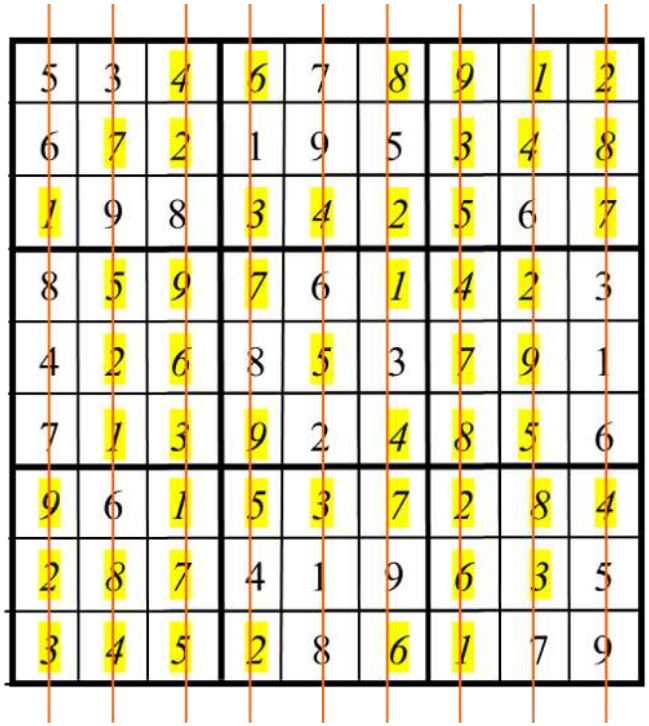

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Every 3 by 3 Box Contains the Numbers 1 to 9

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6							
			4	1	9			5
				8			7	9

5	3	*4*	*6*	7	*8*	*9*	*1*	*2*
6	*7*	*2*	1	9	5	*3*	*4*	*8*
1	9	8	*3*	*4*	*2*	*5*	6	*7*
8	*5*	*9*	*7*	6	*1*	*4*	*2*	3
4	*2*	*6*	8	*5*	3	*7*	*9*	1
7	*1*	*3*	*9*	2	*4*	*8*	*5*	6
9	6	*1*	*5*	*3*	*7*	*2*	*8*	*4*
2	*8*	*7*	4	1	9	*6*	*3*	5
3	*4*	*5*	*2*	8	*6*	*1*	7	9

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Checking Whether a Solution Is Correct

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6							
			4	1	9			5
				8			7	9

5	3	*4*	*6*	7	*8*	*9*	*1*	*2*
6	*7*	*2*	1	9	5	*3*	*4*	*8*
1	9	8	*3*	*4*	*2*	*5*	6	*7*
8	*5*	*9*	*7*	6	*1*	*4*	*2*	3
4	*2*	*6*	8	*5*	3	*7*	*9*	1
7	*1*	*3*	*9*	2	*4*	*8*	*5*	6
9	6	*1*	*5*	*3*	*7*	*2*	*8*	*4*
2	*8*	*7*	4	1	9	*6*	*3*	5
3	*4*	*5*	*2*	8	*6*	*1*	7	9

CheckSudokuSolution

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Multidimensional Arrays (1 of 2)

Occasionally, you will need to represent n-dimensional data structures. In Java, you can create n-dimensional arrays for any integer n.


The way to declare two-dimensional array variables and create two-dimensional arrays can be generalized to declare n-dimensional array variables and create n-dimensional arrays for n >= 3.

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Multidimensional Arrays (2 of 2)

```
double[][][] scores = {
  {{7.5, 20.5}, {9.0, 22.5}, {15, 33.5}, {13, 21.5}, {15, 2.5}},
  {{4.5, 21.5}, {9.0, 22.5}, {15, 34.5}, {12, 20.5}, {14, 9.5}},
  {{6.5, 30.5}, {9.4, 10.5}, {11, 33.5}, {11, 23.5}, {10, 2.5}},
  {{6.5, 23.5}, {9.4, 32.5}, {13, 34.5}, {11, 20.5}, {16, 7.5}},
  {{8.5, 26.5}, {9.4, 52.5}, {13, 36.5}, {13, 24.5}, {16, 2.5}},
  {{9.5, 20.5}, {9.4, 42.5}, {13, 31.5}, {12, 20.5}, {16, 6.5}}
};
```

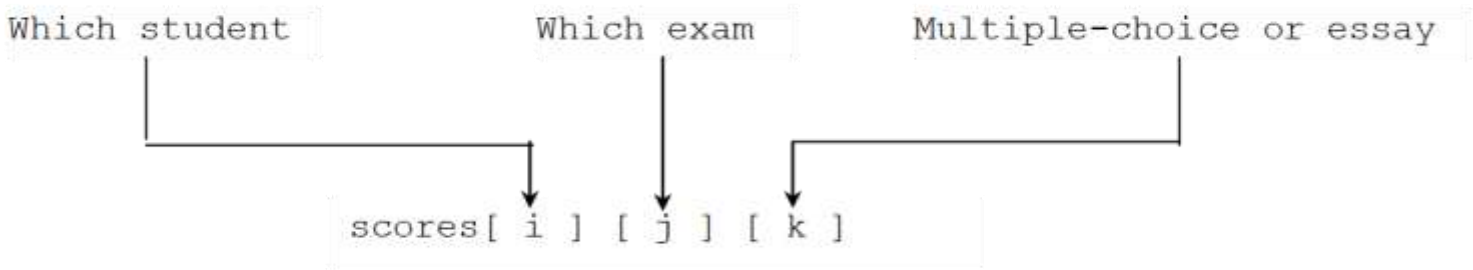

Pearson
Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Problem: Calculating Total Scores

Objective: write a program that calculates the total score for students in a class. Suppose the scores are stored in a three-dimensional array named **`scores`**. The first index in **`scores`** refers to a student, the second refers to an exam, and the third refers to the part of the exam. Suppose there are 7 students, 5 exams, and each exam has two parts--the multiple-choice part and the programming part. So, **`scores[i][j][0]`** represents the score on the multiple-choice part for the **`i`**'s student on the `j`'s exam. Your program displays the total score for each student.

TotalScore

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Problem: Weather Information

Suppose a meteorology station records the temperature and humidity at each hour of every day and stores the data for the past ten days in a text file named weather.txt. Each line of the file consists of four numbers that indicate the day, hour, temperature, and humidity. Your task is to write a program that calculates the average daily temperature and humidity for the `10` days.

```
1 1 76.4 0.92
1 2 77.7 0.93
...
10 23 97.7 0.71
10 24 98.7 0.74
```

(a)

```
10 24 98.7 0.74
1 2 77.7 0.93
...
10 23 97.7 0.71
1 1 76.4 0.92
```

(b)

Weather

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Problem: Guessing Birthday

Listing 4.3, GuessBirthday.java, gives a program that guesses a birthday. The program can be simplified by storing the numbers in five sets in a three-dimensional array, and it prompts the user for the answers using a loop.

GuessBirthdayUsingArray

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved

Copyright



This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.

Pearson

Copyright © 2024 Pearson Education, Inc. All Rights Reserved