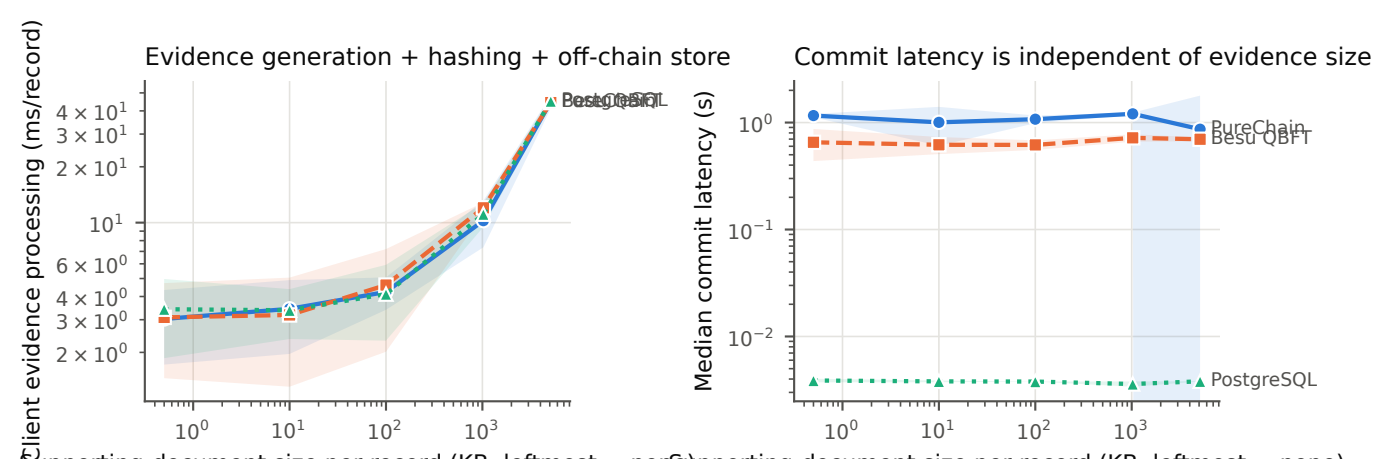
Evidence generation + hashing + off-chain store
Client evidence processing (ms/record)
4×10^1
3×10^1
2×10^1
10^1
6×10^0
4×10^0
3×10^0
2×10^0
10^0
10^1
10^2
10^3
Supporting-document size per record (KB; leftmost = none)
Commit latency is independent of evidence size
Median commit latency (s)
10^0
10^{-1}
10^{-2}
PureChain
Besu QBFT
PostgreSQL
10^0
10^1
10^2
10^3
Supporting-document size per record (KB; leftmost = none)