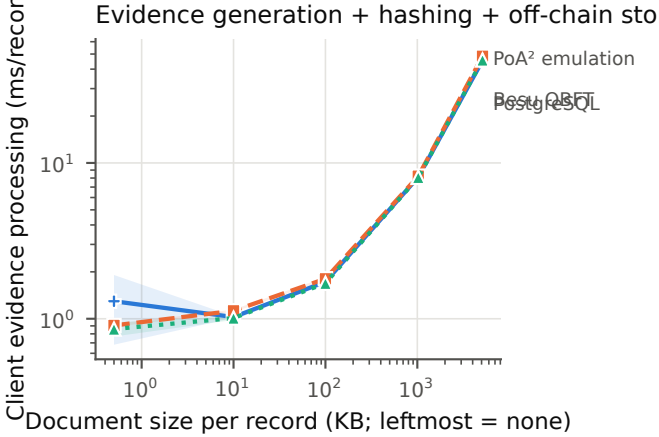
Evidence generation + hashing + off-chain store
Client evidence processing (ms/record)
10^1
10^0
PoA² emulation
Besu QBFT
PostgreSQL
10^0
10^1
10^2
10^3
Document size per record (KB; leftmost = none)

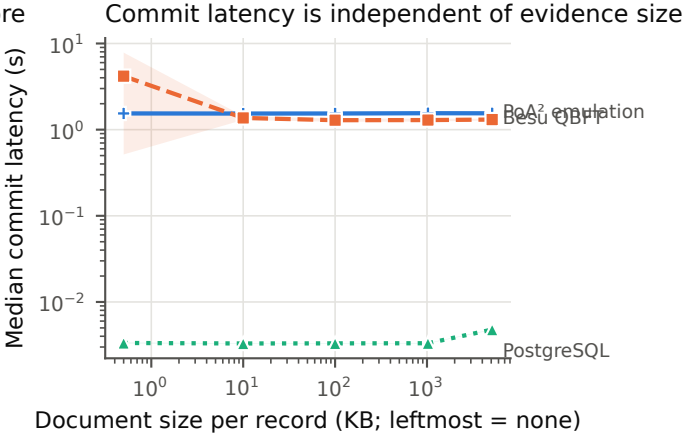
Commit latency is independent of evidence size
Median commit latency (s)
10^1
10^0
10^{-1}
10^{-2}
PoA² emulation
Besu QBFT
PostgreSQL
10^0
10^1
10^2
10^3
Document size per record (KB; leftmost = none)