


Learning comparison weights without match labels

Expectation–maximisation (EM) fits parameters using many record pairs.

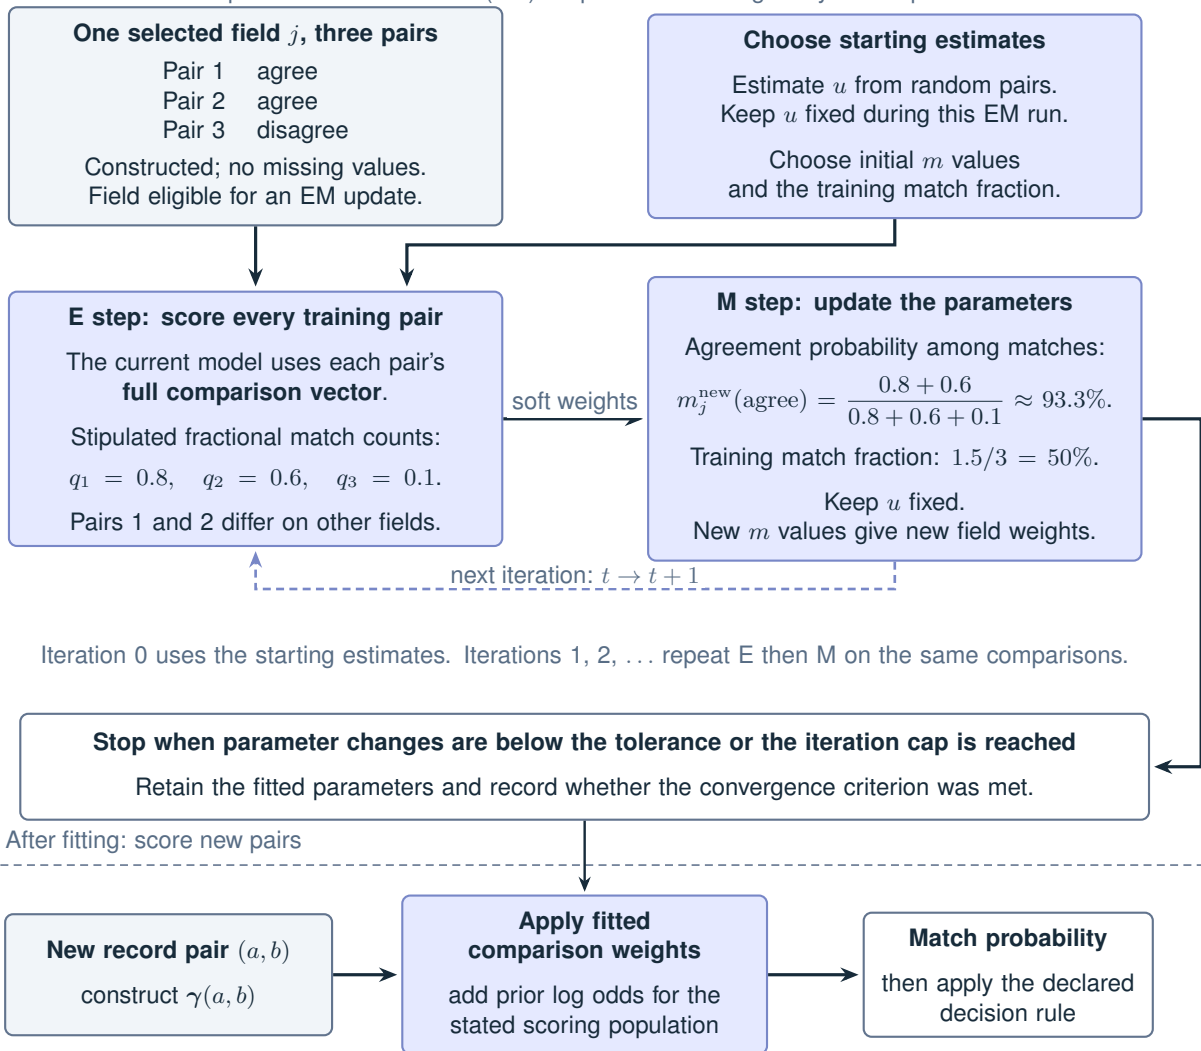

Splink practice. A common route estimates u from random pairs first and holds it fixed during EM.

This notebook's EM arm uses this route. The supervised reference estimates m from known matching pairs.

A stable fit still needs independent evaluation.