


# Wedding tamplate

## 클론 코딩

김현아

# 레이아웃 구조 점검 및 분석

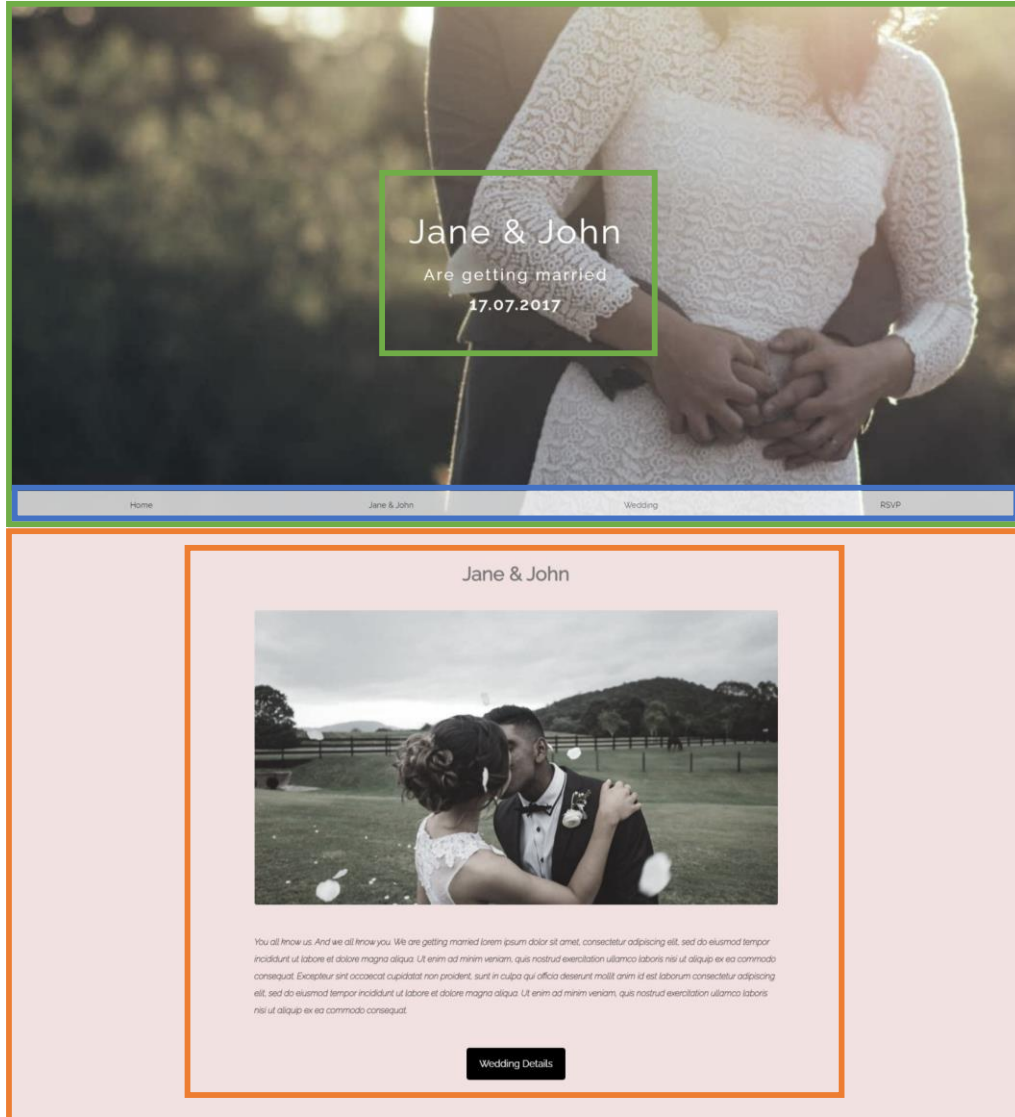

header

h1, h2


고정되어있는 bar - nav

a

본문 - content


H1, img, p

# 레이아웃 구조 점검 및 분석

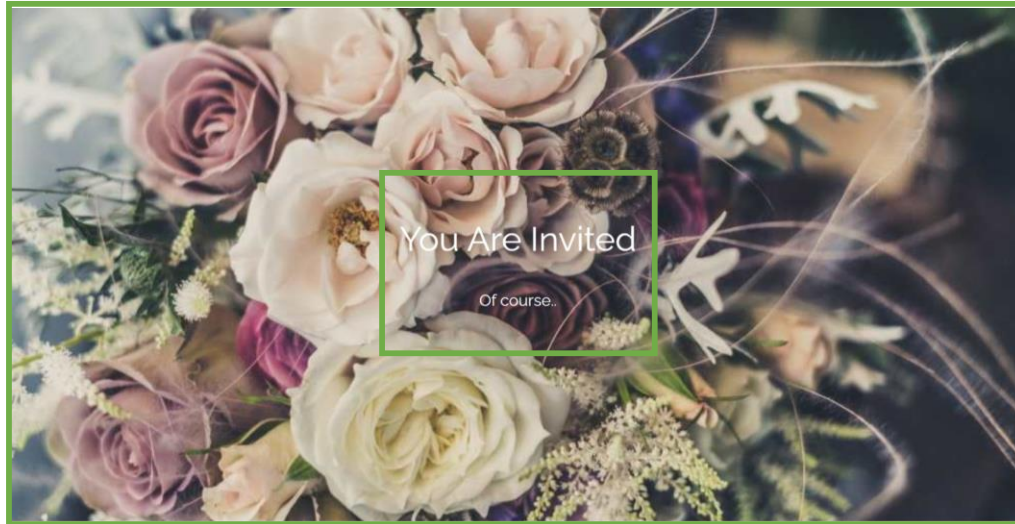

본문 - invited

H1, h2

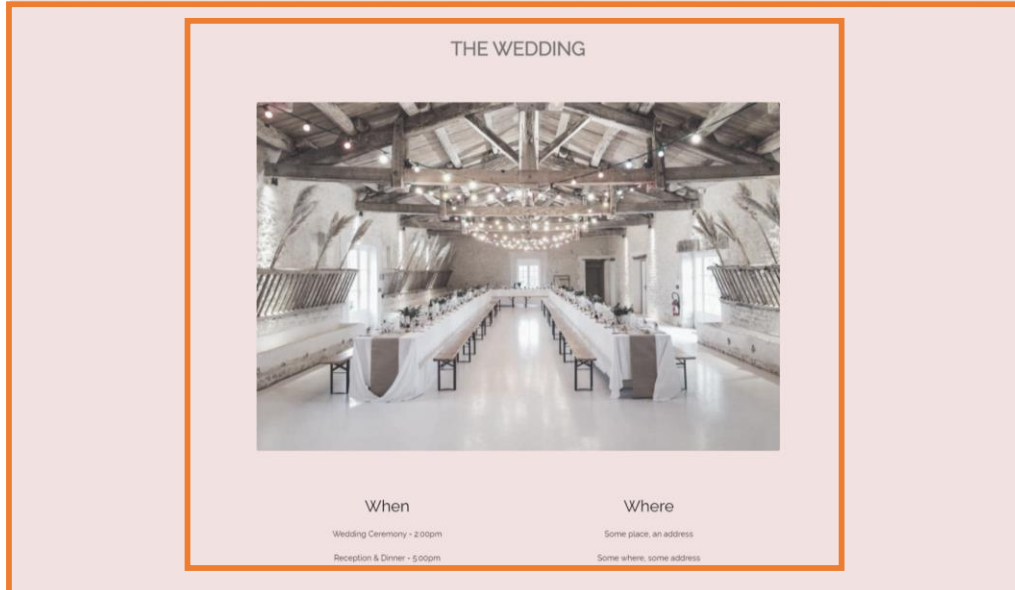

본문 - wedding

H1, img  
H2, p

# 레이아웃 구조 점검 및 분석


본문 - rsvp

H1, p



footer

P, a

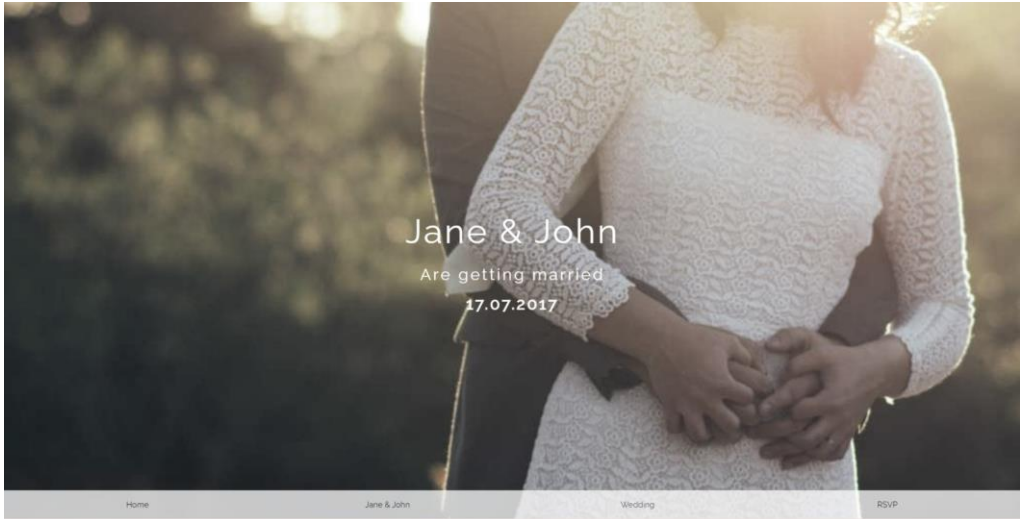


Jane & John



You all know us. And we all know you. We are getting married lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

Wedding Details

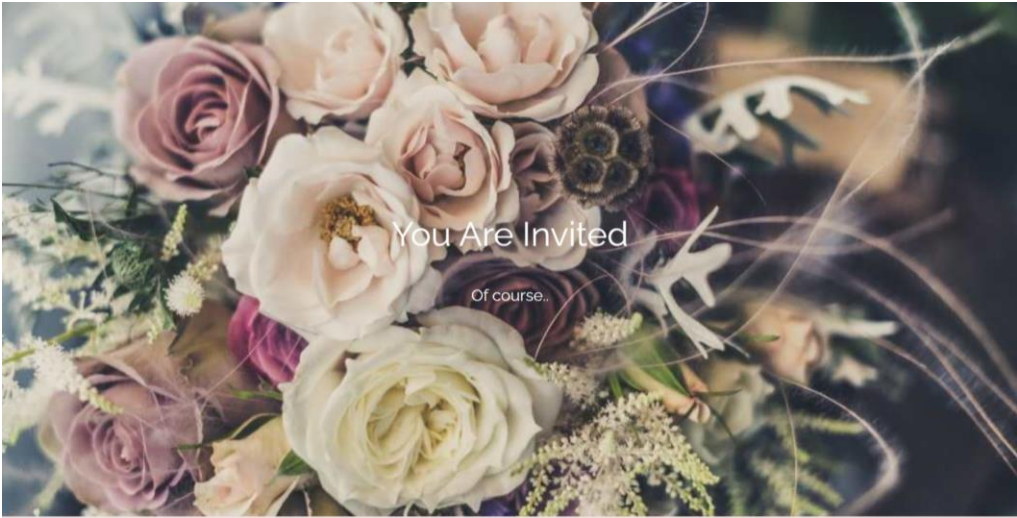

THE WEDDING



When

Wedding Ceremony - 2.00pm  
Reception & Dinner - 5.00pm

Where


Some place, an address  
Some where, some address

HOPE YOU CAN MAKE IT!

Kindly Respond By January, 2017

RSVP

# nav 구현결과




html

```
<div id="nav">
  <div class="bar">
    <a href="#">Home</a>
    <a href="#">Jane & John</a>
    <a href="#">Wedding</a>
    <a href="#">RSVP</a>
  </div>
</div>
```

CSS


```
#nav {
  position: fixed;
  bottom: 0;
  width: 100%;
  background-color: #white;
  opacity: .75;
  text-align: center;
  z-index: 999;
}
.bar {padding: 8px 16px;overflow: hidden;}
.bar a {
  text-decoration: none;
  color: #black;
  float: left;
  width: 25%;
  box-sizing: border-box;
  padding: 8px 16px;
  font-size: 15px;
}
#nav:hover {
  opacity: 1;
}
.bar a:hover {background: #rgb(206, 206, 206);}
.bar a:hover:last-child {background: #black;color: #white;}
```

마우스 hover





# Header 구현결과

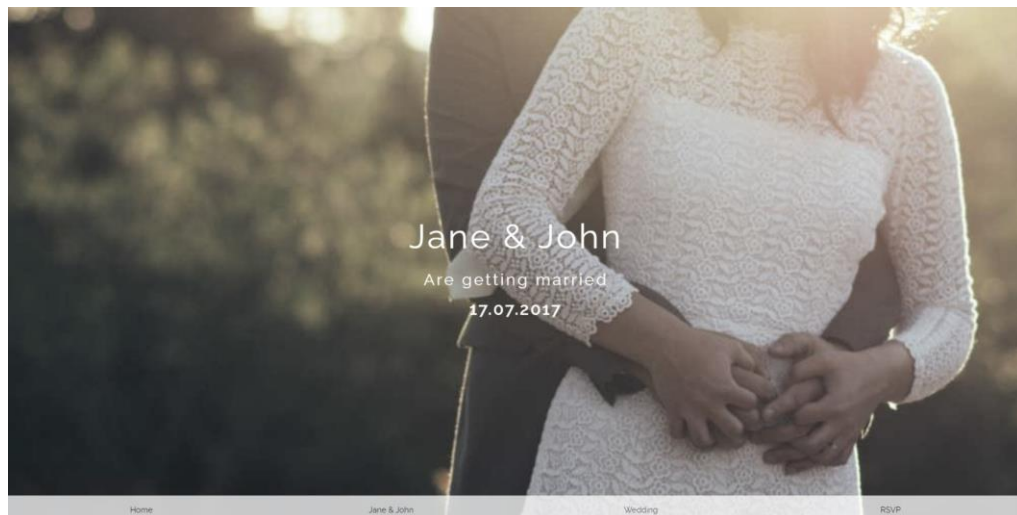

```
<div id="header">
  <div class="header-title">
    <h1>Jane & John</h1>
    <h2>Are getting married</h2>
    <h2><strong>17.07.2017</strong></h2>
  </div>
</div>
```

html

```
body{height: 100vh;}
#header {
  position: relative;
  height: 100%;
  background-image: url(../img/wedding_couple.jpg);
  background-position: center;
  background-size: cover;
  filter: grayscale(.5);
}
.header-title {
  position: absolute;
  top: 50%;
  left: 50%;
  transform: translate(-50%, -50%);
  text-align: center;
  color: white;
  letter-spacing: 4px;
}
.header-title h1 {font-size: 64px;}
.header-title h2 {font-size: 30px;}

#header::after {content: '';display: block;clear: both;}
```

CSS

# content 구현결과



```
<div class="content-box">
  <div class="content">
    <h1><strong>Jane & John</strong></h1>
    
    <p><i><b>You all know us. And we all know you. We are<br>
    <p class="bt-details">
      <a href="#" class="button">Wedding Details</a>
    </p>
  </div>
</div>
```

## html

샘플 페이지의 p태그에는 b태그가 없으나  
제 컴퓨터에서 볼 때 글씨 가독성이 좋지 못해서 추가했습니다

## CSS

```
.content-box {
  background: #ffdddd;
  color: black;
  padding: 64px 16px;
  filter: grayscale(.5);
}

.content {
  max-width: 980px;
  margin: auto;
}

.content h1 {
  text-align: center;
  color: #757575;
  font-size: 36px;
}

.content img {
  margin: 32px 0;
  width: 100%;
  border-radius: 4px;
  filter: grayscale(.5);
}

.content p {
  font-size: 16px;
  line-height: 2;
  margin: 15px 0;
  font-weight: 400;
}
```

```
.button {
  border: none;
  display: inline-block;
  padding: 8px 16px;
  text-decoration: none;
  text-align: center;
  line-height: 2;
}

.bt-details {text-align: center;}
.bt-details a {
  background: black;
  color: white;
  text-align: center;
  text-decoration: none;
  padding: 12px 24px;
  border-radius: 5px;
  font-size: 18px;
  display: inline-block;
}

.bt-details a:hover {
  background: #ddd;
  color: black;
}
```


재사용하기 위한 button클래스 설정

마우스 hover

Wedding Details



# invited 구현결과

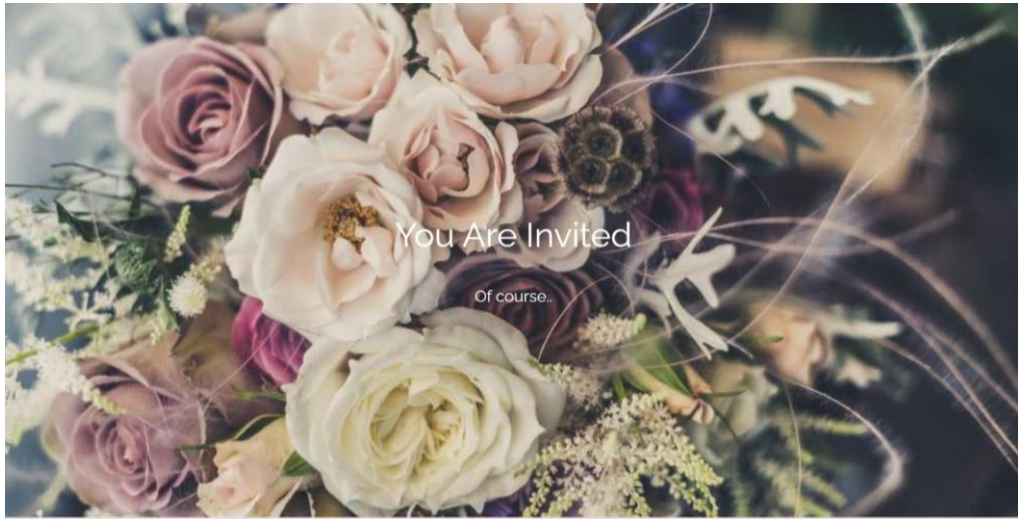


```
<div class="invited">  
  <div class="invited-title">  
    <h1>You Are Invited</h1>  
    <br>  
    <h2>Of course..</h2>  
  </div>  
</div>
```

html

CSS

```
.invited {  
  background: url(../img/flowers.jpg);  
  background-position: center;  
  background-size: cover;  
  height: 100%;  
  position: relative;  
}  
.invited-title {  
  position: absolute;  
  top: 50%;  
  left: 50%;  
  transform: translate(-50%, -50%);  
  text-align: center;  
  color: white;  
}  
.invited-title h1 {font-size: 64px;}  
.invited-title h2 {font-size: 30px;}
```

# invited 구현결과

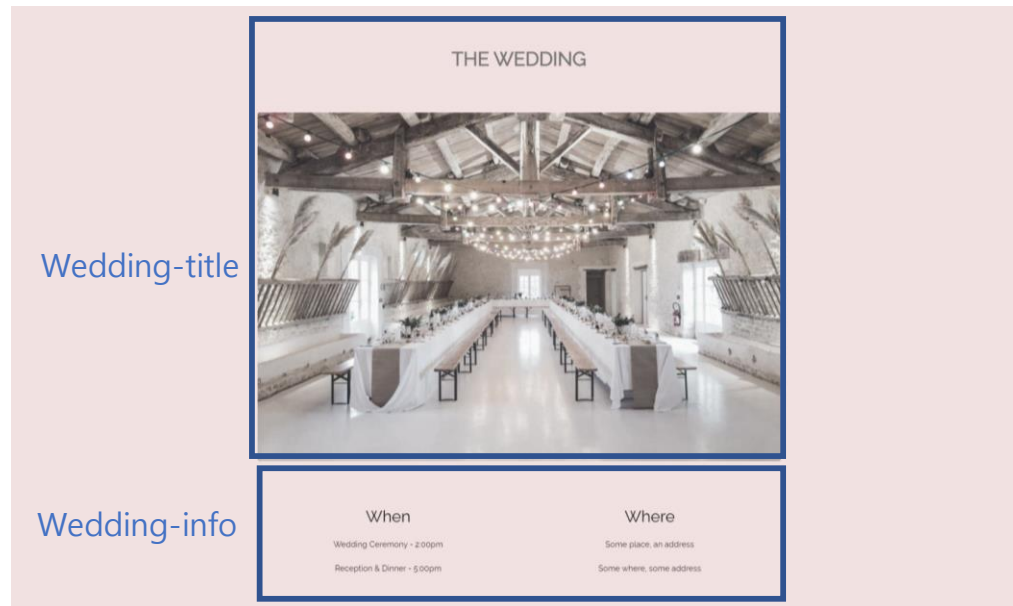

```
<div id="wedding-box">
  <div class="wedding">
    <div class="wedding-title">
      <h1><b>THE WEDDING</b></h1>
      
    </div>
    <div class="wedding-info">
      <div class="when">
        <h2>When</h2>
        <p>Wedding Ceremony - 2:00pm</p>
        <p>Reception & Dinner - 5:00pm</p>
      </div>
      <div class="where">
        <h2>Where</h2>
        <p>Some place, an address</p>
        <p>Some where, some address</p>
      </div>
    </div>
  </div>
</div>
```

html

```
#wedding-box {
  background: ■#ffdddd;
  color: □black;
  padding: 64px 16px;
  filter: grayscale(.5);
}

.wedding {
  max-width: 980px;
  margin: auto;
}

.wedding-title img {
  width: 100%;
  margin: 64px 0;
  border-radius: 4px;

  filter: grayscale(.5);
}

.wedding-title h1 {
  text-align: center;
  color: □#757575;
  font-size: 36px;
}
```


CSS

```
.wedding-info {
  overflow: hidden;
}

.when, .where {
  float: left;
  width: 50%;
  text-align: center;
}

.when h2, .where h2 {font-size: 30px;}
.when p, .where p {font-size: 15px;margin: 15px 0;line-height: 2;}
```

# invited 구현결과

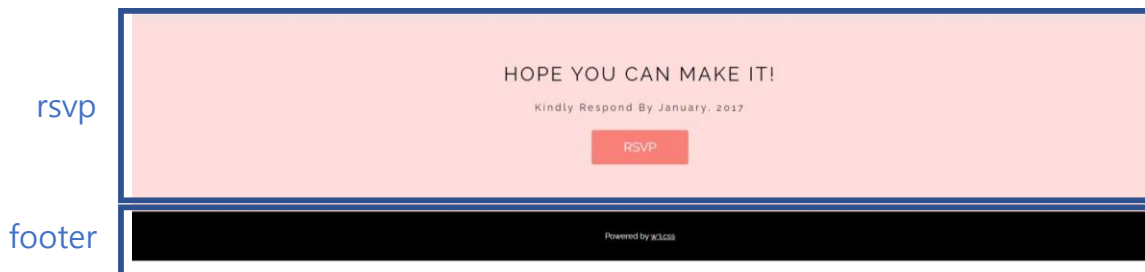

```
<div id="rsvp">
  <h1>HOPE YOU CAN MAKE IT!</h1>
  <p>Kindly Respond By January, 2017</p>
  <p class="bt-rsvp"><button class="button">RSVP</button></p>
</div>

<div id="footer">
  <p>Powered by <a href="https://www.w3schools.com/w3css/default.html">W3CSS</a></p>
</div>
<div>&nbsp;</div>
```

## html


Footer 단락 맨 끝의 div(공백)태그는  
샘플 페이지의 개발자도구를 참고함

## CSS

```
#rsvp {
  background: #ffdddd;
  padding: 64px 0;
  text-align: center;
  letter-spacing: 4px;
}
#rsvp h1 {font-size: 36px;}
#rsvp p {
  font-size: 18px;
  margin: 18px 0;
  line-height: 2;
}
#rsvp .bt-rsvp {
  margin: 24px 0;
}
.bt-rsvp button {
  background: #f44336;
  color: white;
  padding: 8px 60px;
  font-size: 24px;
  border-radius: 4px;
  line-height: 2;
  opacity: .6;
}
.bt-rsvp button:hover {
  background: rgb(212, 212, 212);
  color: black;
  opacity: 1;
}
```

```
#footer {
  width: 100%;
  background: black;
  color: white;
  padding: 16px 0;
  text-align: center;
}
#footer p {
  margin: 15px 0;
  font-size: 15px;
  line-height: 2;
}
#footer p a {color: white;}
#footer p a:hover {color: olivedrab;}
```

마우스 hover



# 소요시간 및 소감

소요시간: 약 4시간

소감

전체적으로 완성한 후 샘플 페이지의 코드에서 여백 크기를 확인해봤는데

Line-height를 넓게 주면 생기는 여백으로 패딩이나 마진처럼 쓸 수 있다는 것을 배웠습니다

오늘의 궁금증: box-sizing을 쓰지 않고 float을 정렬할 수는 없는 건가 매번 작성해줘야 하는 것인가  
4번째 클론코딩인데, 내가 어떤 속성을 사용할 때 아직도 미숙한 지 느껴졌기 때문에  
더 공부해야 할 부분을 알 수 있어서 도움이 됐습니다