

```
<br/>body>
```

```
<div id="box">
box
</div>
</body>
```

```
<style type="text/css">
     margin:0;
     padding:0;
     border:0;
</style>
```

```
<style type="text/css">
  #box{
     width:600px;
     height:500px;
     background-color:#0f0;
     margin:0 auto;
</style>
```

neader

section

footer

100px

300px


```
<div id="header">header</div>
<div id="section">section</div>
<div id="footer">footer</div>
```

```
</div>
```

px % pt

```
<style type="text/css">
  #header{ width:100%;
            height:100px;
            background-color:#0f0; }
  #section{width:100%;
          height:300px;
          background-color:#fa0; }
  #footer{ width:100%;
          height:100px;
background-color:#03f; }
```

</style>

neader

aside

article

foter

100px


300px


<style type="text/css">

</style>

float:left
float:right
clear:both

display:inline display:block display:none

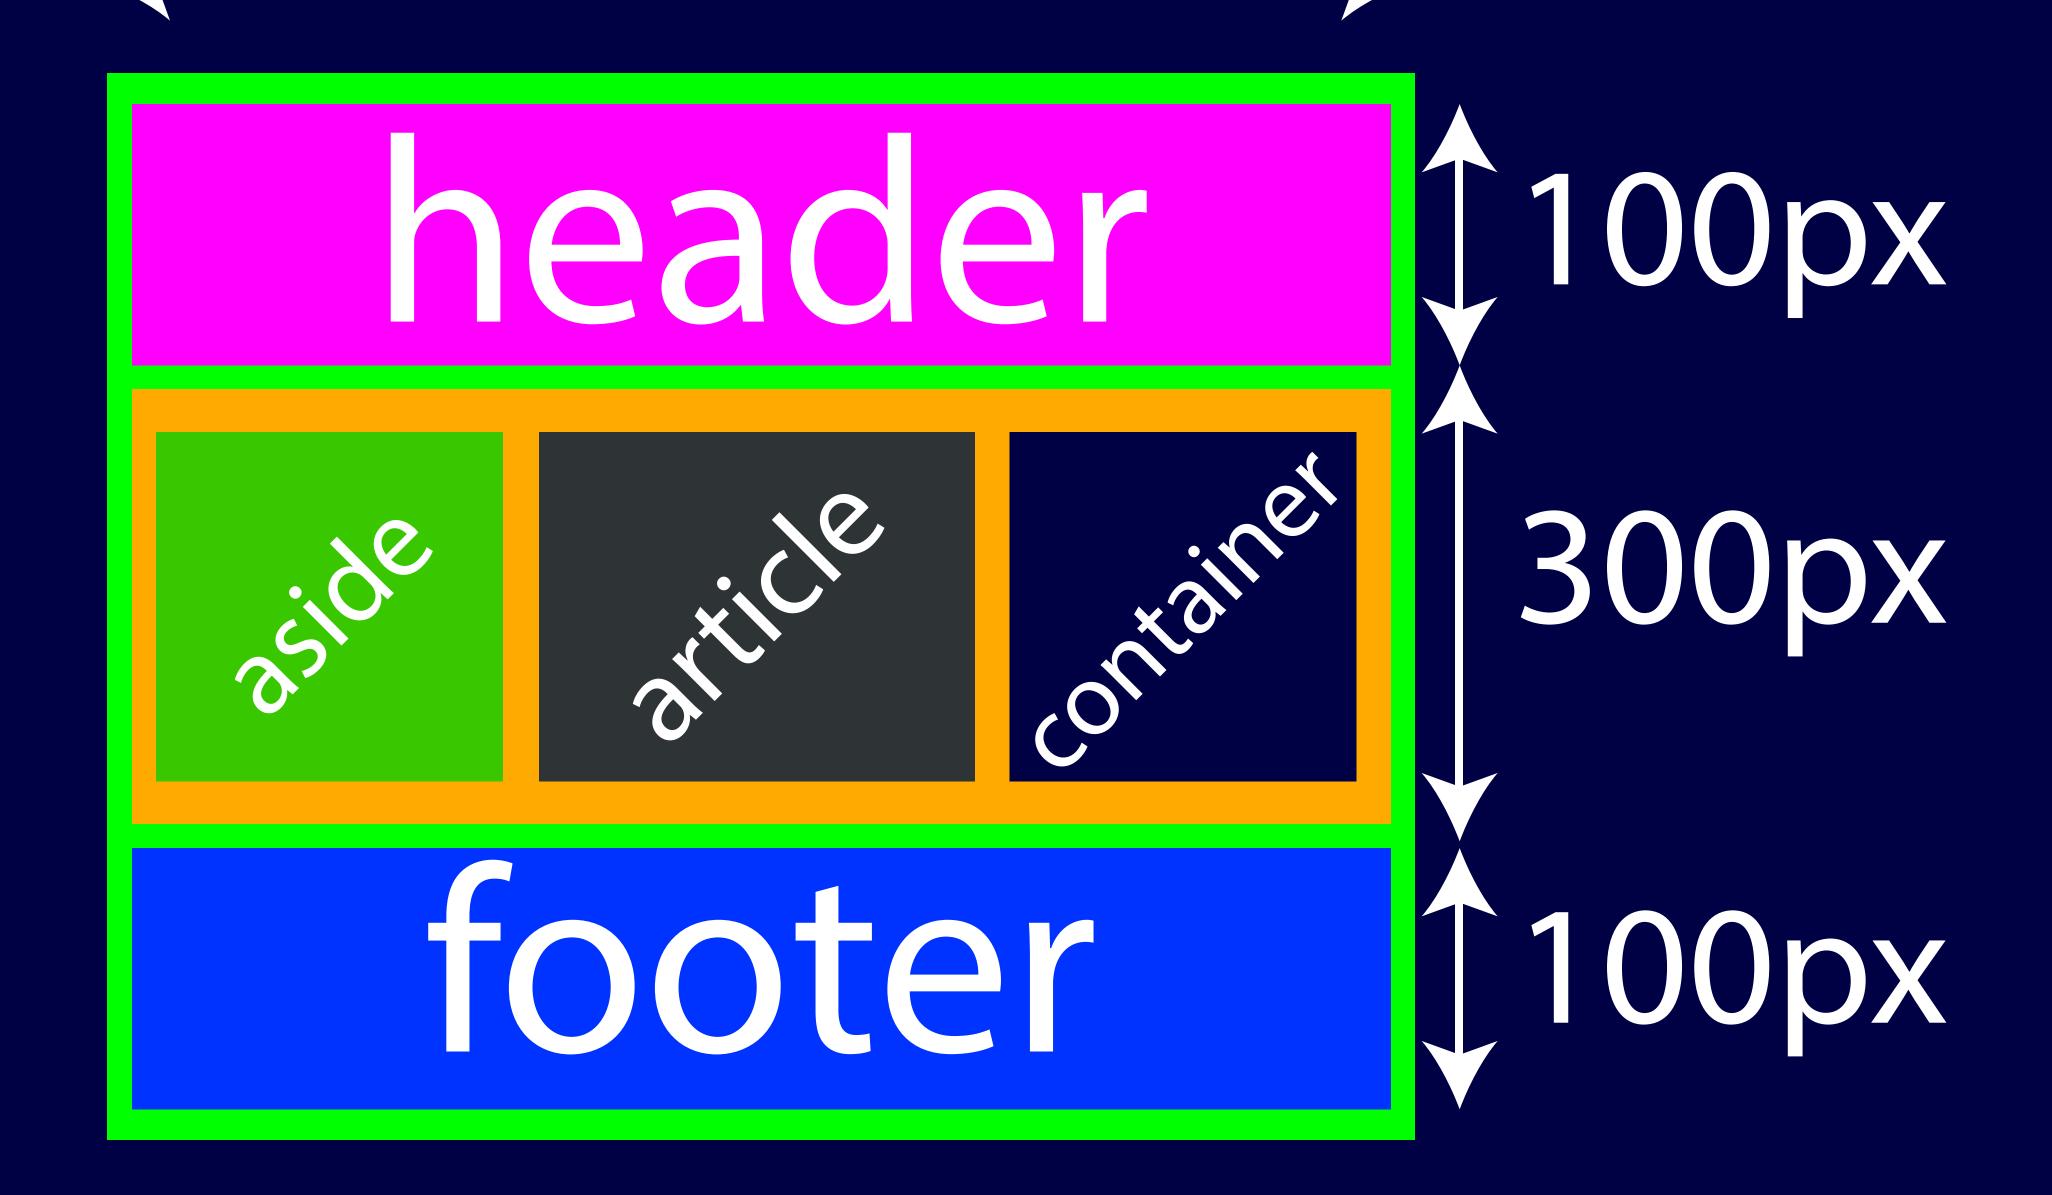

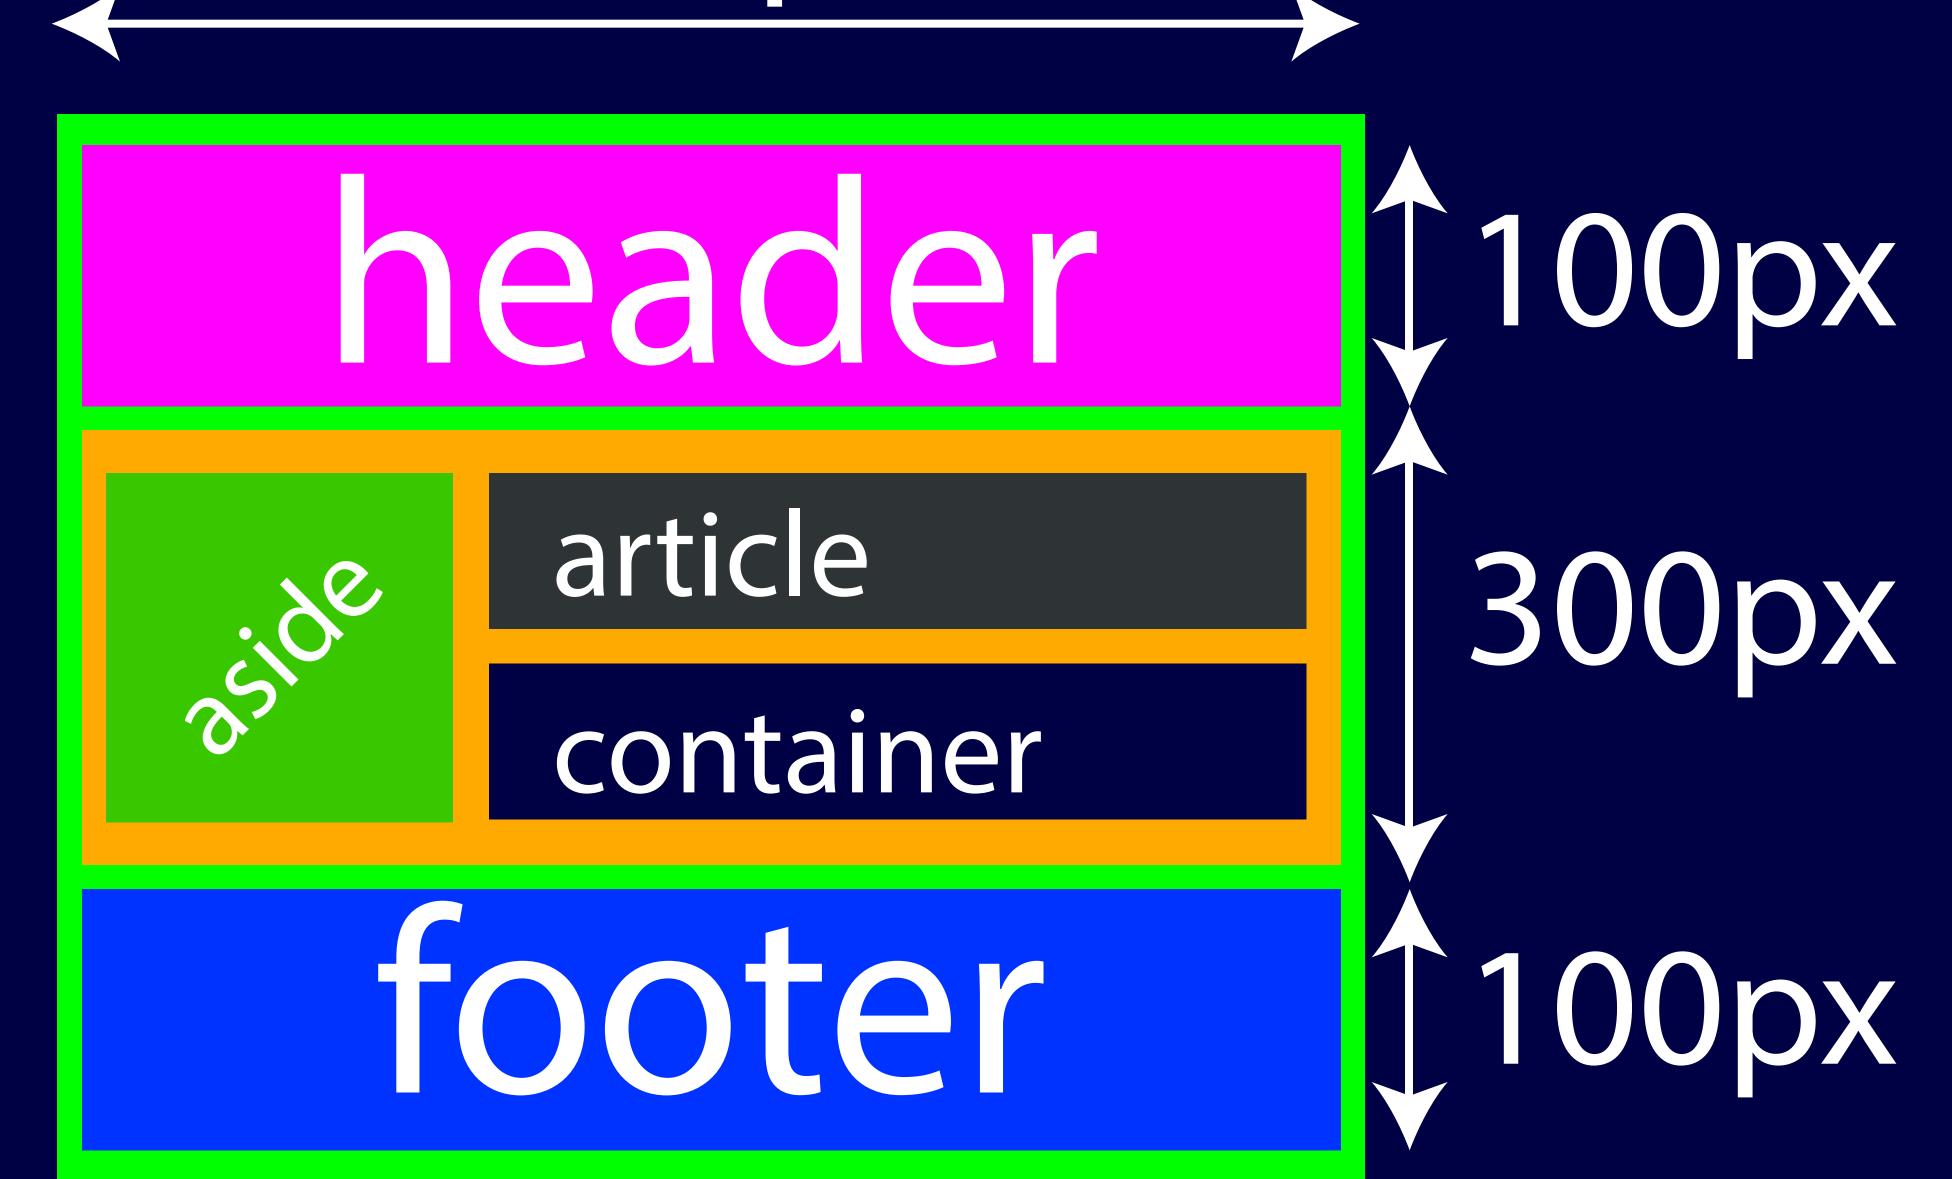

neader

250.8


article

container


foter


100px

300px

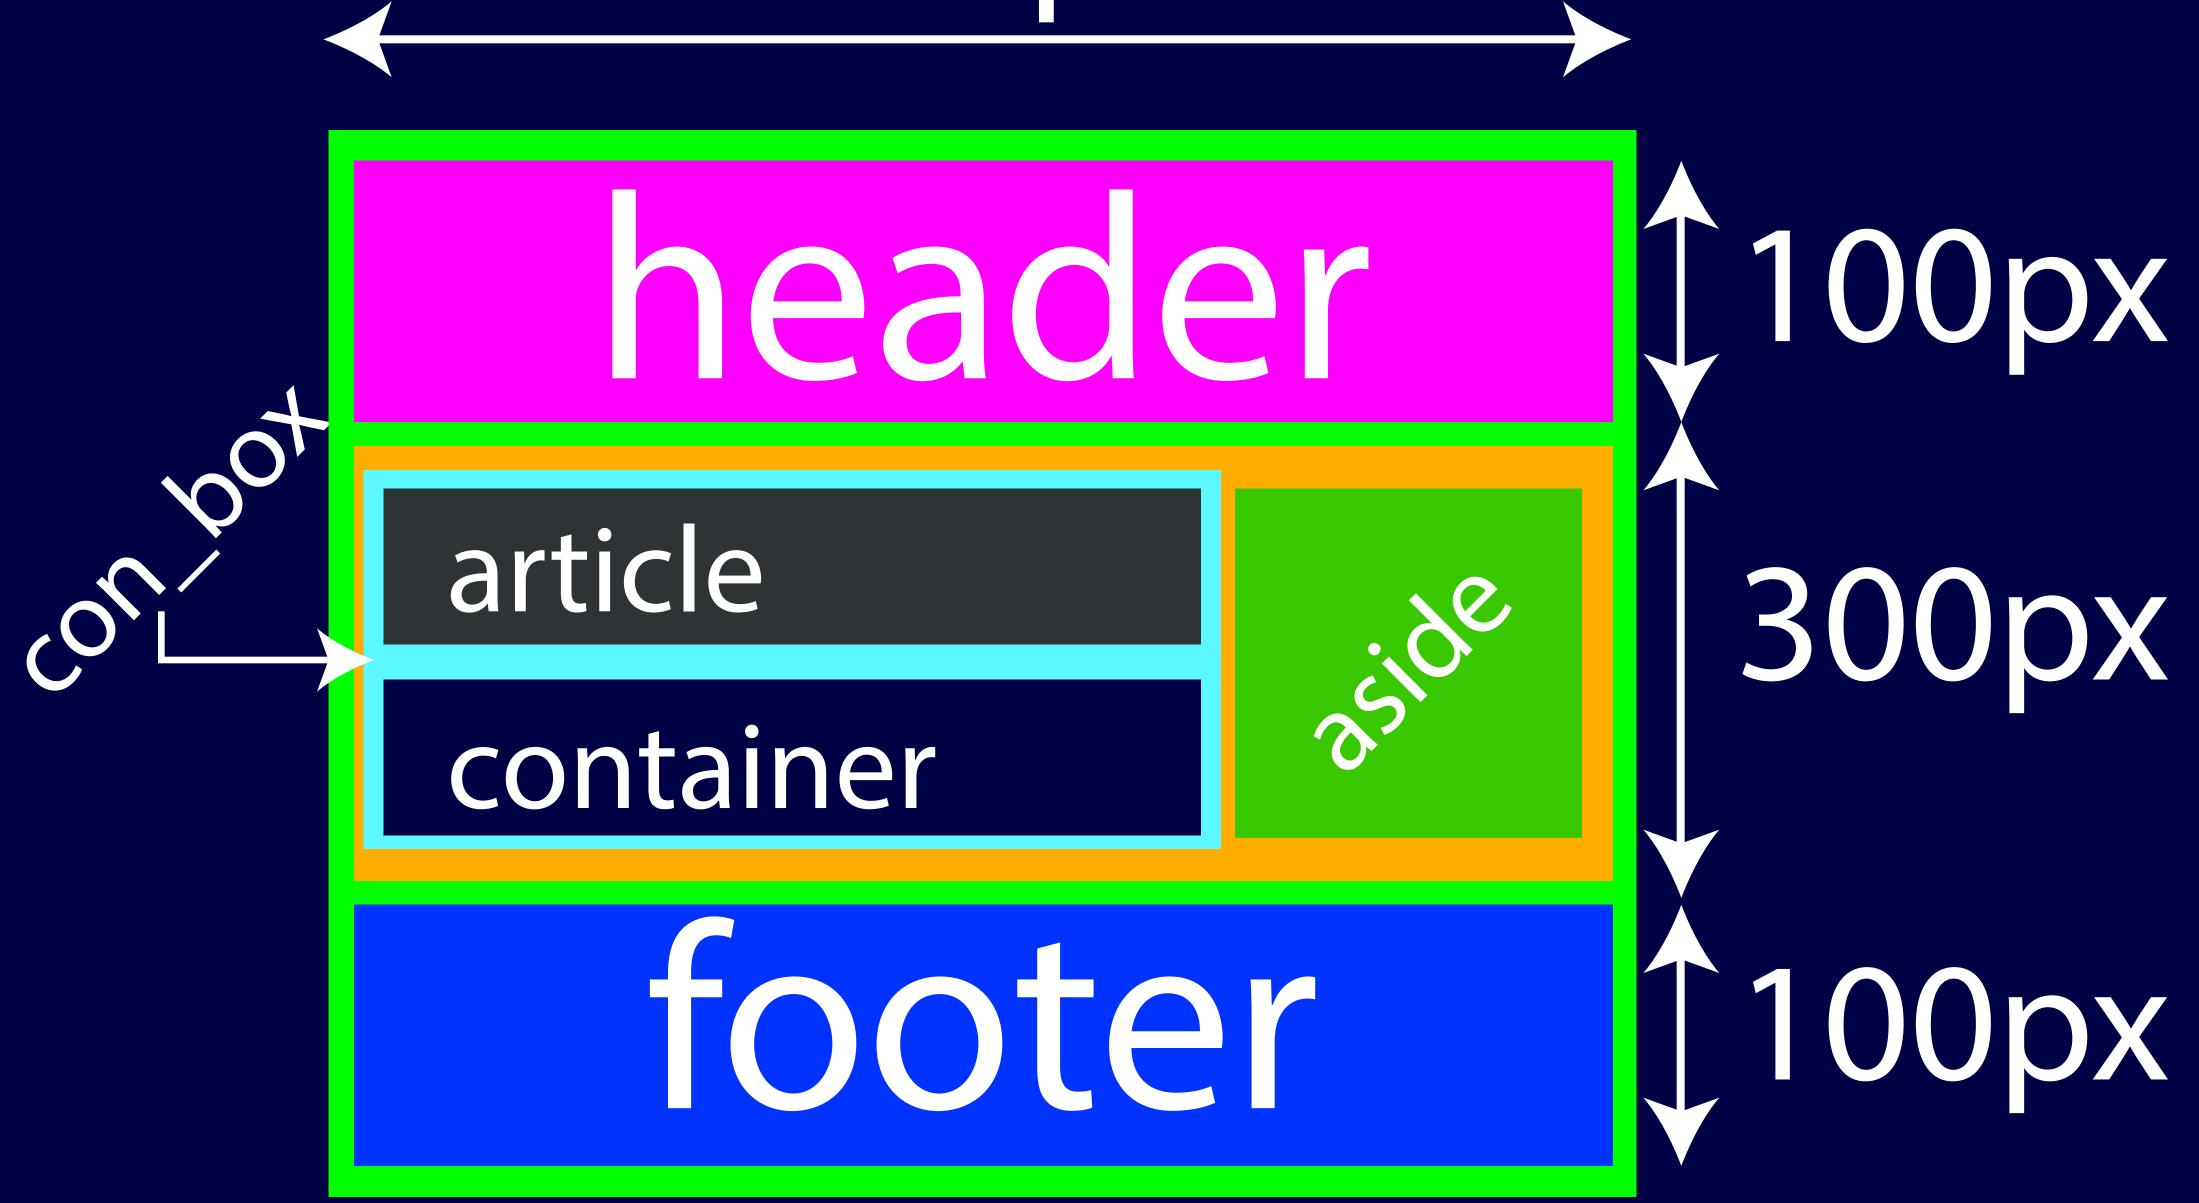

100px navigation 300px section 100px footer

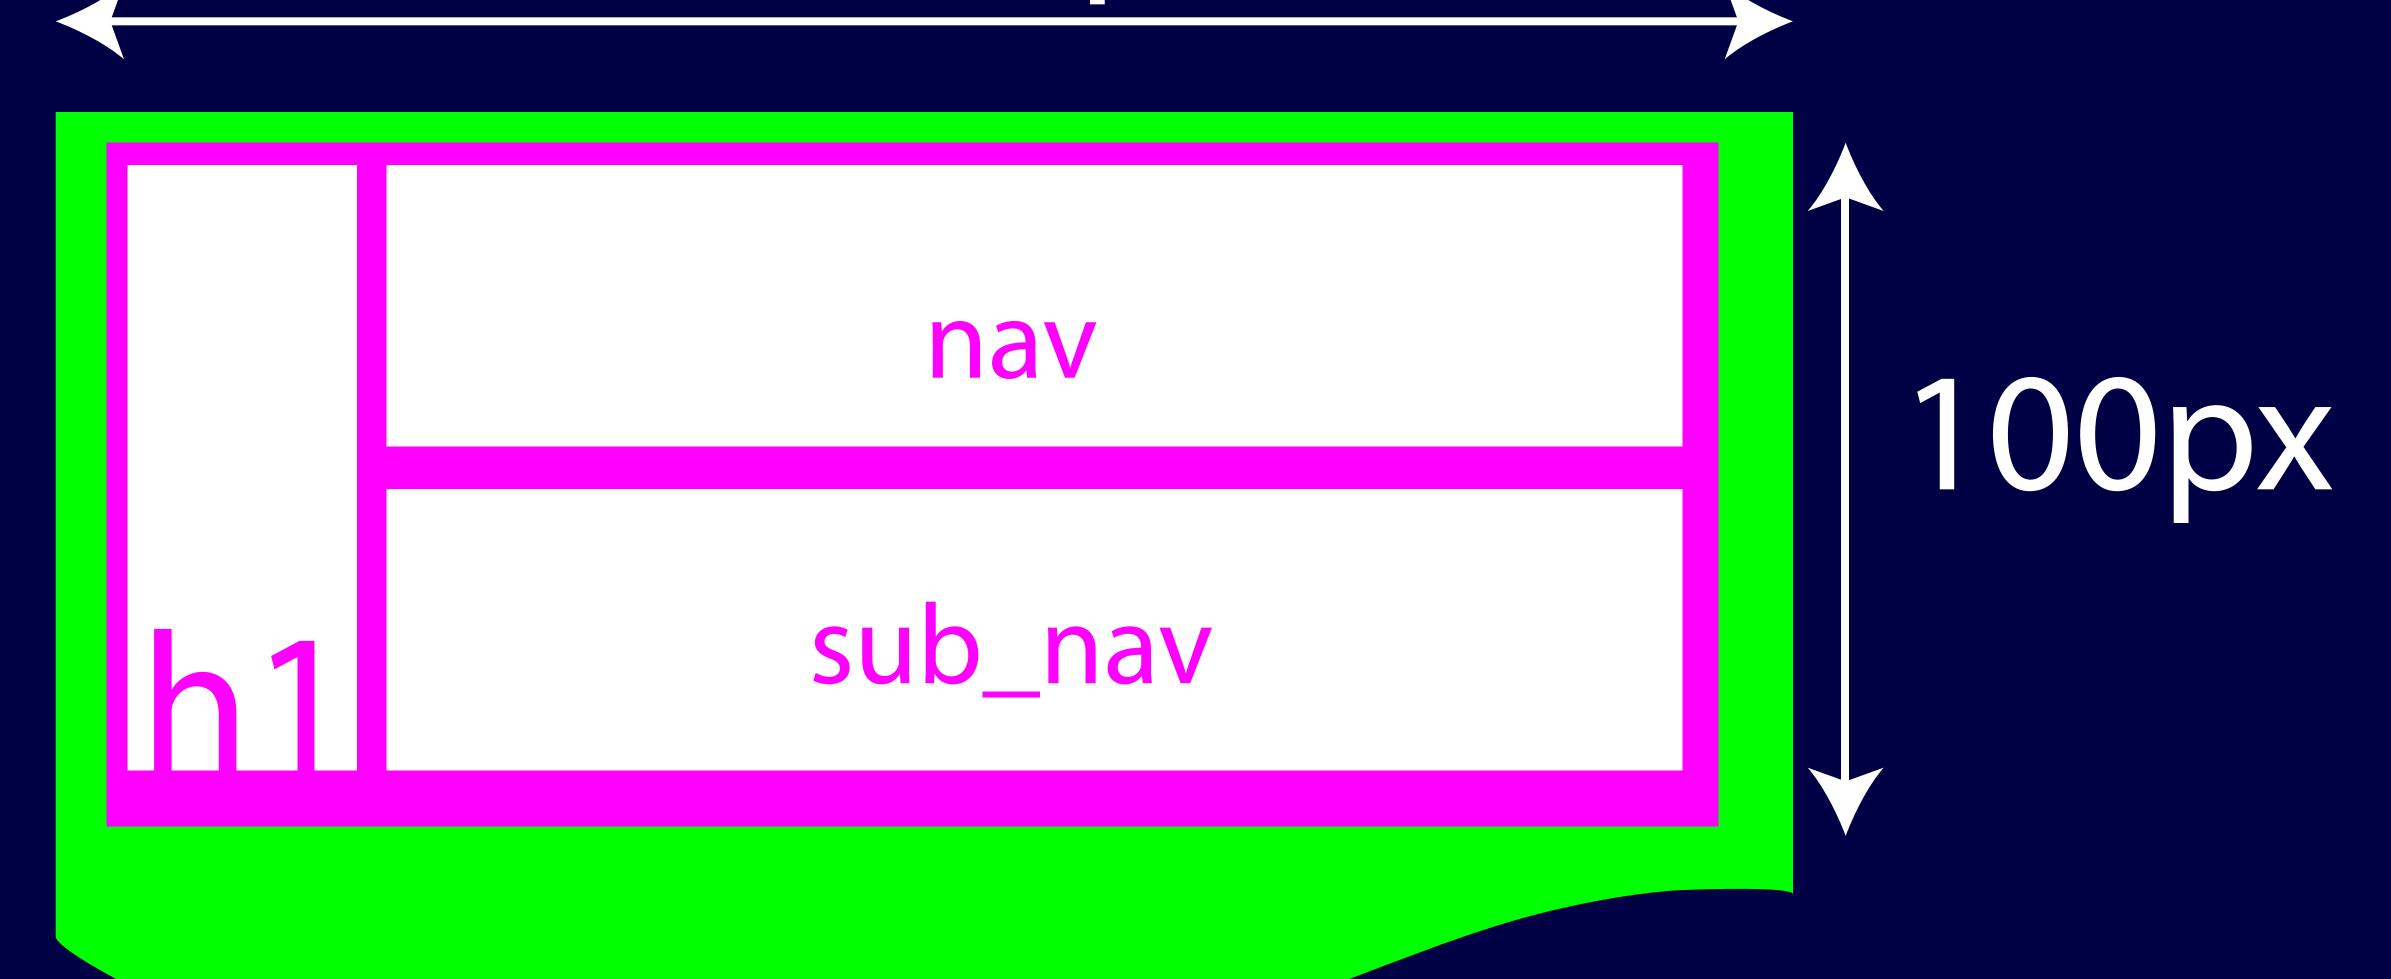

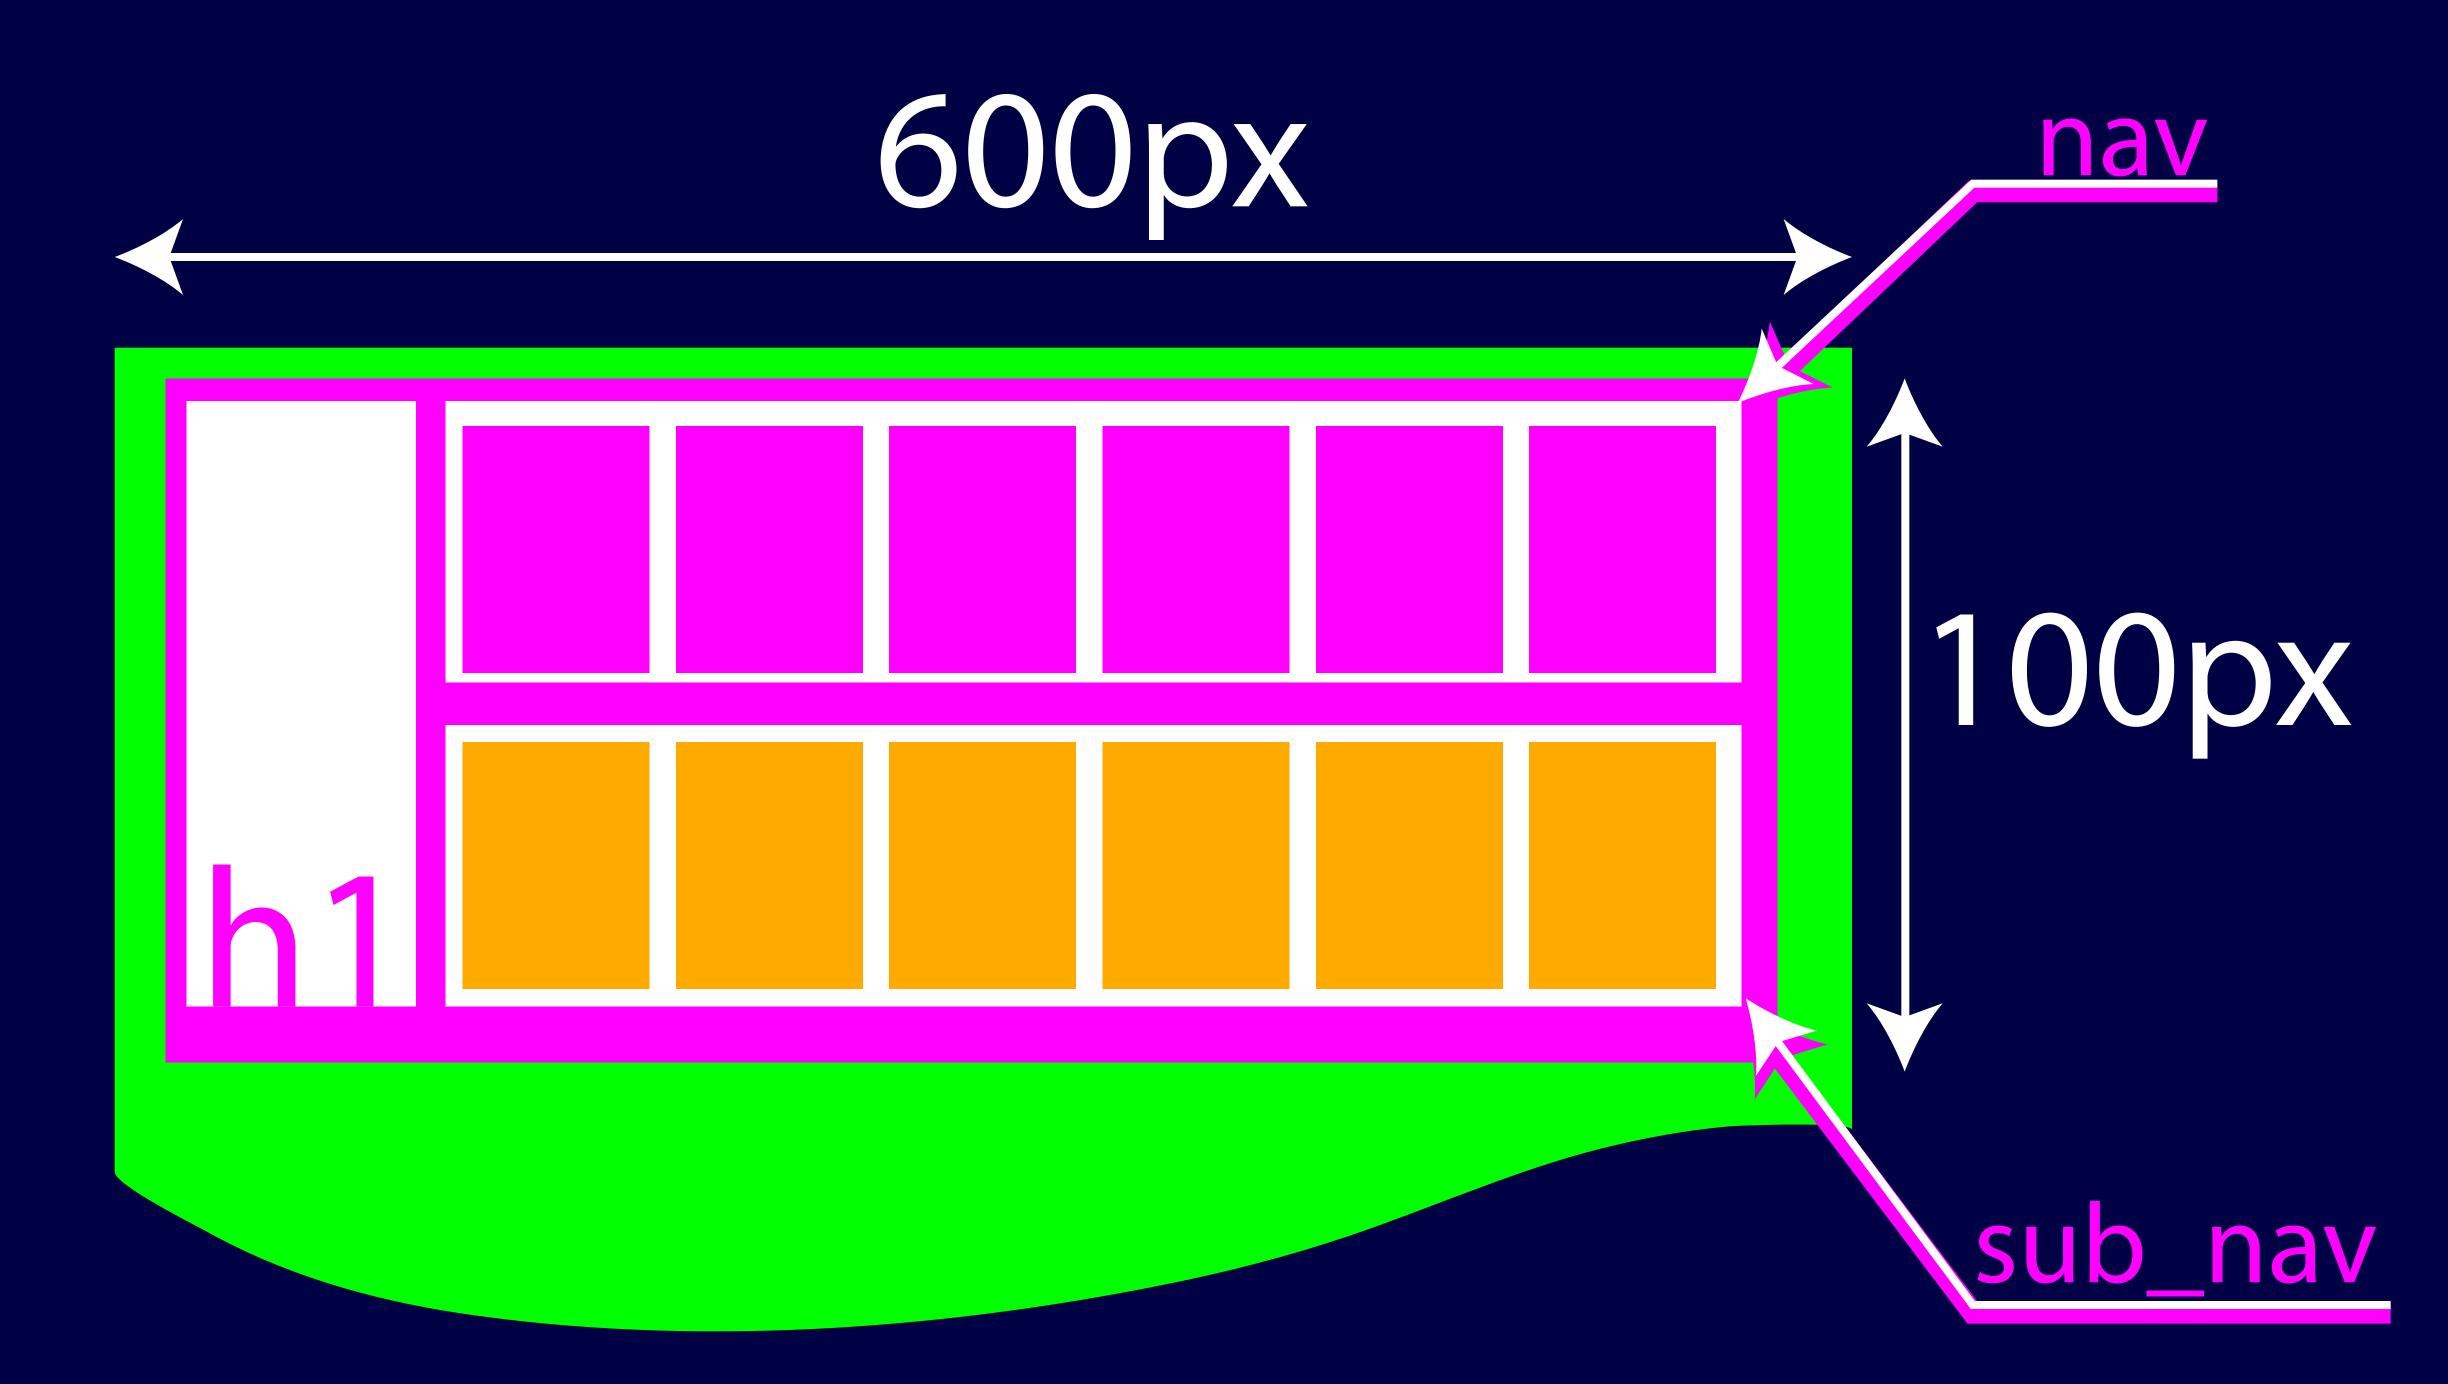

inline 크기값이 X, 줄바꿈 X 여백 X

imgingth

a, span input, label, select

이OCK 크기값 O, 줄바꿈 O 여백 O

ul, ol, li, h1~6, p form, fieldset

6유유 선택자

#box #header uli

不会任任人

#header > ul > li