

My Github URL

My Vercel URL

w12-p1: Show answer of p1_31, p2_31, p3_31 in midterm exam

=> show p1_31

Midterm Hang0727, 213417131

P1_31 P2_31 P3_31

Midterm -- hang0727, 213417131

7-First Card
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Minima, quae!

8-Second Card
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Minima, quae!

9-Third Card
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Minima, quae!

1-Fourth Card
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Minima, quae!

Sign In


DOM Tree:

```
<!DOCTYPE html>
<html lang="en">  scroll
  <head> ...
    <body>
      <div class="nav"> ...
        <section class="show-midterm-answer"> --- 30
          <iframe src="/p1_31/p1_31.html" width="100%" height="100%"#document (http://127.0.0.1:5500/demo/w12_navbar_31/p1_31/p1_31.html)
        </section>
      </div>
      <script src="./js/main_31.js"></script>
      <script src="./js/pd_31.js"></script>
      <!-- Code injected by live-server -->
      <script> ...</script>
    </body>
  </html>
```

Element Inspector:

```
:show-midterm-answer {
  width: 100%;
  height: 92vh;
  background-color: #rgba(152, 230, 230, 0.5);
}
```

=> show p2_31

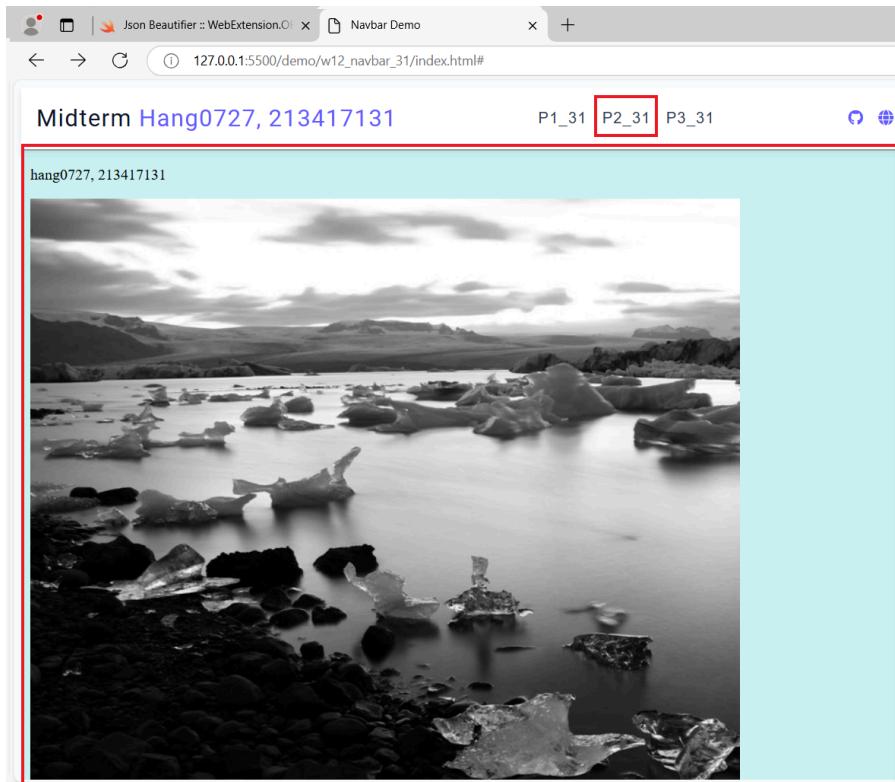

Midterm Hang0727, 213417131 P1_31 P2_31 P3_31

hang0727, 213417131

127.0.0.1:5500/demo/w12_navbar_31/index.html#

Json Beautifier :: WebExtension.O

Navbar Demo

Code Editor (HTML View):

```
<!DOCTYPE html>
<html lang="en"> scroll
  <head> ... </head>
  <body>
    <div class="nav"> ... </div>
    <section class="show-midterm-answer"> == $0
      <iframe src=". /p2_31/p2_31.html" width="100%" height="100%" ...> ... </iframe>
    </section>
    <script src=". /js/main_31.js"></script>
    <script src=". /js/p4_31.js"></script>
    <!-- Code injected by live-server -->
    <script> ...</script>
  </body>
</html>
```


Code Editor (CSS View):

```
.show-midterm-answer {
  width: 100%;
  height: 92vh;
  background-color: #rgba(152, 230, 230, 0.5);
}
```

Code Editor (JavaScript View):

```
*, ::after, ::before {
  box-sizing: border-box;
}
section {
  display: block;
  unicode-bidi: isolate;
}
```

=> show p3_31

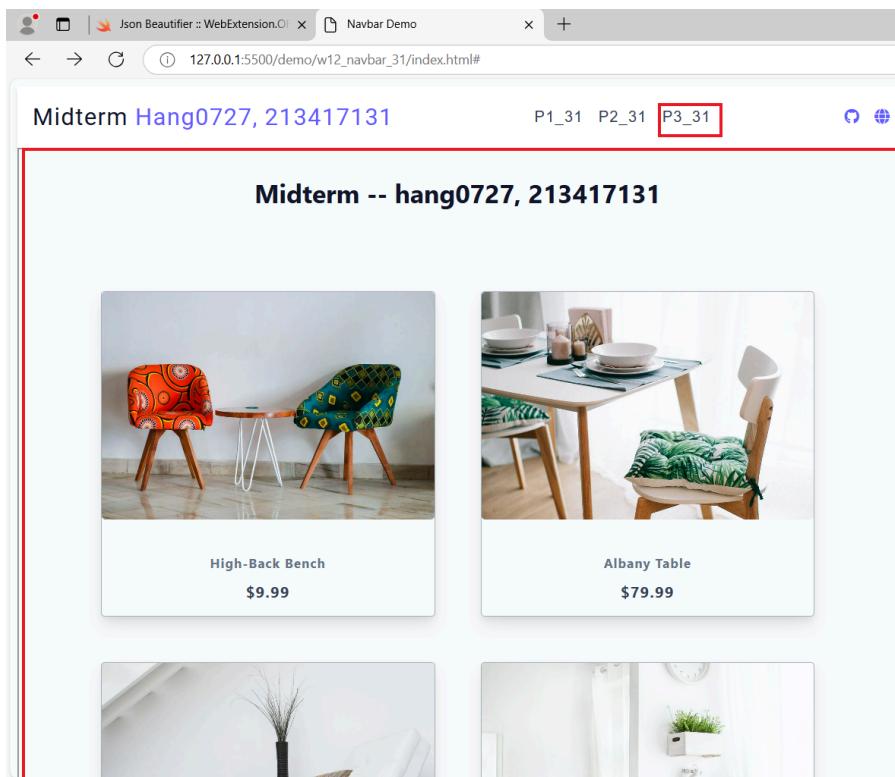

Midterm Hang0727, 213417131 P1_31 P2_31 P3_31

Midterm -- hang0727, 213417131

High-Back Bench \$9.99

Albany Table \$79.99

127.0.0.1:5500/demo/w12_navbar_31/index.html#

Json Beautifier :: WebExtension.O

Navbar Demo

Code Editor (HTML View):

```
<!DOCTYPE html>
<html lang="en"> scroll
  <head> ... </head>
  <body>
    <div class="nav"> ... </div>
    <div class="nav-center"> ... </div> flex
    </div>
    <section class="show-midterm-answer"> == $0
      <iframe src=". /p3_31/p3_31.html" width="100%" height="100%" ...> ... </iframe>
    </section>
    <script src=". /js/main_31.js"></script>
    <script src=". /js/p4_31.js"></script>
    <!-- Code injected by live-server -->
    <script> ...</script>
  </body>
</html>
```

Code Editor (CSS View):

```
.show-midterm-answer {
  width: 100%;
  height: 92vh;
  background-color: #rgba(152, 230, 230, 0.5);
}
```

Code Editor (JavaScript View):

```
*, ::after, ::before {
  box-sizing: border-box;
}
section {
  display: block;
  unicode-bidi: isolate;
}
```

w12-p2: Embed p1_31, p2_31, p3_31 content into index.html, and make it to work correctly

=> select p3_31 nav link, navbar-fixed will be displayed

Midterm Hang0727, 213417131

P1_31 P2_31 P3_31

2-Fifth Card
3-Sixth Card
4-Seventh Card
5-Eighth Card

High-Back Bench \$9.99

Albany Table \$79.99

Accent Chair \$25.99

```
<!DOCTYPE html>
<html lang="en"> <!-- scroll -->
  <head> <!-- head -->
    <body>
      <div class="nav navbar-fixed"> == $0
        <div class="nav-center"> == </div> </div>
      <section class="cards" id="p1_31"> == </section>
      <section class="products-container" id="p3_31"> == </section>
        <grid>
          <script src="/js/main_31.js"></script>
          <!-- Code injected by live-server -->
          <script> == </script>
        </grid>
      </section>
    </body>
</html>
```

```
html body div.nav.navbar-fixed
  Styles Computed Layout Event Listeners DOM Breakpoints >
  □ Filter show .cls +, □
  element.style {
    }
    .nav.navbar-fixed {
      position: fixed;
      top: 0;
      left: 0;
      width: 100%;
      background-color: var(--grey-100);
      box-shadow: var(--shadow-1);
      z-index: 2;
    }
```

=> select p1_31 nav link, navbar-fixed will be removed

Midterm Hang0727, 213417131

P1_31 P2_31 P3_31

7-First Card
8-Second Card
9-Third Card
1-Fourth Card

2-Fifth Card
3-Sixth Card
4-Seventh Card
5-Eighth Card

```
<!DOCTYPE html>
<html lang="en"> <!-- scroll -->
  <head> <!-- head -->
    <body>
      <div class="nav"> == $0
        <div class="nav-center"> == </div> </div>
      <section class="cards" id="p1_31"> == </section>
      <section class="products-container" id="p3_31"> == </section>
        <grid>
          <script src="/js/main_31.js"></script>
          <!-- Code injected by live-server -->
          <script> == </script>
        </grid>
      </section>
    </body>
</html>
```

```
html body div.nav
  Styles Computed Layout Event Listeners DOM Breakpoints >
  □ Filter show .cls +, □
  element.style {
    }
    .nav {
      background: > var(--white);
      box-shadow: var(--shadow-2);
      line-height: 1;
    }
    *::before, *::after {
      box-sizing: border-box;
    }
```

=> select p2_31 nav link, navbar-fixed will be displayed

The screenshot shows a web browser window with the URL 127.0.0.1:5500/demo/w12_landing_31/index.html#p2_31. The page has a header with the text "Midterm Hang0727, 213417131" and three navigation links: P1_31, P2_31 (which is highlighted with a red box), and P3_31. Below the header is a grid of 12 empty cards. At the bottom of the page are three images of furniture: two colorful chairs, a dining table with chairs, and a white sofa with a vase.

Elements

```
<!DOCTYPE html>
<html lang="en">  scroll
  <head> ...
  </head>
  <body>
    ...
    <div class="nav navbar-fixed" style="background-color: #f0f0f0; width: 100%; position: fixed; top: 0; left: 0; z-index: 2;"> ...
      <div class="nav-center" style="display: flex; justify-content: space-around; align-items: center; height: 100%; width: 100%; "> ...
        <span>Midterm Hang0727, 213417131</span>
        <a href="#">P1_31</a>
        <a href="#" style="border: 1px solid red; color: red; border-radius: 5px; padding: 2px 10px; text-decoration: none; font-weight: bold; margin: 0 10px;>P2_31</a>
        <a href="#">P3_31</a>
      </div>
    </div>
    ...
    <section class="cards" id="p1_31"> ...
      <div class="grid" style="display: grid; grid-template-columns: repeat(3, 1fr); gap: 10px; margin-top: 20px;"> ...
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 1" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 2" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 3" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 4" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 5" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 6" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 7" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 8" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 9" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 10" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 11" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
        <div style="background-color: #f0f0f0; border: 1px solid #ccc; padding: 10px; height: 150px; width: 100%; position: relative; &gt; ...
          <img alt="Empty card 12" style="width: 100%; height: 100%; object-fit: cover; &gt; ...
        </div>
      </div>
    </section>
    ...
    <script src="./js/main_31.js"></script>
    <!-- Code injected by live-server -->
    <script></script>
  </body>
</html>
```

Styles

```
element.style { }
.navbar-fixed {
  position: fixed;
  top: 0;
  left: 0;
  width: 100%;
  background-color: var(--grey-100);
  box-shadow: var(--shadow-1);
  z-index: 2;
}
```

main_31.scss:61

w12-p3: git logs for w12-p1