A

Ns=30: mean / consensus width (upper 95%)

N \ u	1e-04	3e-04	1e-03	3e-03
10				
100	0.008/0.007 ~	0.006/0.006 ×	0.008/0.009 *	0.005/0.004 ~
1000	0.004/0.006 ~	0.015/0.018	0.006/0.009 *	0.001/0.005 ~
3000				

Ns=100: mean / consensus width (upper 95%)

N \ u	1e-04	3e-04	1e-03	3e-03
10				
100	0.010/0.009 *	0.008/0.006 *	0.007/0.006 ×	0.001/0.002 ~
1000	0.009/0.009 ~	0.005/0.007 ~	0.007/0.007 *	0.004/0.006 *
3000	0.010/0.008 *	0.007/0.010 *	0.002/0.003 ~	0.004/0.009 *

Ns=300: mean / consensus width (upper 95%)

N \ u	1e-04	3e-04	1e-03	3e-03
10	0.009/0.009 *	0.008/0.007 *	0.004/0.016 ~	0.020/0.030
100	0.009/0.010 *	0.009/0.008 ×	0.006/0.005 *	0.003/0.004 ~
1000	0.012/0.006 ~	0.007/0.003 ~	0.002/0.003 ~ ◇	0.007/0.012
3000	0.016/0.006	0.011/0.010	0.008/0.018 ~	0.006/0.019 ~

Ns=1000: mean / consensus width (upper 95%)

N \ u	1e-04	3e-04	1e-03	3e-03
10				
100	0.009/0.009 *	0.009/0.009 *	0.005/0.003 ×	0.004/0.001 *
1000	0.009/0.008 *	0.007/0.006 ×	0.006/0.005 *	0.004/0.003 ~
3000	0.009/0.008 *	0.006/0.006 *	0.003/0.003 ~	0.003/0.008 *


Ns=3000: mean / consensus width (upper 95%)

N \ u	1e-04	3e-04	1e-03	3e-03
10	0.009/0.009 *	0.005/0.006 *	0.001/0.001 ~	0.049/0.200 ~
100	0.009/0.009 *	0.005/0.006 *	0.006/0.003 *	0.007/0.001 *
1000	0.010/0.009 *	0.005/0.006 ×	0.003/0.003 ~	0.004/0.005 ~
3000	0.010/0.009 *	0.005/0.007 *	0.004/0.004 *	0.005/0.005 ~


max width; × invalid, * narrow; diamond stationary

B

G versus B scaling; diamonds = S additions

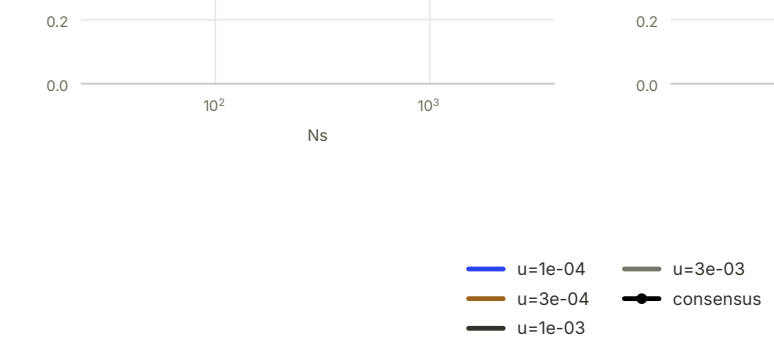


D versus B scaling; diamonds = S additions

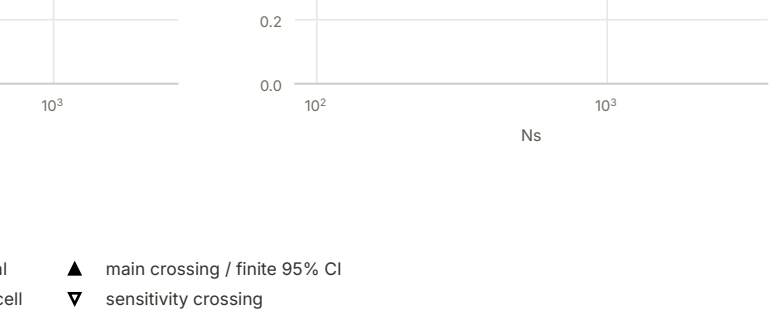


C

95% efficiency

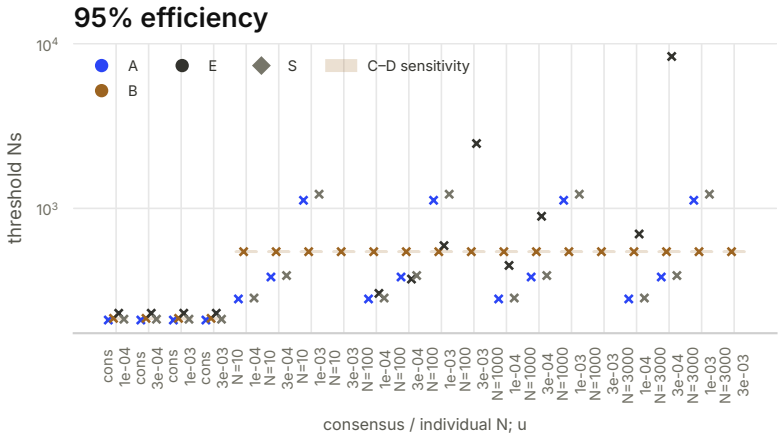


99% efficiency

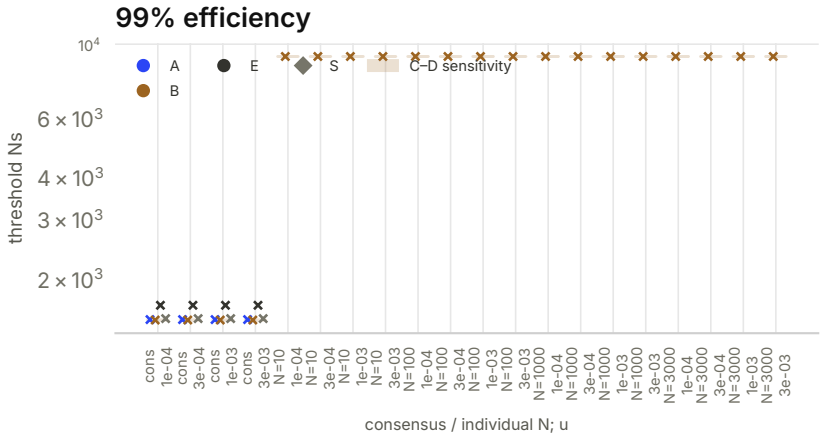


D


N = 100

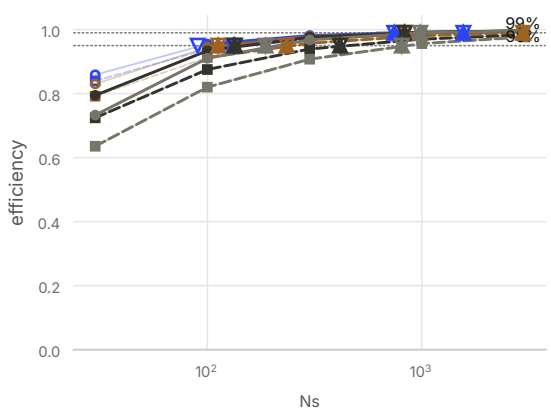

N = 1000

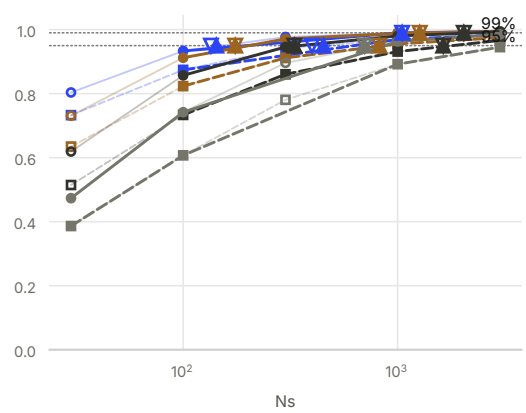

N = 3000

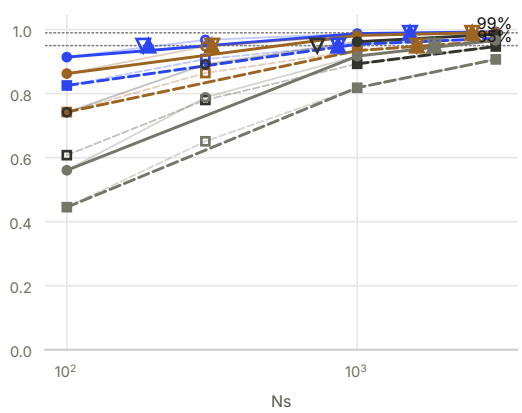

u=1e-04 · u=3e-04 · u=1e-03 · u=3e-03 · consensus · mean individual · non-admitted cell · main crossing / finite 95% CI · sensitivity crossing

B: bars = bracket bounds; diamonds = stationary mean ±95%. C: open = extrapolated; × = poor fit; shade = C–D sensitivity.