FounderOS

User Manual

October 2026

FounderOS User Manual

FounderOS is a personal operating system for a one-person company. It runs your business as a set of AI-assisted departments on one screen: comms, a client funnel, social growth, finances, a searchable knowledge base, and a roster of named agents. Everything lives in one local database on your machine.

Start here

1. Installation: get FounderOS running on your computer.
2. Quick start: a guided first tour of the demo company.
3. Concepts: demo vs real data, departments, connectors, agents.

Using FounderOS

Area	What it covers
Command	Home, Wizard, Comms (email, Slack, WhatsApp, DMs, recordings)
Revenue	Funnel, Brand Deals, Clients, Finances, Trading
Growth	Social, AdPilot, Creative Engine, Analytics, Content Lab, Lead Magnets
Workforce	Agents, Org chart, Chats, Tasks, Workflows, Skills, Compute
Knowledge	Optimal Engine (Brain), Database, Knowledge, Drift

Setting up

- Settings: password, appearance, demo (Filming) mode, API keys.
- Integrations: connect email, Slack, Stripe, and the rest.
- Usage, Blueprint and Roadmap

Reference

- Configuration reference: every environment variable.
- Troubleshooting: common problems and fixes.

Installation

This page gets FounderOS running on your own computer. It takes about five minutes.

Before you start

You need:

- A computer running macOS or Linux (the project is developed on macOS).
- **Node.js 22 or newer.** Check with `node --version`. The project pins Node 22 in a `.nvmrc` file.
- **pnpm**, the package manager FounderOS uses. Check with `pnpm --version`.
- The FounderOS folder (a clone of the repository) on your disk.

You do not need any API keys to start. FounderOS opens on a fictional demo company, so you can look around before connecting anything real.

Install and start

1. Open a terminal and go to the FounderOS folder.
2. If you use nvm, run `nvm use` so you are on Node 22.
3. Install the dependencies:

   ```
   pnpm install
   ```

4. Start the app:

   ```
   pnpm dev
   ```

5. Open http://localhost:4100 in your browser.

On the first start FounderOS builds its demo company into a folder called `demo-data/`. That takes a few seconds. After that you see a working business: agents, tasks, a funnel, brand deals, social accounts and a knowledge base. Nothing in it is real.

To use a different port, set `PORT` (see the configuration reference).

No login on first run

With no password set, FounderOS listens on `127.0.0.1` only. That means only this computer can open it, so there is nothing to sign in to. When you want to reach it from another device, set a password first. See Settings.

Why page switches feel slow in dev mode

`pnpm dev` compiles each page the first time you visit it, so switching to a new page can take several seconds. This is expected and only affects the first visit to each page.

To see FounderOS at its real speed, use preview mode.

Preview mode

Preview builds every page ahead of time, then serves the result. Page switches are fast, the way they are in normal use.

1. Stop `pnpm dev` if it is running (press `Ctrl+C`).
2. Run:

   ```
   pnpm preview
   ```

3. Wait for the build to finish, then open http://localhost:4100.

Preview builds into its own folder (`.next-preview`), so it does not disturb a dev server in the same checkout.

To restart the preview on the last build without rebuilding:

```
pnpm preview --no-build
```

If you change code, run `pnpm preview` again to rebuild. If the build fails, FounderOS does not start an old build.

Other commands

Command	What it does
`pnpm dev`	Start for everyday use and editing. Compiles pages on first visit.
`pnpm preview`	Build, then serve the built app.
`pnpm start`	Serve an existing build.
`pnpm test`	Run the automated tests.

Next step

Take the quick start tour.

Quick start

A first tour of FounderOS using the built-in demo company, then how to switch to your own data. It takes about ten minutes. You need FounderOS running first: see Installation.

1. Look around the demo company

When you open http://localhost:4100 for the first time, FounderOS shows a fictional company. Nothing on screen is real, and none of it touches your own data folder.

1. Find the sidebar on the left. It groups pages by what you are doing: Command, Revenue, Growth, Workforce, Knowledge and System.
2. Click **Home** for the overview.
3. Click **Agents** to see the roster of named AI agents, their tasks and run history.
4. Click **Funnel** to see the client journey, and **Comms** for the unified inbox.
5. Click **Optimal Engine** under Knowledge to browse the searchable knowledge base.

Each area is explained in its own page: Command, Revenue, Growth, Workforce, Knowledge.

2. Jump anywhere with the command palette

The command palette is the fastest way to move around.

1. Press `Cmd+K` (Mac) or `Ctrl+K` (Windows and Linux). A search box opens.
2. Type a few letters, such as `funnel`, `org` or the name of an agent. Every word you type must match the item's name or its keywords.
3. Use the up and down arrow keys to pick a result, then press `Enter`. Click also works.
4. Press `Esc` to close the palette. Press `Cmd+K` again to toggle it.

The palette lists:

- every page in the sidebar, plus a few extra views such as **Org Chart**;
- every agent and tool in your database;
- external links such as Attio CRM and Fathom Calls, which open in a new tab;
- **Toggle sidebar** (also `Cmd+\`).

It shows up to nine results at a time. If nothing matches, it says "No matches".

Number-key shortcuts

When you are not typing in a field, press `1` to `9` to jump to the first nine pages in the sidebar order. Pages you switch off in Settings are skipped.

3. Make it look the way you like

Open **Settings** from the System group. The **Appearance** section lets you pick a style, an accent colour and dark, light or system mode. Changes apply immediately. See Settings.

4. Switch from the demo to your own data

The demo company is called **Filming mode** in the Settings page. When you are ready for your own business:

1. Open **Settings** (press `Cmd+K`, type `settings`, press `Enter`).
2. Find the **Filming mode** card (called **Recording** on the page).
3. Click **Switch to real data**.

FounderOS now reads your real data folder, `data/`. It starts blank apart from six departments: Sales, Marketing/Growth, TECH, Finances, Communications and Clients. You add everything else through the pages or by connecting tools.

Switching only changes which folder FounderOS reads. It never copies, seeds or deletes anything, so you can switch back and forth safely. The change takes effect without restarting.

If the switch is greyed out and says **Pinned by host**, your installation fixes the mode with an environment variable and the switch cannot change it. See Troubleshooting.

To make every fresh install start on blank data instead of the demo, set `GLADOS_DEFAULT_MODE=real`. See the configuration reference.

5. Connect your first tool

1. Open **Connections** from the System group.
2. Find a tool you use, for example Slack or Stripe.
3. Add its key. See Integrations for what each tool needs.

Tools without a key show **Not configured**. That is honest by design: see Concepts.

6. Protect it with a password

If you only use FounderOS on this computer, you can skip this. To open it from a phone or another computer, set a password in **Settings**, then **Security**. See Settings.

Concepts

This page explains how FounderOS thinks. Read it once and the rest of the manual makes more sense.

What FounderOS is

FounderOS is a personal operating system for a one-person company. You set the direction. AI agents cover the departments. Everything is stored in one local database on your machine, and every page reads from it.

Demo data and real data

FounderOS keeps two separate datasets:

- **Demo data** lives in `demo-data/`. It is a fictional company with agents, tasks, a funnel, brand deals, social accounts and a knowledge base. FounderOS builds it on first start and refreshes it when it is about a week old.
- **Real data** lives in `data/`. It starts blank and holds your actual business.

A fresh install opens on the demo company so you see a working business instead of an empty screen. In the Settings page the demo mode is called **Filming mode**, because the demo is also used to record product videos.

Key facts:

- Switching between them only changes which folder is read. Nothing is copied, seeded or deleted.
- Demo rows never go into `data/`.
- While the demo is on, pages that read live services show scripted stand-ins, so connector badges there are not real.
- Some pages are off in the demo. For example, Usage reads nothing from your computer in demo mode.

Switching steps are in the Quick start.

Departments

Real data starts with six departments: Sales, Marketing/Growth, TECH, Finances, Communications and Clients. Agents, tasks and roadmap items belong to a department. The org chart shows how they fit together.

Honest "Not configured" connectors

A connector is a link to an outside tool, such as email, Slack or Stripe. FounderOS never pretends a connection is live.

- A tool with no key shows a **Not configured** badge and a **Set up** link that takes you to the right place.
- A tool with a key that fails its check shows an error with the reason.
- Only a tool that really answers shows as live.

If a card or number is missing, the cause is usually an unconfigured connector, not a bug. See Integrations.

Agents

An agent is a named AI worker with a role, a department, tasks and a run history. The Agents board lists them. To chat with agents, FounderOS needs an AI key (`AI_GATEWAY_API_KEY`). Without one, agent chat says it is not configured. Details are in Workforce.

The **Wizard** is the chat you use to run the system. A project there is a conversation.

Optimal Engine

Optimal Engine is your knowledge base: markdown pages that FounderOS can search and connect. It appears as **Optimal Engine** under Knowledge. It uses the `gbrain` command-line tool and a store folder (by default `knowledge/brain-store`). Set `BRAIN_PROVIDER=stub` to turn it off. See Knowledge.

Modules

You can switch pages off in Settings, under **Modules**. A module that is off leaves the sidebar, search and number keys. Its data is kept.

Where your data and keys live

- Data: `data/` (real) or `demo-data/` (demo).
- Keys and password hash: `.env.local` in the project folder. This file is never committed to git.
- Keys you save in the app are shown masked, with only the last four characters, and are never shown back in full.

Command


The Command area is where you start your day and where your messages arrive. It has three pages.

Page	Address	Use it to
Home	`/`	See the state of the whole business and jot down a task or note
Wizard	`/wizard`	Talk to the system in plain language, and have it create tasks or run agents
Comms (Inbox)	`/inbox`	Read and answer email, Slack and WhatsApp in one list, plus the morning digest, recordings, client lanes and the week

Three things apply to every page below:

- **Demo mode.** A fresh install opens on a fictional company. Everything you see is sample data and nothing real runs. Turn it off in Settings (the switch is called Filming mode). See Settings.
- **Not configured.** When a page needs a connector you have not set up, it says so with a *Not configured* badge or a *Set up* link instead of showing made-up numbers. Connector keys are covered in Integrations.
- **Appearance.** Settings offers more than one look. The pages keep the same content and controls in each look; only the layout and styling change. This manual describes the content.

Home

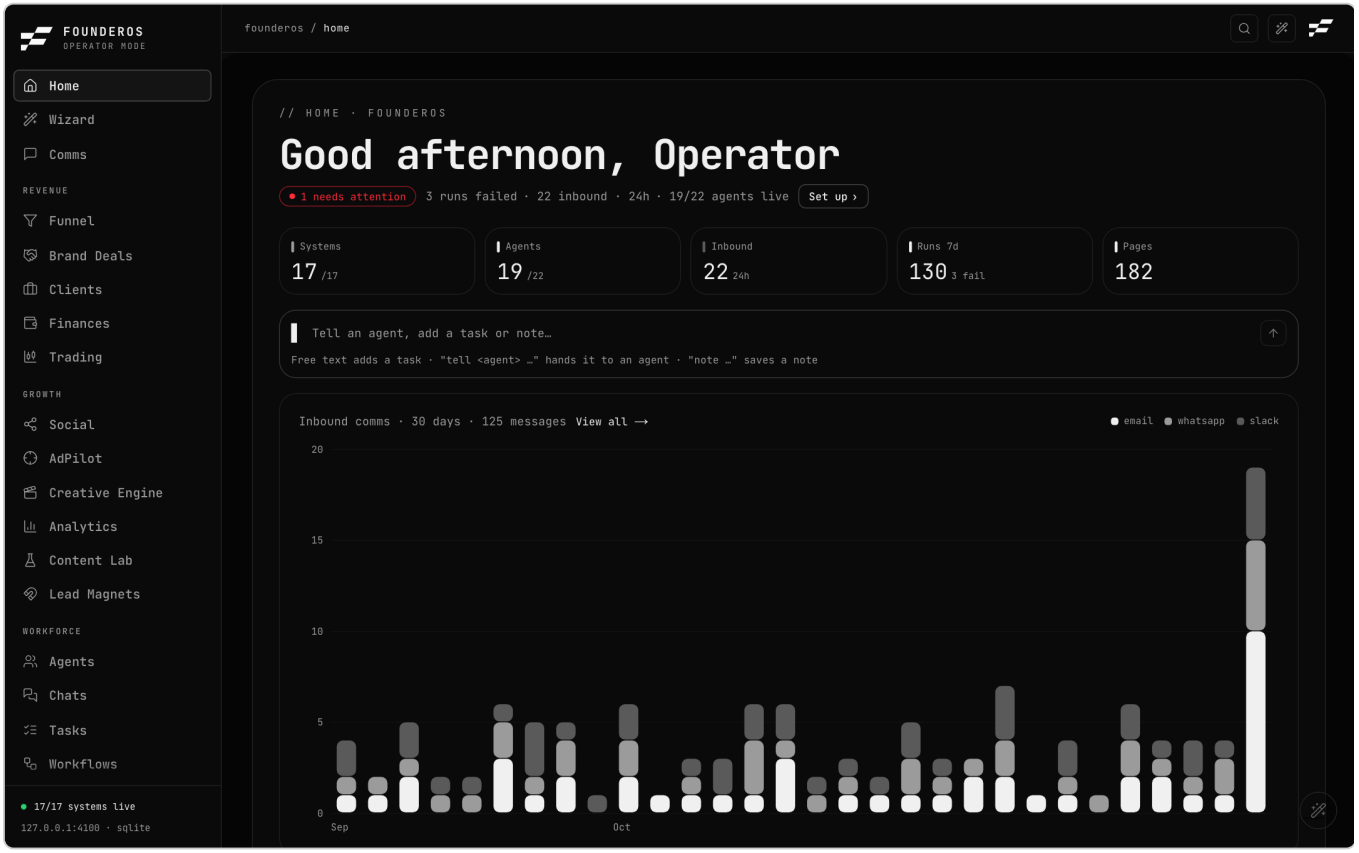

What it is for. Home is the operator console. It answers one question: is the business running, and does anything need me? Everything on it is read from your own data, and every tile is a link to the page behind it.

What you see

Header. A greeting with your name. The name comes from the `GLADOS_OPERATOR_NAME` setting and falls back to "Operator". Next to it is a status pill and up to three short status phrases, for example how many agents are active and how many connectors are connected. The pill is worked out from failed agent runs and connector health. It is never a fixed "Live" label. If something is degraded, a *Set up* link appears and takes you to the guided setup.

Five counters (each opens the page behind it):

Counter	What it counts	Opens
Systems	Connectors that are connected, out of all connectors	Integrations
Agents	Active agents, out of all agents	Agents
Inbound	Messages that arrived in the last 24 hours	Inbox
Runs 7d	Agent runs in the last 7 days (and how many failed)	Agents
Pages	Pages in your knowledge store	Brain

Interject bar. A single text field under the counters. See Use the Interject bar.

Activity chart. By default it shows your posting activity over 90 days, stacked by platform (Instagram, TikTok, X, YouTube, LinkedIn). When there is no posting history, it falls back to inbound messages over 30 days, stacked by source (email, WhatsApp, Slack). If neither exists it says "No posting or comms history yet" with a *Set up* link to Zernio. The "View all" link opens Social or Inbox, matching the chart.

Income strip. Appears only when there is income data. It splits your income by processor. Live data is month to date. In demo mode it shows the demo books, year to date. Details are on Finances.

Left column:

- **Agent activity.** Runs in the last 7 days, a seven-day dot strip, an "all ok" or "N failed" tag, and when the newest run finished. If no run was ever recorded, it says so.
- **Brain freshness.** A gauge of how current your knowledge pages are: Fresh (changed in the last 30 days), Aging (31 to 89 days) and Stale (90 days or more). If the knowledge store is not found it says "Brain store not mounted" with a *Set up* link.
- **Audience.** Up to four tiles with the latest follower or subscriber count and the change since the previous reading. The email tile opens the newsletter page; the others open that platform's page. With no history it says "No audience history yet".
- **Recent runs.** The last five agent runs, with an ok or failed dot, the agent, a one-line summary and the age.

Right column:

- **Details.** Where your knowledge store lives (with a copy button), the number of pages, the database mode, and the port FounderOS is running on.
- **Needs you.** Tasks that are blocked until you act. It lists up to five, high priority first, then the longest waiting. Each row opens that task. A count shows how many more there are, and "See all" opens Tasks.
- **Done today.** What finished since midnight: tasks marked done and agent runs, with failed runs shown as failed. It lists up to three.
- **Agents live.** Up to four active agents, with "+N more". Each opens that agent. If none are active it says "No agents live".

- **Now.** The first items of the current roadmap quarter. Each opens the Roadmap. Hidden if the roadmap is empty.

What you can do

- Click any counter, tile, run or agent to jump to its page.
- Type into the Interject bar to create a task, hand work to an agent, or save a note.
- Click a task under *Needs you* to open and unblock it.

Home is mostly a reading page. It does not change anything except through the Interject bar.

Use the Interject bar

The bar understands three kinds of sentence. It uses fixed rules, not an AI model, so the result is predictable.

You type	What happens
`tell <agent> …`, `ask <agent> …` or `@<agent> …`	A task is created and assigned to that agent. The agent is matched by name or id.
`note …` or `remember …`	The text is saved as a note in your knowledge store inbox, tagged `interject`.
Anything else (a leading `todo` or `task` is optional)	A task is created for you.

If you name an agent that does not exist, the line becomes a plain task for you rather than a guess.


1. Click the bar. The placeholder reads "Tell an agent, add a task or note…".
2. Type at least two characters. For example: `tell Daily Briefing to summarise Friday's replies`.
3. Press Enter, or click the send arrow.
4. A confirmation appears with an **Open** link. For tasks it also offers **Undo** for about ten seconds. Click it if you sent the wrong thing.

Notes cannot be undone from the toast. Delete them from the knowledge store instead.

Demo mode

In demo mode Home shows the fictional company: invented agents, runs, inbound messages and income. The activity chart uses the comms mix. Nothing real is read. The income strip shows the demo books.

Wizard

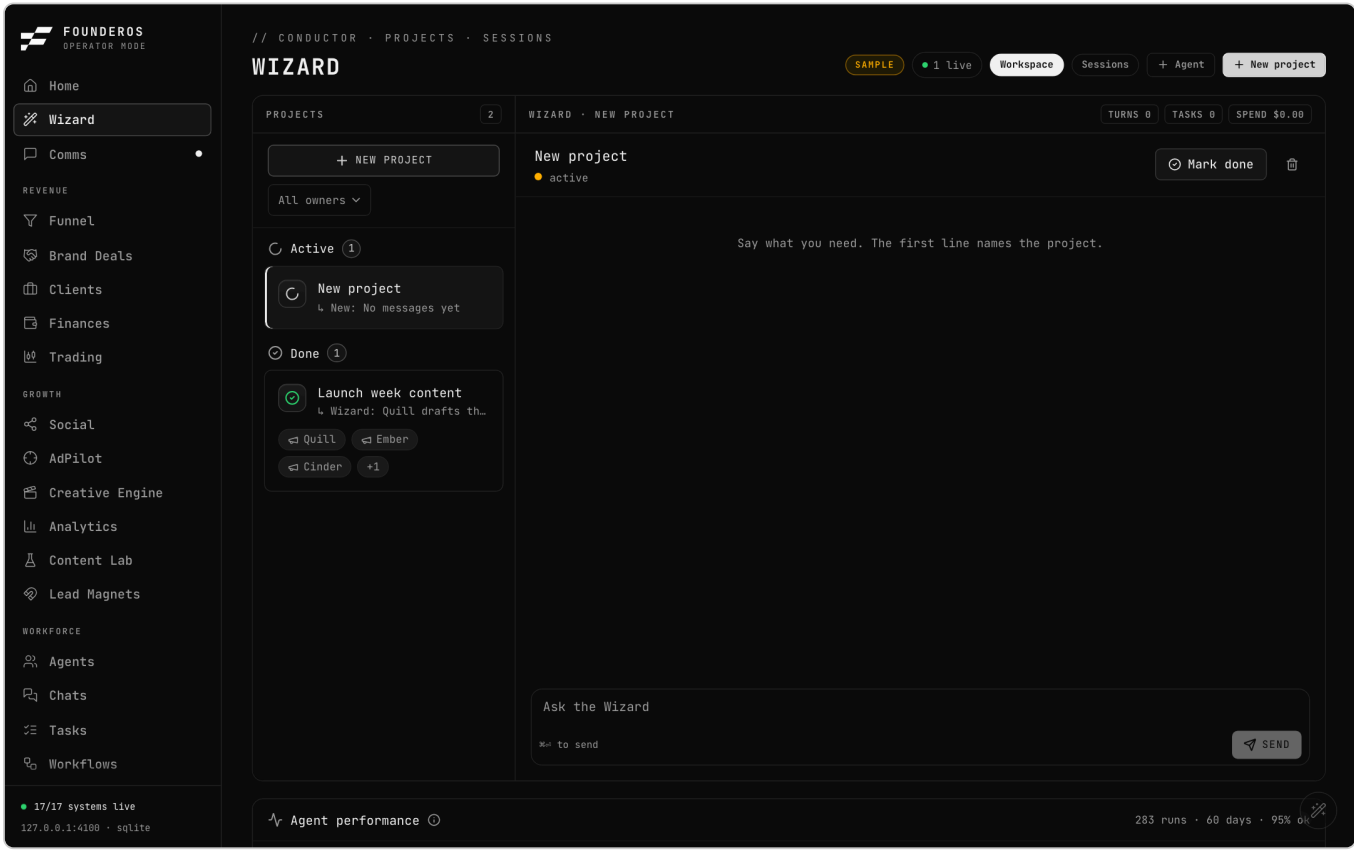

What it is for. The Wizard is a chat with the system itself. Each conversation is a *project*. You say what you need in plain words. The Wizard answers, and when it plans or delegates work it can create tasks, tick tasks off, and run one of your agents. You see exactly what it did as small receipts under its reply.

What you need

The Wizard runs on the Claude command-line tool installed on the same computer as FounderOS. It does not use a cloud key from Settings. Each message is one exchange with that tool, and the same session is resumed for the rest of the project so it remembers the conversation.

If the tool is not installed or does not answer, the Wizard says "Wizard engine unavailable on this host" instead of inventing a reply. The **Sessions** tab shows whether the tool was found.

What you see

At the top: the title, a **Create an agent** button, the number of projects, and two tabs, **Workspace** and **Sessions**.

Workspace tab has three columns:

1. **Projects (left).** Your projects, split into active and done. A filter lets you show only projects that have tasks owned by one agent ("All owners" by default). A **New project** button starts a blank one.
2. **Conversation (centre).** The chat. Above the messages is a strip of the project's tasks. Each task shows its title and owner, and a circle that becomes a tick when it is done. The text box says "Ask the Wizard".
3. **Crew (right).** "Agent performance": for each agent, a row of dots for its last runs in the recent window and the percentage that succeeded. Hover a row to see the latest run. Agents you have designed but not wired up

appear faded.

Sessions tab. The engine card (is the Claude tool present, its version, the host name), totals (sessions, projects, spend in dollars, turns) and a list of sessions, one per project that has started a conversation.

What you can do

- Start, rename, finish and delete projects.
- Send messages. The first line you send names an untitled project (the first 60 characters).
- Click a task chip to mark it done or reopen it.
- Let the Wizard create tasks and run agents. It can only run agents that have a runtime on this machine. If one does not, the receipt says " has no runtime here". It runs at most four agents per message.
- Create an agent design with **Create an agent**.

How to

Ask the Wizard for something

1. Open `/wizard`. If there are no projects, click **New project**.
2. Click the text box ("Ask the Wizard") and type what you need. Press Enter to send.
3. Wait for the reply. The page shows "Wizard is working" with the elapsed time.
4. Read the receipts under the reply. They look like "2 tasks created", "1 marked done" or "Ran ".
5. Check the task strip above the chat. Click a task to tick it off when the work is done.

Rename, finish or delete a project

1. Open the project from the left column.
2. In the conversation header, click the project name to rename it (Enter saves, Escape cancels).
3. Click **Mark done** to finish it. A finished project shows **Reopen** instead.
4. Use the delete control next to it to remove the project. It asks you to confirm first, and it is disabled while the Wizard is working.

Create an agent design

1. Click **Create an agent** at the top.
2. Fill in **Name**, **Department**, **Purpose** and, optionally, **Tools** (comma separated, for example `gmail, attio`).
3. Click **File as designed**.

This files a *spec* only. The new agent appears faded in the Crew panel and on the Blueprint until someone wires it up. It does not start running, and nothing claims it does.


Plain truth about the Wizard

- It answers in plain text. It will say so when you ask for something it cannot do from this session.
- A reply counts spend. The Sessions tab shows the running total.
- It does not send email or messages for you. Use Comms for that.

Demo mode

The Wizard works the same way in demo mode, but its projects, tasks and crew history are stored with the demo data. Your real projects are untouched. The Claude tool is still required for new replies.

Comms (Inbox)

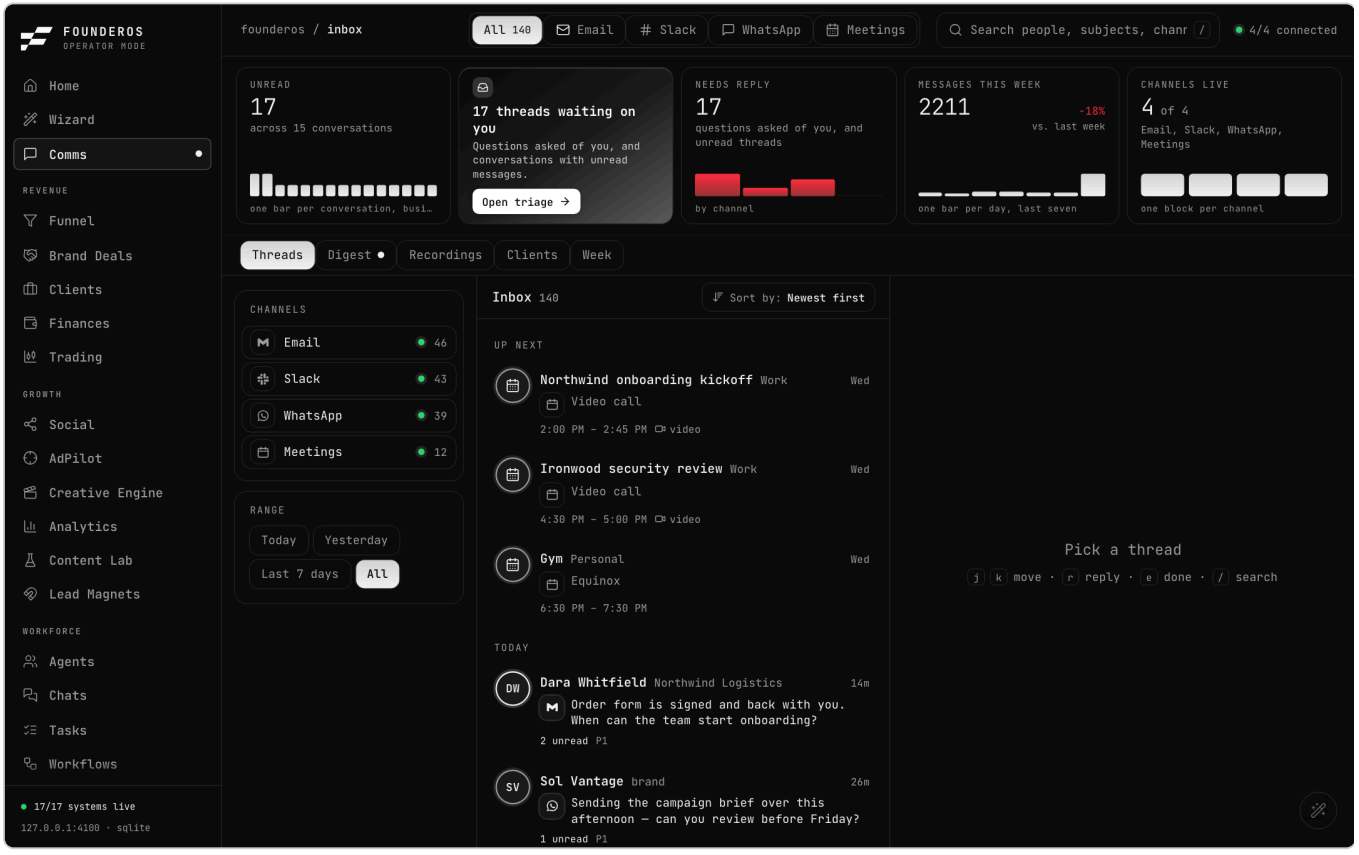

What it is for. One place for everything people send you: email, Slack, WhatsApp and calendar meetings, in a single list with a clear "who owes whom a reply" state. Beyond threads, the same page holds a morning digest, call recordings, one lane per client Slack channel, and a week calendar. Instagram DMs have their own inbox on Social.

What you need

Channel	What it needs	Without it
Email	An IMAP login for up to four inboxes (`INBOX_1_HOST` , `INBOX_1_USER` , `INBOX_1_PASS` , and so on up to 4)	Email shows as not connected with a *Set up* link
Slack	A bot token (`SLACK_BOT_TOKEN`) with read scopes	Same
WhatsApp (reading)	Nothing to enter. It reads the WhatsApp desktop app on this computer	Same
WhatsApp (replying)	A WhatsApp Business number from Meta (`WHATSAPP_PHONE_NUMBER_ID` , `WHATSAPP_ACCESS_TOKEN`)	The reply bar is replaced by "Sending is not set up yet" and a *Set up WhatsApp* link
Meetings	A connected Google Calendar	Meetings shows as not connected
Recordings	`FATHOM_API_KEY` for Fathom, and `PLAUD_INGEST_TOKEN` for Plaud pushes	"No recording source is connected"

Add the keys in Settings or follow the steps in Integrations.

What you see

Top bar. A breadcrumb, a source switcher (**All**, **Email**, **Slack**, **WhatsApp**, **Meetings**, each with a count), a search box (press `/` to focus it) that searches people, subjects and channels, and a "N/4 connected" indicator.

Report row. A strip of small charts and counts summarising the week of comms, with a count of threads that need a reply. Click it to jump straight to the *Needs reply* queue sorted by urgency. When nothing is waiting it says "Nothing waiting on you".

View tabs (shown under the report row): **Threads**, **Digest**, **Recordings**, **Clients** and **Week**. The tab you choose is kept in the address (`?tab=`) so you can bookmark it. A small dot on **Digest** means there is an unread digest.

Threads view

Three columns:

1. **Triage (left).**
    - **Channels:** a checklist of the four sources, each with a green dot if connected and a count. A source that is not connected has a *Set up* link. Click a source to filter; click **Reset** to clear.
    - **Range:** Today, Yesterday, Last 7 days, All.
    - The queue filter: **Needs reply** (they asked something, or a priority contact is waiting on you), **Waiting on them**, **FYI** (read it, nothing to send back) and **Done** (older than three days with nothing unread).
2. **List (middle).** The threads that match your filters. Choose the order: Newest first, Oldest first or Most urgent. Most urgent weighs priority contacts first, then the queue, then unread count. An active filter shows as a chip you can click to clear. If nothing matches it says "Nothing matches these filters."
3. **Reader (right).** The whole exchange for the chosen thread, with the sender, the channel and times. WhatsApp threads load their real history, including images, voice notes (with a play button), video and documents. A calendar meeting shows When, Calendar, Where and Link instead of messages, plus a **Join** button when there is a meeting link.

At the bottom of the reader is the reply bar (when the channel can send): four quick-start chips (`/draft reply` , `/confirm time` , `/ask for details` , `/next steps`) that drop a stub sentence into the box, then the text box and a send arrow. Press Command or Control plus Enter to send.

Above the reply bar are two buttons: **Snooze** (hide the thread for 24 hours) and **Mark done** (press `e`).

Digest view

The morning digest is written once a day at 07:00 by the scheduled runner. It is built from your comms feed. Nothing is sent. It has lanes grouped by source and a calendar lane for today. Each entry shows time, sender and a tier badge; entries that carry over from earlier show *Held over*. A **Clear** button on an entry marks it as dealt with. Opening the tab marks the digest read.

If the runner is off on this computer, it says "Morning digest is off on this instance" and explains that it only runs where `GLADOS_CRON=1` is set on the always-on host. Before the first run it says "Today's digest arrives at 7:00."

Recordings view

Call recordings from Plaud and Fathom in one list, newest first. Each card shows the title, source, date, length and participants. Click a card to open its summary and an **Open transcript** link (or "No transcript link for this recording"). Fathom is pulled when you open the tab, at most once every ten minutes. If Fathom does not answer, an error line appears with a **Retry** button. Plaud does not poll. A small relay on your side pushes finished recordings in (see Integrations). An empty list says "No recordings yet."

Clients view

One lane per confirmed client that has a Slack channel, showing the latest messages with user and age. Each lane has a **Slack** button that opens the channel. If a lane is empty it reminds you to invite the Slack bot to the channel. Without Slack it shows a *Not configured* badge. With Slack but no channels it tells you to confirm a client on Clients and give it a channel.

Week view

A seven-day calendar grid of the next seven days from your connected calendar. Without a calendar it shows *Not configured* and "Connect a calendar and the week fills in." With an empty week it says "Nothing on the calendar in the next seven days."

What you can do

- Filter by channel, range and queue, search, and sort.
- Read a whole thread, including media.
- Reply on Slack, WhatsApp and email (see the rules below).
- Snooze a thread for 24 hours, or mark it done. Both are saved in this browser only, so another computer or browser will not see them.
- Open the Digest, Recordings, Clients and Week views.

How replies work, per channel

- **Slack:** sent for real through the bot, to the thread's channel.
- **WhatsApp:** sent for real, but only if the Business number is set up. It can only answer people on the business number; free-form replies are limited by Meta to 24 hours after their last message.
- **Email:** never sent straight away. The reply becomes a draft that has to be approved before anything leaves. If the draft cannot be created, FounderOS opens a draft in your computer's mail app instead and tells you it did.

A failed send shows an honest message next to the box (for example "failed" or the error), and the text stays in the box.

How to

Clear your reply queue

1. Open `/inbox`.
2. In the report row, click the *Needs reply* count. The list switches to that queue, most urgent first.
3. Click the first thread. Read it in the reader.
4. Type a reply, or click a quick chip to start one, and press Command or Control plus Enter.
5. If the reply is done and nothing else is needed, click **Mark done** (or press `e`).
6. If you cannot answer yet, click **Snooze** to hide it for 24 hours.

Find an old conversation

1. Press `/` to focus the search box.
2. Type a name, a subject word or a channel name.
3. Set **Range** to *All* if the thread is older than a week.

Read the morning digest

1. Click the **Digest** tab. The dot goes away once it is opened.

2. Read each lane. Click **Clear** on entries you have handled.

See a call recording

1. Click **Recordings**.
2. Click a card to open the summary, then **Open transcript** if there is one.

Demo mode

In demo mode Comms shows a scripted week of invented messages, meetings, a digest, recordings, client lanes and a week calendar. Replies are not delivered anywhere. The channel dots show the demo connectors, which are not real.

Sample preview on a blank install

On a real (non-demo) install that has no digest, no recordings and no client lanes yet, adding `?sample=1` to the address (`/inbox?sample=1`) previews those views with a clearly badged sample set. As soon as real data exists the sample is ignored.

Revenue


The Revenue area is about money coming in: the leads you are working, the brand deals in your inbox, the clients you serve, the cash across your processors, and your trading accounts.

Page	Address	Use it to
Funnel	`/funnel`	See every lead from first touch to paying customer, and who to chase today
Brand Deals	`/brand-deals`	Review, approve and track sponsorship replies
Clients	`/clients`	Confirm who your clients are and keep a queue of work requests for each
Finances	`/finances`	See income from every processor, expenses from uploaded statements, and net
Trading	`/trading`	Watch your accounts and set limits for the trading agent

Three things apply to every page below:

- **Demo mode.** A fresh install opens on a fictional company. Everything you see is sample data and nothing real is read or sent. Turn it off in Settings (the switch is called Filming mode). See Settings.
- **Not configured.** When a page needs a connector you have not set up, it says so with a *Not configured* badge and a *Set up* link instead of showing made-up numbers. Connector keys are covered in Integrations.
- **Appearance.** Settings offers more than one look. The content and controls are the same in each; only the layout and styling change.

Funnel

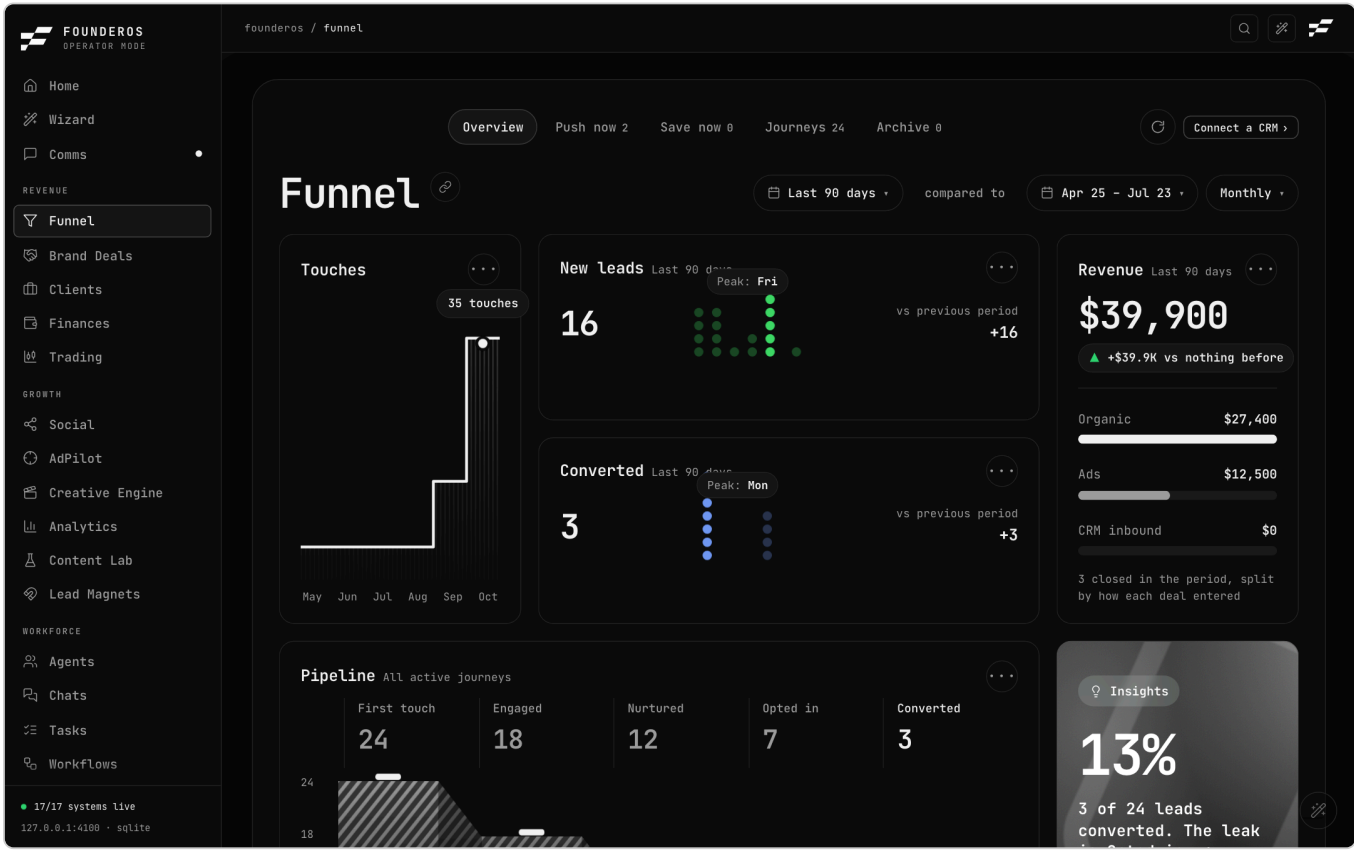

What it is for. The Funnel shows every lead as a *journey* through five stages, so you can see where leads come from, who is hot, and who is fading. Its job is to answer "who should I contact today?"

The five stages are **First touch**, **Engaged**, **Nurtured**, **Opted in** and **Converted**.

Where the data comes from

The Funnel reads leads from whichever of these are connected, and merges them:

Source	Needs	What it adds
Attio (CRM)	An Attio connection	Deals as journeys
GoHighLevel	`GHL_API_KEY` and `GHL_LOCATION_ID`	Contacts as journeys
Trakyo	`TRAKYO_API_KEY`	The first touch for each lead (which post or ad brought them in), and tracked links
Meta Ads	A Meta ad account	A source chip (paid media)

If none of the CRMs has leads, the page falls back to the journeys stored in your own database. On a blank install that means an honest, empty page. A line near the top tells you which source you are looking at (for example "Attio 42 + GHL 18", "local"). Source chips along the top show each connector as connected or not, with a link to connect it.

What you see

Views. A row of tabs: **Overview**, **Push now**, **Save now**, **Journeys** and **Archive**. Push now, Save now, Journeys and Archive show a count.

Controls. Choose the period (Last 30 days, Last 90 days, Last 12 months, All time), what to compare against (previous period, the same period last year, or no comparison), and monthly or weekly grain. A **Refresh** button re-reads the CRM and local journeys. A **copy link** button copies a link to exactly the view you are looking at, including filters.

Overview has these cards:

- **Pipeline**: active journeys by stage. Click a stage to focus it.
- **Revenue**: money from converted leads in the period, with the change versus the comparison period. It is split by lane: **Organic**, **Ads** and **CRM inbound**. Click a lane to see the deals that closed there.
- **Touches**: contact points over time.
- **New leads** and **Converted**: counts for the period with a peak marker.
- **Tracked links** (needs Trakyo): see below.
- **Channels** (needs Trakyo): which channel brought leads, how many booked or converted, and the revenue. Without Trakyo this card says "Channel attribution needs Trakyo" with a *Set up* link.

A prompt bar at the bottom of the Overview says "What would you like to explore next?". It is not an AI. It understands slash commands: `/first-touch`, `/engaged`, `/nurtured`, `/opted-in`, `/converted` (jump to Journeys on that stage), `/organic`, `/ads`, `/crm` (filter by lane), `/push`, `/save`, `/archive` and `/overview`. Type `/` to see the list.

Push now lists hot leads: likelihood 70 or higher, converted ones excluded, still in motion, freshest first. **Save now** lists leads fading toward the archive (quiet for more than 21 days), the most likely to convert first. Each is capped at the top four on the Overview rail.

Journeys is a table of all active leads with Client, Stage, Quiet (days since the last touch), Relationship, Likelihood, Entry, Value and Contact. Chips filter by stage.

Archive holds leads that have been quiet for more than 90 days. They leave the active views automatically.

Dossier. Click any lead row to open a side panel with the stage reached, status, relationship, likelihood, entry, value, first seen, every touch (stage, source, date) and the contact details. The email links open your mail app, and a phone number opens WhatsApp. If the lead is not converted, the panel says "Next touch is yours".

What you can do

- Change period, comparison, grain and filters.
- Open a dossier and contact a lead by email or WhatsApp.
- Create a tracked link (Trakyo and writes enabled only).
- Refresh from the sources.

You cannot edit a lead's stage here. Stages follow your CRM.

How to

Decide who to contact today

1. Open `/funnel`.
2. Click **Push now**. These are hot leads. Open the first row to read the dossier.
3. Use the email or phone link in the dossier to reach out.

4. Click **Save now**. These are leads slipping away. Pick the highest likelihood first and send a nudge.

Create a tracked link

1. On the Overview, find **Tracked links**. If it says *Not configured*, set `TRAKYO_API_KEY` first (see Integrations).
2. Click **New link**. If the button is greyed out, outbound writes are off. The tooltip says "Outbound writes are off on this instance. Set GLADOS_WRITES=1 to create links."
3. Enter the **Destination URL**, a **Source** (for example Instagram) and a **Campaign**, or a **Content id** instead. Optionally pick a **Domain**.
4. Click **Create link**. A confirmation asks "Create link in Trakyo?". Confirm.
5. The new short link appears in the table with its destination and click count.


Share a view

1. Set the period, filters and tab the way you want them.
2. Click the copy-link button. "Link copied" appears.

Demo mode and preview

In demo mode the Funnel shows invented journeys from the demo company, including first touches, so the Channels card is filled. On a real install with no leads, add `?sample=1` to the address (`/funnel?sample=1`) to preview the page on a clearly badged sample set. The default stays honest and empty.

Brand Deals

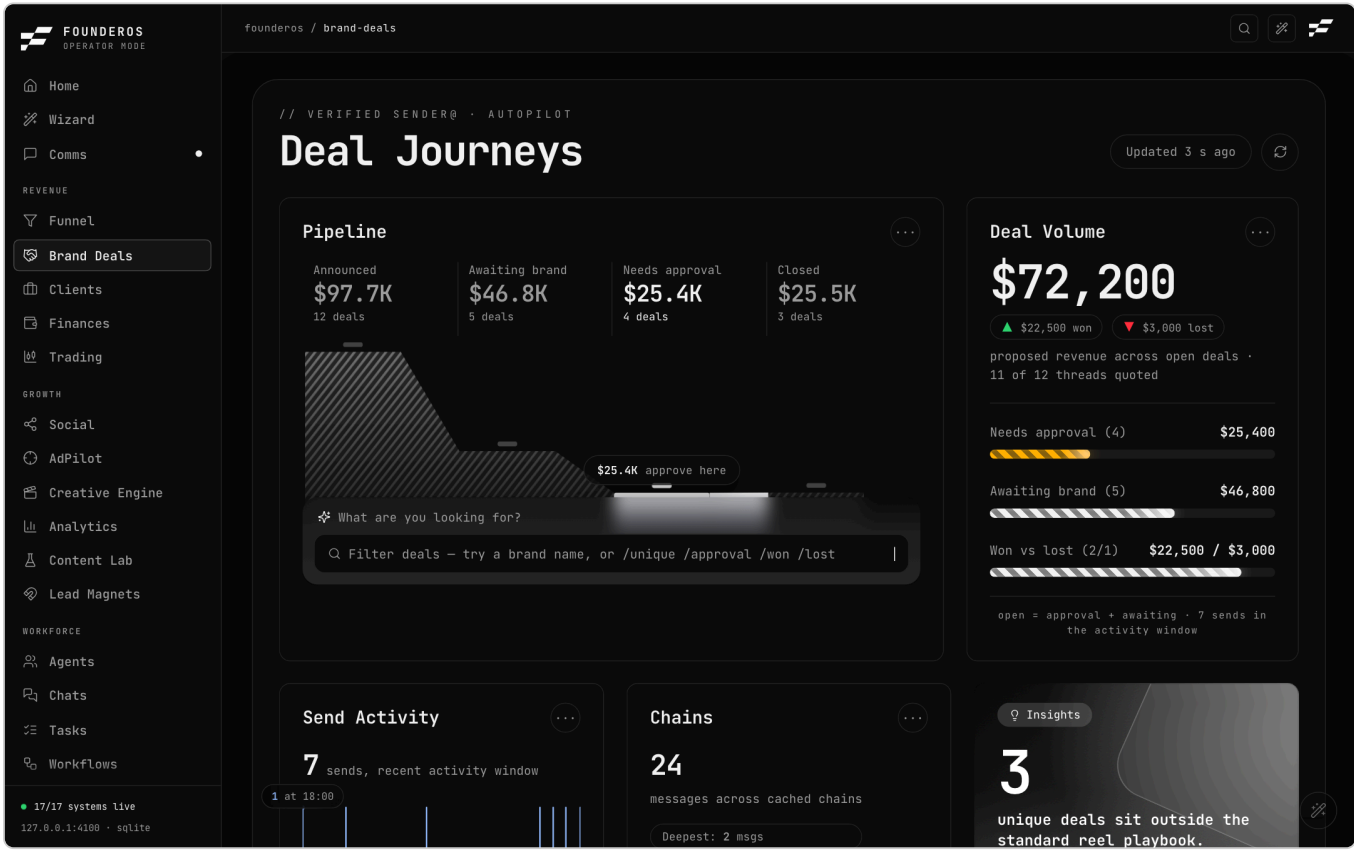

What it is for. The page is called *Deal Journeys*. It follows sponsorship email chains from the first brand message to a won or lost outcome. A background helper called bdpilot reads the emails, drafts replies and tags the unusual ones. You stay in control: nothing is sent without a human approval.

What you need

- The bdpilot helper running on the same computer, writing its state file (`BDPILOT_STATE` , default `~/.config/bdpilot/state.json`).
- Optionally, the sender tool `gsend` (`GSEND_BIN`) to approve and edit drafts from this page.
- Optionally, `BDPILOT_BOT_URL` , the link to the Telegram approval bot. When it is set, an "approve here or in Telegram" button appears. Otherwise the link is hidden.

If the helper has not reported, the page shows *Not configured*, "bdpilot is not reporting" and a *Set up* link, and no zeros.

What you see

- **Header.** A freshness pill (the page refreshes by itself every 30 seconds and tells you if the last refresh failed), the Telegram link when set, and a refresh button.
- **Pipeline.** The funnel of deals by stage, with a filter box. Quick filters: **All**, **Needs approval**, **Awaiting** (sent, waiting for the brand), **Unique** (deals the helper flagged as unusual), **Won** and **Lost**. Type a brand name to filter, or use `/unique` , `/approval` , `/won` or `/lost` .
- **Deal Volume.** Dollar value of the open pipeline, split into needs approval, awaiting the brand, and won versus lost.
- **Send Activity.** Recent sends over time.
- **Chains.** How many messages sit across the cached email chains.
- **Deal list.** Brand, email, subject, stage, last event, and the quote. A quote marked "manual" was set by you; otherwise it was read from the thread.

What you can do

Click a deal to open its panel. What you see depends on its stage.

- **For a deal that needs approval** (a draft is waiting): **Send as the verified sender** (asks for a second click on **Confirm send**), **Skip**, and **Edit draft**.
  - **Edit draft** loads the text. Change it and click **Save draft**. The recipient, subject and thread cannot be changed. This is by design, so an edit can never redirect an email.
  - Sending uses the same safe path as the Telegram tap. If the draft was already sent in Telegram, the second attempt simply fails.
- **Outcome** (any deal): **Mark won**, **Mark lost** or **Reopen**. This is only your tracking. It never emails anyone.
- **Quote**: enter an amount in USD and save. This overrides the amount read from the thread.
- The panel also shows the **Summary** and the full **Email chain** when it was cached.

How to

Approve a drafted reply

1. Open `/brand-deals` .
2. Click **Needs approval** to filter.
3. Click a deal and read the summary and the email chain.
4. If the draft needs changes, click **Edit draft**, edit, and click **Save draft**.

5. Click **Send as the verified sender**, then **Confirm send**.


Record a result

1. Open the deal.
2. Under **Outcome**, click **Mark won** or **Mark lost**.
3. Under **Quote**, enter the amount and save if you want the pipeline value to be right.

Demo mode

In demo mode the board is filled from the demo company's deals. Sending, editing and skipping act on demo data only and nothing is emailed.

Clients

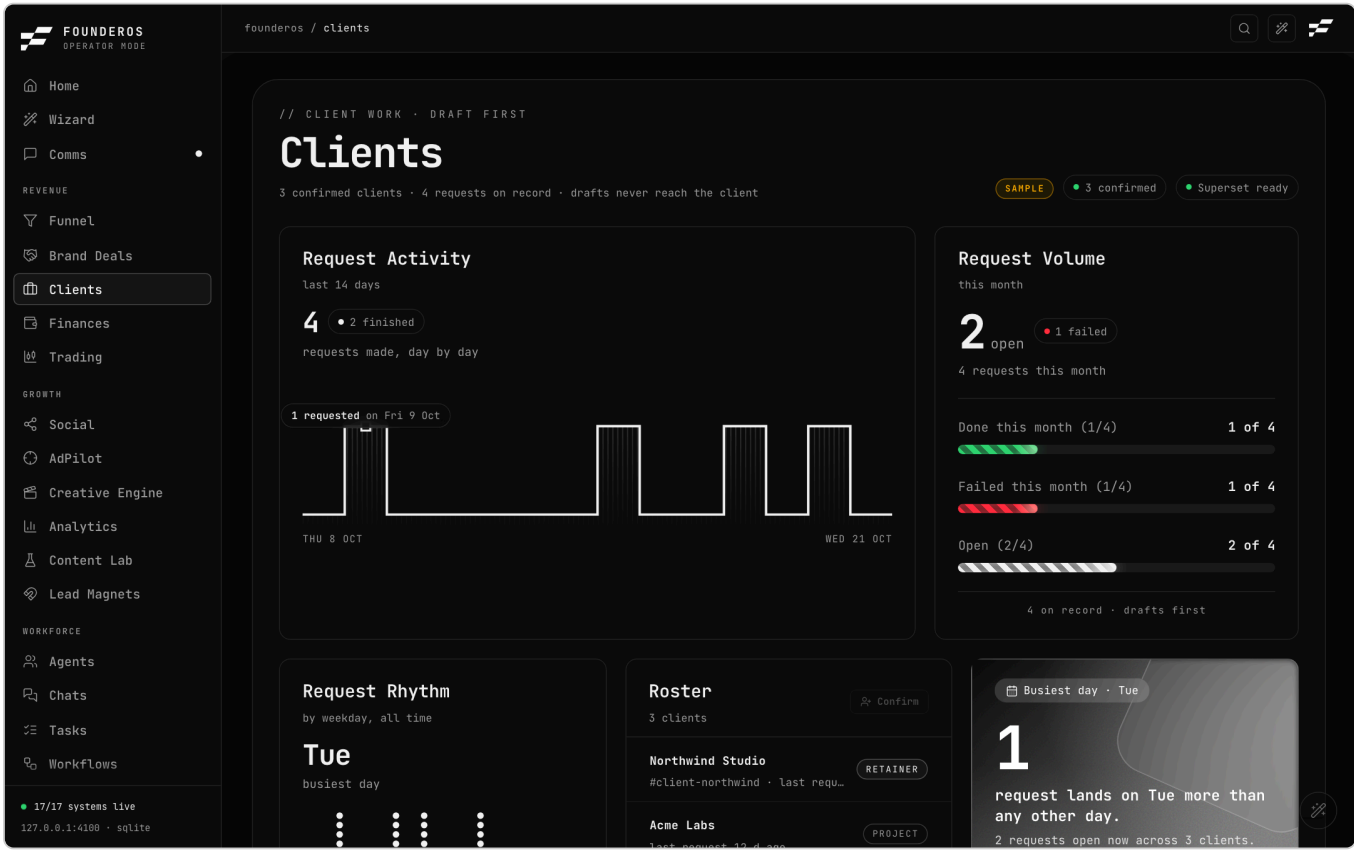

What it is for. A short list of the people you serve, and a queue of work requests per client. It is deliberately simple: a payer is not a client until you confirm them.

What you need

- Attio, to pick clients from your deals (optional). Without it you add clients by hand.
- Superset, to start a request as a draft workspace (optional). Set `SUPERSET_API_KEY` (and optionally `SUPERSET_PROJECT_ID`). Drafts save without it.
- `GLADOS_WRITES=1` to allow launching a request. Without it the launch button explains why it is disabled.

What you see

- **Request activity**: requests made in the last 14 days.
- **Request volume**: how many requests are open, plus meters for done this month, failed this month and open.
- **Roster**: confirmed clients, with a *retainer* mark where it applies. An "Attio not configured" tag appears if Attio is off.
- **Work requests**: a table with Client, Brief, Status, Age and a row menu. Status is Draft, Queued, Running, Done or Failed.
- **Request rhythm**: requests by weekday, with the busiest day.

What you can do

- **Confirm a client** from your Attio deals, or **Add by hand** with a name and optional company.
- Click a client in the roster to edit it: set its retainer mark, **Slack channel** (name or id) and **Superset project**, then **Save**. Or **Unconfirm** it.
- **New request**: write a brief for a client and **Save draft request**. Saving never sends anything to the client.
- **Start draft in Superset** on a request: opens a draft workspace there. It is blocked, with a reason, if Superset is not configured, if writes are off, or if the request is already running or done.
- Mark a request **Done** or **Failed**, **Open brief**, or retry a failed one (**Retry in Superset**).

How to

Add a client and log a request

1. Open `/clients` and click **Confirm a client** in the Roster card. If Attio is not connected the button reads **Add client**.
2. Under *Attio deals*, click **Confirm** next to a deal. Or, under *Add by hand*, type a name and click **Add client**.
3. Click **New request**, choose the client and write the brief.
4. Click **Save draft request**. The request appears in the table with the status Draft.


Give a client a Slack lane

1. Click the client in the roster.
2. Enter the Slack channel in **Slack channel** (for example `client-name`, or a channel id like `C0123ABCD`). Using the id gives you an "Open Slack channel" link.
3. Click **Save**. That client now has a lane in Comms, Clients view.

Demo mode

In demo mode the page shows three invented clients and their requests, marked as sample data. The page is read only (buttons say "Filming mode: read only") and nothing is launched. On a real install with no clients, add `?sample=1` to preview the same sample set.

Finances

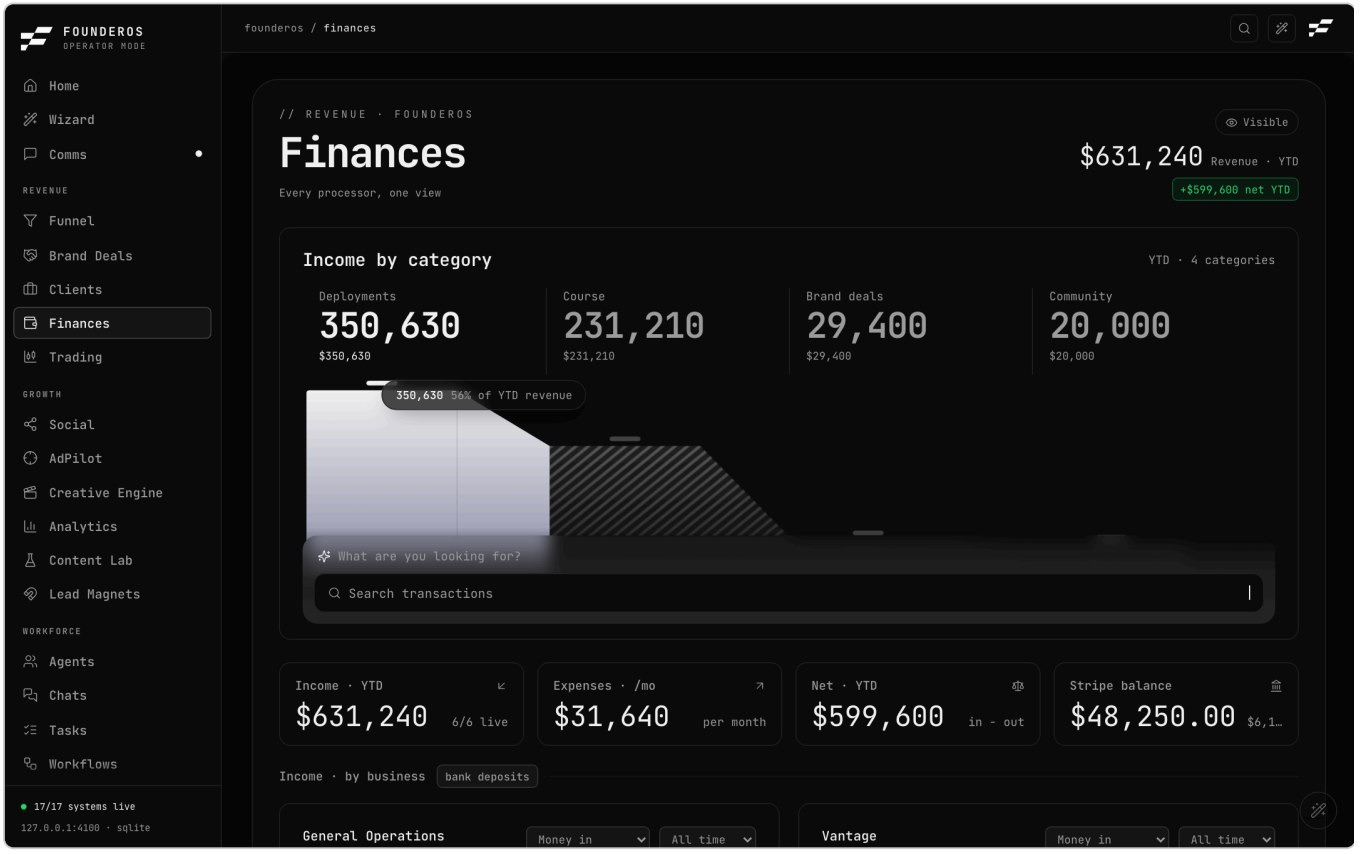

What it is for. Every place money lands, in one view. Income comes from your payment processors. Expenses come from statements you upload. The page shows net income and where the money went.

What you need

Add keys for the processors you use. Each is optional.

Processor	Key	Status today
Stripe	`STRIPE_SECRET_KEY`	Fully live: month-to-date income, balance, recent charges
FanBasis (two accounts)	`FANBASIS_KEY_1` , `FANBASIS_KEY_2`	Month-to-date income
Wise (two accounts)	`WISE_1_TOKEN` , `WISE_2_TOKEN`	Outgoing transfers
PayPal	`PAYPAL_CLIENT_ID` , `PAYPAL_CLIENT_SECRET`	Key is recorded, income pull is not live
Square, Whop	`SQUARE_ACCESS_TOKEN` , `WHOP_API_KEY`	Same: not live yet

A processor with a key but no live pull shows "key set", never a made-up number. A processor with no key shows a *Connect* link.

What you see

- **Header.** A big income figure for the period with a net badge, and a **Visible / Hidden** button that blurs every amount (handy on screen shares).

- **Income by category.** A chart of income per processor account, with a **Search transactions** box. Typing filters everything below. With no processor connected it says "No processor income configured yet." with a *Set up* link.
- **Summary tiles.** *Income*, *Expenses · /mo*, *Net* and *Stripe balance*.
- **Spending.** Your uploaded card spend by month and category, top categories (click one to list its transactions) and top merchants. With no statement it says "Upload a statement to see spending."
- **Income by business.** Bank deposits per business, from uploaded bank statements.
- **Income by processor.** A row per processor with its income, "key set" or *Connect*, and a "N/total live" count.
- **Outgoing, Wise.** Recent outgoing transfers. Hidden entirely until a Wise key exists.
- **Recent income.** Latest Stripe charges.

What you can do

- Search transactions.
- Hide or show amounts.
- Upload statements (below).
- Click through to connect a processor.

How to

Upload a statement

1. Scroll to **Upload statements** (the *Upload a statement* button jumps there).
2. Click **Choose CSV or PDF**.
3. Pick a credit-card **CSV** to see categorized spending. It needs Date, Description and Amount (or Debit and Credit) columns.
4. Or pick a bank statement **PDF** to see per-business income. PDF reading needs the free `pdftotext` tool (installed with `brew install poppler` on a Mac).
5. Wait for the message. A CSV says how many new rows of how many parsed were added. A PDF says the business, month and total money in. The page refreshes.

Re-uploading the same CSV does not duplicate rows. Files are stored on your computer only and are never committed to the repository.

Connect Stripe


1. Click **Connect Stripe** next to *Stripe balance* (or open Integrations).
2. Add `STRIPE_SECRET_KEY`.
3. Reload `/finances`. The Stripe row turns live once Stripe answers. A key that is present but rejected stays "pending", never "live".

Demo mode

In demo mode the page shows scripted books: year-to-date income, demo Stripe balance and charges, Wise transfers, per-business income and categorized spending. Uploads still work, but they land in the demo data. Home's income strip shows the same demo books.

On a real install with no statement, add `?sample=1` to preview the Spending card on a badged sample.

Trading

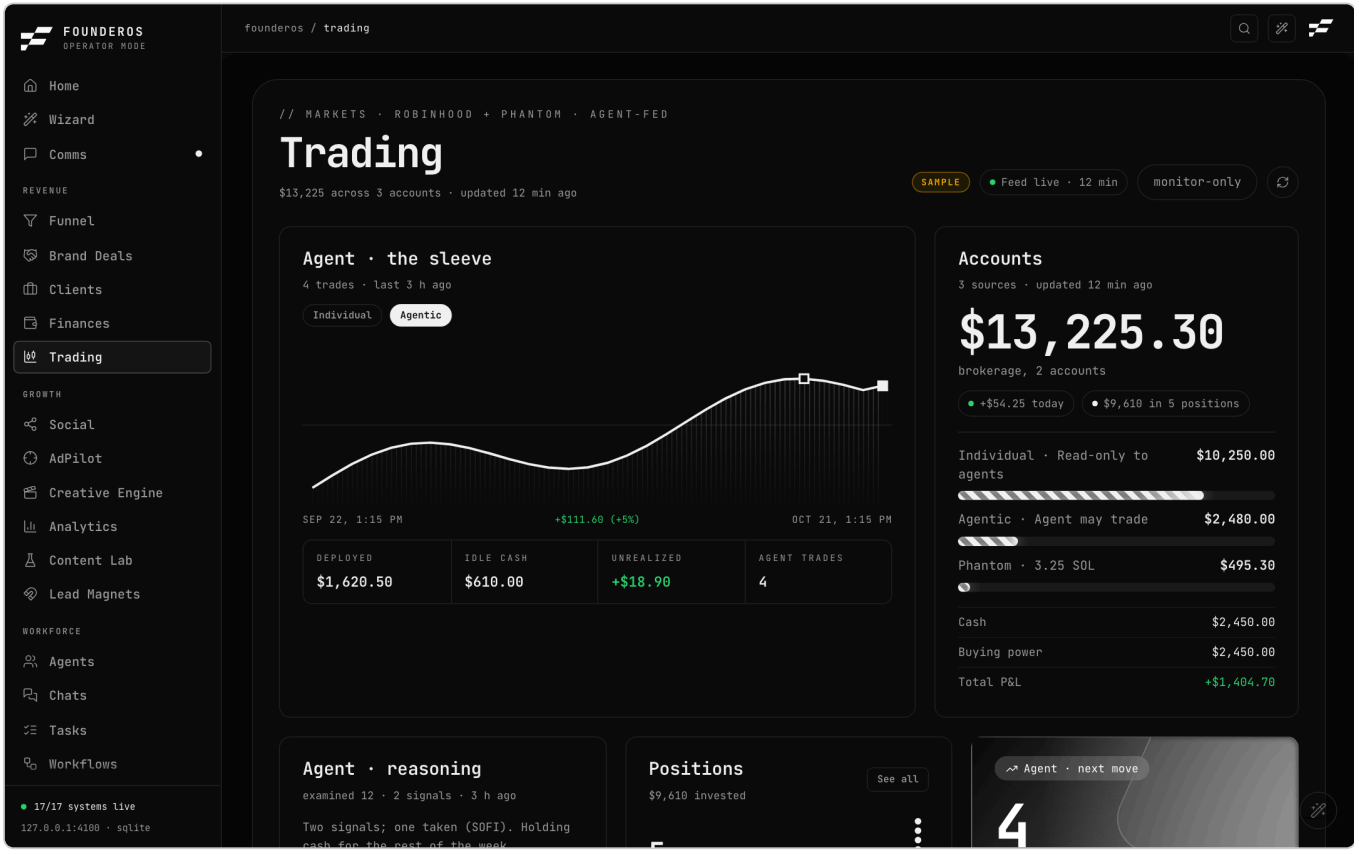

What it is for. A read-only window on your accounts, plus the limits for the trading agent. FounderOS never places an order itself. A separate Markets agent does the trading and pushes its results here. You decide how much freedom it has.

What you need

- `TRADING_PUSH_TOKEN` : any long random string you choose. The Markets agent sends it with each push.
- Optional: `PHANTOM_WALLET_ADDRESS` , a public Solana address (not a key) to show a wallet balance. `SOLANA_RPC_URL` overrides the default free public RPC.

Until the first push, the page shows *Not configured* and "Connect the Markets agent feed. Its first push fills this page." together with the push address to copy. Only the address is shown. The token stays with the agent.

What you see

- **Header.** A status pill: "Feed live" with how fresh the newest capture is, or a warning if the agent has stopped pushing. A **Refresh** button reloads from the store (the wallet read is cached for 60 seconds).
- **Agent sleeve.** The account the agent trades, with a value chart and a selector for the account shown. Stat cards: *Deployed*, *Idle cash*, *Unrealized* and *Agent trades*.
- **Accounts.** Each source with its value and its share of the total. Phantom shows "not configured" without an address.
- **Agent reasoning.** What the agent examined, how many signals it found, and its notes, every run, whether or not it traded.
- **Positions.** Open positions with value and size buckets. "No open positions." if empty.
- **Agent, next move.** Number of trades filled and the latest note.

- **Open orders.** Live orders at the broker, if any.
- **Trade log.** All trades, filtered by **All**, **Agent**, **You** or **Rejected**. Click a trade for details and its rationale.
- **Agent limits.** Seven numbers and an Autopilot switch (below).

What you can do

Set the agent's limits. Each limit has a range, and values outside it are clamped and reported.

Limit	What it controls
Autonomy budget	Most capital deployed at once without a human
Max per trade	Largest single order
Max position	% of the sleeve in one name
Risk per trade	% of the sleeve at risk on one trade
Max positions	Names held at once
Trades per day	Orders per day
Kill-switch floor	Buys stop if the sleeve falls through this value

Nothing is shown as saved until you save it. If no limits are stored, the page says so rather than showing defaults.

How to

Turn on autopilot

1. Scroll to **Agent limits**. Fill in all seven numbers and click the save button.
2. Switch **Autopilot** on. A dialog asks "Turn on autopilot?" and explains that the Markets agent will place real orders inside these limits and FounderOS does not place orders itself.
3. Click **Turn on** to confirm. Click **Cancel** to leave it off.

Switching Autopilot off needs no confirmation. Only you, signed in, can change limits. The agent's own token is refused.

Connect the Markets agent

1. Set `TRADING_PUSH_TOKEN` in Settings or `.env.local`.
2. On `/trading`, click **Copy** next to the push address.
3. Give the address and the token to the Markets agent. Its first push fills the page.

Demo mode

In demo mode the page shows a sample feed, marked with a **Sample** badge, and the limits are read only. No real account is read.

Growth


The Growth area is about getting attention and turning it into leads: your social accounts, paid ads, ad creative, a single analytics view, the Content Lab, and the pages you give away to collect leads.

Page	Address	Use it to
Social	`/social`	See audience and posting across platforms, queue posts, answer Instagram DMs
Platform page	`/social/<platform>`	Dig into one platform's follower history
Newsletter (Beehiiv)	`/social/beehiiv`	See your email list and past issues
AdPilot	`/adpilot`	Watch paid campaigns and research what ads work in your niche
Creative Engine	`/creative-engine`	Turn a concept into researched angles, scripts, briefs and UGC or motion video
Analytics	`/analytics`	One page of headline numbers across audience, money, inboxes and agents
Content Lab	`/lab` and six sub-pages	Learn what works in your niche and plan content that fits
Lead Magnets	`/lead-magnets`	Keep a record of the free pages that collect leads

Three things apply to every page below:

- **Demo mode.** A fresh install opens on a fictional company. Everything you see is sample data and nothing real is read, posted or spent. Turn it off in Settings (the switch is called Filming mode). See Settings.
- **Not configured.** When a page needs a connector you have not set up, it says so with a *Not configured* badge and a *Set up* link instead of showing made-up numbers. Connector keys are covered in Integrations.
- **Appearance.** Settings offers more than one look. The content and controls are the same in each; only the layout and styling change.

Social

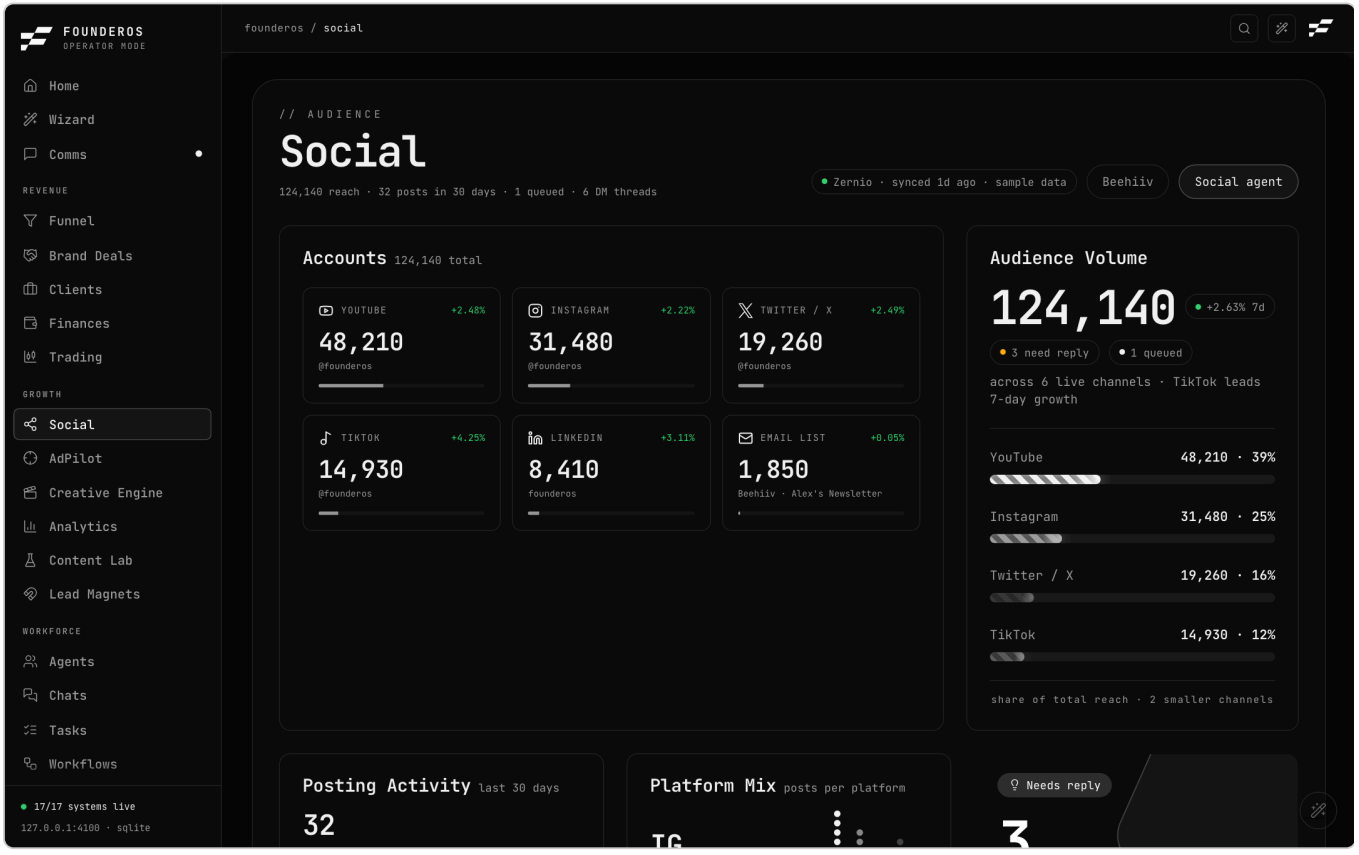

What it is for. The hub for your audience. It shows how many followers you have on each platform, how fast they are growing, what you have posted, and the Instagram messages waiting for a reply. It also holds the composer for queuing new posts.

What you need

- **Zernio** (`ZERNIO_API_KEY`) for follower counts and posting history. A status chip at the top shows whether Zernio is answering. If it is not, a *Set up* link appears. Posting history that cannot be read shows "?" and "Zernio not answering", never zero.
- **ManyChat** for Instagram DMs. See Instagram DM inbox.
- **Beehiiv** for the email list (see Newsletter).

What you see

The title line gives total reach, posts in the last 30 days, posts queued and DM threads. Links at top right open Beehiiv and the Social agent.

- **Accounts.** One tile per platform (Instagram, TikTok, X, YouTube, LinkedIn) plus the email list. Each shows followers, 7-day growth and its share of total reach. Click a tile to open that platform page; the email tile opens the newsletter.
- **Volume card.** Total audience with a short caption and a meter per channel.
- **Posting activity.** Posts out through Zernio in the last 30 days, as a line.
- **Platform mix.** Which platform you posted on most.
- **Needs reply.** How many Instagram DM threads are waiting on you.

- **Stat strip.** *Total reach*, *Audience growth* (with the platform that is leading), *Total DMs* and the *Instagram DMs* tile.
- **Audience over time and consistency.** A chart of combined audience with your posting days, and a pie of audience share by channel.
- **Recent posts.** Your latest posts from Zernio, newest first, with a *view* link. If Zernio has no history yet, the card shows a few sample posts and is labelled "sample". Engagement numbers are not shown for live posts, because they sit behind a paid Zernio add-on. The card never invents them.
- **Publish.** The post composer and queue.

What you can do

- Open any platform or the newsletter.
- Read and reply to Instagram DMs.
- Queue posts.

Instagram DM inbox

Click the *Instagram DMs* tile to open the inbox in a pop-up. It shows conversations on the left, the messages on the right, and a reply box ("Reply to "; Command or Control plus Enter sends).

- A small marker on a thread means it needs a reply.
- The header says **live - manychat** once real DMs have arrived, or **seeded** before that.
- DMs arrive only when ManyChat posts them to FounderOS (`/api/webhooks/manychat`). ManyChat's own API cannot list DMs.
- A reply is sent through ManyChat for real. If it fails, you see the error ("connect ManyChat (MANYCHAT_API_KEY) to reply") and no message is stored, so the inbox never shows a reply that did not go out.
- `MANYCHAT_WEBHOOK_SECRET` , if set, must match the `x-manychat-secret` header ManyChat sends.

Post composer and queue

1. In **Publish**, type a caption. The default platforms are Instagram and TikTok; click any of Instagram, TikTok, X, YouTube, LinkedIn to switch it on or off.
2. Add media: drag files into the drop area, click it to pick files, or paste a media URL. Files upload through Zernio. Each shows its name with a remove button.
3. Optionally set a date and time under **Schedule**.
4. Click the post button. "queued" appears with the platform count.

The post is saved in the queue with the status *queued*. The composer itself does not publish. The Social agent on the Agents page picks queued posts up and publishes them through Zernio (the note beside the button says scheduled posts go out at their time). The queue below the composer lists what is waiting, each with its platforms and either "queued" or its scheduled time.

You need a caption and at least one platform. The composer will not submit while media is still uploading.

Demo mode

In demo mode the page shows the demo company's accounts, a seeded DM inbox and the demo posting history. Nothing is posted and replies are not sent.

Platform page

What it is for. The detail behind one account tile, at `/social/instagram`, `/social/tiktok`, `/social/twitter`, `/social/youtube` or `/social/linkedin`.

What you see.

- **Follower history.** One bar per snapshot with the exact count and change on hover, plus growth badges for 7 days, 30 days, 60 days and all time. The latest snapshot and where it came from are listed below.
- **Volume card.** Current followers with a short caption.
- **Growth windows.** Percent change over 7, 30 and 60 days and all time. A window with not enough history says so instead of showing 0.
- **Daily gains.** How many of the last 30 days had a gain.
- **A 30-day change card.**
- Buttons to go back to Social and to open the profile on the platform.

If the platform is not connected, the page says " is not connected yet" with a *Set up* link. An unknown platform name gives a not-found page.

Newsletter (Beehiiv)


What it is for. Your email list and what you have sent.

What you need. Both `BEEHIIV_API_KEY` and `BEEHIIV_PUBLICATION_ID`.

What you see. A status chip: *beehiiv live*, or *Not configured* with a *Set up* link. Without the keys the page shows a seeded preview and labels it "seeded preview - not connected to Beehiiv", so you can see the layout without trusting the numbers.

- **Sends.** Recipients across every issue, oldest to newest, as a line.
- **Volume card.** Subscriber count.
- **Open rate.** Average and the last six issues.
- **Engagement.** Total link clicks, unsubscribes and spam reports.
- **Best open.** The issue with the best open rate.
- **Issue list.** Every past issue.

AdPilot

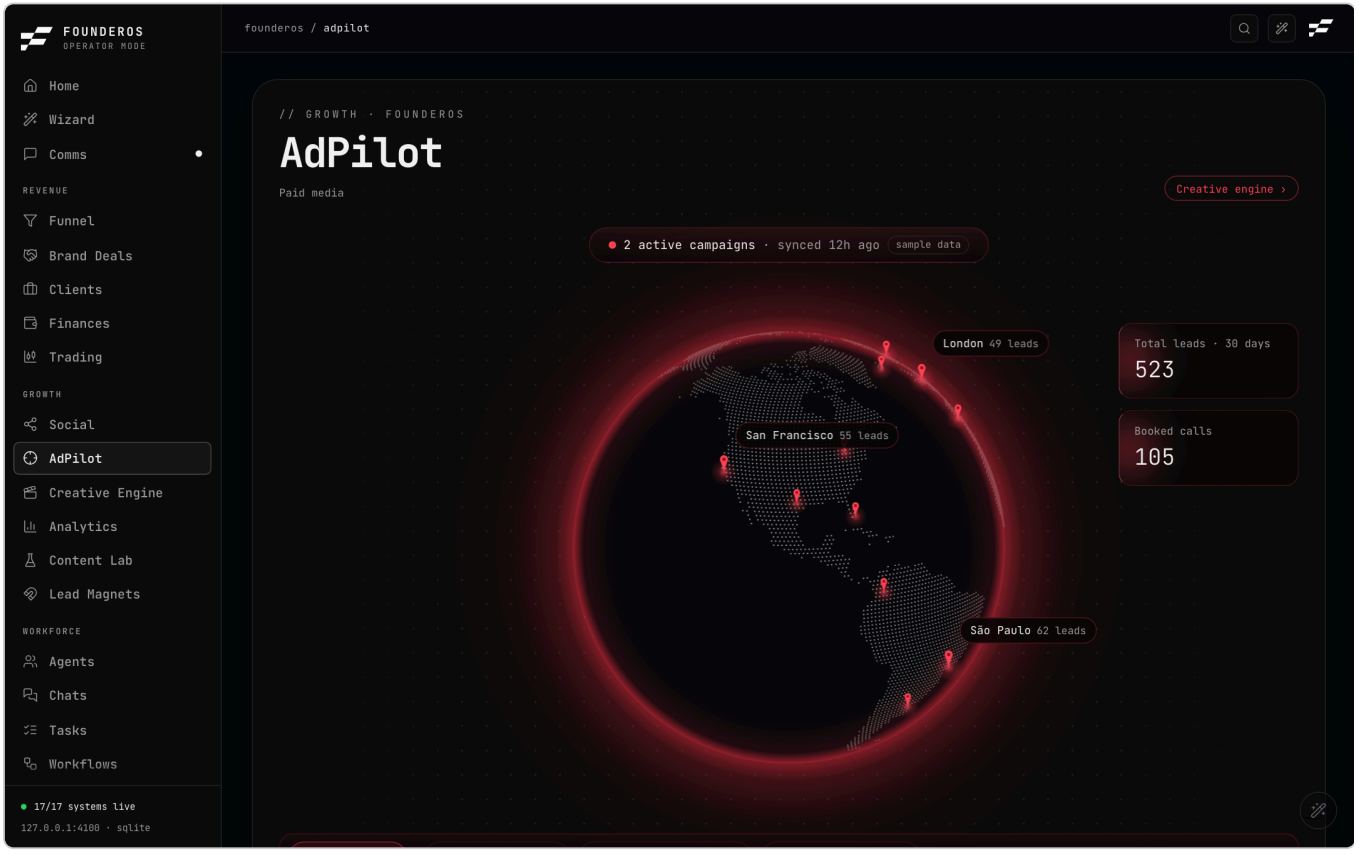

What it is for. Two things on one page. The top half is a deck for your paid campaigns. The bottom half is an *ad library*, a research tool that shows what ads competitors in your niche have kept running.

What you need

- **Campaigns** appear only when an ad account is connected and synced (Meta Ads). They are never added by hand. Until then the deck says "No ad account connected" with a *Connect Meta Ads* link.
- **Ad library** needs a Foreplay key (`FOREPLAY_API_KEY`). Without it the library shows "No Foreplay key yet" and a *Set up* link.
- **Ask Adscout** needs the Claude command-line tool on this computer. Without it, an honest "unavailable" message appears.

What you see

Header. A link to the Creative Engine showing how many campaigns it holds. A status chip shows when the ad account was last synced.

Campaign deck.

- A globe of lead locations.
- A rail of your campaigns. Click to select one, or several, and use the filter box to narrow them.
- **Spend** over time for the selected campaigns.
- A **delivery** matrix of spend by campaign per day. Daily delivery arrives with the sync.
- A **ROAS** ring (revenue against spend).
- **Results** (leads, bookings, purchases) and **Audience** (age, gender, placements).

The numbers change with the campaigns you select. In demo mode they are staged data and the chip says so.

Ad library, with five tabs:

Tab	What it is
For you	A wall of tracked ads, ranked
Search	Describe a concept and get proven ads for it
Saved	Ads you saved (your swipe file)
Watchlist	Brands you track
Activity	Signals from your watched brands

Activity signals read: *launched* (a new ad), *proven* (it has been running long enough to count), *killed*, *scaling up* and *pulling back*.

A credits card shows your remaining Foreplay credits, when the library was last refreshed, and a **Refresh data** button.

What you can do

- Select campaigns and read their numbers.
- **Ask Adscout** a question in plain words, for example "what's working in my niche right now?". It answers from the ads already stored on your computer, so it costs **zero** Foreplay credits.
- **Search** a concept: it expands your words into several searches against Foreplay and ranks the ads by how long they have run. Choose *Proven for* a number of days and a *Format* (all, video or image). This **spends credits**, and asks for a second click first.
- **Save** an ad, **watch** a brand, and open an ad for its full dossier: emotional drivers, hook, transcript and landing page.
- **Refresh data** pulls new ads and signals for every watched brand. It spends one call per brand and asks you to click twice (the button then reads *Confirm refresh*).

How to

Find ads that work in your niche

1. Open `/adpilot` and scroll to the ad library. Check the credits card.
2. Click **Search**.
3. Describe a concept ("how to price a service for a small agency") and choose the days and format.
4. Confirm the credit spend. Results are ranked by how long ads kept running, which is the best sign an ad pays for itself.
5. Click the bookmark on any ad to save it.


Track a competitor

1. Click **Watchlist**.
2. Type the brand's domain (for example `brand.com`) and add it. A message says "Watching . Refresh data to pull its ads."
3. Click **Refresh data** (and confirm) to pull its ads. New launches then show up on **Activity**.
4. To stop, remove the brand. An *Undo* appears briefly.

Demo mode

In demo mode the deck shows staged campaign data and a chip says it is not a live ad account. The library shows the demo store.

Creative Engine

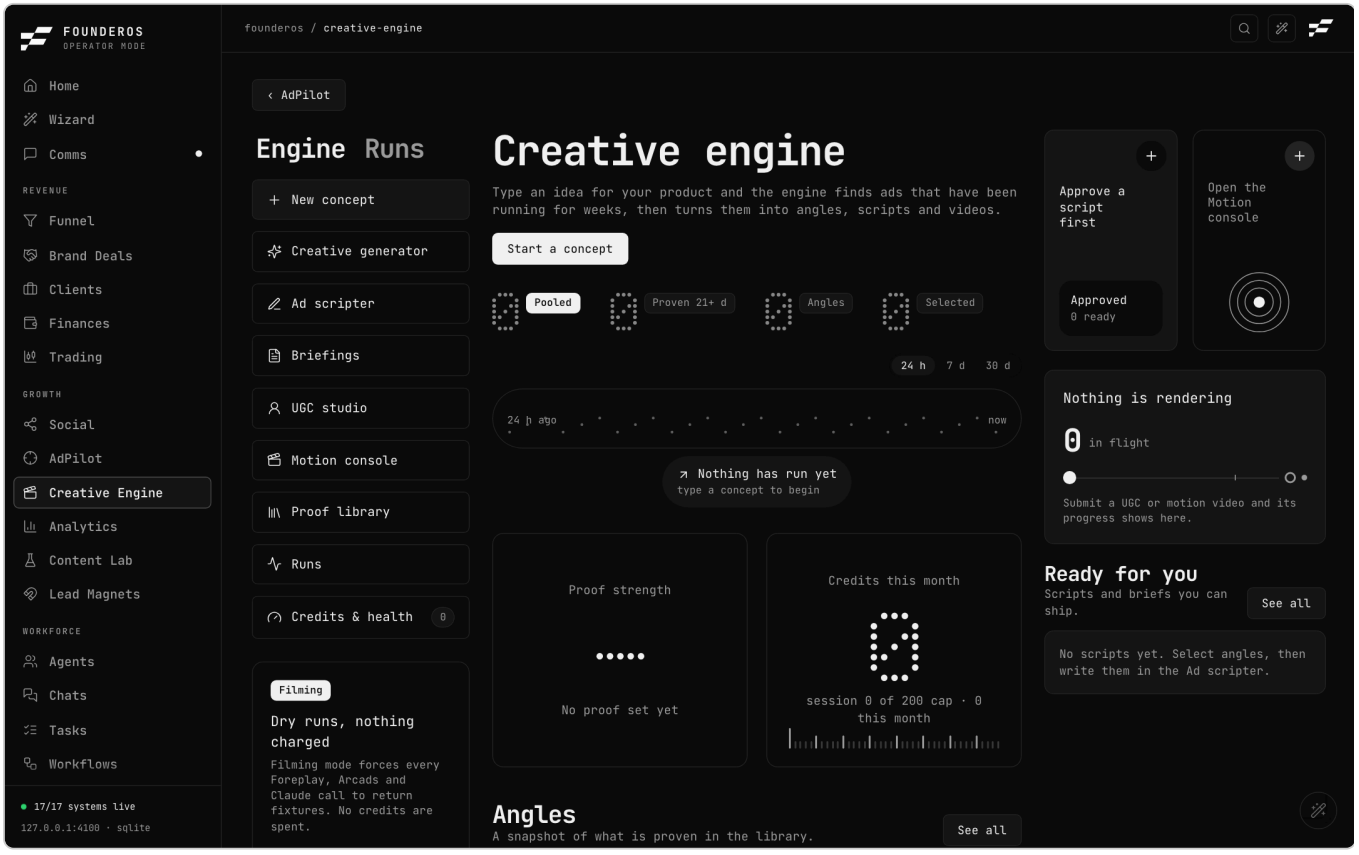

What it is for. A guided workshop for making ads. You describe an idea in a sentence. It researches proven ads, proposes angles, writes scripts, produces a brief with proof, and can make a video. It lives under AdPilot. (The old address `/ad-engine` redirects here.)

What you need

- **Foreplay** (`FOREPLAY_API_KEY`) for research. Without it, research is off and the page says "Research needs the Foreplay key" with a *Set up* link.
- **Arcads** (`ARCADS_BASIC_AUTH`) for actors, voices and video. Without it the video screens say "Arcads is not connected" and offer **Connect Arcads**.
- The Claude command-line tool for writing angles and scripts.

What you see

The page opens on a dashboard with two tabs, **Engine** and **Runs**, and a row of tools:

Tool	What it does
New concept	Starts a fresh campaign in the Creative generator
All campaigns	Switch, rename or delete campaigns (keyboard: arrows, Enter, R to rename, Delete)
Creative generator	Concept, research and angles

Tool	What it does
Ad scripter	Writes and edits scripts
Briefings	Briefs with their proof tables
UGC video	Makes a talking-actor video
Motion console	A detailed control panel for generated motion video
Proof library	Your saved ads, watched brands and signals
Runs	Everything that is processing or has finished

The Engine tab shows the current campaign, a **proof strength** gauge (the median number of days the proven ads kept running; 90 days is full marks, under 45 is "thin proof"), Arcads credits spent this month, a *Ready for you* area with scripts and briefs you can ship, and a timeline of the run in progress.

What you can do

1. **Creative generator.** Write the idea (one sentence about the outcome your customer wants), a product and an audience. Pick a depth: *light* (4 searches), *standard* (6) or *deep* (8). The engine searches Foreplay and shows what it found. Angles are marked **Strong** (backed by proven ads) or **Plausible**. You can filter to *Proven only*, open an ad to see its transcript and landing page, tick the angles you want, and set how many ads you want. You can re-run the research live, which asks before it spends credits.
2. **Ad scripter.** Pick a framework (for example hook-show-demo-result-verdict, problem-agitate-solve, testimonial-arc), a tone, a product intro and a call to action. Click to write. A script has beats (what is said and what is on screen); you can edit any beat, ask for a rewrite with an instruction, and keep versions. Scripts contain spoken words only, no stage directions. **Approve** a version to unlock the next steps: **Make a brief**, **UGC video** and **Motion video**.
3. **Briefings.** Each brief carries its proof table and a driver fingerprint of what moves buyers.
4. **UGC video.** Choose an actor, a voice and a situation, pick an approved script and click generate. A cost panel shows your Arcads balance and your session cap. You must confirm: "Spends Arcads credits on one UGC video, charged on submit". A rejection by the content check is not refunded.
5. **Motion console.** Build a video prompt from a scene tree (parts you can hide or lock), presets and references. A **cost preview** shows exactly what Generate will send and charge before you commit. Running jobs can be abandoned (Arcads may still finish them, and nothing is refunded).
6. **Credits & health.** Foreplay and Arcads status, balance, this month's credits and the session cap. Engine settings let you set a **session credit cap** and reset the session count (with a short Undo).

Money safety

Every action that spends credits asks first, shows the cost, and respects the session cap. If a request would pass the cap you have to choose **Pass the cap once** or cancel. The Runs list is worked out from the real status of each job, and nothing is marked done by the page itself.

How to

Go from idea to a script

1. Open `/creative-engine`. Click **New concept**.
2. Type your idea, product and audience. Pick a depth. Click the generate button.
3. Read the angles. Tick two or three and click continue.
4. In the Ad scripter, pick a framework and write. Edit the beats you do not like.
5. Click **Approve** on the best version.

6. Click **Make a brief**, or **UGC video** to turn it into a video.


Connect Arcads

1. Click **Connect** on the Motion console, or **Connect Arcads** on the UGC screen.
2. Paste the key and click **Save**. Then click **Run the free checks** to confirm sign-in, catalog and balance.
3. Pick or create the Arcads *product* generations are filed under. Creating one asks first.

Dry run and sample

If `CREATIVE_ENGINE_DRY=1` is set, every request returns fixtures and costs zero credits, and a badge says so. Opening `/creative-engine?sample=1` previews every widget on a fictional, read-only sample campaign that is never saved. In demo mode, requests run as fixtures and nothing is charged.

Analytics

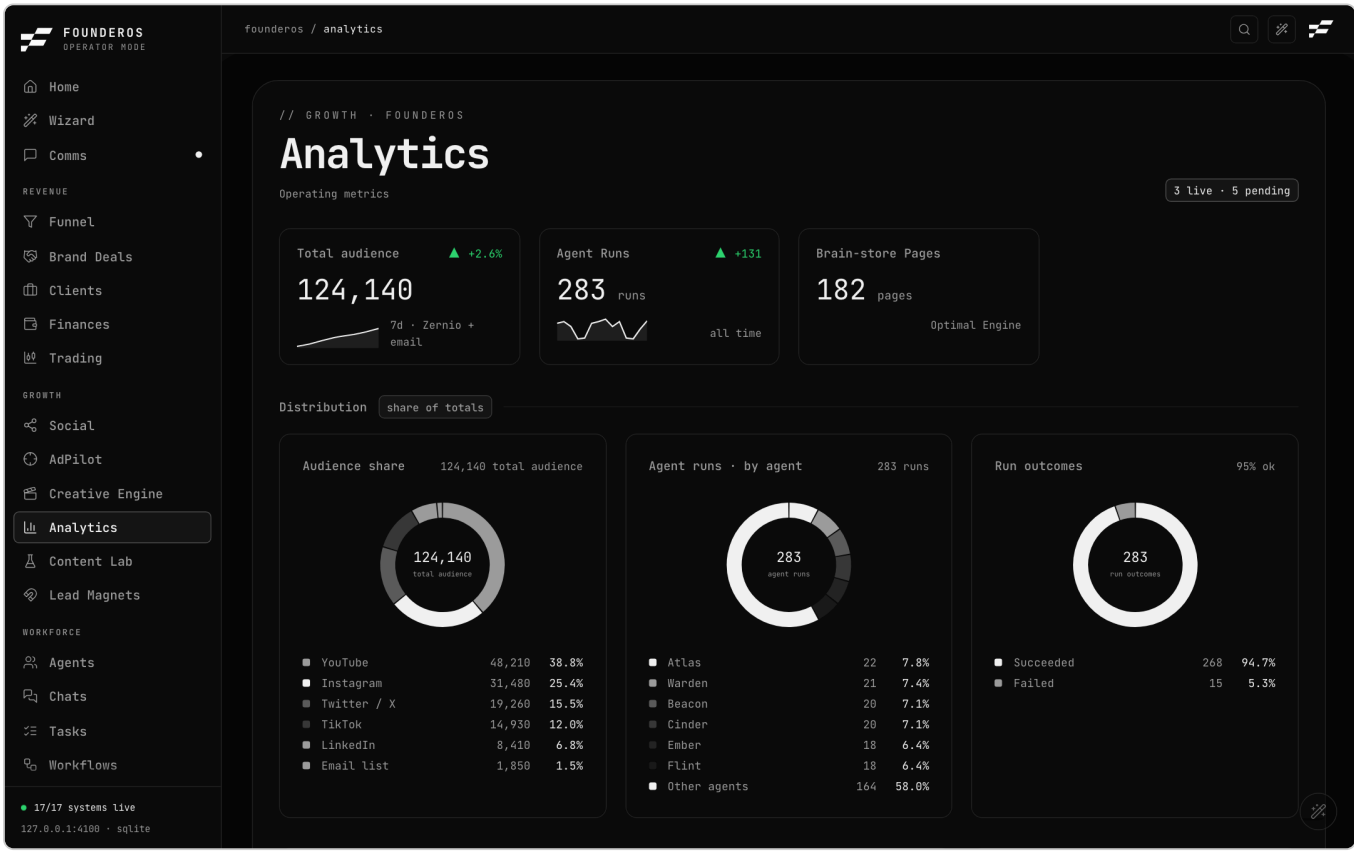

What it is for. One page of headline numbers from across the business, so you do not have to open six pages.

What you see

Metric tiles. Each tile is a real reading from a connector or an honest *pending*. A tile is "live" only when its value is above zero.

Tile	Source
Total audience	Zernio follower counts, with the change over 7 days
Subscribers	Beehiiv

Tile	Source
Open Pipeline (deals)	Attio
Stripe Available	Stripe
Agent Runs	Your own run log, with runs in the last 7 days
Unread, all inboxes	Email
Brain-store Pages	Your knowledge store
Dictations	Wispr Flow

A badge shows "N live, M pending". A tile that is not live moves to the **Awaiting credentials** list, with a *Set up* link to the connector that fixes it.

Distribution. Three donut charts: *Audience share* by channel, *Agent runs by agent*, and *Run outcomes* (succeeded or failed, with the percent ok).

Agent run volume, 14 days. A chart of runs per day. If there are none it says "No agent runs recorded yet" or "No runs in the last 14 days" rather than drawing a flat line.

Audience by platform. Each platform's followers with 7-day growth. A link opens Social.


What you can do

Analytics is a reading page. Click a tile to open the page behind it. There are no forms.

Demo mode

The demo company's connectors are scripted, so most tiles are live with invented values.

Content Lab

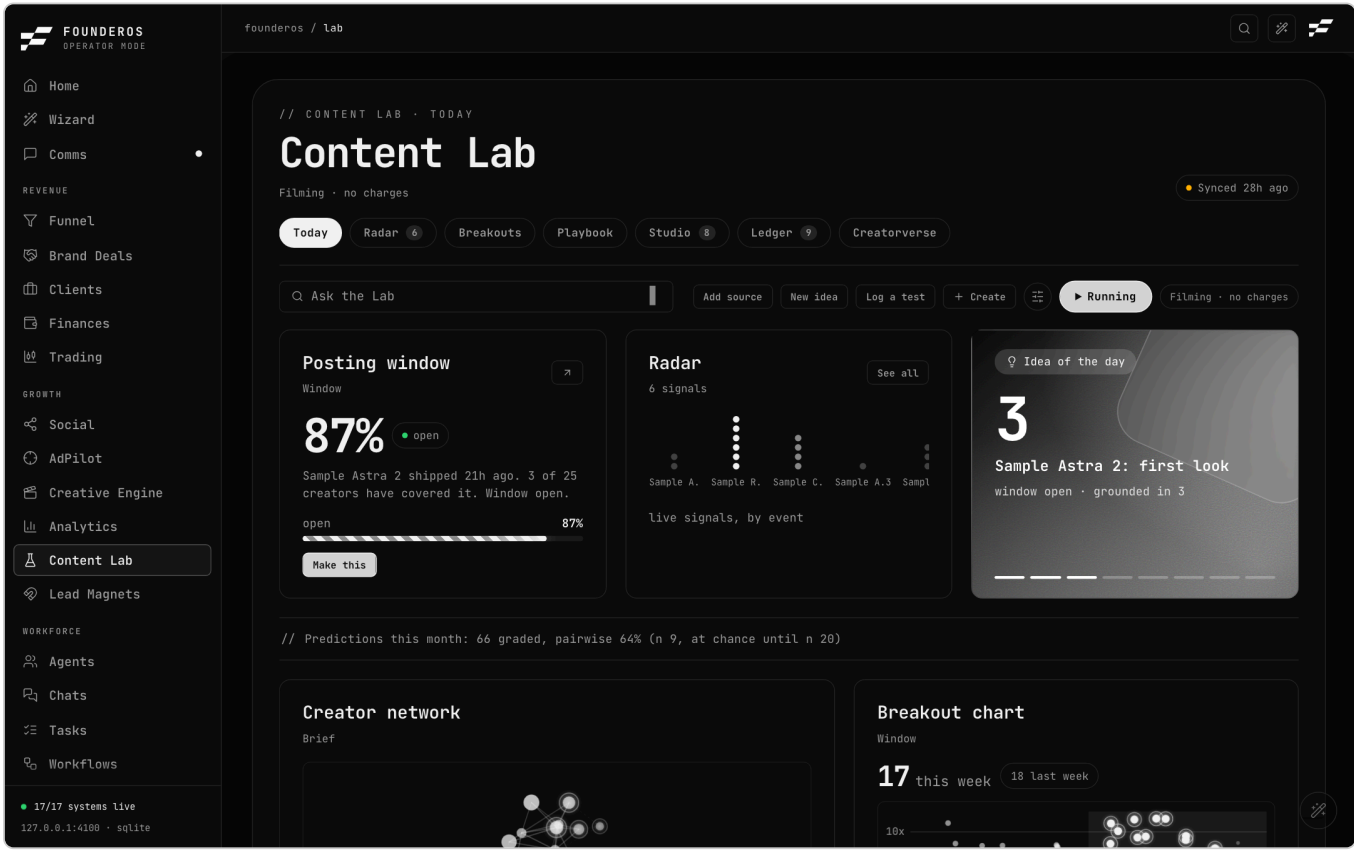

What it is for. The Content Lab studies your niche so you stop guessing. It reads public posts from your accounts and the creators you track, works out what makes some posts break out, watches for launches you could cover early, and helps you write scripts that fit the pattern. Every prediction it makes is written down before you post and graded afterwards, so you can see whether to trust it.

It lives under `/lab` with seven pages, switched from a bar across the top: **Today**, **Radar**, **Breakouts**, **Playbook**, **Studio**, **Ledger** and **Creatorverse**.

What you need

Need	Why	Without it
Apify key (`APIFY_API_TOKEN`)	Reads public posts from your accounts and tracked creators. The only required key	The page says "Content Lab needs an Apify key" and offers **Set up** or **Preview with sample data**
Claude command-line tool	Writes scripts, generates ideas, judges hooks	Those buttons say "The claude CLI is not on this host"
OpenAI key (optional)	Speech-to-text for video transcripts	Captions only
YouTube and Instagram connection (optional)	Retention (where viewers left) and insights	Retention shows "Connect YouTube or Instagram in Setup"
Product Hunt and GitHub tokens (optional)	Extra Radar sources	Radar uses the others

Apify, OpenAI and the optional keys are managed in the Lab's own **Setup** panel (Keys tab), not on the Settings page.

Shared controls on every Lab page

- **Setup** (top bar) opens a side sheet with five tabs: **Checklist**, **Keys**, **Sources**, **Schedule** and **Spend**.
- **Create** offers the page's main actions: **Add source**, **New idea**, **Log a test**, **Generate ideas**, **Log an outside score**, **Run now**.
- A search pill says **Ask the Lab** and opens a question box.
- A status line shows "Synced ago" or "Never synced", and this month's Apify spend against its cap.
- A banner appears when the Lab is empty ("Add your accounts to start. The first run reads your last 30 posts per account"), thin ("numbers with fewer than 5 posts behind them say 'not enough yet'") or paused.
- Every figure that rests on very few posts says **not enough yet** instead of guessing.

Today

The overview. A brief, your own posts, launches, ideas and how the system is doing.

- Hero numbers: *Your posts vs your normal* and *Breakouts in your niche*, with a platform switch and a week or month scrubber.
- **Brief** (a one-sentence finding such as which hook form lifts breakouts in a format) and **Ask the Lab** (type a question about your niche; examples are shown). The brief needs at least eight breakouts in one format. A **Make this** button turns it into an idea.
- **Your posts**: judged at their age against your normal, so a young post is not called low.
- **Launch radar**: events with an open window.
- **Next to make**: open ideas, launches first, each with **Write script** or **Open script**.
- **Pipeline**: counts of posts *Scraped*, *Transcribed* and *Dissected*, plus spend against the cap, with a link to spend and runs.
- **Ledger** summary and a **Finish setting up** checklist.

Radar

Watches for AI launches you could cover early. It reads Hacker News, Hugging Face, GitHub, vendor changelogs and (with keys) X, Product Hunt and TikTok Creative Center.

- **Launch timeline**: each launch with pings by source and the coverage wave once its window opens. Filter by class (*Spike*, *Adopted*, *Not classed*) and window (*Open*, *Closing*, *Closed*).
- **Topic tide**: weekly posts per topic over 12 weeks.
- **Rising topics**: timing, momentum and who has covered it.
- **Lead-time ledger**: how early Radar fires, by class and source.
- **Sources**: how many posts, creators and breakouts per source, and which you have covered.

Click a launch to see its wave, angles and sources, and create an idea from it. You can dismiss a launch. Its pings are kept so it is not created again.

Breakouts

The posts in your niche that beat their creator's normal.

- **The Field**: a chart with breakout ratio across and depth up, with your own posts ringed. Posts fall into four quadrants: *Ideal*, *Loyal*, *Clickbait* and *Dud*.
- Filters: **Platform**, **Format**, **Quadrant**, **Days** (7, 30 or 90), **Dual-High only**, and **Mine only**. Dual-High needs age-matched ratios.
- Click a post for its sheet: Overview, Transcript, Contact sheet (the first three seconds and the rest), Metrics and Comments. You can mark a post as an *outside push*, add it to a test, or open the original.

Playbook

What the Lab has learned, as rules with evidence.

- **Formats** to pick from, and a **Beat shape** chart: where the time goes in breakouts and in yours.
- **What lifts breakouts**: features such as hook form, opener, structure, pacing and call to action, with lift and a 90 percent interval. Only what clears the statistical bar is shown; the rest is counted as hidden.
- **Your DNA** and **Gaps**.
- **Script rules**: the rule pack checked against your own posts ("Your data agrees" or "disagrees").

It fills in after posts are dissected. Until then it says how long that should take.

Studio

Where ideas become scripts.

- **Ideas**: grouped as *Window open*, *Early*, *No window*, *Used* and *Dismissed*. **Generate ideas** reads your breakouts and open launches and keeps the ten most different. **New idea** needs a title of at least eight characters. **Ground it** attaches real posts as support.
- **Your audience keeps asking**: questions that three people asked on two or more posts become idea seeds.
- **Selected idea**: what people think versus what is actually true, the target shape, hooks that work here, variants and grounding posts.
- **Scripts**: write a script from an idea, edit its beats, and check it against the gate. The gate blocks dashes, banned words, hedging, engagement-bait calls to action, and word counts well off budget, and runs one more model check. Nothing is shown as ready until it passes. A prediction is **frozen once** when you commit, and graded seven days after posting.
- Per idea: **Send to Creative Engine**, **Ask the Wizard**, **Mark used**, **Dismiss** (with a reason) and **Reopen**.

Ledger

The Lab's honesty page.

- **Calibration** and **Reliability**: how often its forecasts hit.
- **Predictors** and **Predictions**: every frozen forecast, what it said, what happened, and whether it was a hit, a miss or still pending.
- **Tests**: a test compares two or three hooks on the same body, as Trial Reels (judged at 72 hours on shares per reach) or as a YouTube Test and Compare you report by hand. **Log a test** to start one. Results can confirm or contradict a Playbook rule.
- **Planner**: suggests what to test next. It opens after enough posts have 72-hour results.
- **Retention**: where viewers left (needs YouTube or Instagram connected).
- **Log an outside score**: record a score from another tool so it is graded with the rest.

Creatorverse

A map of the creators you track, sized by audience, with links between those who cover similar ground. Search for a creator, show or hide kinds and platforms, colour by kind or platform, zoom, and go full screen. Click a creator for audience, breakouts in 30 days, posts stored and main topic, with links to their breakouts and to Setup. There is also a keyboard-friendly table of every creator.

Setup sheet

- **Checklist**: the steps left to finish, required ones first.

- **Keys**: paste or remove each key. Each shows a state: *Connected*, *Not connected*, *Expiring*, *Error* or *Not configured*, with a **Check again** button. YouTube and Instagram connect through a sign-in flow.
- **Sources**: your own accounts (*owned*), creators you *track*, suggestions to **Track** or **Ignore**, an X *watch list*, and the Radar feeds.
- **Schedule**: every automatic job, how often it runs, a **Run now** button, and a master **Pause**.
- **Spend**: monthly caps in dollars per provider and per line, what has been spent and reserved, and a run log. A cap of 0 turns that line off.

How to

Start the Lab on your own accounts

1. Open `/lab` and click **Set up**.
2. In **Keys**, paste your Apify token and save. It should turn *Connected*.
3. In **Sources**, choose Owned, pick a platform, type your handle and click **Add**. Add a few creators you admire under Tracked.
4. In **Schedule**, click **Run now** on *Daily sync*. The first run reads your last 30 posts per account.
5. In **Spend**, check the monthly cap is one you accept.
6. Return to **Today**. It fills in as posts are transcribed and dissected.


Turn an idea into a frozen prediction

1. Open **Studio** and select an idea, or click **Generate ideas**.
2. Click **Write script**. Read the checks.
3. Fix anything the gate flags. When it passes, freeze the prediction.
4. Post your video. Seven days later the **Ledger** grades the prediction.

Sample preview and demo mode

Add `?sample=1` to any Lab address (for example `/lab?sample=1`) on a blank install to preview every page on badged, read-only sample data. Real data always wins over the sample once it exists. In demo mode the Lab shows its scripted world and nothing is charged.

Lead Magnets

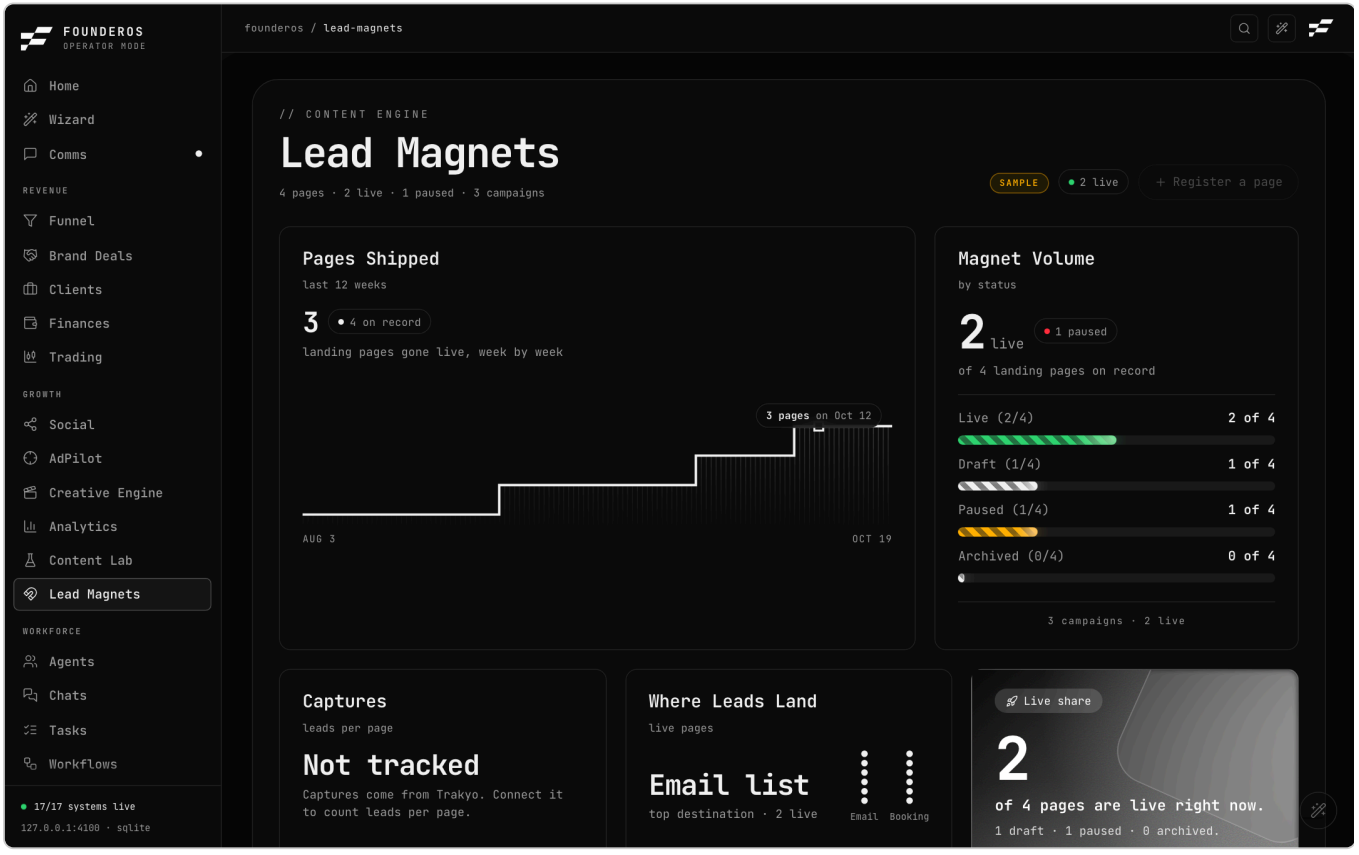

What it is for. A register of the free pages you give away to collect leads: what each one offers, where it lives, where its leads go and whether it is live. Nothing is published from here. It is a record.

What you need

Nothing for the register itself. To count leads per page you would need Trakyo, but today the page does not count them (see below).

What you see

- **Pages shipped**: a bar chart of how many went live per week over the last 12 weeks.
- **Where leads land**: the split of live pages between *Email list* and *Booking*. If nothing is live: "Nothing live yet. Set a page to Live to see where its leads go."
- **All pages**: a table with Name, What they get, Link (with a copy button), Lands, Campaign, Captures, Status and Went live. Filter chips for the four statuses: **Draft**, **Live**, **Paused**, **Archived**.
- **Captures** says "not tracked" with the reason, never 0. Without Trakyo, a *Captures not tracked* tag and a *Set up* link appear. Even with Trakyo keyed, the Trakyo API cannot count leads per landing page, so the column stays "not tracked". That is intentional and honest.

What you can do

- **Register a page**: name, what they get (the offer), live URL (must be a secure `https` link), where leads land (Email list or Booking), the campaign it was built for, status, the date it went live and notes.
- Change a page's status straight from its row.
- **Edit** or **Delete** a row. Deleting removes the record, not the page itself.

- Copy or open the link.

How to

Register a lead magnet

1. Open `/lead-magnets` and click **Register a page** (or the add button in the header).
2. Enter a name, the offer, and the live `https://` URL.
3. Choose where leads land and, if you know it, the campaign.
4. Set the status. Choose **Live** and set the date it went live if it already is.
5. Save. The row appears and the charts update.

Use it from an agent

The content-generation skill can register a page by posting the same fields to `/api/lead-magnets`. The record then appears here.

Demo mode

In demo mode the page shows four invented pages with a **Sample data** badge. On a real install with no pages, add `?sample=1` to preview the same set. Buttons that would change data are disabled in demo mode.

Workforce


The Workforce area is where you see and direct your agents: who they are, what they are doing, what they are waiting on you for, and what work is on the board.

Page	Address	Use it to
Agents	`/agents`	Watch the live board, message the Conductor, approve agent work
Agent setup	`/agents/setup/<agent id>`	Enter the keys an agent needs
Org chart	`/org`	See the hierarchy, filter by venture, broadcast to every agent
Chats	`/chats`	Read and continue conversations with any agent
Tasks	`/tasks`	Track agent work and keep your own to-do list
Workflows	`/workflows`	Map a process as a canvas of steps and test it
Skills	`/skills`	Browse the capability library and draft a new skill
Compute	`/compute`	See the cloud computers your agents work on

Two things apply to every page below:

- **Demo mode.** A fresh install opens on a fictional company. Everything you see is sample data and nothing real runs. Turn it off in Settings (the switch is called Filming mode). See Settings.
- **Not configured.** When a page needs a connector you have not set up, it says so with a *Not configured* badge and a *Set up* link instead of showing made-up numbers. Connector keys are covered in Integrations.

Agents

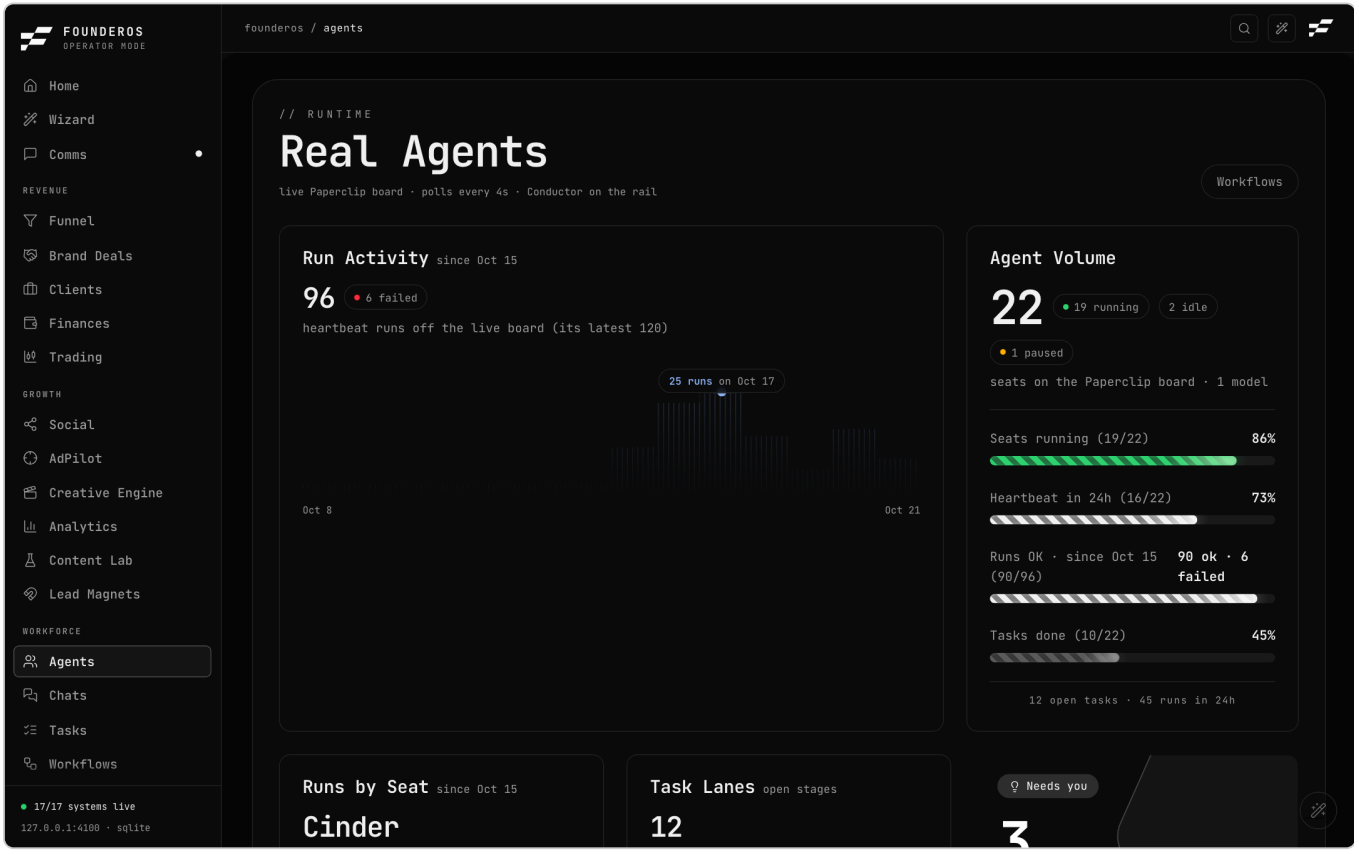

What it is for. `/agents` is the board: the live view of your agent seats, their runs, and the work moving between stages. You also talk to the Conductor here. The Conductor is the lead agent (the CEO seat) that routes work to the others.

The page title is "Real Agents". It reads a Paperclip board, which is the harness that actually runs your agents. In demo mode it reads the demo company's board instead.

What you see

Top of the page:

- **Run Activity**, **Agent Volume**, **Runs by Seat** and **Task Lanes** cards. These summarise the last days of runs and the open stages. They use the same data the board strip below polls.
- Two buttons at top right: **Open board** (only shown when a board address is configured; opens the Paperclip board in a new tab) and **Workflows**.

Below that is one large panel with four tabs:

1. **Roster**: the live board, with the Conductor chat on the right.
2. **Needs You**: the queue of agent work waiting for your decision.
3. **Deliverables**: files the agents have produced.
4. **Hermes**: the Hermes worker-pool dashboard, embedded. It loads only the first time you open the tab.

Roster tab: Board live

The strip refreshes by itself every 4 seconds while the browser tab is visible.

- A header showing how many seats there are and how many are running, plus the models currently holding seats. If the board does not answer, it says "board unreachable" and shows no data. Nothing is invented.
- Five counters: **Seats**, **Running now**, **Open tasks**, **Runs - 24h**, **Heartbeats - 24h**.
- **Seat chips**, one per agent. Each shows the name, the model and adapter, and either a small spinner with elapsed time (the agent is running now) or a play button.
- **Run feed**: the most recent runs, newest first, with a status mark, the agent name, the duration and how long ago. Runs that did not finish cleanly also show their status in words.
- **Task lanes**: tasks grouped by stage (for example todo, in progress, done). An empty stage shows "nothing here". A task whose agent is running right now is marked as live.

Conductor chat

On the right is the Conductor panel. Type in the box ("Message the CEO...") and send. The box also lets you:

- Attach a text file (its contents are sent with your message).
- Dictate with your voice, and have the last reply read aloud.
- See which model currently holds the Conductor seat.

Your message goes into a thread on the board and wakes the Conductor. The reply appears in the same panel when it lands. The panel checks every few seconds while it waits. If the run takes long, it tells you the reply will still arrive in the thread.

Needs You tab

This is the queue of agent files that are asking something of you. The agents' own file names decide the kind of ask, and the queue is ordered with people waiting on you first, then deadlines. Each row shows what it is, where it came from, why it is in front of you, and a due time if the agent gave one.

Each row has these buttons:

Kind of item	Main button	What it means
Staged reply	send it	The agent wrote it and is waiting for you to send it
Decision	go ahead	Only you can make this call
Gate	unblock	Work is paused until you answer
Request	approve	Someone asked you for something
Draft	publish	A draft waits for your sign-off
Done / output	ok	Informational; nothing is asked

- **dismiss** drops the item.
- **snooze** hides it from your queue for two hours. Nothing is sent and no agent is told.
- **clear all** (then **dismiss all N** to confirm) dismisses everything shown. There is deliberately no bulk approve.
- **refresh** reloads the list.

Clicking a row opens a review panel on the right that renders the file (text, images and PDFs show inline; other formats offer a download). The panel has **approve**, **dismiss**, and **download** (or **open page** for a live proposal link). Press Esc to close it.

Your decision is recorded in FounderOS and clears the item from the queue. If the agent rewrites the file, it comes back for a fresh decision. After you decide, an **undo** button lets you take it back.

Deliverables tab

A list of the files agents produced, grouped, with markers for items that are new since you last looked or were rewritten after you read them. Use the refresh button to reload, and open any item in the same review panel. Tab badges show how many items are new or changed, and how many are waiting on you.

Hermes tab

Shows the Hermes dashboard in a frame, with an **Open full dashboard** link. If the frame is blank or shows an error, the dashboard process on its host may be down. The address comes from `HERMES_DASH_URL`.

What it needs

The live board needs three settings in `.env.local`: `PAPERCLIP_API_URL`, `PAPERCLIP_BOARD_KEY` and `PAPERCLIP_COMPANY_ID`. See Integrations. Without them, or if the board is down, the strip reads "board unreachable", the counters are empty, and Conductor messages fail with "Message did not reach the board".

Demo mode

The board shows the demo company's seats, runs and tasks. The Conductor chat cannot reach a real board, so a message you send will report that it did not reach the board. Approvals you make in Needs You are recorded locally in the demo data only.

How to: message the Conductor

1. Open **Agents**.
2. On the Roster tab, click the box in the Conductor panel on the right.
3. Type what you want, or click the microphone to dictate. Attach a text file if it helps.
4. Press send. Your message appears at once and a "thinking" state shows.
5. Wait for the reply to appear in the panel. You can leave the page; the reply stays in the thread.

How to: clear your approval queue

1. Open **Agents** and click **Needs You**.
2. Click a row to read the full file in the review panel.
3. Click **approve** (or the row's main button) to say yes, or **dismiss** to say no.
4. If you are not ready to decide, click **snooze** to hide the item for two hours.
5. Click **undo** if you decided by mistake.

How to: run an agent now

1. On the Roster tab, find the agent's seat chip.
2. Click the play button on the chip. It asks the board to run that agent's heartbeat.
3. The chip shows a spinner and elapsed time while it runs. The result appears in the Run feed. If the board rejects the request, the chip shows "run failed".

Agent setup

What it is for. A step-by-step page that lists what a not-yet-active agent needs before it can work. The address is `/agents/setup/<agent id>`, for example `/agents/setup/gmail-worker`. The Workflows page links to one of these

(the brand deal drafter) when its rules file is missing.

What you see

- The agent's name, status, tier, role and model, and a one-line description.
- A numbered list of steps, each of one of three kinds:
  - **Key**: a field named after an environment variable (for example `ATTIO_API_KEY`), with a hint on where to find the value and a **Save** button.
  - **Yours to do**: something only you can do outside FounderOS, sometimes with an "open" link.
  - **Build owed**: wiring that is not built yet.
- If no guide exists for the agent, the page says so.

What you can do


Paste a key into a Key step and click **Save** (or press Enter). The key is written to `.env.local` on the machine running FounderOS and takes effect right away. The field shows whether a key is already present, in masked form. The agent only becomes active once its wiring is proven, not when the steps are filled in.

How to: set up an agent

1. Open `/agents/setup/<agent id>` (use the agent's id; the Workflows page also links to the brand deal drafter's guide).
2. Work through the steps in order.
3. For each Key step, paste the value and click **Save**. The field then shows the key as present.
4. Do any "Yours to do" steps in the outside service they point to.
5. Return to Agents and check the agent's seat.

Keys are never shown in full and are never committed to git. See Settings for the full list of places keys can be entered.

Org chart

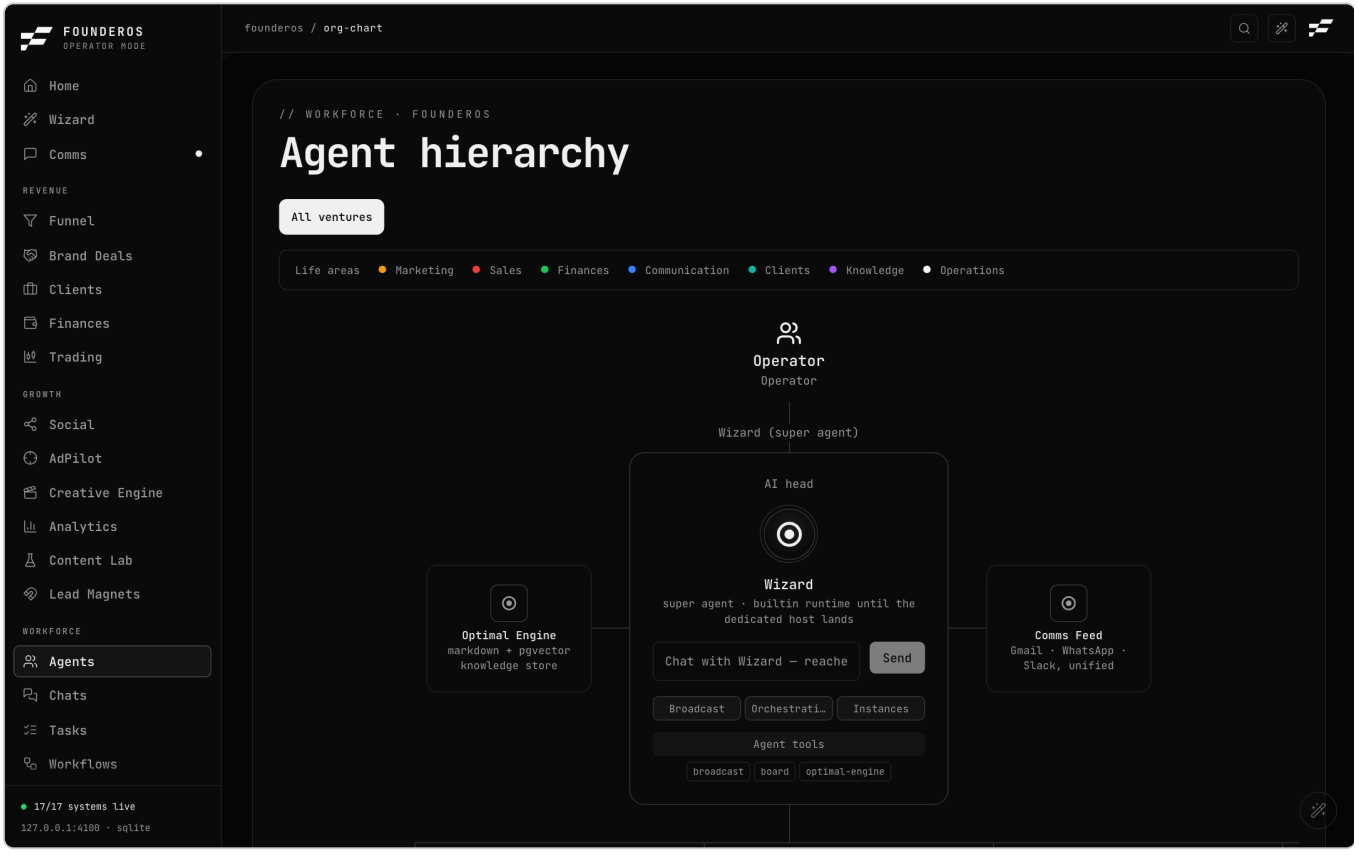

What it is for. A picture of who reports to whom: you at the top, the Wizard (the super agent) below you, then each department's crew.

What you see

- A row of **venture** buttons: **All ventures** plus one per venture you have. Choosing one lights up only the agents that serve it and dims the rest. A panel then shows that venture's executive focus and its Optimal Engine tag.
- A **Life areas** legend. Each department crew is tinted by the part of life it serves.
- The top of the tree: your name as Operator, the Wizard card, with the **Optimal Engine** card on one side and the **Comms Feed** card on the other. Both cards link to their pages.
- One column per department: its crew of lead agents (each with status dot, role and instance), the worker agents as small pills below them, and the tools that department's agents use. An empty department says agents land there as it goes live.
- Hover an agent for its description.

What you can do

- Switch ventures with the buttons at the top.
- Open Optimal Engine or Comms from the two cards.
- **Broadcast**: the Wizard card has a box ("Chat with Wizard - reaches every agent"). Type a message and send it to broadcast to all agents. The last broadcast is kept on the card.

If the Conductor agent is missing from the database, the page shows "conductor missing" and a hint to run the seed.


Demo mode

The org chart is built from the demo company's agents and ventures. Real installs start with the six seeded departments and no agents until you add them.

How to: see who serves a venture

1. Open **Org chart**.
2. Click the venture name at the top.
3. Read the highlighted crews and the focus list. Agents that do not serve it fade.
4. Click **All ventures** to reset.

Chats

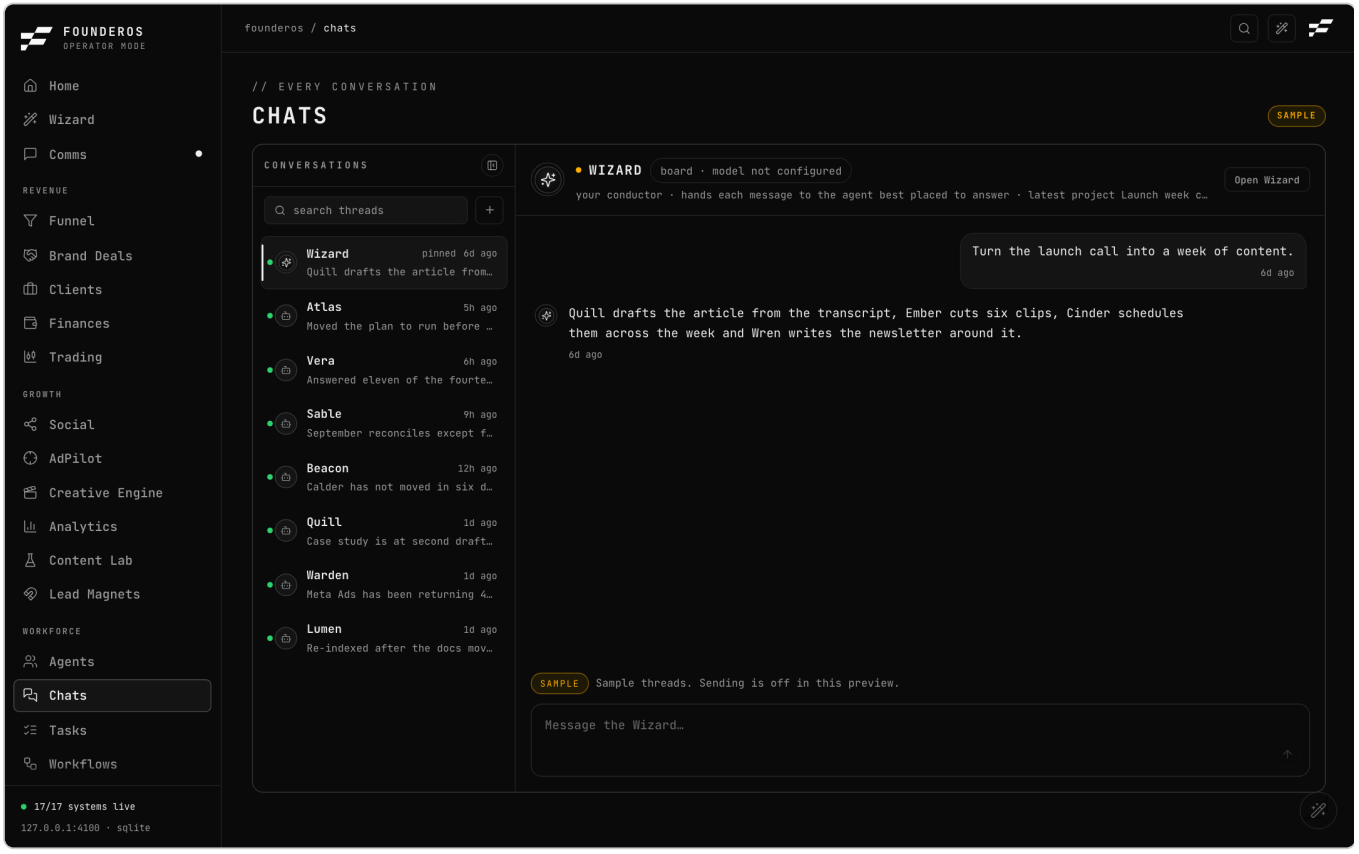

What it is for. Every conversation with every agent in one place, plus the Wizard thread, which is pinned at the top.

What you see

- A **Conversations** list on the left with a search box ("Search threads"). Pinned threads are marked.
- The thread on the right: your messages, the agent's replies, and small notes such as "read crm, email" when an agent used a tool to read your data.
- A header with the agent's name and a button: **Open Wizard** for the Wizard thread, or **Open agent** for an agent.
- A line under the header: the Wizard hands your message to the best-placed agent, and the reply also lands in that agent's thread. A direct chat is read-only: the agent can read your data but not change it.
- A message box. **Enter** sends; **Shift+Enter** adds a new line.

What you can do

- **New chat**: top right. It switches the list to an agent picker with a search box ("Search agents"). Choose an agent to open a direct line.
- Send a message to the Wizard or to an agent. A failed send shows "Not sent" with a **Retry** button.
- When the Wizard routes your message, the answer shows "Answered by " with an **Open thread** link.
- Collapse the conversation list to a slim strip with the button at the top of the list.

What it needs

Agent chat needs a model key: the AI Gateway key, `AI_GATEWAY_API_KEY`. Without it the message box is disabled and shows a *Not configured* badge with a *Set up* link. See Integrations.

Demo mode


The threads are sample conversations, marked with a **Sample** badge, and sending is turned off ("Sample threads. Sending is off in this preview."). Nothing leaves your machine.

How to: chat with an agent

1. Open **Chats**.
2. Click **New chat**, type part of the agent's name in the search box and click the agent. If you already have a thread with them, click it in the list instead.
3. Type your question in the message box. Ask what the agent can see, for example "What is open in my funnel?". It reads its connectors to answer.
4. Press **Enter**.
5. The agent's reply appears below. If it says "Not sent", click **Retry**.

You can also arrive here from a link that names an agent (`/chats?agent=<id>`), which opens straight on that thread.

Tasks

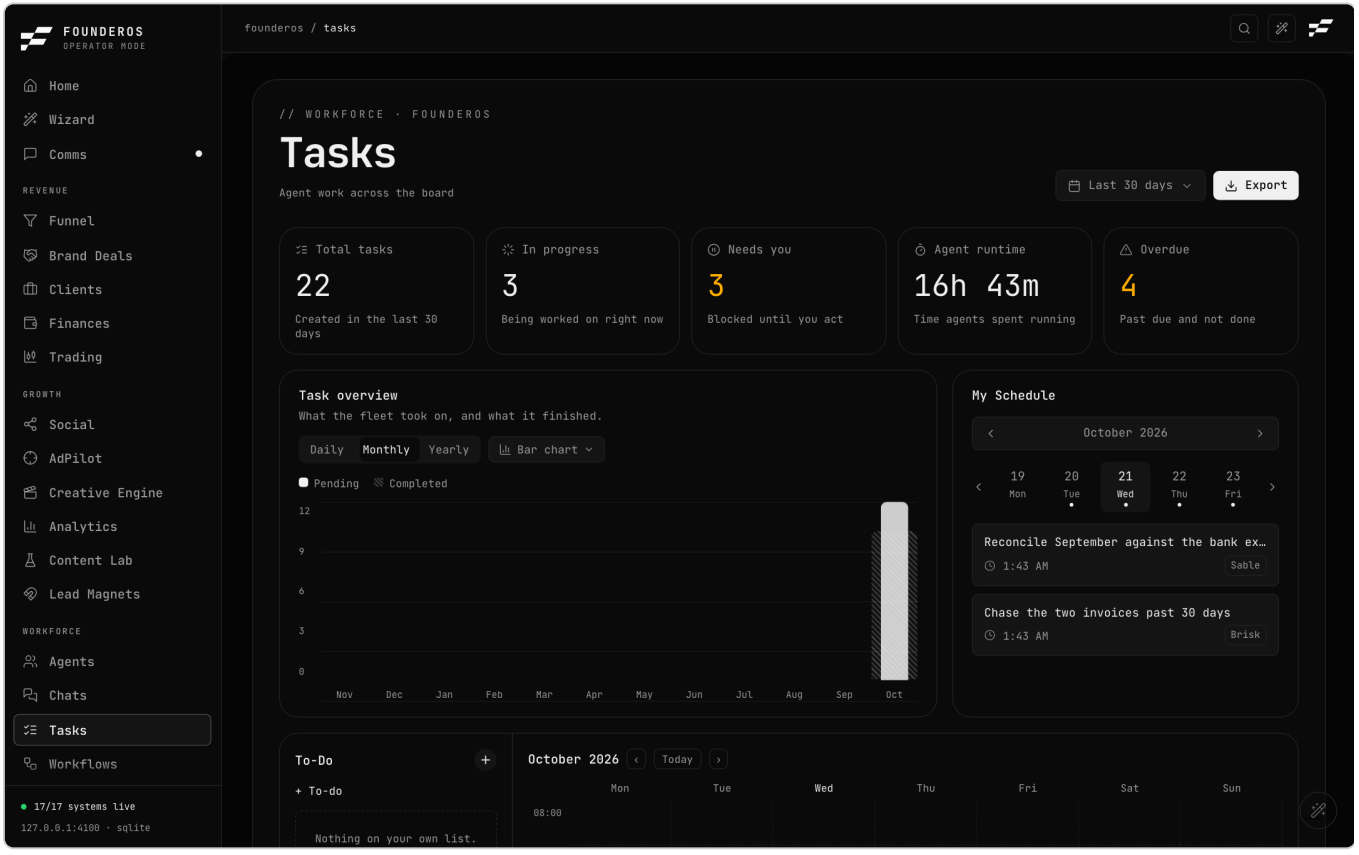

What it is for. One view of all work on the board: tasks the agents are doing, tasks waiting on you, and your own to-do list.

What you see

At the top right, a **range** pill: Last 7 days, 30 days (the default), 90 days or 12 months. Every number on the page uses this one window.

Then, from top to bottom:

1. **Five stat cards**: Total tasks (created in the range, with a change figure), In progress, Needs you (blocked until you act), Agent runtime (time agents spent running) and Overdue (past due and not done). A card shows a dash when there is nothing to measure, for example no due dates set, or no agent has run yet.
2. **Task overview**: a chart of pending and completed tasks, switchable between Daily, Monthly and Yearly.
3. **Schedule**: a day-by-day list of what is due, with arrows to move by day or by month. A day with nothing due says so.
4. **The board**: a **To-Do** list on the left (your own tasks, grouped as This week, This month, This quarter, Someday and Unsorted) and a week calendar on the right with hours down the side and a **Today** button.
5. **Workload overview**: a sortable table per agent with department and load level, with a switch to show only agents who have open work.
6. **Activity and Run outcomes**: when agents run during the week, and how many runs succeeded or failed. If no agent has run, the page says "No agent runs recorded yet".

What you can do

- Change the range with the pill.
- **Add a to-do**: click the plus beside To-Do, pick a horizon, type "What needs doing?" and press Enter. Escape cancels.
- **Complete a to-do**: click the check beside it. It is marked done.
- **Add a to-do at a set time**: click an empty slot on the week calendar. A prompt asks for the task title.
- Sort the workload table by clicking its column heads.
- Open a task from a link such as `/tasks?task=<id>`. The board scrolls to it and shows it selected, with its owner, status and due date. If the task is gone, the page says it is no longer on the board.

Task states are Open, In progress, Blocked and Done.

What it needs

Tasks live in FounderOS's own database, so no connector is required. Run figures come from agent runs recorded there.

Demo mode


The page shows the demo company's tasks and run history. Tasks you add are saved to the demo data only.

How to: add a task and hand work to an agent

The Tasks page creates tasks that you own. It has no field for assigning a task to an agent.

1. Open **Tasks**.
2. Click the plus beside **To-Do**, choose when it is due (This week to Someday), type the task and press Enter.
3. To put work on an agent, ask the Conductor on the Agents page, or message the agent in Chats. Tasks that reach the board show up in the Agents page task lanes.
4. Track progress in the **Needs you**, **In progress** and **Overdue** cards.

Workflows

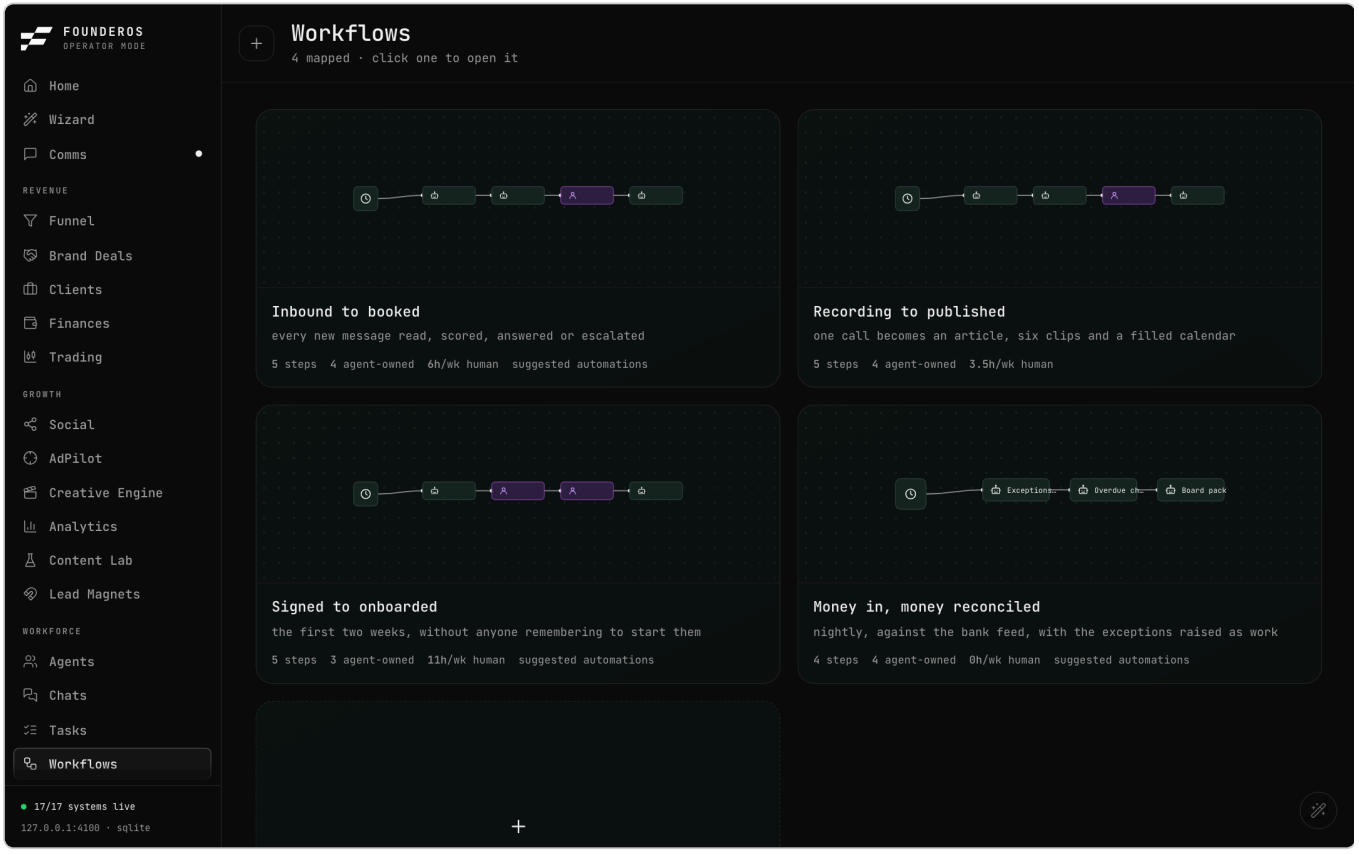

What it is for. A canvas where you map a process as connected steps, each owned by a person or by a named agent, and see how much of it is human work and how much is agent work.

What you see

- A top bar with the workflow name, a **New workflow** button, a **Version history** button and a save button that reads **Saved** or **Save changes**.
- Three tabs: **Editor**, **Executions** and **Tests**.
- The canvas with your steps and the connections between them, plus zoom, fit and undo controls.
- A **Human to agent** ratio meter. You can drag its marker to set a target ratio and double-click to clear it.
- A bottom bar with **Test workflow**, **Show chat** and a run log.

What you can do

- **Create** a workflow and give it a name and description. Open any existing one from the workflows list.
- **Add steps** from the picker (press Cmd+K). Drag from one step's port to another to connect them. A step takes one incoming connection, and a loop back on itself is refused.
- **Bind a step** to a real roster agent, or to a person for a manual step.
- **Edit a step** in the inspector panel: duplicate it, switch it off, or mark an automation live.
- **Save** your changes. Every save is versioned; open the history to restore an older version. You can also duplicate, export as a JSON file, or delete a workflow from the menu.
- **Draft with Claude**: in the chat dock, describe the workflow you want ("Describe the workflow you want...") and a draft is offered for you to review before applying. It only fills the canvas; nothing is saved until you save. If the drafting assistant is not available on your machine, the chat says so and you build it by hand.

- **Executions** tab: recorded agent runs, with filters for All and Failed. Click a run to open its trace.
- **Tests** tab: currently says workflow tests are not built yet.

Test workflow actually runs agents

The **Test workflow** button runs each agent-bound step for real, one after another. A step owned by a person is not simulated; it is logged as a manual step. A step with no agent bound is skipped. Do not press it if you do not want those agents to run.

What it needs

The canvas itself needs no connector. Some steps (the brand deal steps) read and write a rules file for the brand deal daemon. When that file is missing, those fields show *not configured* and a *Set up* link to the brand deal drafter's agent setup page. The Draft with Claude feature needs the `claude` command-line tool on the machine running FounderOS.


Demo mode

The demo company's workflows are shown. Saves go to the demo data only.

How to: build a workflow

1. Open **Workflows** and click the **New workflow** button in the top bar.
2. Enter a name and an optional description, then create it.
3. Open the picker with Cmd+K and click a step type to add it. Repeat for each step.
4. Drag from a step's output port to the next step's input to connect them.
5. Click a step and use the inspector to name it and bind it to an agent or a person.
6. Click **Save changes**. The button reads **Saved** when done.
7. Optional: click **Test workflow** to run the bound agents, and watch the run log.

Skills

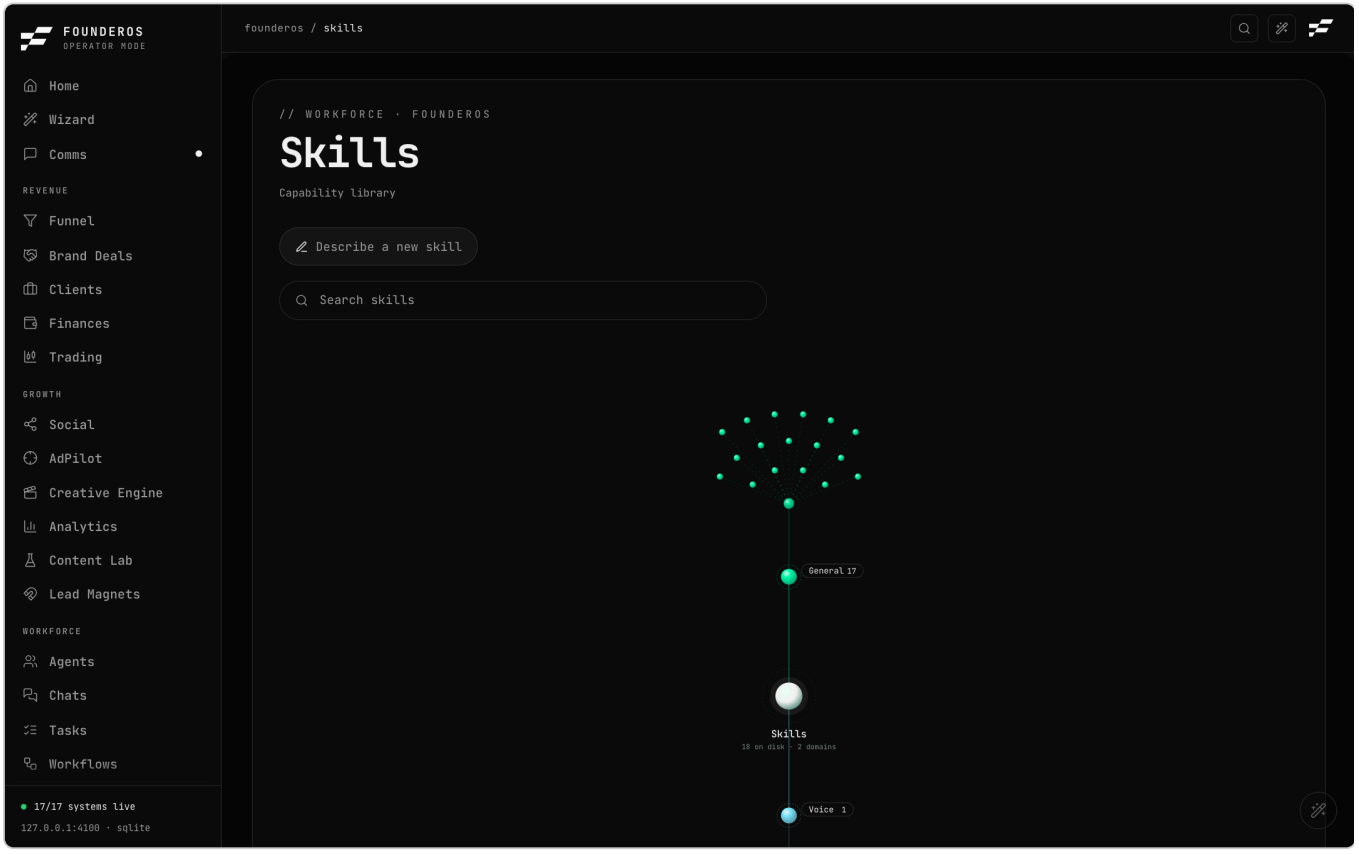

What it is for. A library of the capabilities your agents can draw on. Each skill is a folder with a `SKILL.md` instruction file.

What you see

- A search box ("Search skills"). Typing filters the cards and dims the non-matching branches in the hierarchy.
- A hierarchy of skills by domain and group, and a grid of skill cards with name, group and a short description.
- A note on where the list came from. When skills are found on the machine, it says how many were read live from `~/.claude/skills`, and opening a card shows the full `SKILL.md`. When none are found, it says it is showing the seeded catalog instead.

What you can do

- Search, browse, and open a card to read the skill.
- **Describe a new skill**: a panel with a box ("What should this skill do?") and an optional name in kebab-case, such as `invoice-chaser`.

What it needs

No connector. Skills are read from disk (`~/.claude/skills`). Creating a draft writes to that same folder, so it must be writable.


Demo mode

If the machine has no skills folder, you see the seeded catalog. If it has one, you see your own real skills even in demo mode.

How to: draft a new skill

1. Open **Skills**.
2. Open the **Describe a new skill** panel.
3. Describe what the skill should do in at least a sentence (the description needs 8 or more characters). Add a name if you want one.
4. Click **Propose placement**. It suggests where the skill belongs in your hierarchy, with up to two alternatives. This step writes nothing.
5. Pick a placement and click **Create draft skill**.
6. The page shows the new file path. The draft is only a stub. Open it and write the real instructions before first use.

Compute

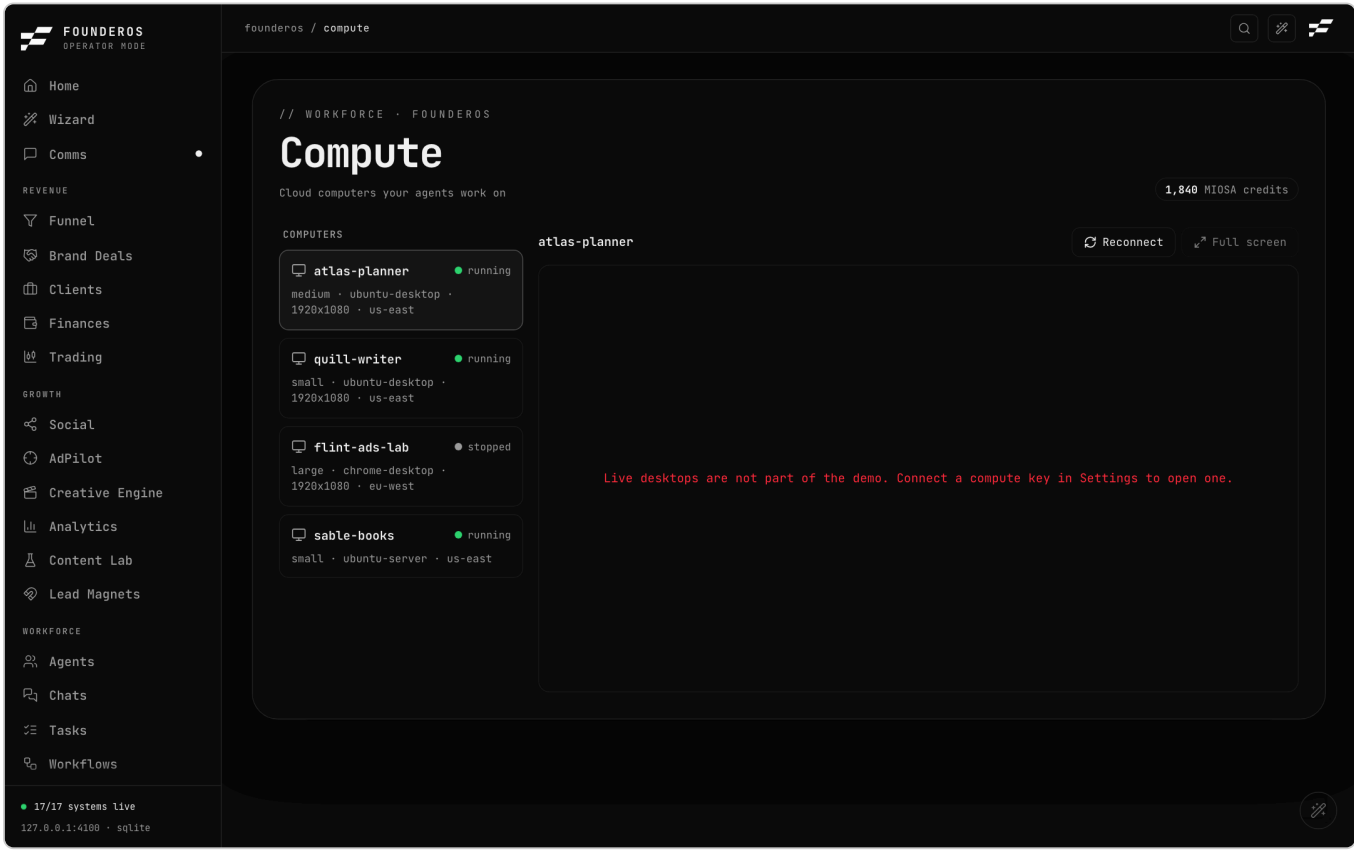

What it is for. The cloud computers your agents work on, with a live view of each desktop. It uses MIOSA as the provider. Nothing is stored in FounderOS; it reads MIOSA on every visit.

What you see

- A **Computers** list: name, status, and size, template, resolution and region.
- A pill with your MIOSA credit balance, when MIOSA reports one.

- The selected computer's live desktop in a frame, with **Reconnect**, **Full screen** and **New tab** buttons. The desktop link is renewed automatically before it expires.
- Messages for each state: "Opening the desktop...", "This computer has no desktop.", or "This computer is . Start it from MIOSA to see its desktop here."

Not configured

Without a MIOSA key, the page shows a *Not configured* badge, "No MIOSA key on this machine." and a *Set up* link. Set `MIOSA_API_KEY` (create one with `miosa auth token create`). If MIOSA is configured but does not answer, you see "MIOSA did not answer" with the reason. If you have no machines, the page tells you to create one with `miosa computers create`.

Demo mode

Four sample machines are listed. Live desktops are not part of the demo: connecting shows "Live desktops are not part of the demo."

How to: view an agent's desktop

1. Set `MIOSA_API_KEY` (see Integrations) and restart.
2. Open **Compute**.
3. Click a computer in the list. If it is running and has a desktop, it connects on its own.
4. Use **Full screen** or **New tab** for a bigger view, or **Reconnect** if the frame goes blank.

Knowledge


The Knowledge area is where FounderOS keeps what you and your agents know, and lets you search it, look at it, and check it for contradictions.

Page	Address	Use it to
Optimal Engine (Brain)	`/brain`	Ask your notes a question, add notes, check the health of the knowledge store
Brain files (Database)	`/database`	Browse the brain folder on disk, sized block by block
Knowledge visualizer	`/knowledge`	See how every record connects and which ones the rest depends on
Drift	`/drift`	Review claims that contradict your canon

Two things apply to every page below:

- **Demo mode.** A fresh install opens on a fictional company with its own sample knowledge base. Nothing in it is real. Turn it off in Settings (the switch is called Filming mode). See Settings.
- **Not configured.** When a page needs something you have not set up, it says so with a *Not configured* badge and a *Set up* link, rather than showing made-up data. See Integrations.

Optimal Engine (Brain)

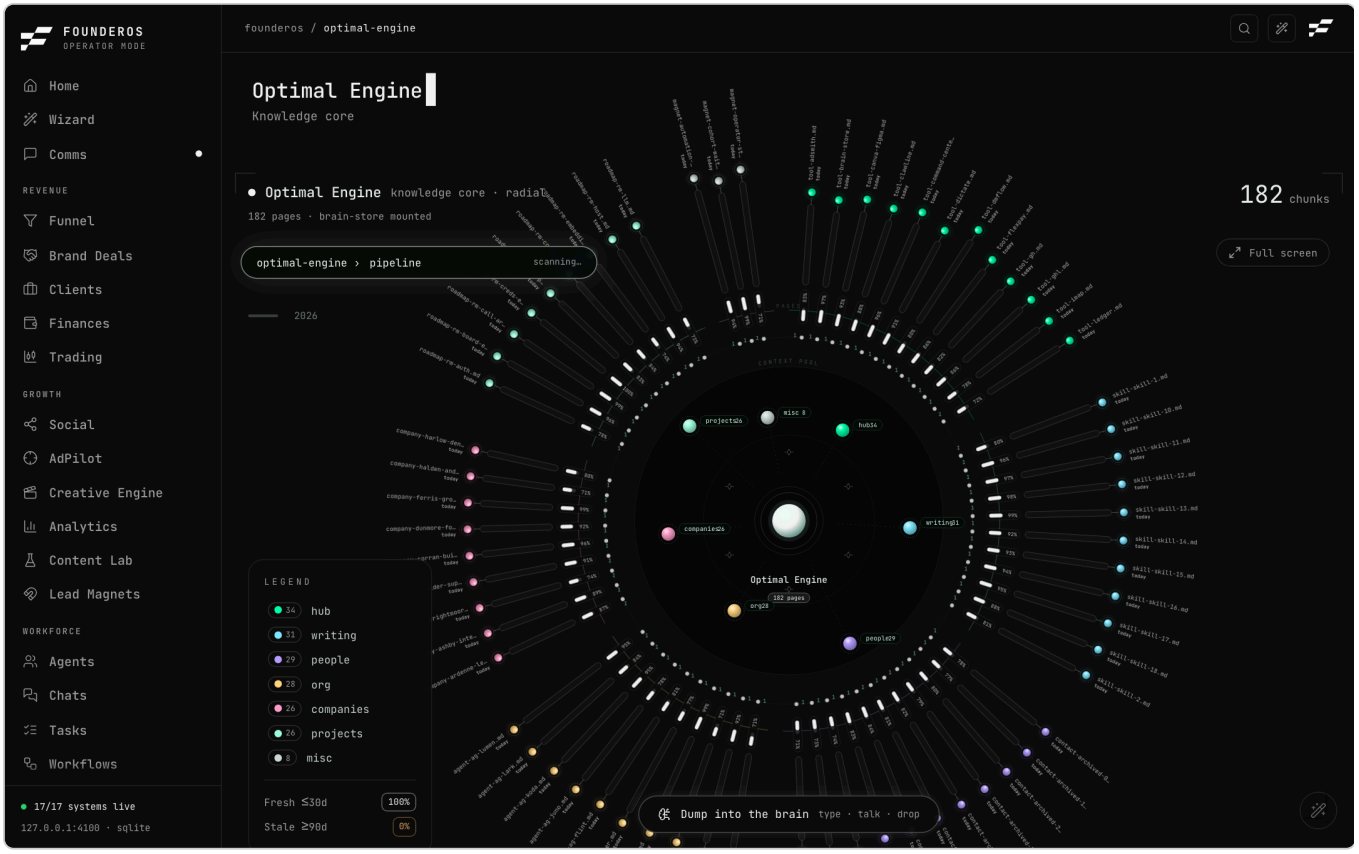

What it is for. Optimal Engine is your searchable knowledge base. It is a folder of markdown notes (the brain store) that FounderOS indexes so you and your agents can ask questions in plain language. Behind it sits the gbrain

command-line tool, which handles the indexing and searching.

What you see

The page is titled **Optimal Engine** and opens on a large living view of your notes. From top to bottom:

- **The radial view.** Your notes arranged by folder around a core. Year buttons filter by when a note was made, and a full-screen button gives you pan and zoom. An ask bar sits at the top left (see below).
- **Capture.** A small card floating at the bottom middle, described below.
- **Knowledge graph.** A graph of agents, departments, people, tasks and the memory constellation, with a count of nodes. It loads separately, so the rest of the page never waits on it. It prefers live client data from Attio when Attio is connected, and otherwise uses your local funnel.
- **Pillar health.** A radar chart of the pillars of the knowledge base.
- **Doctor.** The result of the engine's own health checks: "ok", "warnings" or "unreachable", and when a brain agent last ran.
- **Hybrid search.** A panel for the search the engine runs.
- **Pipeline.** Three stages: the markdown brain store on disk, the engine command-line tool, and the Supabase Postgres database with pgvector that holds the searchable chunks. Page and chunk counts appear only when the engine answers; otherwise the page says they are unavailable. It never shows remembered counts.
- **Query path.** A diagram of how a question is answered: the question is expanded into variants, keyword and vector search run side by side, the results are merged into one ranking, and ranked snippets come back.

What you can do

Ask the brain

Type in the ask bar ("ask a question..." or "Ask the brain a question...") and press Enter. FounderOS runs the search live against your notes and shows the answer, with its sources, in a notice above the view. Typed questions also dim the notes that do not match. When the store is not found, the bar is disabled and reads "brain-store not mounted".

If the database behind the engine is paused or unreachable, search falls back to a plain text search over the markdown files. It has fewer smarts but keeps working. The brain store on disk always works.

Capture a note

The capture card opens when you point at it, and stays open while you use it. If you collapse it mid-sentence, your draft is kept.

- Type or paste text into the box ("Dump into the brain, or drop documents").
- Click the microphone to dictate (voice needs a browser that supports it, such as Chrome or Safari).
- Drag documents onto the card, or click **Upload** to choose files. Each document becomes one note.
- Optionally give it a title (otherwise it is taken from the first words) and tag a venture.
- Click **Save**.

FounderOS writes a real markdown file into your brain store and then embeds it so it can be found by search. The status line tells you which happened: "Embedded" means it is searchable now; "Saved" means the file is written but the engine was unreachable, so indexing will wait.

Read the health of the store

Use the Doctor and Pipeline sections. A warning shows what the engine checked and a *Set up* link. Settings holds the paths (see below).

What it needs

Search and indexing need the gbrain command-line tool. To wire it:

1. Install it with `bun install -g github:garrytan/gbrain` (not the npm package of the same name).
2. Run `gbrain init --pglite --no-embedding`.
3. Run `gbrain import ~/path/to/your/notes --no-embed`.
4. Set `GBRAIN_BIN` (absolute path to the binary) and `GBRAIN_STORE` (your notes folder) in `.env.local`.

The embedded database allows one writer at a time. Run the command-line tool, as FounderOS does, or a long-running `gbrain serve`, not both at once. Setting `BRAIN_PROVIDER=stub` turns the engine off. The full list of variables is in the configuration reference, and Integrations shows the connector's status.

When no notes folder is found, the page shows zero pages and "brain-store not found". Nothing is invented.

Demo mode

The demo company ships its own brain: a store of 180 sample pages and a stub engine that answers from them. Asking and browsing work. Capturing a note writes into the demo data, never into your real store.


How to: search the brain

1. Open **Optimal Engine** from the sidebar.
2. Wait for the view to load. If the bar says "brain-store not mounted", fix the setup first (see "What it needs").
3. Click the ask bar and type a question, for example "What did we agree with our biggest client about pricing?".
4. Press Enter.
5. Read the answer in the notice above the view, and check the source names listed with it.
6. Look at which notes brightened in the view to see where the answer came from.

How to: add a note to the brain

1. Open **Optimal Engine** and point at the capture card at the bottom middle.
2. Type or paste the note, dictate it, or click **Upload** and choose documents.
3. Add a title or venture tag if you want.
4. Click **Save**.
5. Check the status line. "Embedded" means it can be found right away.

Brain files (Database)

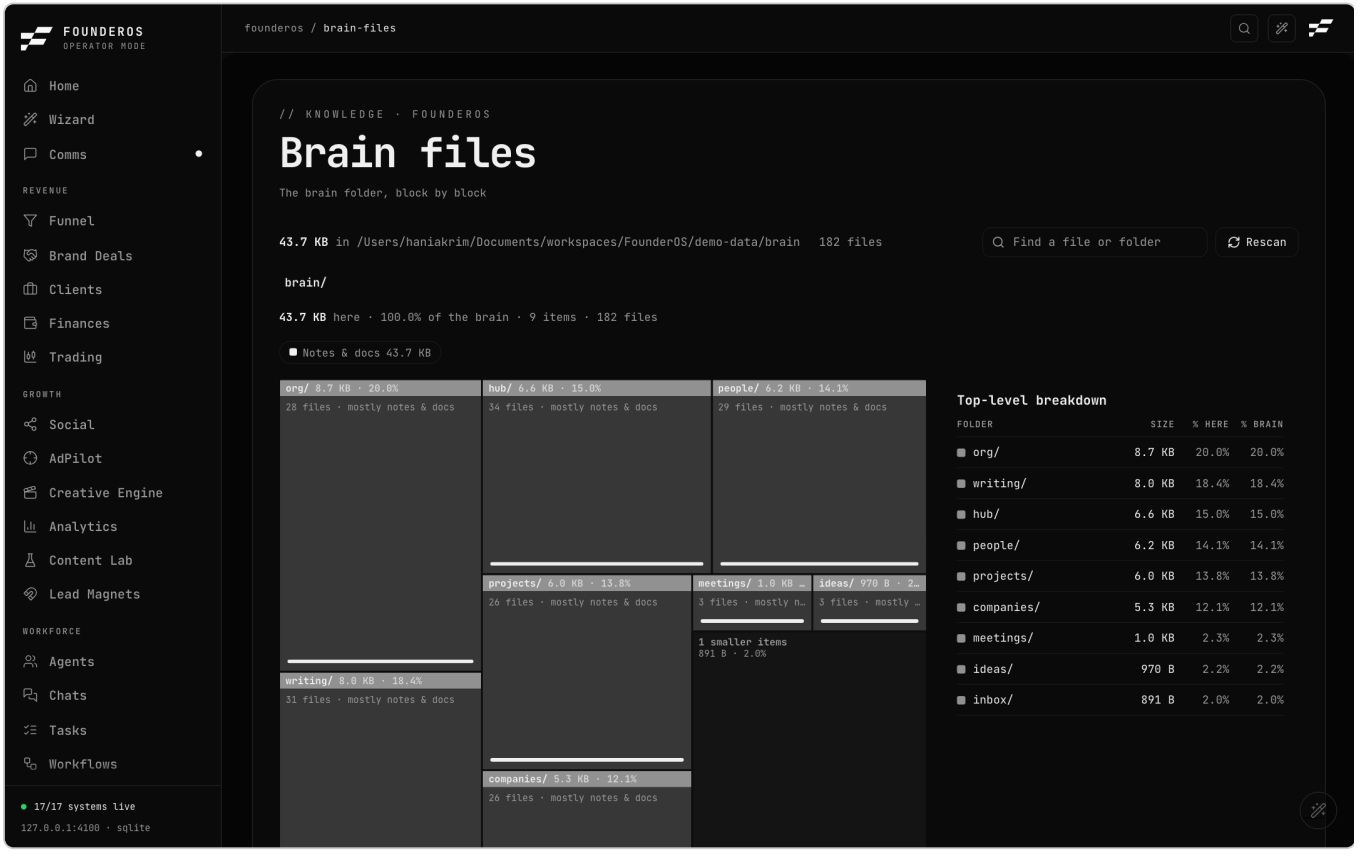

What it is for. A map of the brain folder on disk, so you can see what is taking up space and read individual files. The page title is "Brain files". It reads the folder straight from disk each time you visit (cached for about a minute).

What you see

- A block map. Every file and folder is a block sized by the space it uses.
- A path bar across the top (breadcrumbs) with an **Up** button (Esc also goes up one level).
- Filter chips by file type: Notes and docs, Video, Images, Audio, Code and config, Data and archives, Git and system, Other. Click a chip to show only that type, and click again to clear.
- A list beside the map with each item's size, its share of the current folder and its share of the whole brain.
- A search box ("Find a file or folder").
- A note when the folder is huge: the map stops at 60,000 entries.

What you can do

- Click a folder to zoom in. Click a file to open a preview on the side. Text files show their contents (the first 24 KB). Binary files say they have no preview and give you the path.
- Files marked private are never shown. The page says the contents stay on disk.
- **Rescan** to read the folder again.

This page is read-only. You cannot edit, move or delete anything here.

What it needs

A brain folder. FounderOS looks for `BRAIN_DIR` in `.env.local`, then `~/Desktop/brain`, then `~/Sync/brain`. If none exist, the page shows a *Not configured* badge, "No brain folder found on this machine", where it looked, and a *Set up* link to Settings.


Demo mode

The map shows the demo company's sample brain folder.

How to: find what is taking up space

1. Open **Brain files**.
2. Look for the biggest blocks. Click one to zoom in.
3. Use a file-type chip to narrow to one kind, for example Video.
4. Click a file for a preview, or read its full path in the panel.
5. Press Esc or click **Up** to go back.

Knowledge visualizer

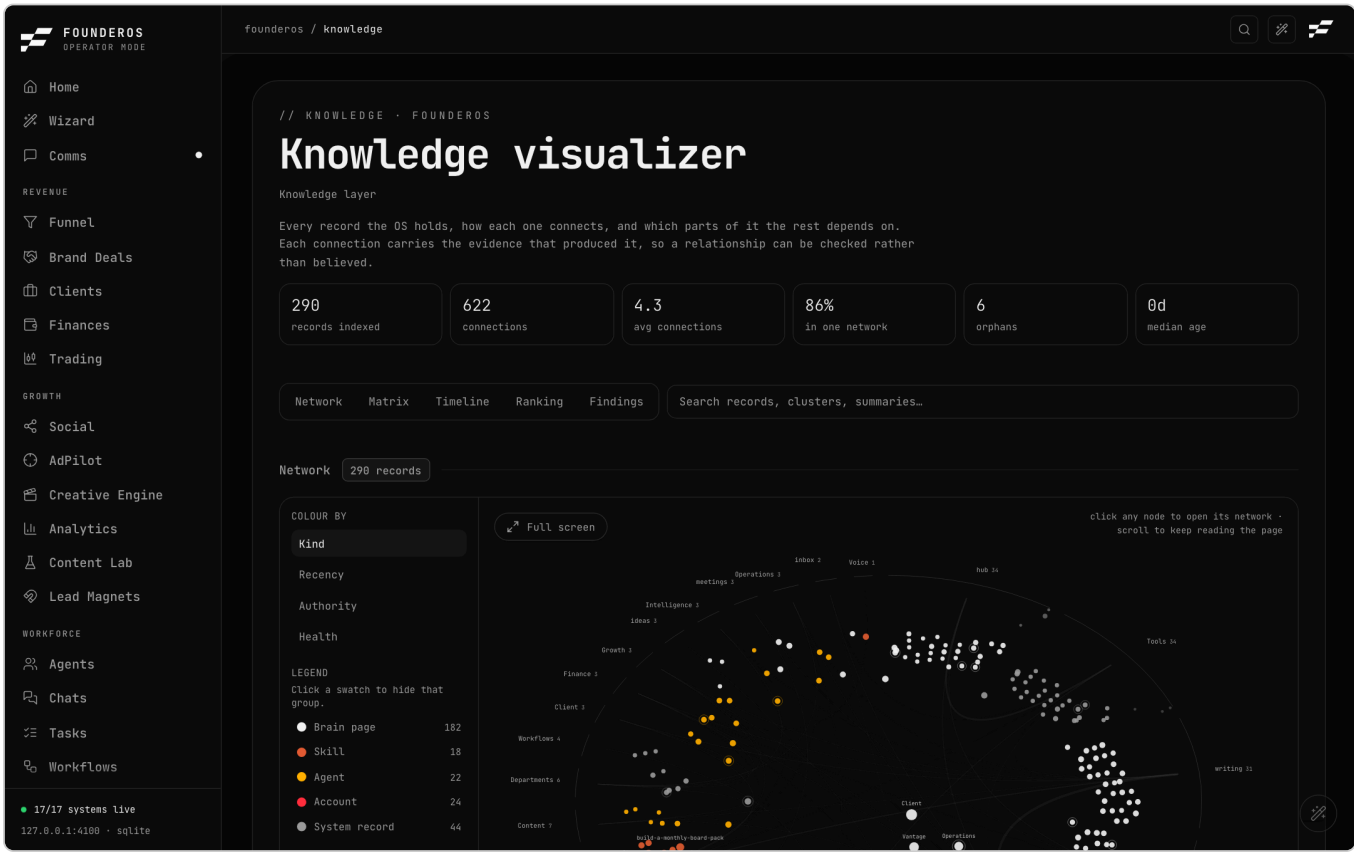

What it is for. One graph over everything FounderOS knows: notes, skills, agents, people, clients, workflows, tools and departments. Optimal Engine is where you retrieve; this page is where you analyse. Every connection shows the evidence behind it, so you can check a relationship instead of taking it on trust.

What you see

- A row of summary tiles at the top.
- A search box ("Search records, clusters, summaries...").

- Five views, switched with buttons:
  - **Network**: how everything connects.
  - **Matrix**: which clusters talk to each other.
  - **Timeline**: what has gone cold.
  - **Ranking**: the numbers, sortable.
  - **Findings**: the structural audit.
- **Colour by**: Kind (what sort of record), Recency (how long since it was edited), Authority (how much the graph relies on it) or Health (what is structurally wrong with it), with a legend. Click a swatch in the legend to hide that group.
- **Connection kinds**: link (an author wrote a `[[link]]`), owns (a relationship recorded in the database), mention (a record's name appears in another's text, with the sentence shown) and similar (shared distinctive vocabulary). Similar is inferred rather than observed, so it is off by default.
- Full-screen buttons for the network and the matrix.

What you can do

- Search, colour and filter.
- Click a record to open its detail panel and read the evidence for each of its connections.
- Turn connection kinds on or off.
- Read Findings for the structural audit.

The page is read-only. It does not change any record.

What it needs

No connector. It reads your brain store, your skills folder and your database. With nothing to index, it says "Nothing to index". The analysis is cached against the state of the files on disk, so a very large knowledge base can make the first load slower.


Demo mode

It indexes the demo company's sample pages, skills and records.

How to: find your most important notes

1. Open **Knowledge visualizer**.
2. Click **Ranking** to see records sorted by how much the rest depends on them.
3. Click **Findings** to see structural problems.
4. Switch **Colour by** to **Recency** and look at **Timeline** to spot notes that have gone cold.
5. Click any record to read the evidence for its connections.

Drift

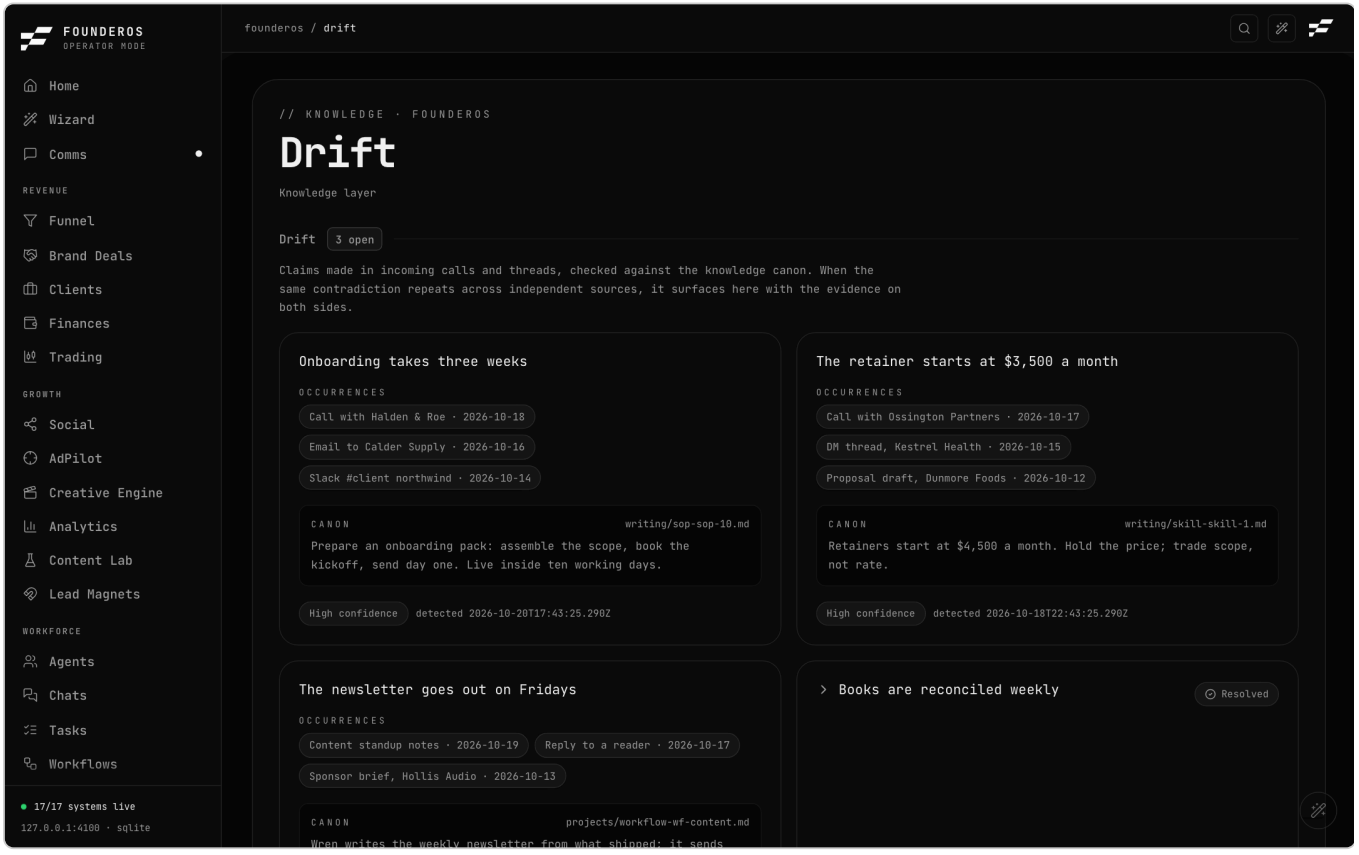

What it is for. Drift catches contradictions. Claims made in incoming calls and threads are checked against your knowledge canon. When the same contradiction shows up across independent sources, it appears here with the evidence on both sides.

What you see

- A heading with the count of open items.
- Cards for each contradiction, each showing:
  - **Occurrences**: where the claim was made, with a short quote from each source.
  - **Canon**: the passage in your canon it disagrees with, and the file it lives in.
  - A confidence chip and the date it was detected.

What you can do

On a card that has a proposed fix, two buttons:

- **Update canon** shows a proposed change as removed and added lines, with a **Copy** button for the new passage. Drift does not write anything. You paste the passage into the named file yourself.
- **Draft correction** shows a message to the person responsible, with a **Copy** button. Drift does not send it. You can paste it into Comms or any other channel.

What it needs

A detection pipeline that extracts claims from calls and threads and records them. Until that is running there are no insights, and the page shows a "not configured" state that explains what Drift does and that the extraction pipeline is

not set up. It never invents contradictions.

Demo mode

The demo company includes sample drift insights so you can see how cards look and work.

How to: resolve a drift item

1. Open **Drift**.
2. Read the occurrences and the canon passage to confirm the contradiction is real.
3. If your canon is wrong, click **Update canon**, click **Copy** on the new passage, and paste it into the canon file named on the card.
4. If the claim came from a person who is mistaken, click **Draft correction**, click **Copy**, and send it through your usual channel.

Settings


Settings is at `/setup`, in the System group of the sidebar. It controls how FounderOS looks, which pages show, which data it reads, who can open it, and it tracks the steps to get the whole system wired up.

To open it, click **Settings** in the sidebar, or press `Cmd+K` and type `settings`.

The page has these sections, top to bottom:

1. Appearance
2. Modules
3. Bring-up progress
4. Recording (Filming mode)
5. Security
6. The bring-up phases, with a place to paste API keys

Appearance

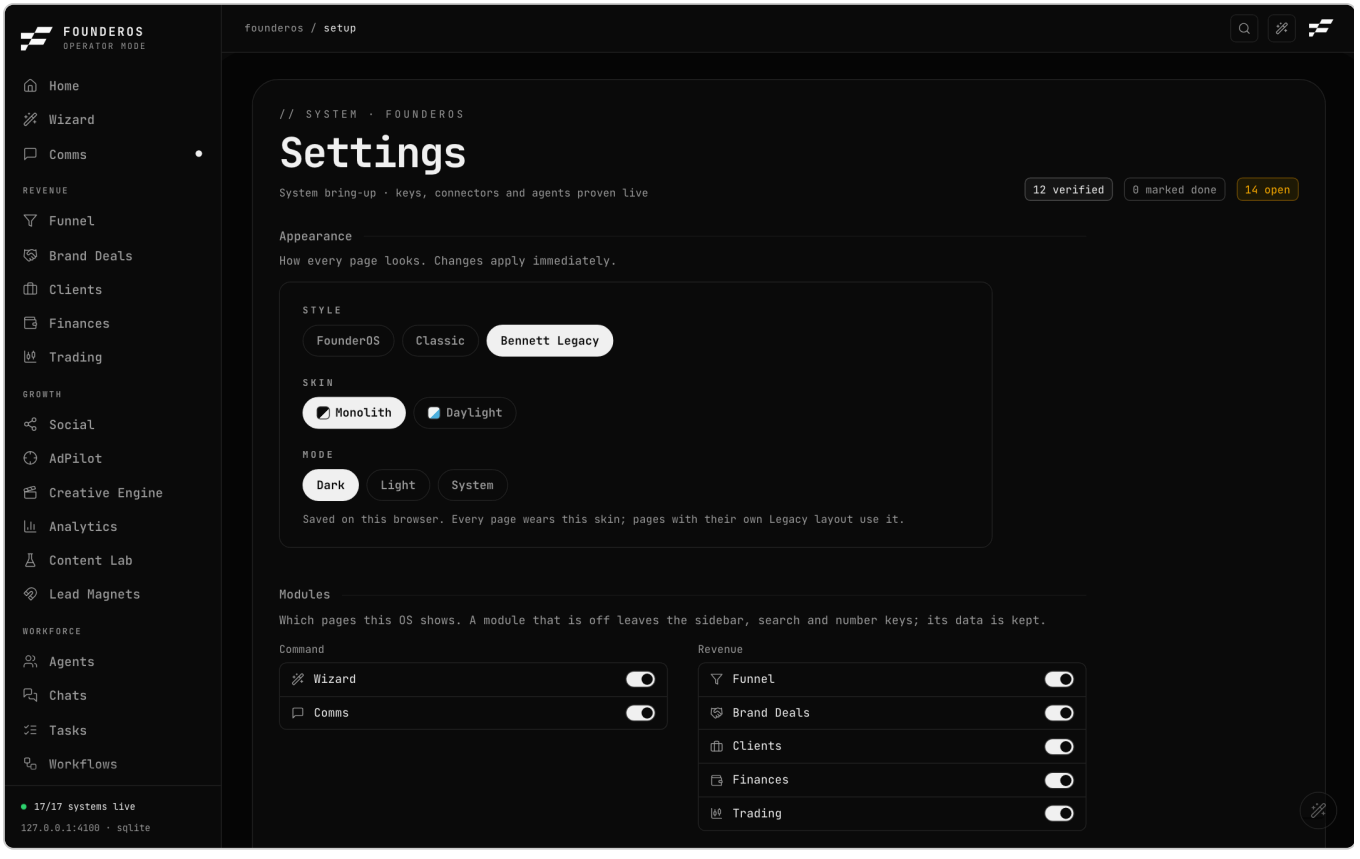

Controls how every page looks. Changes apply immediately and are kept per browser, so another device can use a different look.

1. Open **Settings**, then find **Appearance**.
2. Under **Style**, pick one of the three looks:
    - the product style (named after the app),

    - **Classic**,
    - **Bennett Legacy**.
3. Pick a colour. In the product style you choose an accent: Ice, Lime, Ember or Mint. In Classic you pick one of the Classic themes.
4. Pick a mode: **Dark**, **Light** or **System**. System follows your computer's setting. In Classic, the mode comes from the theme you choose.

Switching style does not lose your colour choice in the other style.

Modules

Choose which pages this installation shows.

1. Open **Settings**, then find **Modules**.
2. Pages are grouped as in the sidebar. Use the toggle next to a page to switch it off or on.

A page that is off disappears from the sidebar, search (`Cmd+K`) and the number-key shortcuts. Its data is kept, so switching it back on restores everything.

Bring-up

Bring-up is a checklist for getting the whole system working. A progress bar shows "N of M steps done". Two kinds of completion are counted:

- **Verified**: FounderOS checked it live (a key works, a file exists, a connector answers). Shown as "auto-verified".
- **Marked done**: a step only you can confirm, such as a setting in another app. Tick it yourself with **Mark done**. You can undo it.

The steps are in five phases:

Phase	What it covers
1. Foundation	The host serving, the operator password, the brain store, the verified send path, the approval bot
2. Keys and connectors	Primary inbox, Attio, the AI gateway, Beehiiv, GoHighLevel, payments, Slack, Notion, ManyChat
3. Hands-on steps	Things you do outside FounderOS, such as installing the engine CLI or granting WhatsApp Full Disk Access
4. Builds owed	Agent features still to be built or enabled
5. Make it yours	Forking the repository, merging knowledge bases and similar

Some of these steps belong to the operator's own setup. In a fresh install, an open step simply means that part is not wired yet.

Click **open** on a step to go to the page that fixes it.

Adding an API key from a step

A step that needs a key shows a text field while it is open.

1. Paste the value into the field on that step.
2. Save it. The key is written to `.env.local` and takes effect immediately.

3. The step turns **verified** once the connector answers.

Saved keys are shown masked (only the last four characters). FounderOS never shows a full secret back to you. You can also set keys on the Connections page: see Integrations.

Recording (Filming mode)

This card decides which dataset FounderOS reads. "Filming" is the app's name for the demo company.

- **Filming on**: reads `demo-data/`. Nothing on screen is real and nothing you write reaches your live data.
- **Filming off**: reads `data/`, your real data.

To switch:

1. Open **Settings**, find **Recording** (or **Filming mode**).
2. Click **Switch to real data** (or **Switch to sample data**).

The card also shows the folder currently in use. Switching never seeds, copies or deletes anything. It takes effect without a restart.

If the card says **Pinned by host**, the mode is fixed by `GLADOS_DATA_DIR` or `DEMO_MODE` in the environment, and the switch is disabled. Remove that setting and restart to change it.

Turn Filming on before recording a video or taking screenshots. A fresh install starts in Filming mode unless `GLADOS_DEFAULT_MODE=real` is set.

Security

Sets who can open FounderOS.

- **No password**: FounderOS answers only on the computer it runs on (`127.0.0.1`). Any other address gets a 503 page that tells you to set a password. No login screen appears.
- **Password set**: every page and every API route asks for it. You sign in at `/login`.

Set a password

1. Open **Settings**, find **Security**.
2. Click **Set password**.
3. Enter a new password of at least 8 characters, and repeat it.
4. Submit. You are signed in on this device.

The password hash and a session secret are stored in `.env.local` as `GLADOS_PASSWORD_HASH` and `GLADOS_SESSION_SECRET`. You never type these yourself. Setting a password does not need a restart.

Reach FounderOS from another device

Setting a password alone does not open it to the network. You also choose the address it listens on.

1. Set a password as above.
2. Set `GLADOS_HOST` in `.env.local` to the address to listen on, such as your Tailscale address or `0.0.0.0`.
3. Restart FounderOS. Changing the address needs a restart.

Without `GLADOS_HOST`, FounderOS keeps listening on `127.0.0.1` even with a password. See Troubleshooting.

Change the password

1. Click **Change password**.
2. Enter your current password, then the new one twice.

Sign out every other device

Click **Sign out others** and enter your current password. This replaces the session secret, so other devices must sign in again. This device stays signed in.

Remove the password

Click **Remove password** and enter your current password. This signs the device out and puts FounderOS back to answering on this computer only, until you set a new password.

Every action except setting the first password asks for your current password again, so a tab left open is not enough to change it.

Sessions last 30 days. Too many wrong attempts in a short time are refused with "too many attempts, wait a minute".

Forgot the password

See Troubleshooting.

API keys

Keys can be set in two places:


- on a step in the Bring-up checklist (above);
- in the **API keys** panel at the bottom of the Connections page (Integrations).

Both write to `.env.local`. All variables are listed in the configuration reference.

Integrations (Connections)

The Connections page, at `/integrations`, lists every outside tool FounderOS can reach and its live state. It is in the System group of the sidebar, labelled **Connections**.

How the page works

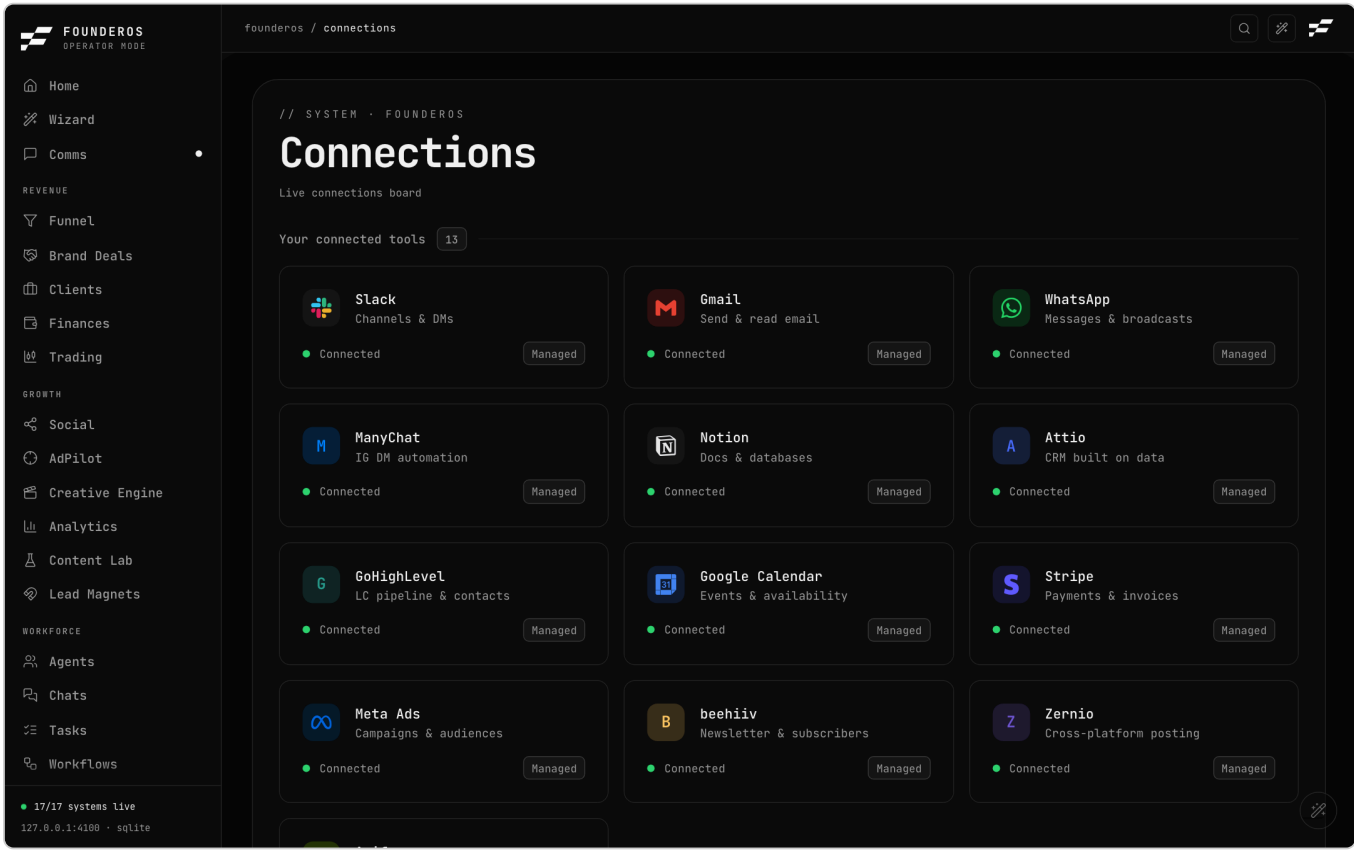

- **Your connected tools** lists tools that are answering right now.
- **Popular** lists common tools you have not connected yet.
- **Browse by category** lists everything, grouped (Communication, Productivity, CRM and Sales, Developer, Scheduling, Finance, Marketing, Storage, AI and Automation, Creative). You can search and filter it.
- **API keys** at the bottom shows each key slot as set or empty, with masked values.

Each tool shows one of these states:

State	Meaning
Live (connected)	The tool answered a real check.
Not configured	No key yet. A **Set up** link takes you to where to add it.
Error	A key exists but the check failed. The card shows the reason.

Some catalogue entries (for example Discord, Zoom, HubSpot or GitHub) are listed so you can see what exists, but have no connector in FounderOS yet. They never show as live.

While the demo (Filming) is on, the board shows scripted stand-ins. Switch to real data to see true states. See Settings.

Status checks are cached for about a minute. Saving or removing a key clears the cache, so a new key shows on the next page load.

Add a key

1. Open **Connections**.
2. Scroll to **API keys**, or open the tool's card and follow its **Set up** link.
3. Find the key slot, paste the value, and save.
4. Reload the page. The tool should turn Live.

Keys are written to `.env.local` on the machine running FounderOS. Values are shown masked, only the last four characters. You can also edit `.env.local` by hand, then restart.

Key slots on the API keys panel: the four email inboxes, Slack, Stripe, PayPal, Square, Whop, Notion, ManyChat, the brain-store path, Attio, the Vercel AI Gateway, GoHighLevel, Beehiiv, the Deal Alerts bot token, Foreplay, MIOSA and Arcads.

Connectors and what each needs

Variables go in `.env.local`. All of them are optional: a connector without them simply shows Not configured. Full list: configuration reference.

Communication

Tool	What it gives you	Variables
Email (IMAP)	Up to four inboxes in Comms. For Gmail use an App Password.	`INBOX_n_HOST`, `INBOX_n_USER`, `INBOX_n_PASS`, optional `INBOX_n_NAME`, `INBOX_n_PORT` (n = 1 to 4)
Email sending (SMTP)	Replies from Comms. Host defaults to the IMAP host with `imap.` changed to `smtp.`, port 465.	Optional `INBOX_n_SMTP_HOST`, `INBOX_n_SMTP_PORT`
Slack	Reads joined channels. Needs scopes `channels:read`, `channels:history`, `users:read`; `chat:write` to reply.	`SLACK_BOT_TOKEN`
WhatsApp	See WhatsApp below.	Sending only: `WHATSAPP_PHONE_NUMBER_ID`, `WHATSAPP_ACCESS_TOKEN`
ManyChat	Instagram DM automation.	`MANYCHAT_API_KEY`, optional `MANYCHAT_WEBHOOK_SECRET`
Plaud	Recordings, pushed to FounderOS by a relay.	`PLAUD_INGEST_TOKEN`
Fathom	Meeting list, read-only, cached 10 minutes.	`FATHOM_API_KEY`

ManyChat: its API cannot list DMs. The live DM inbox on Social is fed by a webhook, `/api/webhooks/manychat`. If you set `MANYCHAT_WEBHOOK_SECRET`, the request must carry the header `x-manychat-secret` with the same value.

Plaud: it does not get polled. The relay posts recordings to `/api/plaud/ingest` with `Authorization: Bearer <PLAUD_INGEST_TOKEN>`.

Productivity and storage

Tool	What it gives you	Variables
Notion	Mirrors pages shared with the integration.	`NOTION_API_KEY`
Google Calendar (Calendar)	Events and availability.	None in `.env.example`.
Notes (Obsidian)	A markdown vault.	Optional `OBSIDIAN_VAULT` (default `~/Documents/Notes Vault`)
Miro	Whiteboards.	`MIRO_ACCESS_TOKEN`

CRM, sales and funnel

Tool	What it gives you	Variables
Attio	Live pipeline on Funnel (read-scoped).	`ATTIO_API_KEY`
GoHighLevel	Second live source for funnel journeys.	`GHL_API_KEY`, `GHL_LOCATION_ID`
WebinarJam	Webinar registrants and attendees.	`WEBINARJAM_API_KEY`
Trakyo	Funnel attribution and the link studio.	`TRAKYO_API_KEY`, optional `TRAKYO_ACCOUNT_ID` (agency keys only)
Vidalytics	Catalogue entry only. Nothing reads the key yet.	`VIDALYTICS_API_KEY`

Finance and trading

Tool	What it gives you	Variables
Stripe	Balance and charges on Finances. Fully wired.	`STRIPE_SECRET_KEY`
PayPal	Registered; the client arrives with the keys.	`PAYPAL_CLIENT_ID`, `PAYPAL_CLIENT_SECRET`
Square, Whop	Payment processors, shown as Not configured until keyed.	`SQUARE_ACCESS_TOKEN`, `WHOP_API_KEY`
FanBasis	Two accounts.	`FANBASIS_KEY_1`, `FANBASIS_KEY_2`
Wise	Income and outgoing transfers, two accounts.	`WISE_1_TOKEN`, `WISE_2_TOKEN`
Robinhood	No key. An agent pushes snapshots to `/api/trading/snapshot` with a bearer token. FounderOS never places orders.	`TRADING_PUSH_TOKEN`
Phantom	Reads a public Solana address only; nothing can be signed.	`PHANTOM_WALLET_ADDRESS`, optional `SOLANA_RPC_URL`

Marketing and creative

Tool	What it gives you	Variables
Beehiiv	Real subscriber counts on Social. Needs both.	`BEEHIIV_API_KEY`, `BEEHIIV_PUBLICATION_ID`
Zernio	Cross-platform posting.	`ZERNIO_API_KEY`
Meta Ads	Paid-funnel attribution. The token is detected; live pulls depend on the Meta Ads setup.	`META_ADS_ACCESS_TOKEN`
Foreplay	Ad library for AdPilot and the Creative Engine (credits per call).	`FOREPLAY_API_KEY`
Arcads	AI video ads and UGC actors.	`ARCADS_BASIC_AUTH`

Tool	What it gives you	Variables
Apify	Scrapes posts and creators for Content Lab.	`APIFY_API_TOKEN`
MIOSA	Cloud computers on the Compute page.	`MIOSA_API_KEY`

Content Lab has many more optional settings (YouTube and Instagram insights, spend caps, feature switches). They are all in the configuration reference.

AI, knowledge and developer

Tool	What it gives you	Variables
AI Gateway (LLM)	Agent chat and Wizard replies. Without it, chat says not configured.	`AI_GATEWAY_API_KEY` , optional `LLM_PROVIDER` , `LLM_MODEL`
Optimal Engine (gbrain)	Your knowledge base. Defaults work.	Optional `BRAIN_PROVIDER` , `GBRAIN_BIN` , `GBRAIN_STORE` , `BRAIN_DIR`
Superset	Launches agent workspaces for client drafts.	`SUPERSET_API_KEY` , optional `SUPERSET_BIN` , `SUPERSET_PROJECT_ID`
Wispr, local stack	Local tools that FounderOS checks on this computer.	None

Outbound actions such as Superset drafts and Trakyo links are off unless `GLADOS_WRITES=1` , and each still asks you to confirm. Never put real secrets in files you commit.

WhatsApp

Path: `/integrations/whatsapp` . Open it from the WhatsApp card.

WhatsApp is two separate connections, each with its own state.

Reading

- FounderOS reads the WhatsApp desktop app's local database on this Mac, read-only.
- There is nothing to paste. The desktop app must be signed in, and the process running FounderOS needs **Full Disk Access** (macOS System Settings, Privacy and Security).
- It gives you every chat, message history, profile pictures and downloaded media.
- It cannot send anything.

Sending

- Sending uses the Meta WhatsApp Business Cloud API, with a separate business number.
- Get the phone number ID and access token from developers.facebook.com, your app, WhatsApp, API Setup, then save them as `WHATSAPP_PHONE_NUMBER_ID` and `WHATSAPP_ACCESS_TOKEN` .
- You can reply to anyone who messaged your business number within 24 hours of their last message. Outside that window only pre-approved templates go through.
- It cannot reach your personal chats, groups or linked IDs.


Why there is no QR pairing

Pairing by QR (like WhatsApp Web) is the only route that could reply to personal chats, but it depends on an unofficial library and accounts get banned for automated use. FounderOS does not offer it.

Usage, Blueprint, Roadmap, Wizard and Login

Five smaller pages in one place.

Usage

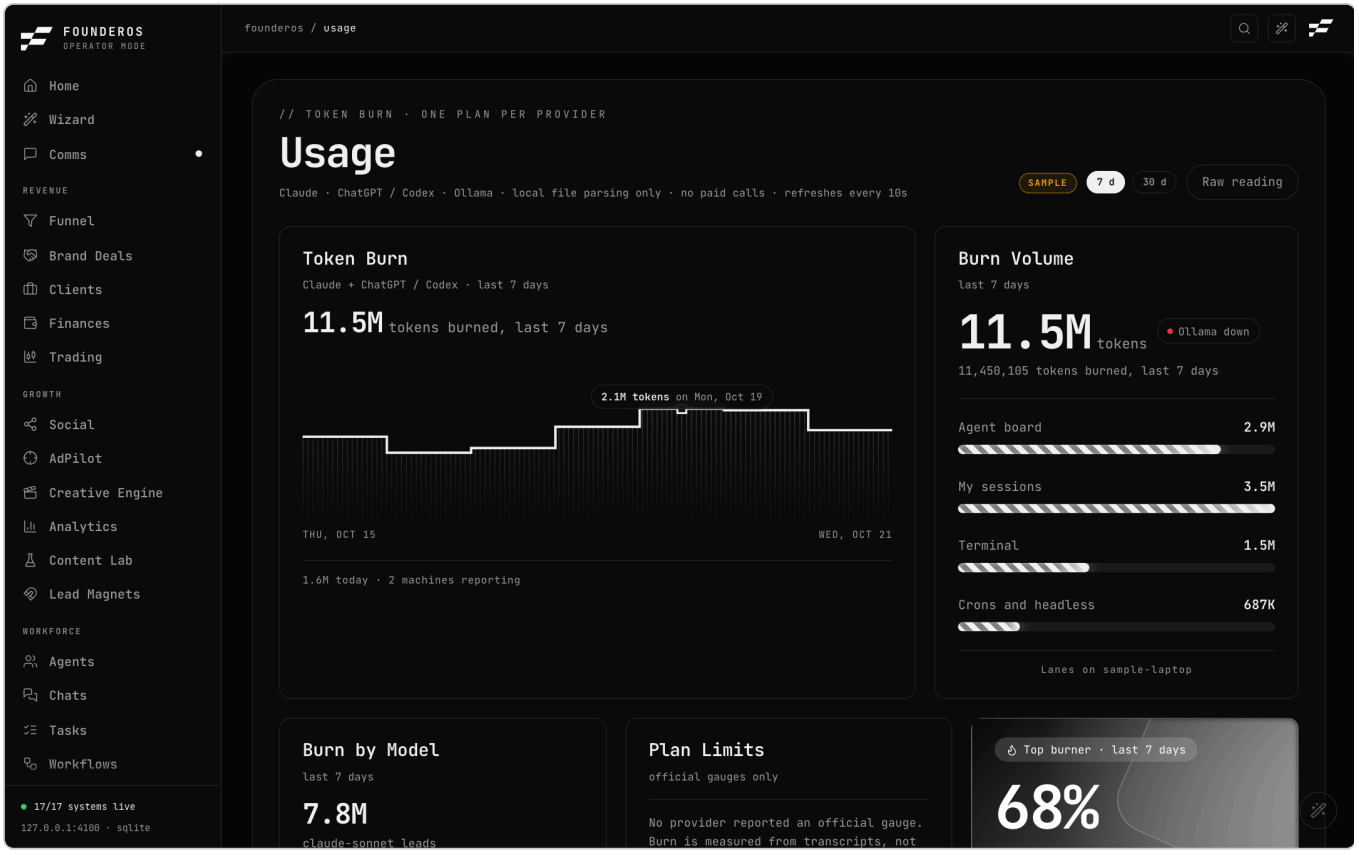

Path: `/usage` (System group).

Usage shows how many AI tokens you burn, by plan, model, lane and machine, against the provider's own limit gauges. It reads the transcript folders that Claude and Codex keep on your computer, so it needs no key.

Demo mode: Usage is off on a demo (Filming) install. It reads nothing from your home folder and says it is not available. Switch to real data to use it. See Settings.

How the number is counted: burn = input + output + cache writes. Cache reads are not counted.

Choose a time range

Use the range selector on the page to view 7 or 30 days. The page refreshes by itself every 10 seconds while you are looking at it.


Where the data comes from

- **This computer:** transcripts in `~/.claude/projects` and `~/.codex/sessions`. Change the folders with `CLAUDE_PROJECTS_DIR` and `CODEX_SESSIONS_DIR`.

- **Other computers:** they can send their readings to `POST /api/usage/push` with `Authorization: Bearer <USAGE_PUSH_TOKEN>`. Set `USAGE_PUSH_TOKEN` to any long random string you choose and share it with those machines. The page can copy the push address for you.
- **Machine name:** this computer's name in the board is its hostname, unless you set `GLADOS_USAGE_MACHINE`.
- **Ollama:** the page also checks for a local Ollama on your computer.

If there is no transcript folder and nothing was pushed, the page shows **Not configured** instead of zeros.

Blueprint

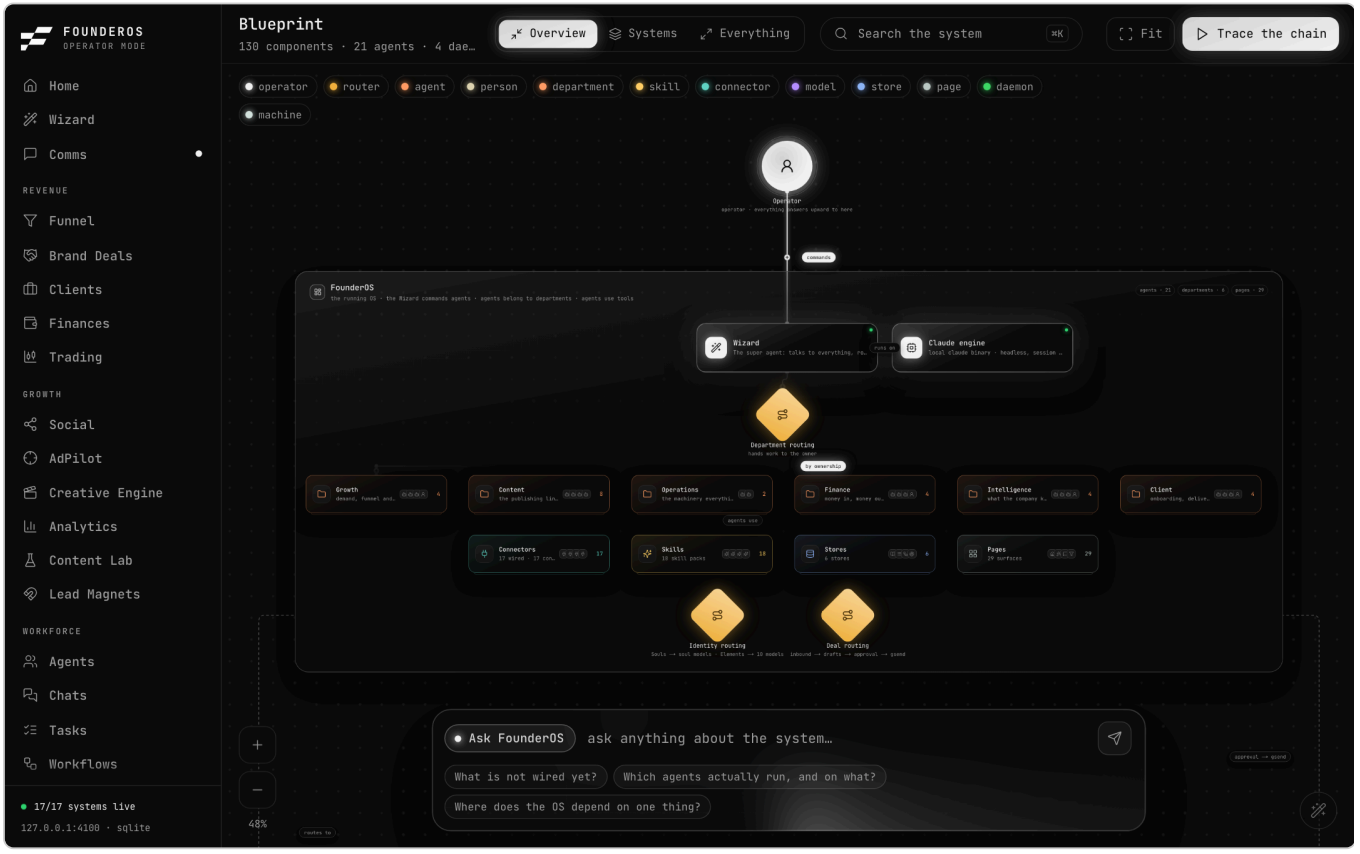


Path: `/blueprint` (System group).

Blueprint is a live map of FounderOS itself: its machines, groups and parts (agents, daemons, connectors and more), drawn from the system's own registries on every visit. The line under the title counts components, agents, daemons and machines, and says when the map was compiled. The counts change when the system does.

Use it to see what exists and how it connects. It is read-only.

Roadmap

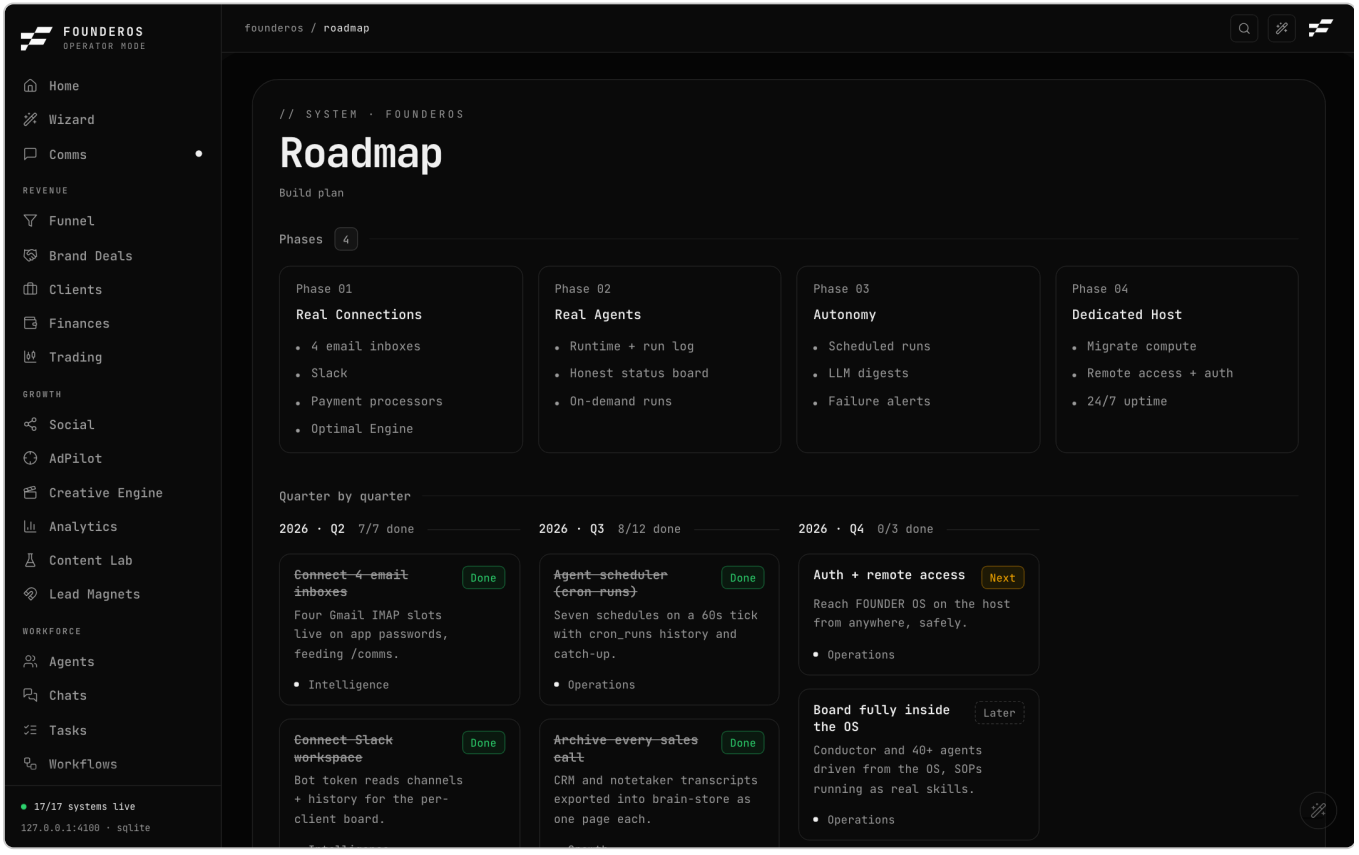

Path: `/roadmap` (System group).

Roadmap is the build plan, in two parts:

- **Phases**: high-level phases with their items.
- **Quarters**: roadmap items grouped by quarter, each with a status badge and its department.

Status badges are **Done**, **Now**, **Next** and **Later**. Done items are dimmed. In the product style, adding `?show=open` to the address hides completed items.

On a fresh real install the roadmap is blank until you add items.

Wizard

Path: `/wizard` (Command group).

The Wizard is the chat you use to run the system. Each project is a conversation. A panel beside it shows the crew: the real run history of your agents.

Agent replies need an AI key. Without `AI_GATEWAY_API_KEY`, chat reports that it is not configured. See Integrations. More on agents: Workforce and Command.

Login

Path: `/login`.

This is the only page reachable without a session. What you see depends on whether a password exists:

- **No password set:** the page says no password is set on this install, so there is nothing to sign in to. It gives two buttons: open FounderOS, or go to Settings to set a password.
- **Password set:** you see a password box. Enter the operator password to sign in. If you were sent here from another page, you return to it afterwards.

To set, change or remove the password, see Settings. If you forgot it, see Troubleshooting.

Configuration reference

Every setting is an environment variable. Put them in a file called `.env.local` in the FounderOS folder (it is never committed to git). Use `.env.example` as the template: copy it to `.env.local` and fill in what you need.

- **Required?** Nothing is strictly required. FounderOS runs with an empty `.env.local`. "Required" below means required for that feature to work.
- Never share or commit real keys. The app shows saved keys masked.
- Restart FounderOS after hand-editing `.env.local`. Keys saved through the app take effect without a restart.
- Values in `<angle brackets>` are placeholders.

See also: Settings, Integrations.

Sign-in and server

Variable	Purpose	Required?	Default
`GLADOS_PASSWORD_HASH`	Operator password hash. Written by Settings, Security. Do not set by hand.	No	none (no password)
`GLADOS_SESSION_SECRET`	Session secret. Written by Settings, Security. Do not set by hand.	No	none
`GLADOS_HOST`	Address to listen on once a password is set (a Tailscale IP, `0.0.0.0`). Refused until a password exists.	No	`127.0.0.1`
`PORT`	Port to serve on.	No	`4100`
`GLADOS_BRAND`	Empty shows FounderOS. `glados` shows the operator's own GladOS instance.	No	FounderOS
`GLADOS_TRUSTED_HOSTS`	Comma list of names that resolve to this machine (for example a filming alias). Ignored once a password is set.	No	none
`GLADOS_OPERATOR_NAME`	The name shown across the OS.	No	`Operator`
`GLADOS_DEFAULT_MODE`	`real` starts blank on `data/`. Otherwise a fresh install opens on the demo company.	No	demo
`GLADOS_DB`	Override the SQLite database path.	No	project default
`GLADOS_DATA_DIR`	Pins the data folder and turns the Filming switch off.	No	none
`DEMO_MODE`	`1` forces demo mode on, `0` forces it off for this process. Disables the Filming switch.	No	none
`NEXT_DIST_DIR`	Build folder. Preview uses `.next-preview`.	No	`.next` (dev), `.next-preview` (preview)
`GLADOS_WARM`	`0` skips the live-read cache warm-up at server start.	No	on
`GLADOS_SWR`	`0` turns the live-read cache off entirely.	No	on
`GLADOS_WRITES`	`1` allows outbound launches (Superset drafts, Trakyo links). Each still asks you to confirm. Forced off in Filming.	No	off
`GLADOS_CRON`	`1` runs scheduled agent jobs from this process every 60 seconds. Use on one always-on host only. Forced off in Filming.	No	off

Variable	Purpose	Required?	Default
GLADOS_TZ	Time zone for Content Lab's local times (for example Europe/London).	No	this machine's zone

Email

Up to four inboxes. Replace n with 1 to 4.

Variable	Purpose	Required?	Default
INBOX_n_HOST	IMAP server, such as imap.gmail.com .	For email	none
INBOX_n_USER	Login (email address).	For email	none
INBOX_n_PASS	Password. For Gmail use an App Password.	For email	none
INBOX_1_NAME	Display name for the inbox.	No	none
INBOX_1_PORT	IMAP port.	No	993
INBOX_n_SMTP_HOST	SMTP server for sending replies.	No	the IMAP host with imap. changed to smtp.
INBOX_n_SMTP_PORT	SMTP port.	No	465
COMMS_WORK_KEYWORDS	Comma list of extra keywords (brands, key clients) that send a message to the Comms Work lane.	No	built-in work signals only

Messaging, recordings and social

Variable	Purpose	Required?	Default
SLACK_BOT_TOKEN	Slack bot token (xoxb-). Scopes: channels:read , channels:history , users:read .	For Slack	none
PLAUD_INGEST_TOKEN	Long random string you choose. A relay sends Plaud recordings with it as a bearer token.	For Plaud	none
FATHOM_API_KEY	Fathom meeting list (read-only).	For Fathom	none
VIDALYTICS_API_KEY	Catalogue entry only. Nothing reads it yet.	No	none
WHATSAPP_PHONE_NUMBER_ID	Meta WhatsApp Business number ID, for sending.	For sending	none
WHATSAPP_ACCESS_TOKEN	Meta WhatsApp Business access token, for sending. Reading needs no key.	For sending	none
MANYCHAT_API_KEY	ManyChat API key.	For ManyChat	none
MANYCHAT_WEBHOOK_SECRET	If set, the ManyChat webhook must send x-manychat-secret with this value. Leave blank only in development.	No	none
BEEHIIV_API_KEY	Beehiiv API key.	For Beehiiv	none
BEEHIIV_PUBLICATION_ID	Beehiiv publication ID (pub_...). Both Beehiiv variables are needed.	For Beehiiv	none
ZERNIO_API_KEY	Zernio cross-platform posting.	For Zernio	none
NOTION_API_KEY	Notion internal integration secret. Share pages with the integration.	For Notion	none

Payments and trading

Variable	Purpose	Required?	Default
`STRIPE_SECRET_KEY`	Stripe secret key (`sk_live_` or `sk_test_`).	For Stripe	none
`PAYPAL_CLIENT_ID` , `PAYPAL_CLIENT_SECRET`	PayPal credentials.	For PayPal	none
`SQUARE_ACCESS_TOKEN`	Square access token.	For Square	none
`WHOP_API_KEY`	Whop API key.	For Whop	none
`FANBASIS_KEY_1` , `FANBASIS_KEY_2`	FanBasis keys, one per account.	For FanBasis	none
`WISE_1_TOKEN` , `WISE_2_TOKEN`	Wise tokens, one per account.	For Wise	none
`TRADING_PUSH_TOKEN`	Long random string shared with the agent that pushes Robinhood snapshots. FounderOS never places orders.	For trading	none
`PHANTOM_WALLET_ADDRESS`	Public Solana address. Not a key.	For Phantom	none
`SOLANA_RPC_URL`	Solana RPC server.	No	`https://api.mainnet-beta.solana.com`

CRM, funnel and clients

Variable	Purpose	Required?	Default
`ATTIO_API_KEY`	Attio CRM key (read-scoped).	For Attio	none
`GHL_API_KEY`	GoHighLevel Private Integration token.	For GoHighLevel	none
`GHL_LOCATION_ID`	GoHighLevel sub-account location ID.	For GoHighLevel	none
`WEBINARJAM_API_KEY`	WebinarJam account key.	For WebinarJam	none
`TRAKYO_API_KEY`	Trakyo API key.	For Trakyo	none
`TRAKYO_ACCOUNT_ID`	Agency keys only.	No	none
`SUPERSET_API_KEY`	Handed to the Superset CLI when a client draft is launched.	For Superset	none
`SUPERSET_BIN`	Path to the Superset CLI.	No	`superset` on your PATH
`SUPERSET_PROJECT_ID`	Default Superset project for launches.	No	none
`META_ADS_ACCESS_TOKEN`	Meta Ads access token.	For Meta Ads	none

Usage

Variable	Purpose	Required?	Default
`USAGE_PUSH_TOKEN`	Long random string shared with other machines that push usage readings.	For pushing	none
`CLAUDE_PROJECTS_DIR`	Folder of Claude transcripts to read.	No	`~/.claude/projects`
`CODEX_SESSIONS_DIR`	Folder of Codex transcripts to read.	No	`~/.codex/sessions`
`GLADOS_USAGE_MACHINE`	This machine's name on the Usage board.	No	hostname

AI and knowledge

Variable	Purpose	Required?	Default
`AI_GATEWAY_API_KEY`	Vercel AI Gateway key. Enables agent chat and Wizard replies.	For chat	none
`LLM_PROVIDER`	`stub` gives deterministic offline answers for testing.	No	`gateway`
`LLM_MODEL`	`provider/model` routed through the gateway.	No	`anthropic/claude-sonnet-4-6`
`BRAIN_DIR`	The brain folder the Brain Files page maps.	No	`~/Desktop/brain` , then `~/Sync/brain`
`BRAIN_PROVIDER`	`stub` disables Optimal Engine.	No	`gbrain`
`GBRAIN_BIN`	Path to the `gbrain` CLI.	No	`gbrain` on your PATH
`GBRAIN_STORE`	Path to the brain store.	No	`knowledge/brain-store`
`GBRAIN_DISABLE_DIRECT_POOL`	Passed to the gbrain CLI.	No	`1`
`OBSIDIAN_VAULT`	Path to your markdown notes vault.	No	`~/Documents/Notes Vault`

Creative Engine

Variable	Purpose	Required?	Default
`FOREPLAY_API_KEY`	Ad library for research and proof. Uses credits per call.	For Foreplay	none
`MIOSA_API_KEY`	Cloud computers on the Compute page.	For Compute	none
`ARCADS_BASIC_AUTH`	Arcads credentials: base64, or the full `Basic ...` value.	For Arcads	none
`CREATIVE_ENGINE_DRY`	`1` makes every Foreplay, Arcads and Claude call return sample data. Costs no credits; a badge is shown.	No	off
`CREATIVE_ENGINE_CREDIT_CAP`	Per-session Arcads credit ceiling.	No	`200`
`CREATIVE_ENGINE_STORE_DIR` , `CREATIVE_ENGINE_ASSET_DIR`	Override storage folders (used for tests).	No	built-in folders

Content Lab

Most of these are optional. Settings, Keys can write the operator names for you.

Variable	Purpose	Required?	Default
`APIFY_API_TOKEN`	Apify token for your posts, tracked creators, discovery and Radar. The only required Lab key.	For Content Lab	none
`OPENAI_API_KEY`	Whisper speech-to-text. Without it, captions only.	No	none
`LAB_YT_CLIENT_ID` , `LAB_YT_CLIENT_SECRET`	YouTube Analytics OAuth client from Google Cloud.	For YouTube	none
`LAB_YT_REFRESH_TOKEN` , `LAB_YT_CHANNEL_ID` , `LAB_YT_CONNECTED_AT`	Written by Connect YouTube. Never paste.	No	none
`LAB_YT_REDIRECT_URI`	OAuth redirect address.	No	`http://localhost:<port>/api/lab/oauth/youtube/callback`
`LAB_IG_APP_ID` , `LAB_IG_APP_SECRET`	Instagram insights: your Meta app.	For Instagram	none
`LAB_IG_ACCESS_TOKEN` , `LAB_IG_TOKEN_EXPIRES_AT` , `LAB_IG_USER_ID`	Written by Connect Instagram, or pasted.	No	none
`LAB_IG_REDIRECT_URI`	OAuth redirect address.	No	`http://localhost:<port>/api/lab/oauth/instagram/callback`
`PRODUCTHUNT_TOKEN`	Product Hunt developer token, a Radar source.	No	none
`GITHUB_TOKEN`	Fine-grained token with	No	none

Variable	Purpose	Required?	Default
	no scopes, for the GitHub fake-star filter.		
`LAB_APIFY_CAP_USD`	Monthly Apify spend cap in USD. 0 is off.	No	`98`
`LAB_APIFY_SYNC_CAP_USD`	Cap for daily sync, discovery and Google Trends.	No	`46`
`LAB_APIFY_SNAPSHOTS_CAP_USD`	Cap for your posts at fixed ages.	No	`22`
`LAB_APIFY_X_CAP_USD`	Cap for your X posts.	No	`10`
`LAB_APIFY_VERIFY_CAP_USD`	Cap for actor checks.	No	`1`
`LAB_APIFY_RADAR_X_CAP_USD`	Cap for the Radar X watch list.	No	`15`
`LAB_APIFY_RADAR_TIKTOK_CAP_USD`	Cap for Radar TikTok Creative Center.	No	`3`
`LAB_APIFY_RADAR_PRODUCTHUNT_CAP_USD`	Cap for Radar Product Hunt (actor path).	No	`1`
`LAB_STT_CAP_USD`	Speech-to-text cap.	No	`13`
`LAB_STT_CONTROLS_CAP_USD`	Whisper for comparison posts.	No	`3`
`LAB_COMMENTS_CAP_USD`, `LAB_DOWNLOADS_CAP_USD`, `LAB_EMBED_CAP_USD`	Caps for comments, video downloads and OpenAI embeddings.	No	`0` (off)
`LAB_RUN_MAX_USD`	Ceiling for one Apify run.	No	`3`

Variable	Purpose	Required?	Default
`LAB_COMMENTS`	`1` turns the comments line on (cap must be above 0).	No	off
`LAB_TIKTOK_DOWNLOADS`	`1` turns TikTok video downloads on (cap must be above 0).	No	off
`LAB_TIKTOK_DOWNLOAD_PRICE_USD`	Override the video-download price.	No	price book
`LAB_EMBED_PROVIDER`	`local` (free) or `openai`.	No	`local`
`LAB_FRAMES`	`1` turns frame contact sheets on. Needs `ffmpeg` and `ffprobe`.	No	off
`LAB_JUDGE`	`0` disables the pairwise hook judge.	No	on
`LAB_JUDGE_MODEL`	Model for the judge.	No	the Claude CLI default
`LAB_GROUNDING_CONTROL`	Share of new drafts in the control arm, 0 to 0.5.	No	`0`
`LAB_COMMENT_SALT`	Written once by the Lab. Never shown or pasted.	No	none
`LAB_X_POLL_MIN`	X watch list interval in minutes, minimum 60. Settings, Schedule overrides it.	No	`120`
`LAB_BRIEF_TELEGRAM`	`1` sends the morning	No	off

Variable	Purpose	Required?	Default
	brief through the Wizard.		
`LAB_DRY`	`1` makes every Apify, speech and AI call return sample data, with no network.	No	off
`LAB_FIXTURE_SCENARIO`	Filming only: `full`, `thin`, `fresh`, `quiet`, `blocked`, `running` or `degraded`.	No	`full`
`LAB_SYNC_WAIT_MIN`	Minutes the sync command waits on Apify runs.	No	`20`
`LAB_DISSECT_MODEL`	Model for dissection.	No	the Claude CLI default

Agent health checks

Each falls back to a sensible default.

Variable	Purpose	Required?	Default
`BDPILOT_STATE`	Brand-deal daemon state file.	No	`~/.config/bdpilot/state.json`
`BDPILOT_BOT_URL`	Brand-deal approval bot link (`https://t.me/<bot>`). Brand Deals hides its Telegram link until set.	No	none
`BRAND_DEALS_SKILL`	Drafting playbook skill file.	No	`~/.claude/skills/brand-deals/SKILL.md`
`GSEND_BIN`	Verified sender binary.	No	`~/bin/gsend`
`GSEND_QUEUE_PLIST`	Its queue daemon definition, if it has one.	No	none
`GLADOS_AUTOMATION_DIR`	Scheduled-job folder.	No	`~/Sync/brain/Automation` or `~/Desktop/brain/Automation`
`GLADOS_AGENT_JOB_PREFIX`	Launchd label prefix used to count agent jobs.	No	`glados.agent.`

Troubleshooting

Find your symptom below.

I forgot my password

FounderOS stores only a hash of your password, so it cannot be looked up. To reset it you edit `.env.local` on the computer running FounderOS.

1. Stop FounderOS (press `Ctrl+C` in the terminal).
2. Open `.env.local` in the FounderOS folder.
3. Delete the line that starts with `GLADOS_PASSWORD_HASH=`.
4. Start FounderOS again with `pnpm dev` or `pnpm preview`.
5. Open http://localhost:4100/setup on that same computer.
6. Under **Security**, click **Set password** and choose a new one (at least 8 characters).

Until a new password exists, FounderOS answers only on this computer.

A 503 page from another device

The page says "GladOS is not reachable from here yet" (or an API call returns 503 with a similar message).

Cause: no password is set, so FounderOS only answers on the computer it runs on. Any other address is refused on purpose.

1. On the computer running FounderOS, open http://localhost:4100/setup.
2. Under **Security**, set a password.
3. Set `GLADOS_HOST` in `.env.local` to the address to listen on (your Tailscale address, a LAN address, or `0.0.0.0`).
4. Restart FounderOS. A changed address needs a restart.
5. Open FounderOS from the other device and sign in.

Without `GLADOS_HOST`, FounderOS keeps listening on `127.0.0.1`, even with a password. If you set `GLADOS_HOST` before a password exists, it is refused.

If you reach it through a name that points at this computer in your hosts file, see `GLADOS_TRUSTED_HOSTS` in the configuration reference. That setting is ignored once a password is set.

I am sent to the login page, or I see "unauthorized"

A password is set and your session is missing or expired (sessions last 30 days). Sign in at `/login`. An API call that returns 401 "unauthorized" means the same thing. If you see "cross-origin request refused" (403), the request came from a different site or address than the page it was sent from. Open FounderOS directly at the address you use to reach it.

If a lot of sign-in attempts fail, you get "too many attempts, wait a minute". Wait a minute and try again.

Page switches are slow

In `pnpm dev`, each page compiles the first time you visit it, so the first visit to a page is slow. This is normal for dev mode.

To see real speed:

1. Stop the dev server.
2. Run `pnpm preview` and wait for the build.
3. Open http://localhost:4100.

Preview compiles every page ahead of time. After code changes, run `pnpm preview` again. More in Installation.

Optimal Engine (gbrain) errors or a stuck status

Optimal Engine runs the `gbrain` command-line tool. The engine accepts one writer at a time. If a second `gbrain` process is writing to the same store, writes can fail or time out.

1. Check for another running `gbrain` process, for example an import or embed started in a terminal or by another tool.
2. Wait for it to finish, or stop it.
3. Reload the page. The Optimal Engine status refreshes.

Long operations (capture, import, embed) are given more time than reads, but they can still time out if the machine is busy.

Also check:

- `gbrain` is on your PATH, or `GBRAIN_BIN` points to it.
- `GBRAIN_STORE` points to a folder that exists. The default is `knowledge/brain-store`.
- To turn the engine off on purpose, set `BRAIN_PROVIDER=stub`.

A tool shows "Not configured"

This is not a fault. It means FounderOS has no key for that tool and will not pretend otherwise.

1. Click the **Set up** link on the badge, or open **Connections**.
2. Find the tool in Integrations and check which variables it needs. Some tools need two (Beehiiv needs a key and a publication ID; GoHighLevel needs a key and a location ID).
3. Save the key in the **API keys** panel, then reload the page.

If the badge changes to **Error**, a key exists but the check failed. The card shows the reason, such as a wrong or expired key.

Checks are cached for about a minute. A new key clears the cache, so it should show on the next load. If you edited `.env.local` by hand, restart FounderOS.

I still see "Not configured" while the demo is on

In demo (Filming) mode the connector board shows scripted stand-ins, not real connections. Switch to real data in **Settings**, **Recording**, then add your keys. See the Quick start.

The Filming switch is greyed out ("Pinned by host")

`GLADOS_DATA_DIR` or `DEMO_MODE` is set in the environment, so the mode is fixed. Remove that variable and restart. See the configuration reference.

Usage says it is not available

Usage is off in demo mode and reads nothing then. Switch to real data. If it shows **Not configured**, there is no Claude or Codex transcript folder on this computer and nothing has been pushed. See Usage.

Agent chat says it is not configured

Agent and Wizard chat need `AI_GATEWAY_API_KEY`. Add it in **Connections**, **API keys**, under the Vercel AI Gateway key.

A page I expect is missing from the sidebar

You may have switched it off. Open **Settings**, **Modules**, and turn it back on.

Port already in use

Another program is using port 4100. Stop it, or set `PORT` to a free port in `.env.local` and restart.