
NAME: Hania Naeem

Rollno: 261-3088

Section: SE-1C

Scanned with CamScanner

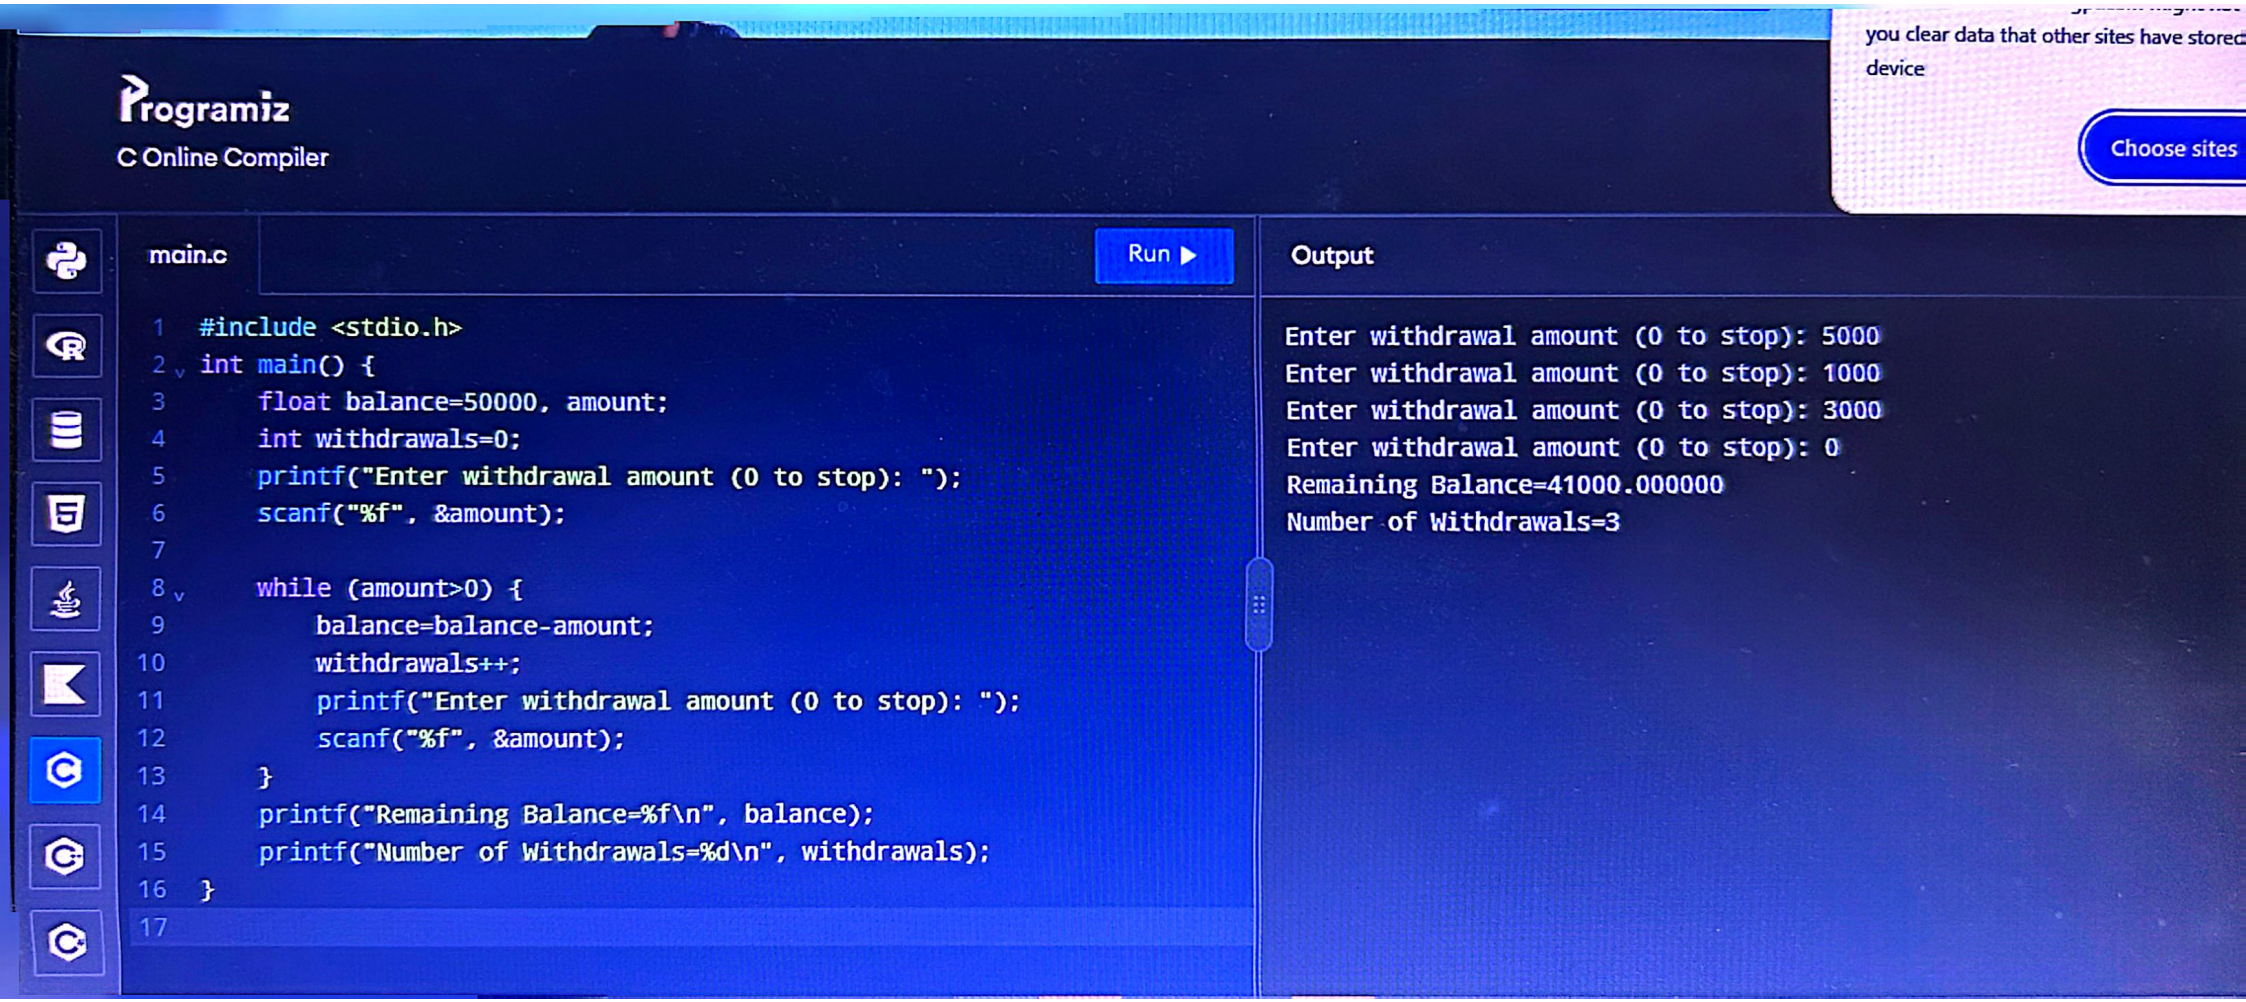

Scanned with CamScanner

.c


Run ▶

```c
float marks, total=0, average;
int students=0;
printf("Enter marks (0-100) or -1 to stop: ");
scanf("%f", &marks);
while (marks!=-1) {
    if (marks>=0 && marks<=100) {
        total=total+marks;
        students++;
    }
    printf("Enter marks (0-100) or -1 to stop: ");
    scanf("%f", &marks);
}
if (students>0)
    average=total/students;
else
    average=0;
printf("Total Marks=%f\n", total);
printf("Number of Students=%d\n", students);
printf("Average Marks = %f\n", average);
```


Output

```
Enter marks (0-100) or -1 to stop: 50
Enter marks (0-100) or -1 to stop: 60
Enter marks (0-100) or -1 to stop: 80
Enter marks (0-100) or -1 to stop: -1
Total Marks=190.000000
Number of Students=3
Average Marks = 63.333332
```

Scanned with CamScanner

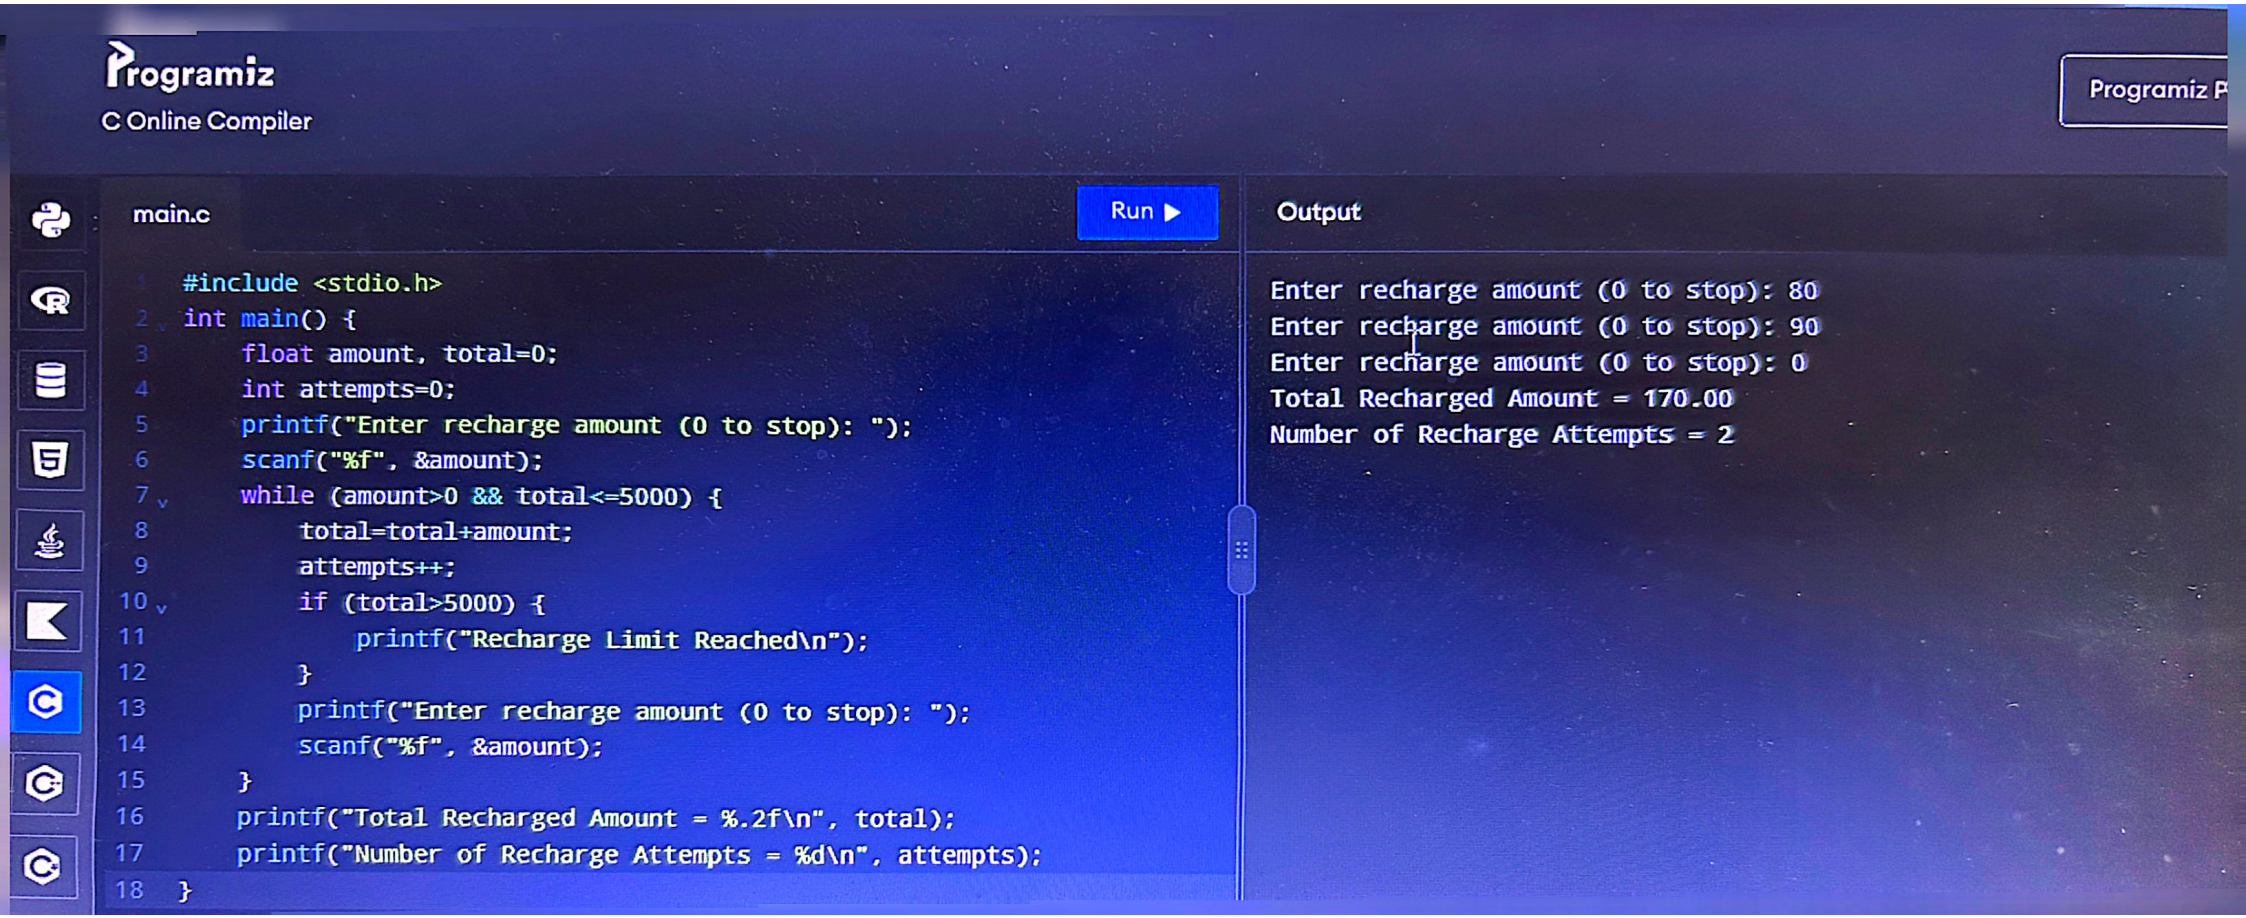

Scanned with CamScanner

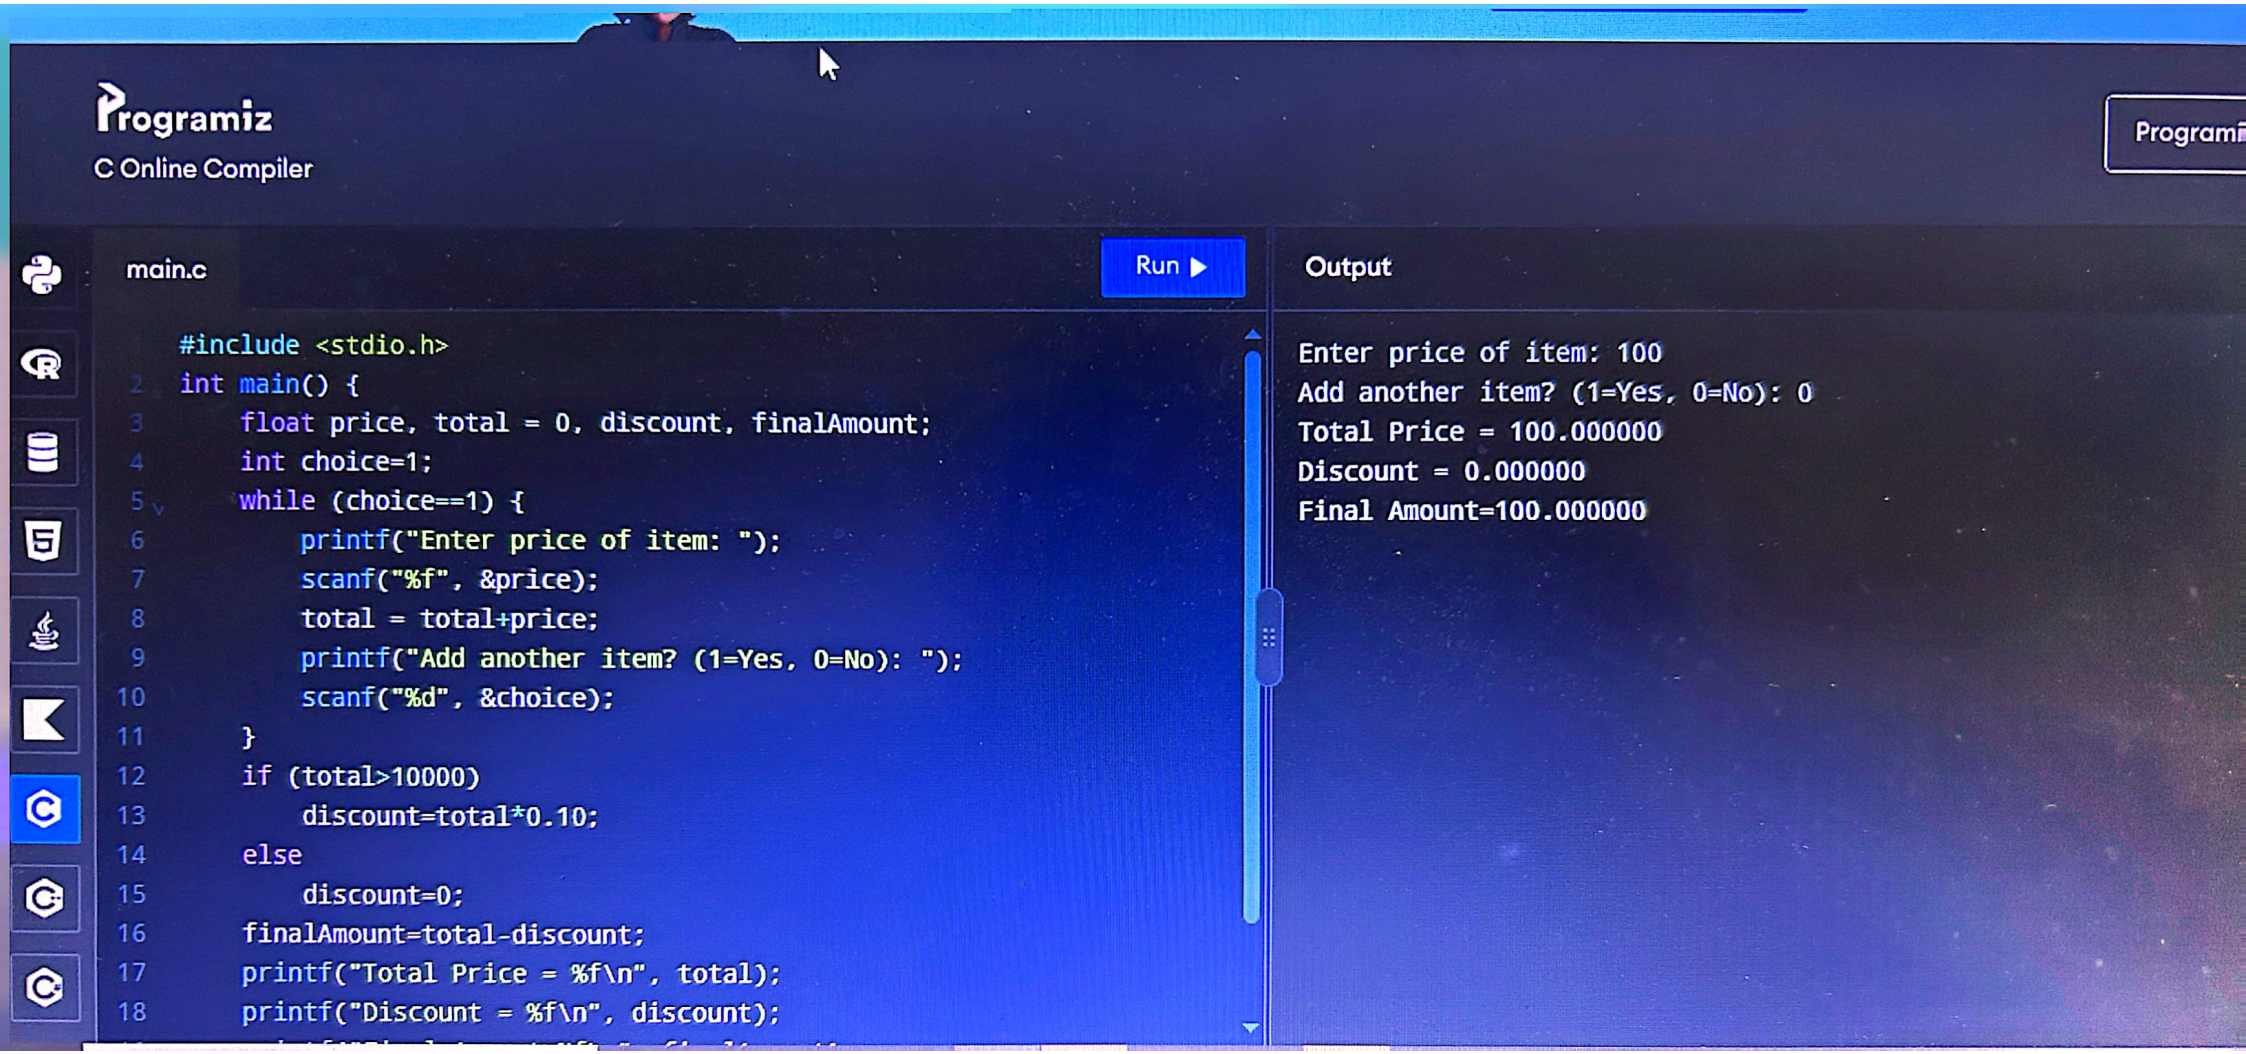

Scanned with CamScanner

Programiz

C Online Compiler

main.c

Run ▶

```c
#include <stdio.h>
int main() {
    float price, total=0, discount, finalBill;
    int choice=1;
    while (choice==1) {
        printf("Enter price of item: ");
        scanf("%f", &price);
        total=total+price;
        printf("Order another item? (1=Yes, 0=No): ");
        scanf("%d", &choice);
    }
    if (total>5000)
        discount=total*0.05;
    else
        discount=0;
    finalBill=total-discount;
    printf("Total Bill = %f\n", total);
    printf("Discount = %f\n", discount);
    printf("Final Bill =%f\n", finalBill);
```

Output

```
Enter price of item: 2000
Order another item? (1=Yes, 0=No): 1
Enter price of item: 6000
Order another item? (1=Yes, 0=No): 0
Total Bill = 8000.000000
Discount = 400.000000
Final Bill =7600.000000
```

Scanned with CamScanner

Programiz

C Online Compiler

main.c

Run

```c
#include <stdio.h>
int main() {
    int pin;
    int attempts=0;
    while (attempts<3) {
        printf("Enter PIN: ");
        scanf("%d", &pin);
        if (pin==1234) {
            printf("Login Successful\n");
            return 0;
        }
        attempts++;
        printf("Incorrect PIN\n");
        printf("Remaining Attempts=%d\n", 3-attempts);
    }
    printf("Account Locked\n");
}
```

Output


```
Enter PIN: 9090
Incorrect PIN
Remaining Attempts=2
Enter PIN: 1234
Login Successful
```

Scanned with CamScanner

main.c

```c
#include <stdio.h>
int main() {
    int marks[5];
    int i=0;
    int total=0;
    int highest, lowest;
    float average;
    while (i<5) {
        printf("Enter marks of student %d: ", i + 1);
        scanf("%d", &marks[i]);
        i++;
    }highest=marks[0];
    lowest=marks[0];
    i=0;
    while (i<5) {
        total=total+marks[i];
        if (marks[i]>highest)
            highest=marks[i];
```

Scanned with CamScanner

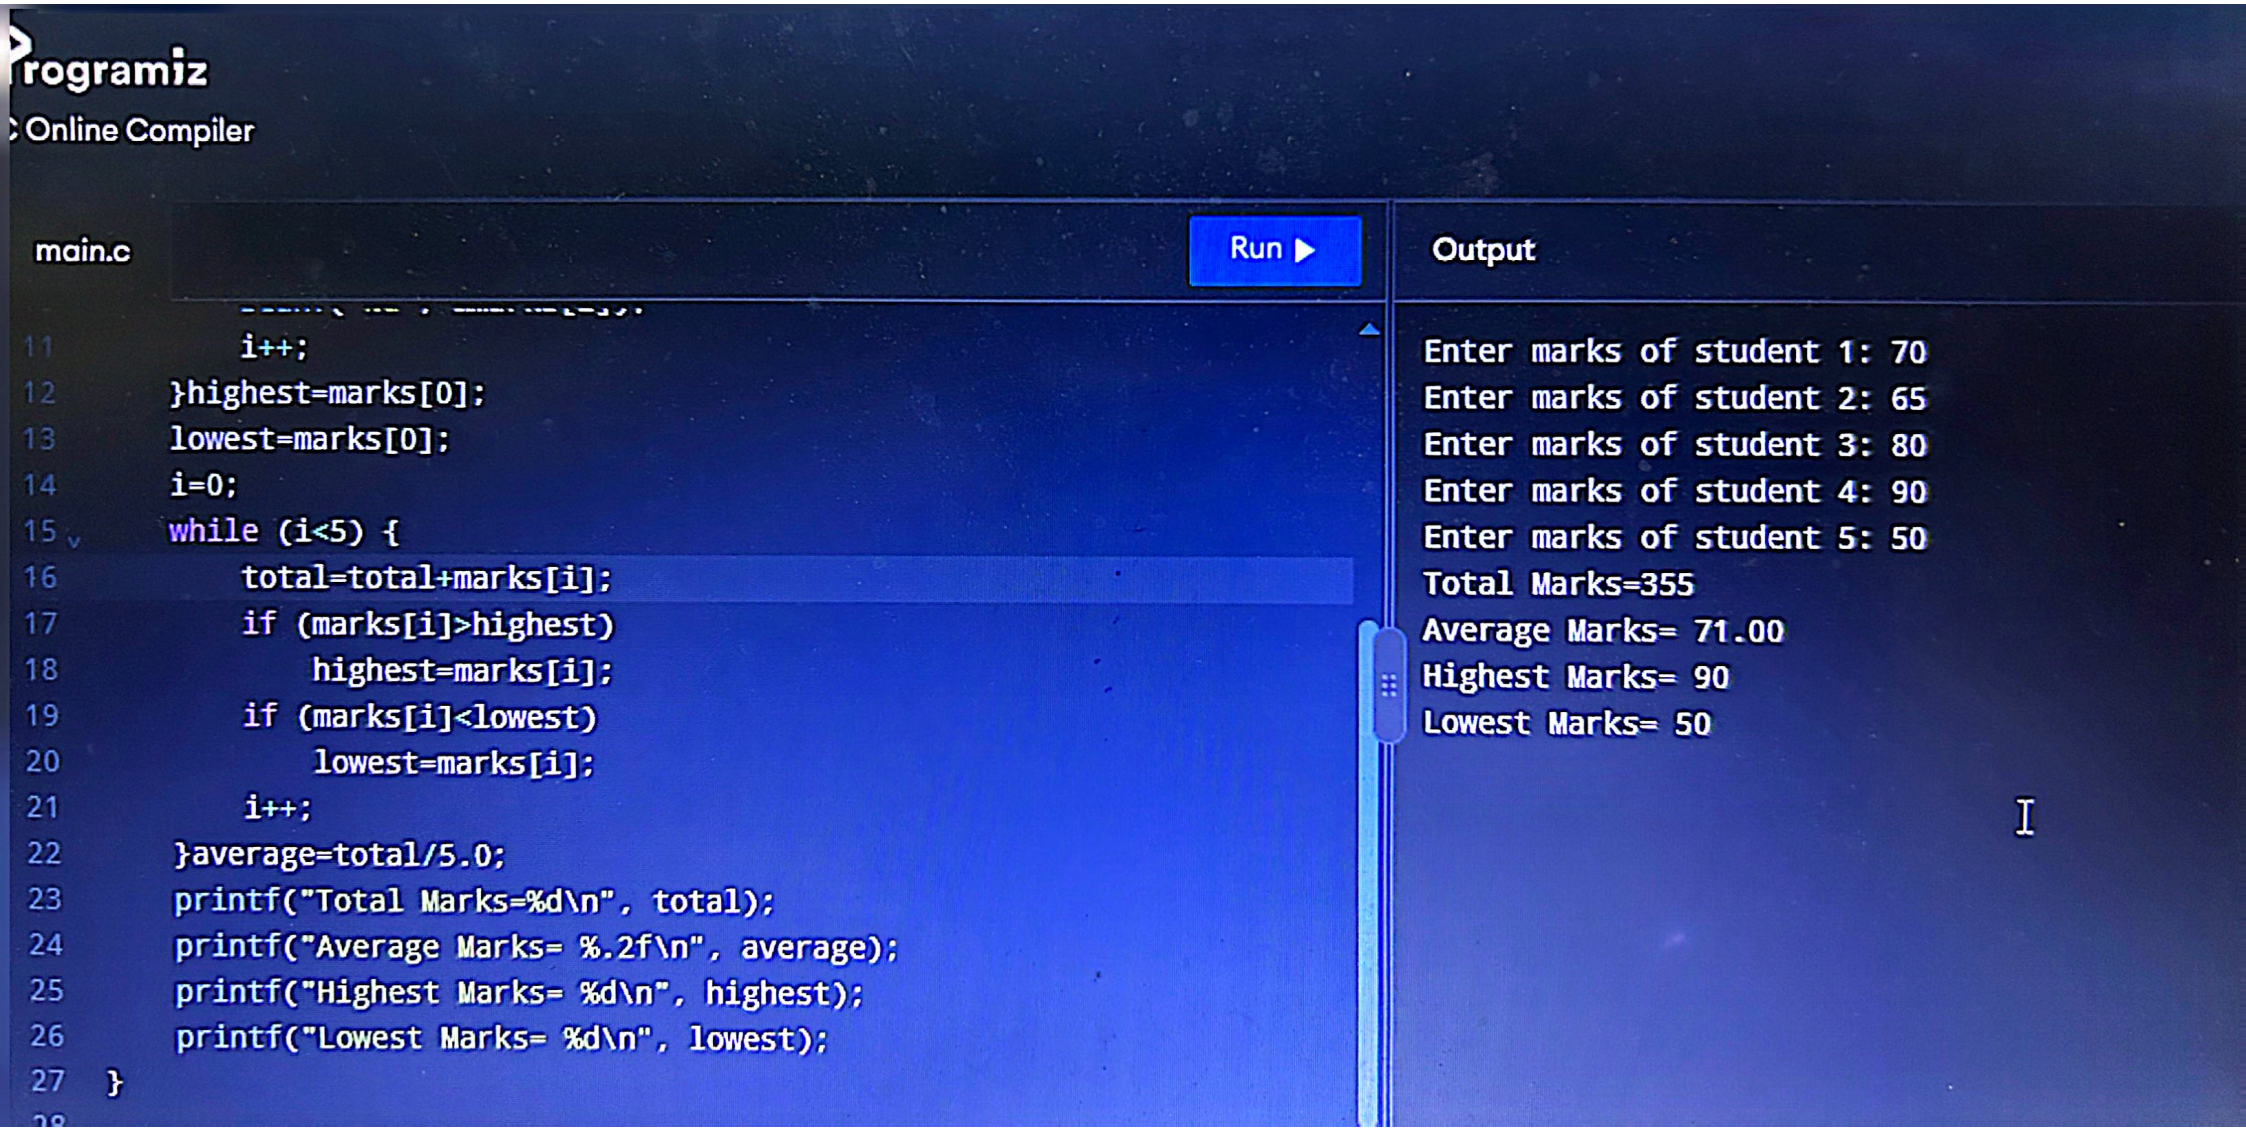

Scanned with CamScanner

ogramiz

nline Compiler

main.c

Run ▶

```c
float prices[5];
float total=0, discount, finalAmount;
int i=0;
while (i<5) {
    printf("Enter price of product %d: ", i + 1);
    scanf("%f", &prices[i]);
    i++;
}i=0;
while (i<5) {
    total=total+prices[i];
    i++;
}if (total>10000)
    discount=total*0.10;
else
    discount=0;
finalAmount=total-discount;
printf("Original Total= %f\n", total);
printf("Discount=%f\n", discount);
```

Output

```
Enter price of product 1: 5000
Enter price of product 2: 1000
Enter price of product 3: 500
Enter price of product 4: 5000
Enter price of product 5: 500
Original Total= 12000.000000
Discount=1200.000000
Final Amount= 10800.00
```

Scanned with CamScanner

gramiz


line Compiler

ain.c


```c
#include <stdio.h>
int main() {
    int units[5];
    int i=0;
    int totalUnits=0;
    int highest, lowest;
    float bill, totalAmount=0;
    while (i<5) {
        printf("Enter units for household %d: ", i + 1);
        scanf("%d", &units[i]);
        i++;
    }
    highest=units[0];
    lowest=units[0];
    i=0;
    while (i<5) {
        totalUnits=totalUnits+units[i];
        if (units[i]>highest)
```

Type here to search

Scanned with CamScanner

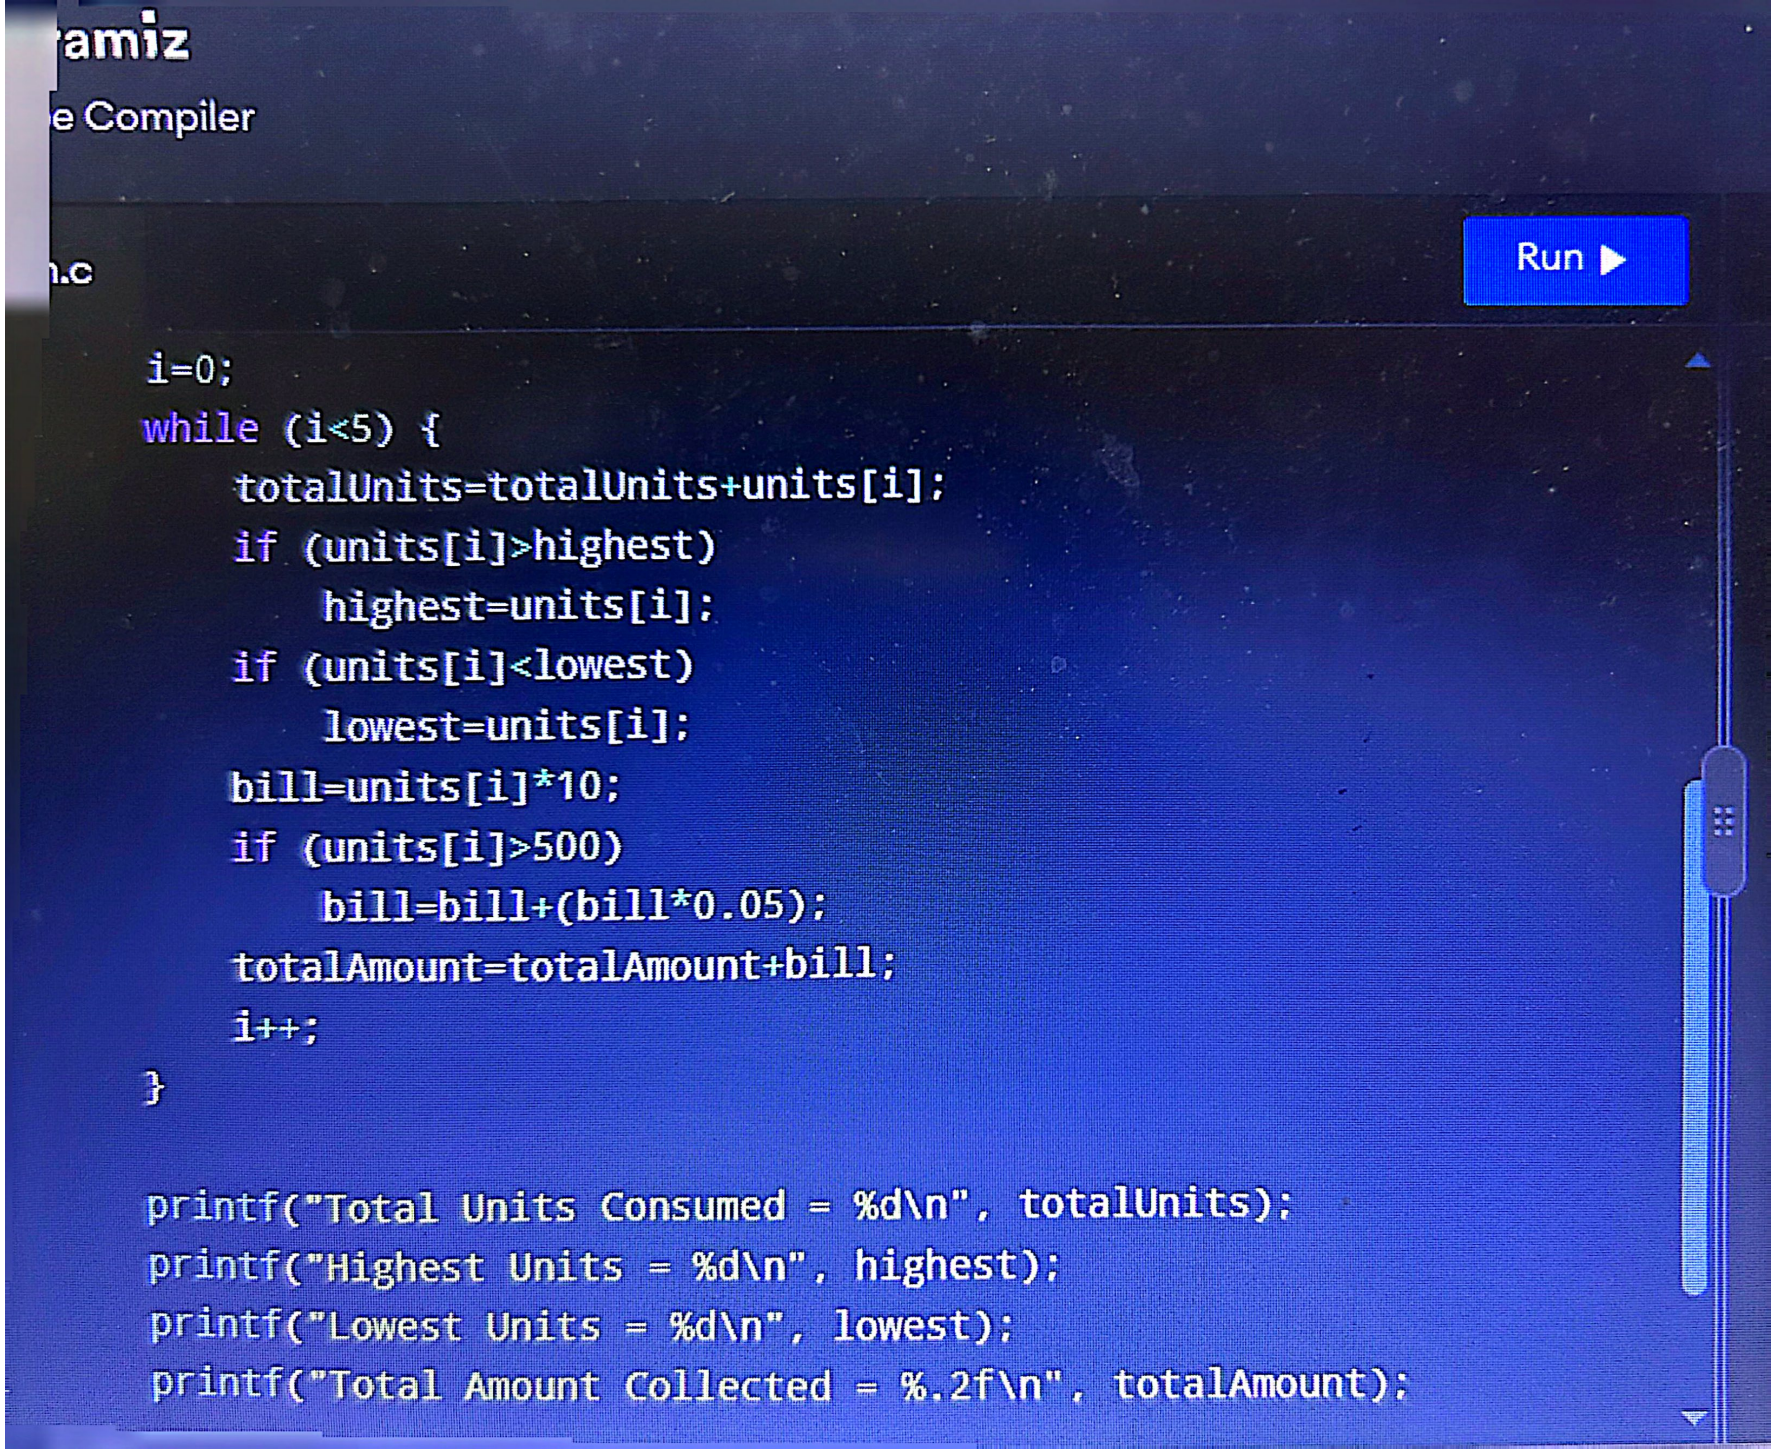

Scanned with CamScanner

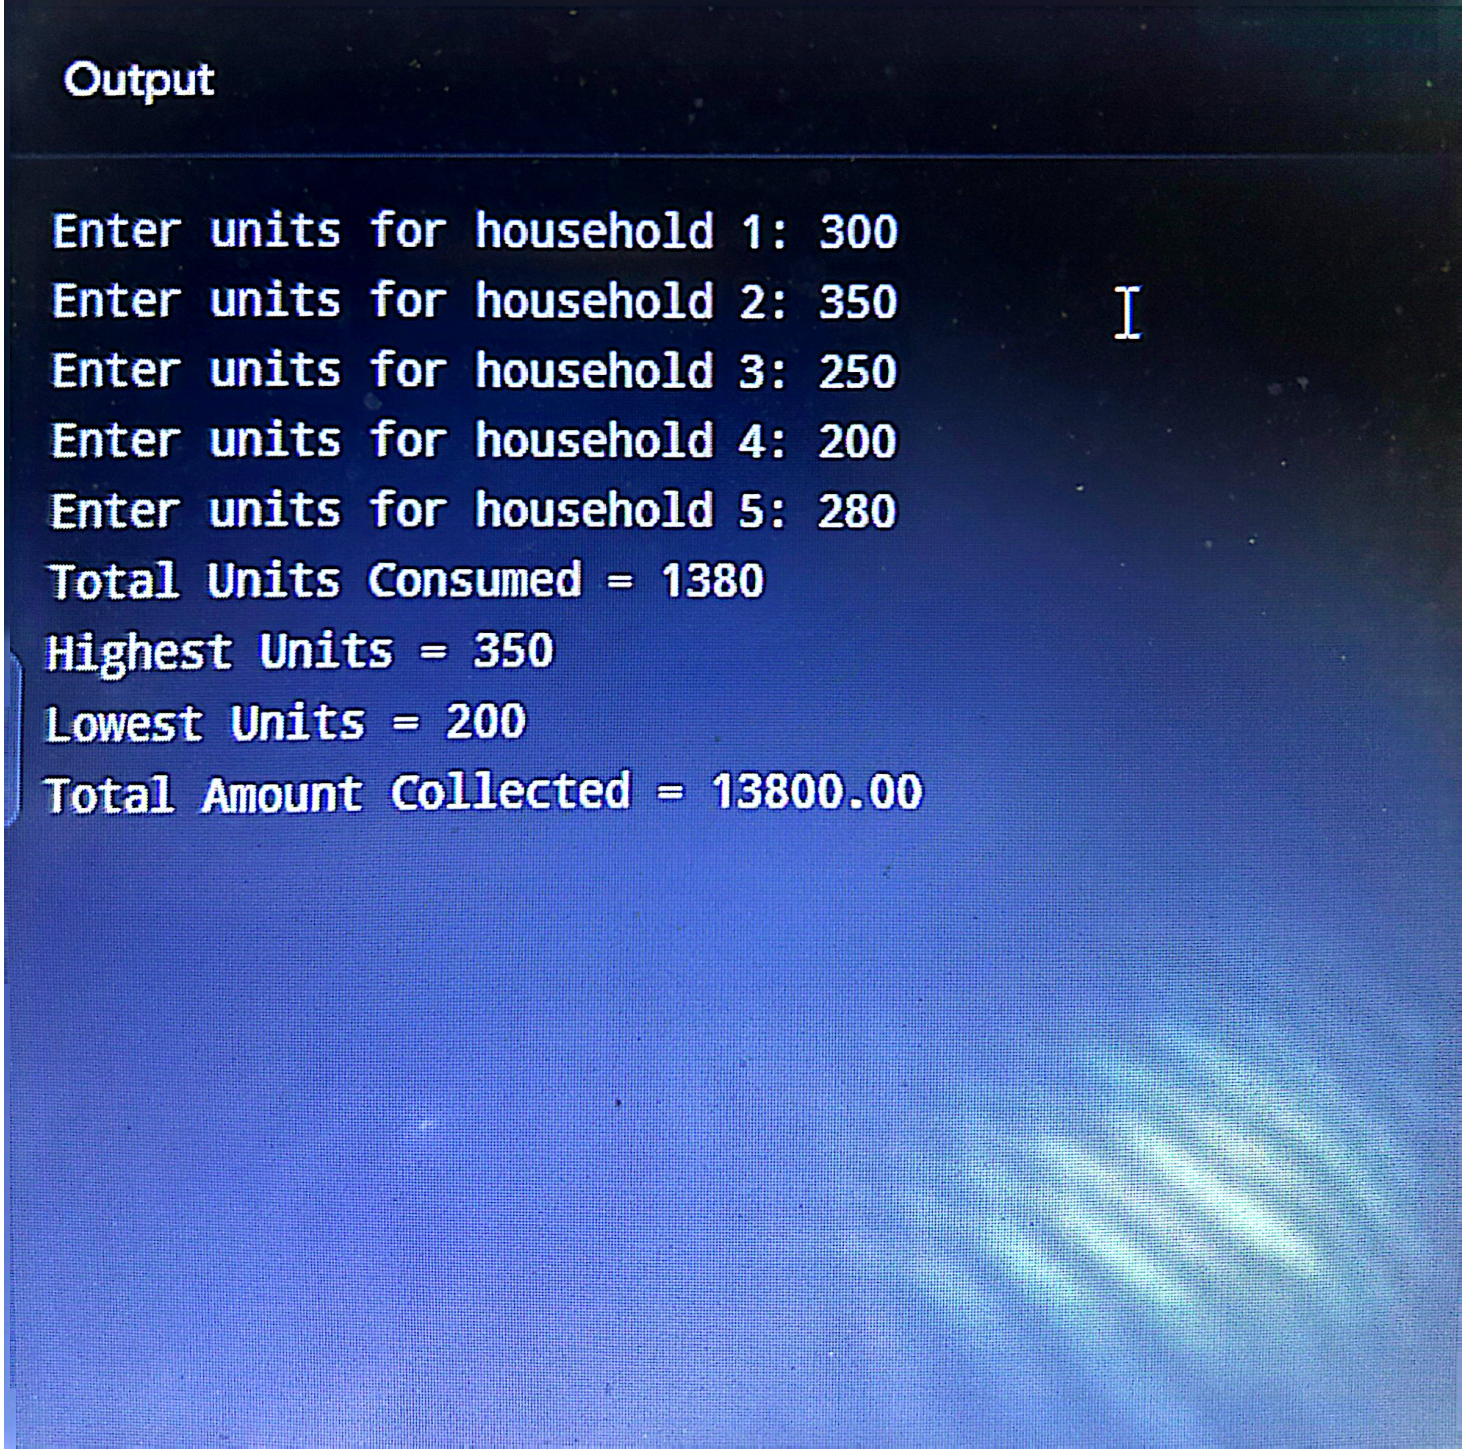

Scanned with CamScanner