

AWS Exam

חניל זרבאילוב Hanil Zarbailov

319331419

Section 1: Multiple Choice Questions

1) Aws Core Services

1. C
2. A
3. C

2) IAM & Security

4. A
5. B

3) Networking and Connectivity

6. B
7. A

4) Storage & Databases

8. B
9. C

5) AWS Billing & Pricing

10. C
11. A

6) Research-based AWS Questions

12. An AWS landing zone is a **well-architected, multi-account AWS environment** that is a starting point from which you can deploy workloads and applications. **It provides a baseline to get started with multi-account architecture**, identity and access management, **governance**, data security, network design, and logging.
13. AWS WAF is equipped with pre-configured rules that **automatically detect and block SQL injection attempts and Cross-Site Scripting (XSS) attacks**. These are **two of the most common and dangerous web application vulnerabilities**.
14. AWS Snowball is a **service that provides secure, rugged devices**, so you can **bring AWS computing and storage capabilities to your edge environments**, and **transfer data into and out of AWS**. AWS

Snowball is appropriate **for cases in which it would take over one week to retrieve data** using your existing connection or **in harsh working conditions and environments where network connection is limited**, such as at the ocean or at a mining facility.

15. An **AWS snapshot** is just a **point-in-time copy of an Amazon EBS volume** for an EC2 instance with **limited storage and recovery options**. An **AWS EC2 backup** is a **more comprehensive and flexible copy of your cloud workloads**, offering **reliable protection** and ensuring **fast and consistent recovery**.
16. AWS Shield is a **managed distributed denial of service (DDoS) protection service** that safeguards applications running on AWS. It provides **dynamic detection and automatic inline mitigations** that **minimize application downtime and latency**.
17. VPC Peering and Transit Gateway are used to connect multiple VPCs. VPC Peering provides **Full-mesh architecture** while Transit Gateway provides **hub-and-spoke architecture**. Transit Gateway gives VPC connectivity at scale and simplifies VPC-to-VPC communication management over VPC Peering with a large number of VPCs
18. AWS Step Functions is a **visual workflow service** that helps developers use AWS services to build distributed applications, automate processes, orchestrate microservices, and create data and machine learning (ML) pipelines. You can set it up so **it triggers based on different events that are coming in your system**.
19. With the AWS control tower, you can **set up a landing zone, a multi-account environment for simpler migration**. AWS Control Tower uses other services such as Organizations, Service Catalog, and Config to **govern the multi-account environment**.
20. AWS Outposts servers provide **fully managed AWS infrastructure, native AWS services, APIs, and tools to virtually any on-premises or edge location**. It enables you to run applications that have low latency and local data processing needs on premises, while removing the undifferentiated heavy lifting required to procure, manage, and upgrade on-premises infrastructure.
21. Multiple EFS instances can share files across multiple regions while AWS EBS is only accessible in a single region and Amazon S3 is a cloud storage service that can be accessed from anywhere.

Section 2: Hands-on UI-Based Questions

1. S3 Bucket Configuration

General configuration

AWS Region
US East (N. Virginia) us-east-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency access patterns. Directory buckets are stored in a single Availability Zone, which provides faster access.

Bucket name [Info](#)

hanil-bucket

Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Bucket Versioning

Versioning is a means of keeping multiple variants of a single object within a bucket. With versioning, you can easily recover from accidental deletions or overwrites.

Bucket Versioning

☐ Disable

☒ Enable

✔ **Successfully created bucket "hanil-bucket"**
To upload files and folders, or to configure additional bucket settings, choose **View details**.

At the Permissions tab, go to bucket policy and click edit:

Bucket policy

[Edit](#) [Delete](#)

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

❗ **Public access is blocked because Block Public Access settings are turned on for this bucket**

To determine which settings are turned on, check your Block Public Access settings for this bucket. Learn more about [using Amazon S3 Block Public Access](#)

Permissions for jb-user to upload:

Policy

1 {
2 "Version": "2012-10-17",
3 "Statement": [
4 {
5 "Effect": "Allow",
6 "Action": "s3:PutObject",
7 "Resource": "arn:aws:s3:::han1l-bucket/*",
8 "Principal": {
9 "AWS": "arn:aws:iam::504949722475:user/jb-user"
10 }
11 }
12]
13 }

Edit statementRemove

Add actions

Choose a service

Q IAMX

Available

IAM

IAM Identity Center (successor to AWS SSO)

IAM Identity Center (successor to AWS SSO) direc

IAM Roles Anywhere

A green banner with a white checkmark icon and the text "Successfully edited bucket policy."

2. Launch an EC2 Instance

Launch instance

To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.

Launch instance▼

Migrate a server↗

▼ Instance typeInfo | Get advice

Instance type

t2.micro

Free tier eligible

Family: t2 1 vCPU 1 GiB Memory Current generation: true

On-Demand Windows base pricing: 0.0162 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0134 USD per Hour

On-Demand SUSE base pricing: 0.0116 USD per Hour

On-Demand RHEL base pricing: 0.026 USD per Hour

On-Demand Linux base pricing: 0.0116 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0) Remove

Type	Info	Protocol	Info	Port range	Info
ssh		TCP		22	
Source type	Info	Source	Info	Description - optional Info	
Anywhere		Add CIDR, prefix list or security g. 0.0.0.0/0 ✕		e.g. SSH for admin desktop	

▼ Security group rule 2 (TCP, 80, 0.0.0.0/0) Remove

Type	Info	Protocol	Info	Port range	Info
HTTP		TCP		80	
Source type	Info	Source	Info	Description - optional Info	
Anywhere		Add CIDR, prefix list or security g. 0.0.0.0/0 ✕		e.g. SSH for admin desktop	

✓ **Success**
Successfully initiated launch of instance ([i-0c50d20df60232505](#))

☐	Name ✎	Instance ID	Instance state
☐	hanil-test	i-0c50d20df60232505	Running 🔍 🔍

3. Configure an IAM User with S3 Access

Create new policy:

Policy editor Visual JSON Actions 📄

```

1  {
2    "Version": "2012-10-17",
3    "Statement": [
4      {
5        "Effect": "Allow",
6        "Action": [
7          "s3:GetBucketLocation",
8          "s3:ListAllMyBuckets"
9        ],
10       "Resource": "arn:aws:s3:*"
11     },
12     {
13       "Effect": "Allow",
14       "Action": "s3:*",
15       "Resource": [
16         "arn:aws:s3:::hanil-bucket",
17         "arn:aws:s3:::hanil-bucket/*"
18       ]
19     }
20   ]
21 }

```

Edit statement

Select a statement

Select an existing statement in the policy or add a new statement.

+ Add new statement

Create user:

Specify user details

User details

User name

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and + , . @ _ - (hyphen)

☒ **Provide user access to the AWS Management Console - optional**
If you're providing console access to a person, it's a [best practice](#) to manage their access in IAM Identity Center.

Do you want to provide console access to a person?

We recommend that you use Identity Center to provide console access to a person. With Identity Center, you can centrally manage user access to their AWS accounts and cloud applications. To do so, sign into the console by using the credentials of the management account in AWS Organizations, and then enable Identity Center. If you aren't the management account owner, contact the owner to perform this task.

Console password

☐ Autogenerated password
You can view the password after you create the user.

☒ Custom password

Attached policy to it:

Permissions policies (1/1444)

Choose one or more policies to attach to your new user.

Filter by Type: All types 2 matches

	Policy name	Type	Attached entities
☐	hanil-bucket-upload	Customer managed	0
☒	hanil-s3-bucket	Customer managed	0

User created successfully

You can view and download the user's password and email instructions for signing in to the AWS Management Console.

[View user](#)

Step 1: Specify user details

Step 2: Set permissions

Step 3: Review and create

Step 4: **Retrieve password**

Retrieve password

You can view and download the user's password below or email users instructions for signing in to the AWS Management Console. This is the only time you can view and download this password.

Console sign-in details

Console sign-in URL

<https://jb-labs.signin.aws.amazon.com/console>

User name

[hanil-user](#)

Console password

[Show](#)

[Email sign-in instructions](#)

[Cancel](#)

[Download .csv file](#)

[Return to users list](#)

To test this, I need to log in as the new user and see if I can access only the hanil-bucket S3 bucket and no other.

Inside the hanil-bucket as hanil-user:

hanil-bucket

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

Access Points

Objects (1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 >

Name

Type

Last modified

Size

Storage class

[image_2025-02-08_160851706.png](#)

png

February 8, 2025, 16:08:59 (UTC+02:00)

5.4 KB

Standard

Trying to access another bucket amitbe-bucket:

amitbe-bucket

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

Access Points

Objects

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 >

Name

Type

Last modified

Size

Storage class

Insufficient permissions to list objects

After you or your AWS administrator has updated your permissions to allow the s3:ListBucket action, refresh the page. [Learn more about Identity and access management in Amazon S3](#)

Diagnose with Amazon Q

4. Set Up a CloudWatch Alarm

Metric

Edit

Graph

This alarm will trigger when the blue line goes above the red line for 1 datapoints within 5 minutes.

Percent

70

36.6

3.2

13:00 14:00 15:00

CPUUtilization

Namespace

AWS/EC2

Metric name

CPUUtilization

InstanceId

i-0c50d20df60232505

Instance name

hanil-test

Statistic

Average

Period

5 minutes

Conditions

Threshold type

☒ Static
Use a value as a threshold

☐ Anomaly detection
Use a band as a threshold

Whenever CPUUtilization is...

Define the alarm condition.

☒ Greater
> threshold

☐ Greater/Equal
≥ threshold

☐ Lower/Equal
≤ threshold

☐ Lower
< threshold

than...

Define the threshold value.

Must be a number

► Additional configuration

Created SNS that will send a notification via email if the alarm gets triggered:

Configure actions

Notification

Remove

Alarm state trigger

Define the alarm state that will trigger this action.

☒ In alarm
The metric or expression is outside of the defined threshold.

☐ OK
The metric or expression is within the defined threshold.

☐ Insufficient data
The alarm has just started or not enough data is available.

Send a notification to the following SNS topic

Define the SNS (Simple Notification Service) topic that will receive the notification.

☐ Select an existing SNS topic

☒ Create new topic

☐ Use topic ARN to notify other accounts

Create a new topic...

The topic name must be unique.

SNS topic names can contain only alphanumeric characters, hyphens (-) and underscores (_).

Email endpoints that will receive the notification...

Add a comma-separated list of email addresses. Each address will be added as a subscription to the topic above.

user1@example.com, user2@example.com

Create topic

Add notification

Add name and description

Name and description

Alarm name

hanil-test-instance-cpu-greater-70

Alarm description - optional [View formatting guidelines](#)

Edit


Preview

This is an H1
double asterisks will produce strong character
This is [an example](https://example.com/) inline link.

Up to 1024 characters (0/1024)

✓ Successfully created alarm hanil-test-instance-cpu-greater-70.

5. Identify AWS Billing Costs

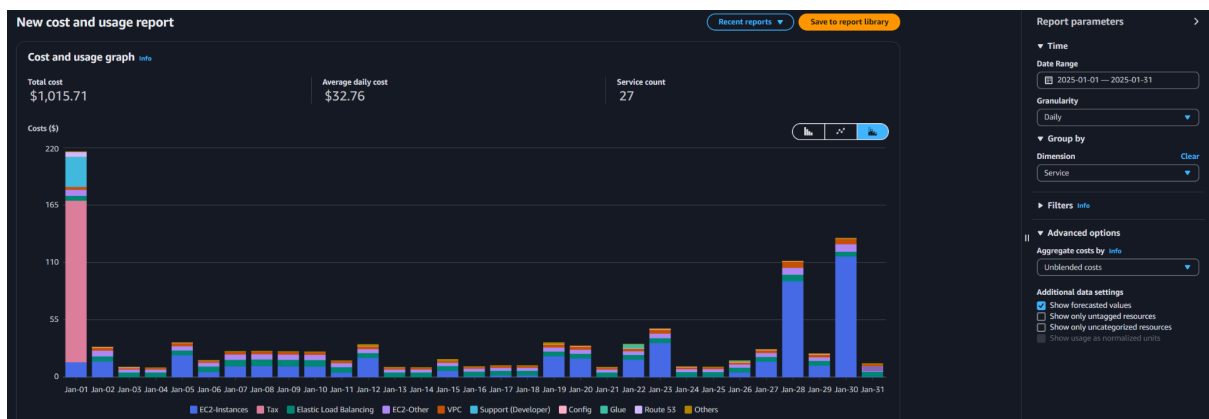

We can see what services we pay the most for and this way we can analyze where we can cut costs and which recent events have had effects on the costs of each service.

Section 3: Hands-on advanced

1. Deploy an Auto Scaling Group with a Single EC2 Instance

Create launch template

Creating a launch template allows you to create a saved instance configuration that can be reused, shared and launched at a later time. Templates can have multiple versions.

Launch template name and description

Launch template name - *required*

hanil-lt

Must be unique to this account. Max 128 chars. No spaces or special characters like '&', '*', '@'.

Template version description

A prod webserver for MyApp

Max 255 chars

Amazon Machine Image (AMI)

amzn2-ami-kernel-5.10-hvm-2.0.20250201.0-x86_64-gp2

ami-04681163a08179f28

2025-02-01T08:34:55.000Z Architecture: 64-bit (x86) Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Amazon Linux 2 Kernel 5.10 AMI 2.0.20250201.0 x86_64 HVM gp2

Architecture

x86_64

AMI ID

ami-04681163a08179f28

Verified provider

▼ Instance type [Info](#) | [Get advice](#)

Advanced

Instance type

t2.micro

Free tier eligible

Family: t2 1 vCPU 1 GiB Memory Current generation: true

On-Demand Windows base pricing: 0.0162 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0134 USD per Hour

On-Demand SUSE base pricing: 0.0116 USD per Hour

On-Demand RHEL base pricing: 0.026 USD per Hour

On-Demand Linux base pricing: 0.0116 USD per Hour

☒ All generations

[Compare instance types](#)

Additional costs apply for AMIs with pre-installed software

Security group that allows inbound SSH and HTTP:

Common security groups [Info](#)

Select security groups

hanil-sg-test sg-06b4de458c4308835 ✕

VPC: vpc-0c3424b7237e51c20

[Compare security group rules](#)

Security groups that you add or remove here will be added to or removed from all your network interfaces.

Created launch template:



Create new load balancer:

Load balancing

Info

Use the options below to attach your Auto Scaling group to an existing load balancer, or to a new load balancer that you define.

☐ No load balancer

Traffic to your Auto Scaling group will not be fronted by a load balancer.

☐ Attach to an existing load balancer

Choose from your existing load balancers.

☒ Attach to a new load balancer

Quickly create a basic load balancer to attach to your Auto Scaling group.

Attach to a new load balancer

Define a new load balancer to create for attachment to this Auto Scaling group.

Load balancer type

Choose from the load balancer types offered below. Type selection cannot be changed after the load balancer is created. If you need a different type of load balancer than those offered here, [visit the Load Balancing console](#).

☒ Application Load Balancer

HTTP, HTTPS

☐ Network Load Balancer

TCP, UDP, TLS

Load balancer name

Name cannot be changed after the load balancer is created.

hanil-lb

Load balancer scheme

Scheme cannot be changed after the load balancer is created.

☐ Internal

☒ Internet-facing

Network mapping

Your new load balancer will be created using the same VPC and Availability Zone selections as your Auto Scaling group. You can select different subnets and add subnets from additional Availability Zones.

VPC

vpc-0c3424b7237e51c20

jessica-vpc

Availability Zones and subnets

You must select a single subnet for each Availability Zone enabled. Only public subnets are available for selection to support DNS resolution.

☒ us-east-1d

subnet-0003823a1ff4476d3

☒ us-east-1a

subnet-0040f9cf696fbde73

☒ us-east-1e

subnet-0d4400a275dd1f24f

☒ us-east-1f

subnet-0e98a99fe5ec6af3f

☒ us-east-1c

subnet-033718a2c4c50e30c

☒ us-east-1b

subnet-039b17c5ab155b2fc

Listeners and routing

If you require secure listeners, or multiple listeners, you can configure them from the [Load Balancing console](#) after your load balancer is created.

Protocol

HTTP

Port

80

Default routing (forward to)

Create a target group

New target group name

An instance target group with default settings will be created.

hanil-tg

Tags - optional

Consider adding tags to your load balancer. Tags enable you to categorize your AWS resources so you can more easily manage them.

Add tag

50 remaining

Configure group size and scaling - optional [Info](#)

Define your group's desired capacity and scaling limits. You can optionally add automatic scaling to adjust the size of your group.

Group size [Info](#)

Set the initial size of the Auto Scaling group. After creating the group, you can change its size to meet demand, either manually or by using automatic scaling.

Desired capacity type

Choose the unit of measurement for the desired capacity value. vCPUs and Memory(GiB) are only supported for mixed instances groups configured with a set of instance attributes.

Units (number of instances)

Desired capacity

Specify your group size.

1

✔ hanil-asg, 1 Load balancer, 1 Target group, 1 Listener created successfully. 1 new target group has been attached to ASG.

2. Connect to the EC2 Instance and Install Nginx

```
>> chmod 400 hanil-pem-test.pem
>> ssh -i "hanil-pem-test.pem" ec2-user@ec2-107-22-140-229.compute-1.amazonaws.com
```

```

      #_
    ~\_ #####_      Amazon Linux 2023
  ~ ~ \_ #####\
  ~ ~ \_###|
  ~ ~ \#/ _____ https://aws.amazon.com/linux/amazon-linux-2023
  ~ ~  V~' '->
  ~ ~
  ~ ~ . _ . _ /
  ~ ~ _/ _/ _/
  ~ ~ _/m/ ' _/

[ec2-user@ip-172-31-24-159 ~]$
```

```
[ec2-user@ip-172-31-24-159 ~]$ sudo yum update -y
sudo yum install -y nginx
echo "<h1>Welcome to AWS Auto Scaling</h1>" | sudo tee /usr/share/nginx/html/index.html
sudo systemctl start nginx
sudo systemctl enable nginx
Amazon Linux 2023 Kernel Livepatch repository    94 kB/s | 14 kB    00:00
Dependencies resolved.
Nothing to do.
Complete!
Last metadata expiration check: 0:00:02 ago on Sat Feb  8 16:55:44 2025.
Dependencies resolved.
```

```
=====
Package                                Arch      Version                                Repository    Size
=====
Installing:
  nginx                                x86_64    1:1.26.2-1.amzn2023.0.1              amazonlinux   33 k
Installing dependencies:
  generic-logos-httpd                 noarch    18.0.0-12.amzn2023.0.3              amazonlinux   19 k
  gperftools-libs                     x86_64    2.9.1-1.amzn2023.0.3              amazonlinux  308 k
  libunwind                          x86_64    1.4.0-5.amzn2023.0.2              amazonlinux   66 k
  nginx-core                          x86_64    1:1.26.2-1.amzn2023.0.1              amazonlinux  670 k
  nginx-filesystem                    noarch    1:1.26.2-1.amzn2023.0.1              amazonlinux   9.9 k
  nginx-mimetypes                     noarch    2.1.49-3.amzn2023.0.3              amazonlinux   21 k
=====
```

```

Installing      : libunwind-1.4.0-5.amzn2023.0.2.x86_64          3/7
Installing      : gperftools-libs-2.9.1-1.amzn2023.0.3.x86_64    4/7
Installing      : nginx-core-1:1.26.2-1.amzn2023.0.1.x86_64      5/7
Installing      : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch 6/7
Installing      : nginx-1:1.26.2-1.amzn2023.0.1.x86_64          7/7
Running scriptlet: nginx-1:1.26.2-1.amzn2023.0.1.x86_64          7/7
Verifying       : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch 1/7
Verifying       : gperftools-libs-2.9.1-1.amzn2023.0.3.x86_64    2/7
Verifying       : libunwind-1.4.0-5.amzn2023.0.2.x86_64          3/7
Verifying       : nginx-1:1.26.2-1.amzn2023.0.1.x86_64          4/7
Verifying       : nginx-core-1:1.26.2-1.amzn2023.0.1.x86_64      5/7
Verifying       : nginx-filesystem-1:1.26.2-1.amzn2023.0.1.noarch 6/7
Verifying       : nginx-mimetypes-2.1.49-3.amzn2023.0.3.noarch    7/7

Installed:
  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch
  gperftools-libs-2.9.1-1.amzn2023.0.3.x86_64
  libunwind-1.4.0-5.amzn2023.0.2.x86_64
  nginx-1:1.26.2-1.amzn2023.0.1.x86_64
  nginx-core-1:1.26.2-1.amzn2023.0.1.x86_64
  nginx-filesystem-1:1.26.2-1.amzn2023.0.1.noarch
  nginx-mimetypes-2.1.49-3.amzn2023.0.3.noarch

Complete!
<h1>Welcome to AWS Auto Scaling</h1>
Created symlink /etc/systemd/system/multi-user.target.wants/nginx.service → /usr/lib/systemd/system/nginx.service.
[ec2-user@ip-172-31-24-159 ~]$
```

```
[ec2-user@ip-172-31-24-159 ~]$ curl http://localhost:80
<h1>Welcome to AWS Auto Scaling</h1>
```

3. Access the Web Page via the Load Balancer

DNS name Info


 hanil-lb-418601482.us-east-1.elb.amazonaws.com (A Record)

< > ↺ ⚠ Not secure hanil-lb-418601482.us-east-1.elb.amazonaws.com

Welcome to AWS Auto Scaling

4. IAM User Setup for S3 Access

Create new policy:

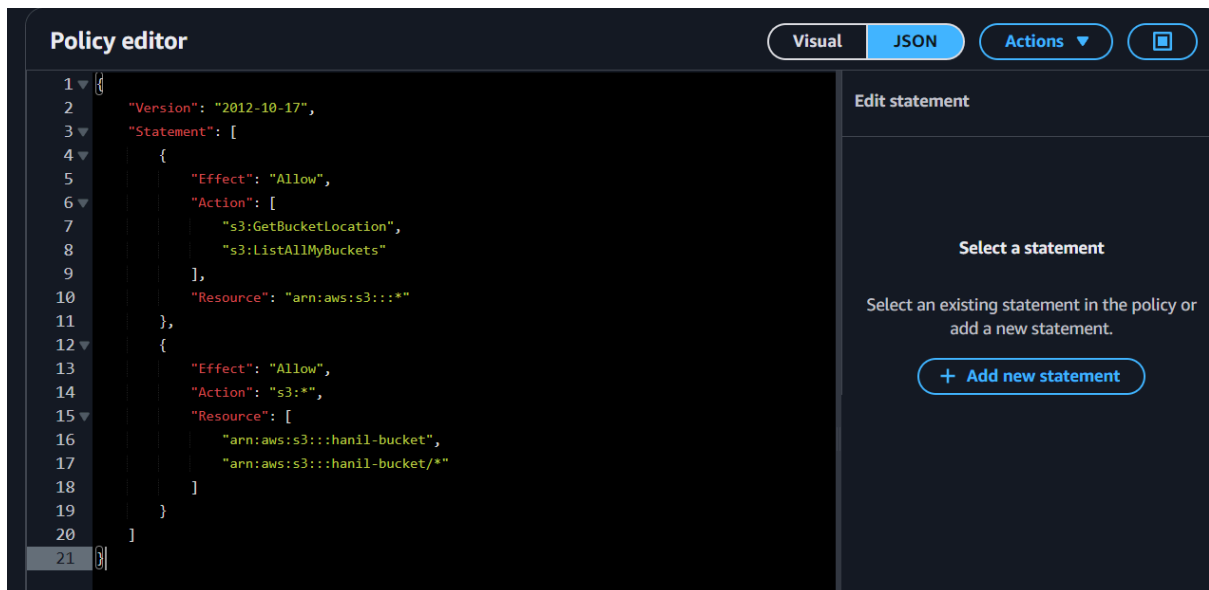

Create user:

Specify user details

User details

User name

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and + = , . @ _ - (hyphen)

☒ **Provide user access to the AWS Management Console - optional**
If you're providing console access to a person, it's a [best practice](#) to manage their access in IAM Identity Center.


Do you want to provide console access to a person?
We recommend that you use Identity Center to provide console access to a person. With Identity Center, you can centrally manage user access to their AWS accounts and cloud applications. To do so, sign into the console by using the credentials of the management account in AWS Organizations, and then enable Identity Center. If you aren't the management account owner, contact the owner to perform this task.

Console password

☐ **Autogenerated password**
You can view the password after you create the user.

☒ **Custom password**

Attached policy to it:

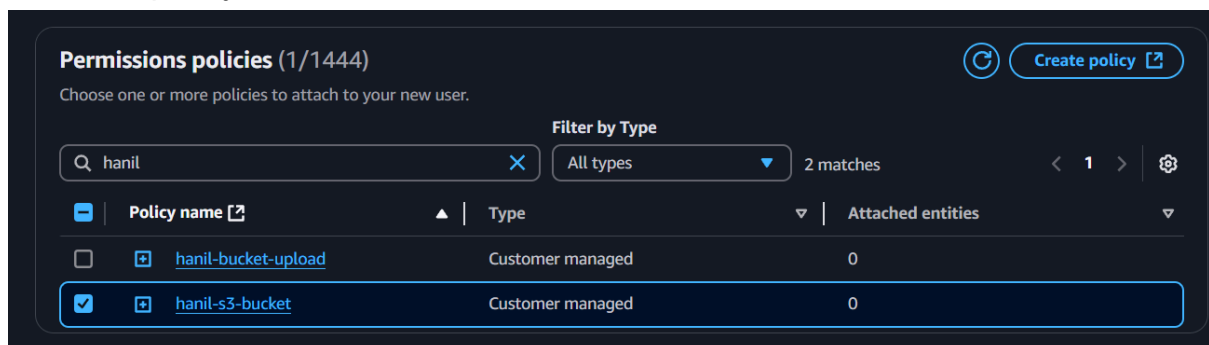

User created successfully

You can view and download the user's password and email instructions for signing in to the AWS Management Console.

View user

Step 1

Specify user details

Step 2

Set permissions

Step 3

Review and create

Step 4

Retrieve password

Retrieve password

You can view and download the user's password below or email users instructions for signing in to the AWS Management Console. This is the only time you can view and download this password.

Console sign-in details

Email sign-in instructions

Console sign-in URL

https://jb-labs.signin.aws.amazon.com/console

User name

hanil-user

Console password

***** Show

Cancel

Download .csv file

Return to users list

To test this, I need to log in as the new user and see if I can access only the hanil-bucket S3 bucket and no other.
Inside the hanil-bucket as hanil-user:

hanil-bucket Info

Objects

Metadata

Properties

Permissions

Metrics

Management

Access Points

Objects (1)

Refresh

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

Name

Type

Last modified

Size

Storage class

image_2025-02-08_160851706.png

png

February 8, 2025, 16:08:59 (UTC+02:00)

5.4 KB

Standard

Trying to access another bucket amitbe-bucket:

amitbe-bucketInfo

Objects

Metadata

Properties

Permissions

Metrics

Management

Access Points

↻

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 >

Name

Type

Last modified

Size

Storage class

Insufficient permissions to list objects

After you or your AWS administrator has updated your permissions to allow the s3:ListBucket action, refresh the page. Learn more about [Identity and access management in Amazon S3](#)

Diagnose with Amazon Q

5. Create a CloudWatch Alarm for CPU Usage

Metric

Edit

Graph

This alarm will trigger when the blue line goes above the red line for 1 datapoints within 5 minutes.

Percent

70

36.6

3.2

13:00

14:00

15:00

CPUUtilization

Namespace

AWS/EC2

Metric name

CPUUtilization

InstanceId

i-0c50d20df60232505

Instance name

hanil-test

Statistic

Average

Period

5 minutes

Conditions

Threshold type

☒ **Static**
Use a value as a threshold

☐ **Anomaly detection**
Use a band as a threshold

Whenever CPUUtilization is...
Define the alarm condition.

☒ **Greater**
> threshold

☐ **Greater/Equal**
≥ threshold

☐ **Lower/Equal**
≤ threshold

☐ **Lower**
< threshold

than...
Define the threshold value.

Must be a number

► **Additional configuration**

Created SNS that will send a notification via email if the alarm gets triggered:

Configure actions

Notification

Alarm state trigger
Define the alarm state that will trigger this action. Remove

☒ **In alarm**
The metric or expression is outside of the defined threshold.

☐ **OK**
The metric or expression is within the defined threshold.

☐ **Insufficient data**
The alarm has just started or not enough data is available.

Send a notification to the following SNS topic
Define the SNS (Simple Notification Service) topic that will receive the notification.

☐ Select an existing SNS topic

☒ **Create new topic**

☐ Use topic ARN to notify other accounts

Create a new topic...
The topic name must be unique.

SNS topic names can contain only alphanumeric characters, hyphens (-) and underscores (_).

Email endpoints that will receive the notification...
Add a comma-separated list of email addresses. Each address will be added as a subscription to the topic above.

user1@example.com, user2@example.com

Create topic

Add notification

Add name and description

Name and description

Alarm name

Alarm description - optional [View formatting guidelines](#)

Edit
Preview

This is an H1

****double asterisks will produce strong character****

This is [an example](https://example.com/) inline link.

Up to 1024 characters (0/1024)

✔ Successfully created alarm hanil-test-instance-cpu-greater-70.