



# Frizione - Clutch

Version: 0.2

Release Date: 18/06/2008

Copyright © [Syger](#) 2008. All rights reserved.

# Table of Contents

---

Frizione - Clutch .....	3
Requirements and Architecture .....	3
Running the Clutch Web Application .....	4
Changing the Port .....	4
Running as a Pseudo Domain .....	5
Services .....	5
Compressor Service .....	5
Compressor Service Example .....	6
Fixture Service .....	6
Fixture Service Example .....	6
Join Service .....	7
Join Service Example .....	7
JSLint Service .....	8
JSLint Service Example .....	8
Test Service .....	8
Test Service Example .....	9
Unit Testing .....	10
The Unit Test Framework .....	11
Asynchronous Unit Testing .....	12
Creating Your Own Projects .....	13
Using Clutch .....	14
The Home Page .....	14
The JSLint Page .....	15
The Join/Compress Page .....	18
The Unit Tests Page .....	19
Documentation .....	22
Third Party Software .....	22
JSLint .....	22
JSON .....	23
Prototype .....	23
Why the Name Clutch? .....	23
Contacts .....	23
Frizione – Clutch Version History .....	24
Version 0.2 - 18/06/2008 .....	24
Version 0.1.1 – 10/06/2008 .....	24
Version 0.1 - 10/06/2008 .....	24
John Leach .....	25

© Syger 2008. Content licensed according to the [Artistic License 2.0](#).

# Frizione - Clutch

---

[by John Leach](#)

Frizione (that's Italian for Clutch, which is what I'll call the project from now on) is a classic open source tool – born of a desperate itch which I just simply had to scratch. I decided to give [Gears](#) a close scrutiny, since it is an interesting project which provides a browser agnostic plugin platform. I pretty soon realised that I'd be needing a robust JavaScript testing system since it is nearly impossible to debug code within a [WorkerPool](#).

Apart from the usual problems of running JavaScript within a browser, I also wanted a small suite of tools, such as [JSLint](#), JavaScript code file joining or concatenation (as used by the [Prototype](#) library), and JavaScript code [compression](#). It seemed a reasonable idea to put them all together within a framework which runs inside the browser itself, much as the unit testing code would have to.

So that's how Frizione, er, Clutch got started. Although I'm using it for Gears development, it is actually a library agnostic set of tools for any type of browser based JavaScript development, which coincidentally has Gears support too.

The Frizione project is hosted on the [Google Code](#) web site. It is released under a [MIT license](#), and kept in a shady [Subversion repository](#), away from direct sunlight. There is also a low volume [discussion group](#).

## Requirements and Architecture

---

Clutch consists of a set of HTML pages, CSS and JavaScript files, together with a very rudimentary, but essential web application. The Clutch web application is written in Ruby, using [WEBrick](#) and [ERB](#). The [YUICompressor](#), which is *optionally* used to remove comments and whitespace from JavaScript files, is a Java library (jar file).

To use Clutch you will need a [Ruby installation](#) (I'm using version 1.8.6) and *optionally*, a [Java installation](#) (I'm using version 1.6.0). You definitely need Ruby, but you can avoid using Java if you're prepared to settle for [JSMin](#) (the [Ruby version](#)) JavaScript text compression instead of YUICompressor.

The Clutch web application, apart from serving the static text files, also provides a small set of services, listed below:

Service URL	Description
/run-compressor	Compresses a JavaScript file.
/run-fixture	Provides POST (write) operations for fixture (unit testing data) files.
/run-join	Joins or concatenates a series of JavaScript files into a single file.
/run-jshint	Creates a <a href="#">JSLint</a> page for a specific JavaScript file.
/run-test	Creates a unit test page, and result view page, for a specific JavaScript file.

Clutch also provides a simple unit testing framework, written in JavaScript, which runs within the browser. The unit test results are written to hard disk automatically in [JSON](#) format, and can then be viewed by retrieving the written results.

The following sections give further details of the services and unit testing library.

## Running the Clutch Web Application

---

Clutch can only perform it's magic with the Clutch web application running. To start the Clutch web application, open a command prompt in the /Frizione/Ruby directory, then type:

```
ruby server.rb
```

The Clutch web application runs as localhost on port 80, which might conflict with other web servers. After issuing the command the prompt should look something like:

```
C:\Frizione\Ruby>ruby server.rb
[2008-06-08 12:00:40] INFO  WEBrick 1.3.1
[2008-06-08 12:00:40] INFO  ruby 1.8.6 (2007-09-24) [i386-mswin32]
[2008-06-08 12:00:40] INFO  ClutchServer#start: pid=3600 port=80
```

That's it, Clutch is up and running. You can stop the web application at any time by pressing Ctrl-C.

## Changing the Port

---

If port 80 does not suite your needs, you can change the value by editing the server.rb script. Open server.rb in your favourite text editor, move to the end of the file, where you should see:

```
...
# Create the server
server = ClutchServer.new(:Port => 80)

# trap signals to invoke the shutdown procedure cleanly
['INT', 'TERM'].each do |signal|
  trap(signal) { server.shutdown }
end

# Start the server
server.start
```

Change the line

```
server = ClutchServer.new(:Port => 80)
```

to the port value that you want, then restart the server.

## Running as a Pseudo Domain

---

In some circumstances, particularly for Gears development, you may want to use an URL such as `http://clutch.syger.it` instead of `http://localhost`. This can be achieved by setting the hosts file.

On Windows you'll find the hosts file in `C:\Windows\system32\drivers\etc`, whereas on most Linux systems it is located in `/etc`. Again, using your favourite text editor, open the file and add a line as follows:

```
127.0.0.1      clutch.syger.it
```

Save the file, and with the Clutch server running, open your browser and type the URL `http://clutch.syger.it` which should now present you with the Clutch home page.

## Services

---

The web application provides a small suite of services which aid in the development, testing, and deployment of JavaScript software.

### Compressor Service

---

The compressor service takes a JavaScript file and removes comments and unnecessary whitespace. Since this can be a destructive operation, Clutch checks that you supply an output URL, and that it is not identical to the input URL.

To invoke the service, send a POST request to `/run_compressor`, appending the absolute JavaScript file path, with respect to the `/Frizione` root directory, as part of the URL. Clutch will then compress the JavaScript file, either using [JSMIn](#) or [YUICompressor](#). Additional request parameters can be set to modify the behaviour of the compressor, using the [YUICompressor command line options](#).

The service uses the following default values:

Parameter	Option	Required	Default value
<code>jsmin</code>	No equivalent	no	true. Set to false to use the YUICompressor.
<code>line-break</code>	<code>--line-break</code>		0
<code>charset</code>	<code>--charset</code>		UTF-8
<code>output</code>	<code>-o</code>	yes	None.
<code>nomunge</code>	<code>--nomunge</code>		true

Note that YUICompressor options which do not require a value (such as `--nomunge`) are replaced by a parameter value of `true` or `false`.

Note also that JSMIn ignores all parameters except `jsmin` and `output`.

## Compressor Service Example

---

```
<form action="/run-compressor/projects/clutch/src/string.js"
  enctype="application/x-www-form-urlencoded" method="post">
  <input name="output" type="hidden" value="/projects/clutch/src/min-string.js" />
  <input type="submit" value="JSMin '/clutch/src/string.js'" />
</form>
```

The first example above, uses JSMin to compress the JavaScript file.

```
<form action="/run-compressor/projects/clutch/src/string.js"
  enctype="application/x-www-form-urlencoded" method="post">
  <input name="jsmin" type="hidden" value="false" />
  <input name="output" type="hidden" value="/projects/clutch/src/min-string.js" />
  <input type="submit" value="Compress 'clutch/src/string.js'" />
</form>
```

This second example uses YUICompressor to compress the JavaScript file.

See also `/Frizione/projects/clutch/joins/index.html`.

## Fixture Service

---

The fixture service allows you to write text to hard disk. When sent a POST, the service writes the POST data to the file specified in the URL, optionally modifying the contents with parameter values specified in the POST request, using ERB.

To invoke the service, send a POST request to `/run_fixture`, appending the absolute output text file path, with respect to the `/Frizione` root directory, as part of the URL.

If you specify an absolute input text file path, in the `from` parameter, with respect to the `/Frizione` root directory, Clutch will read that file, accepting and executing include commands (see the Join Service, below), as well as injecting parameters into the constructed text file.

You can use as many parameters as you like, with the following constraints:

- the `from` parameter name, and any parameter names starting with `clutch`, are reserved by Clutch,
- within the text file each parameter value can be referenced by typing `<%= params['parameter-name'] %>`, substituting `parameter-name` for the name of the parameter,
- more complicated expressions can be achieved using ruby code snippets, as explained in the [ERB](#) documentation.

## Fixture Service Example

---

The fixture service is used by the run unit test HTML pages to store the JSON formatted test results file. A JavaScript example of this usage is shown below:

```
function storeClutchTests(testFunction, jsonUrl, viewUrl) {

  jsonUrl = '/run-fixture' + jsonUrl;
  ...
  clutch.executeRequest("POST", jsonUrl, null,
    JSON.stringify(tests.summarise(), null, "\t"), handleRequest);
}
```

```
}
```

Here `jsonUrl` is the file path where the results are stored, and the POST body is created by the JSON library `stringify` function.

See `/Frizione/clutch/js/saver.js` for the complete code example.

TODO: show true fixtures examples...

## Join Service

---

The join (or concatenate) service uses ERB to join together a list of text files, producing a single concatenated file. Each file can contain `include` commands which contain relative URLs to other files to be included at the point of the `include` command itself. This process can also be repeated within the included files (nesting).

To invoke the service, send a POST request to `/run_join`, specifying the absolute text file path, with respect to the `/Frizione` root directory, as part of the URL. Clutch will then create the joined (or concatenated) file. The `to` request parameter is required to set the destination absolute URL of the resulting joined file.

## Join Service Example

---

```
<form action="/run-join/projects/clutch/joins/all-tests.js"
  enctype="application/x-www-form-urlencoded" method="post">
  <input name="to" type="hidden" value="/projects/clutch/tests/all-tests.js" />
  <input type="submit" value="Join 'unit-test'" />
</form>
```

Given the following directory layout:

```
/projects
  /clutch
    /joins
      all-tests.js
    /src
      unit-test.js
      string.js
    /tests
      all-tests.js
      string-tests.js
      unit-tests.js
```

The relative URL to the `/projects/clutch/src` directory, from within `/projects/clutch/joins/all-tests.js` will be `../src`, giving the following `include` command within `/projects/clutch/joins/all-tests.js`:

```
<%= include '../src/string.js',
  '../src/tests/all-tests.js' %>
```

Similarly, the relative URL to the `/projects/clutch/src/tests` directory, from within `/projects/clutch/src/tests/all-tests.js` will be `./`, giving the following `include` command:

```
<%= include './string-tests.js', './unit-tests.js' %>
```

See also `/Frizione/projects/clutch/joins/index.html`.

## JSLint Service

---

The original [lint program](#) analysed C source code for potential (and subtle) malpractices likely to lead to run-time bugs. Modern C compilers now provide sufficient syntactic and semantic checking that `lint` is now rarely required or used.

Fortunately for JavaScript programmers, [Douglas Crockford](#) has built a lint program specifically for JavaScript, in JavaScript, called [JSLint](#). Finding and removing potentially poor code before unit testing is an essential process, at least for me. Unfortunately, cutting and pasting code to the web page can itself be error prone.

Clutch alleviates this problem by creating static HTML pages that read in your JavaScript code, which can then be analysed locally by JSLint. You only need create the static HTML page once for each JavaScript file you wish to analyse.

To invoke the service, send a POST request to `/run_jslint`, specifying the absolute JavaScript file path, with respect to the `/Frizione` root directory, as part of the URL. Clutch will then produce a static HTML file specified by the `to` parameter, which automatically loads the JavaScript file ready for linting.

## JSLint Service Example

---

```
<form action="/run-jslint/projects/clutch/src/introspect.js"
  enctype="application/x-www-form-urlencoded" method="post">
  <input name="to" type="hidden"
    value="/projects/clutch/jslint/src/introspect.html" />
  <input type="submit" value="Create 'clutch/src/introspect.js' Page" />
</form>

<a href="/projects/clutch/jslint/src/introspect.html">
  Run /clutch/src/introspect.js page
</a>
```

See also `/Frizione/projects/clutch/jslint/index.html`.

## Test Service

---

The test service creates a run/view pair of static HTML files for a given JavaScript file. The reasons for using two HTML files is explained in the 'Unit Testing' section below.

It can also provide functionality similar to the join service. It can use ERB to join together a list of JavaScript files, producing a single concatenated JavaScript file, but only if the `to` parameter is specified.

The service has three required parameters and three optional parameters listed below:



Parameter	Required	Usage
to	no	Specifies the output absolute URL of the joined JavaScript file to be tested. If not defined, the specified JavaScript file is left unchanged.
run-comment	no	A comment to be displayed in the test run page. Usually used where the tests are expected to take a long time to run.
view-comment	no	A comment to be displayed in the test run page. Usually used where failures and/or errors are expected.
run	yes	The absolute URL of the created run test HTML page.
view	yes	The absolute URL of the created view test results HTML page.
json	yes	The absolute URL of the test results JSON file.

To invoke the service, send a POST request to `/run_test`, specifying the absolute JavaScript file path, with respect to the `/Frizione` root directory, as part of the URL. Clutch will then create the two static HTML files.

## Test Service Example

---

The first example joins, and then tests, the specified JavaScript file:

```
<form action="/run-test/projects/clutch/joins/all-tests.js"
  enctype="application/x-www-form-urlencoded" method="post">
  <input name="to" type="hidden" value="/projects/clutch/tests/all-tests.js" />
  <input name="comment" type="hidden"
    value="There should be 1 Failure and 1 Error in these tests,
      &lt;code&gt;failTest&lt;/code&gt; produces the failure, and
      &lt;code&gt;errorTest&lt;/code&gt; produces the error." />
  <input name="run" type="hidden"
    value="/projects/clutch/tests/run-all-tests.html" />
  <input name="view" type="hidden"
    value="/projects/clutch/tests/view-all-tests.html" />
  <input name="json" type="hidden"
    value="/projects/clutch/tests/all-tests.json" />
  <input type="submit" value="Create Test Pages '/clutch/all-tests'" />
</form>
then <a href="/projects/clutch/tests/run-all-tests.html">run</a>
and <a href="/projects/clutch/tests/view-all-tests.html">view</a> 'all-tests'
```

The second example tests the specified JavaScript file 'as is':

```
<form action="/run-test/projects/clutch/tests/all-tests.js"
  enctype="application/x-www-form-urlencoded" method="post">
  <input name="comment" type="hidden"
    value="There should be 1 Failure and 1 Error in these tests,
      &lt;code&gt;failTest&lt;/code&gt; produces the failure, and
      &lt;code&gt;errorTest&lt;/code&gt; produces the error." />
  <input name="run" type="hidden"
    value="/projects/clutch/tests/run-all-tests.html" />
  <input name="view" type="hidden"
```

```

        value="/projects/clutch/tests/view-all-tests.html" />
<input name="json" type="hidden"
        value="/projects/clutch/tests/all-tests.json" />
<input type="submit" value="Create Test Pages '/clutch/all-tests'" />
</form>
then <a href="/projects/clutch/tests/run-all-tests.html">run</a>
and <a href="/projects/clutch/tests/view-all-tests.html">view</a> 'all-tests'

```

See also </Frizione/projects/clutch/tests/index.html>.

## Unit Testing

---

Unit testing is another useful technique to better ensure the quality and correctness of your JavaScript code. Unfortunately, the dynamic nature of JavaScript makes it a difficult environment in which to perform unit testing. One of the most important aspects is to provide a simple and unintrusive unit test library, which does not alter the characteristics of your own code.

To achieve this objective, Clutch uses a two pass technique. The first pass runs the unit testing code, and stores the results to a JSON file. The second pass reads and then displays the JSON file.

Note that the Clutch unit test framework, due to its architecture, is not suited for user interface testing, for such needs you might want to consider something like [Selenium](#).

In the first pass, Clutch necessarily adds four files to your unit test code:

- `/projects/clutch/src/unit-test.js` – the unit testing framework,
- `/clutch/js/json2.js` – the JSON converter,
- `/clutch/js/xhr.js` – the XMLHttpRequest function,
- `/clutch/js/saver.js` – the JSON file saving function.

Although that may seem like a lot of code, it is kept in two namespaces, `JSON` and `clutch`, so as not to interfere with your own code.

In order for the unit testing process to work, you must supply a `runClutchTests` function in your own code, which either returns a `clutch.test.unit` or a `clutch.test.group` object.

Here is an example of a `runClutchTests` function which returns a `clutch.test.unit` object:

```

function createUnitTests() {
    return clutch.test.unit('Assertion Tests', {

        testPass: function () {
            // ...
        },

        // other tests here

    }, 1000);
}

function runClutchTests() {
    return createUnitTests();
}

```

```
}
```

Here is an example of a `runClutchTests` function which returns a `clutch.test.group` object:

```
function createUnitTests() {
  return clutch.test.unit('Assertion Tests', {

    testPass: function () {
      // ...
    },

    // other tests here

  }, 1000);
}

function createStringTests() {
  return clutch.test.unit('String Tests', {

    testTrim: function () {
      // ...
    },

    // other tests here

  }, 1000);
}

function runClutchTests() {
  return clutch.test.group([
    createUnitTests(),
    createStringTests()
  ], 2000);
}
```

The second pass is independent of your unit testing code, and so can use Prototype to dynamically produce the unit test results display.

See also `/Frizione/projects/clutch/src/tests/` for example unit test code.

## The Unit Test Framework

---

The framework follows a similar pattern to the well known [JUnit](#) Java testing framework.

Create your test methods in a plain JavaScript object, then wrap that object in a `clutch.test.unit` function call, as shown in the first example above. All functions in your test object which begin with `test` will be executed by the unit test framework, but the order of function execution is not guaranteed.

Before a `testxxx` function is executed, the unit test framework will execute a `setUp` function in your object. After a `testxxx` function has been executed, the unit test framework will execute a `tearDown` function in your object. Clutch provides a default no-operation function for `setUp` and `tearDown` if none are defined in your object.

You can run more than one unit test object by wrapping each in a `clutch.test.group` function call, after you've wrapped each test object in a `clutch.test.unit` function call, as shown in the second example above.

When your test object is being executed, the following functions are available:

## Function

`this.log(message)`

## Purpose

Adds a 'log' message to the unit test results. Essentially works as a logging function, where traditional console functions are not available.

`this.fail(message)`

Adds a 'fail' message to the unit test results. Use to check that certain code statements are not executed, such as when an exception should have been thrown.

`this.error(/* Error */ err)`

Adds an 'error' message to the unit test results. The `err` parameter should be an instance of `Error`. Not usually required of the unit test code, as all errors are caught and logged by Clutch.

`this.assert(condition, message)`

Checks that the expression defined in `condition` evaluates to true. If not, adds a 'fail' message to the unit test results. The `message` parameter is optional.

See also `/Frizione/projects/clutch/src/tests/` for example unit test code.

When the usual `testxxx` function naming convention is not suitable, or when you need to control the order of test function calls, Clutch provides a meta-programming mechanism of specifying the test methods, described below.

## Asynchronous Unit Testing

---

Clutch can also perform asynchronous unit testing, but needs a little help from you, the programmer. Each asynchronous test must consist of a synchronous function, and zero or more asynchronous functions which you expect the system under test to call. Clutch only checks the first asynchronous function called, it currently has no provision for checking multiple asynchronous function calls triggered by a single synchronous function call.

The help that Clutch requires from you, is in the form of a small JSON like property within your test object with the name `clutchTest`. The following example shows the meta-programming information:

```
function createXhrTests() {  
    return clutch.test.unit('XHR Tests', {  
        clutchTests: [  
            { func: 'validUrl', callbacks: [ 'validUrlHandler' ] },  
            { func: 'invalidUrl', callbacks: [ 'invalidUrlHandler' ] },  
            { func: 'abortedRequest', callbacks: [ 'abortedRequestHandler' ] }  
        ],  
        validUrl: function () {  
            // ...  
        },  
    },
```

```

        validUrlHandler: function (status, statusText, responseText) {
            // ...
        },

        // other tests here

    }, 18000);
}

```

The `clutchTests` property consists of an array of objects, each of which contain two properties; `func`, the name of the synchronous function, and `callbacks`, an array of callback functions, or `null` for a pure synchronous test.

The `clutchTests` property can also be used to guarantee the order of a set of synchronous unit tests, or to create a mix of synchronous and asynchronous tests, which again will be run in the specified order. If Clutch finds the `clutchTests` property in your test object, it will not look for the traditional `testxxx` functions.

In the following example a set of synchronous tests are executed in the specified order:

```

function createUnitTests() {

    return clutch.test.unit('Assertion Tests', {

        clutchTests: [
            { func: 'logTest', callbacks: null },
            { func: 'passTest', callbacks: null },
            { func: 'failTest', callbacks: null },
            { func: 'errorTest', callbacks: null },
            { func: 'assertTest', callbacks: null }
        ],

        logTest: function () {
            // ...
        },

        // other tests here

    }, 1000);
}

```

See also `/Frizione/projects/clutch/src/tests/unit-test-tests.js` for an example of synchronous unit test code, and `/Frizione/projects/clutch/src/tests/gears/xhr-tests.js` for example asynchronous unit test code.

## Creating Your Own Projects

---

Clutch lives a quiet life in a shady Subversion repository. Unfortunately this can make adding your own code to the Clutch framework difficult and potentially dangerous. However, from version 0.2 onwards, Clutch provides a `/projects` directory in which you can safely store your own JavaScript code, and keep it under the loving care of your own Subversion repository, while still being able to update both your own code, and Clutch itself. The Clutch library is also stored in the `/projects/clutch` directory. Whether this can be considered a form of bootstrapping or dog food consumption is a matter of opinion.

Connecting your project to Clutch is relatively simple:

- add a directory for your project under /projects,
- create a `clutch.json` file in that folder.

The `clutch.json` file contains the project name, and links to your project's principal directories. The following is the clutch project `clutch.json` file:

```
{
  "name": "Frizione - Clutch",
  "home": "/projects/clutch/",
  "joins": "/projects/clutch/joins/",
  "jslint": "/projects/clutch/jslint/",
  "tests": "/projects/clutch/tests/"
}
```

Once you have added this file, you should see your project name listed under “Clutch Controlled Projects” in the home page (<http://clutch.syger.it/>).

See [/Frizione/projects/clutch](#) for an example of creating an external project.


## Using Clutch

---

With the Clutch web application running, open your browser and type the pseudo domain root address <http://clutch.syger.it/>, you should then see the Clutch home page.

## The Home Page

---

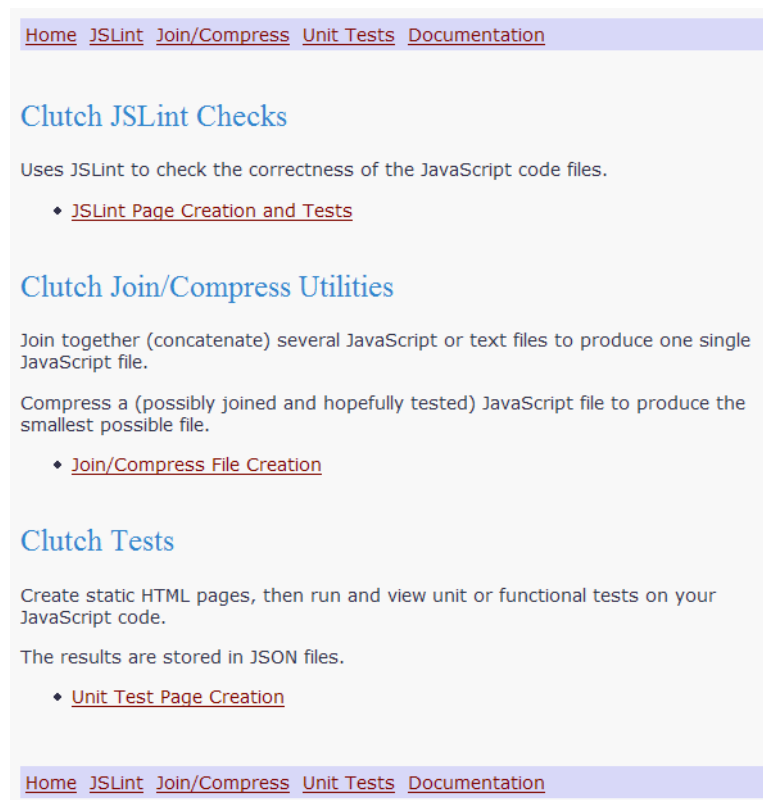

The home page provides access to the principal static HTML pages. You can add your own links as desired for your own projects.

# The JSLint Page

---


The screenshot shows the 'Clutch JSLint Page Creation and Tests' interface. It features a navigation bar at the top with links: [Home](#), [JSLint](#), [Join/Compress](#), [Unit Tests](#), and [Documentation](#). The main content is organized into sections: 'Clutch JSLint Page Creation and Tests', 'JSLint Infrastructure', 'Unit Testing Infrastructure', 'Clutch Library', and 'Clutch Gears Library'. Each section contains a list of actions, each consisting of a 'Create' button followed by a 'then Run' link. For example, under 'JSLint Infrastructure', the actions are: 'Create 'clutch/js/xhr.js' Page' then [Run /clutch/js/xhr.js page](#), and 'Create 'clutch/js/jslint-loader.js' Page' then [Run /clutch/js/jslint-loader.js page](#). The interface has a light blue header and footer with the same navigation links.

The main JSLint page provides links both for the creation of static JSLint pages, and for running JSLint on the JavaScript code. Each page loads the latest version of the JavaScript code, and so can be used to check modifications 'on the fly'. You may need to refresh the page (usually F5).

The screenshot shows the 'JSLint Results' page. It features a navigation bar at the top with links: [Home](#), [JSLint](#), [Join/Compress](#), [Unit Tests](#), and [Documentation](#). The main content area displays 'JSLint Test: [/clutch/src/string.js page](#)'. The interface has a light blue header and footer with the same navigation links.

The generation of a static JSLint HTML page gives a results page which also contains a link to the newly created page.

[Home](#)
[JSLint](#)
[Join/Compress](#)
[Unit Tests](#)
[Documentation](#)



JSLint: The JavaScript Verifier:  
'/clutch/src/string.js'  
Options, Documentation, Book  
Edition 2008-06-04

```

/*
 */

/*jshint evil: true */
/*global clutch, JSON */

if (!this.clutch) {
    clutch = {};
}

clutch.date = {
    toStandardJSON: function () {
        function tens(n) {
            // Format integers to have at least two digits.
            return n < 10 ? '0' + n : n;
        }
    }
}

```

JSLint

Options

☐ Stop on first error  
☐ Strict whitespace  
☒ Assume a browser  
☐ Assume a [Yahoo Widget](#)  
☐ Assume a [Windows Sidebar Gadget](#)  
☐ Assume [Rhino](#)  
☐ A~~S~~afe  
☒ Disallow undefined variables  
☒ Disallow leading \_ in identifiers  
☒ Disallow == and !=  
☒ Disallow ++ and --  
☒ Disallow bitwise operators  
☐ Disallow . in RegExp literals  
☒ Disallow global var

☐ Tolerate debugger statements  
☐ Tolerate eval  
☐ Tolerate HTML case  
☐ Tolerate HTML event handlers  
☐ Tolerate HTML fragments  
☐ Tolerate sloppy line breaking  
☐ Tolerate [unfiltered](#) for in

Clear All Options

Recommended Options

Good Parts

Indentation 
Predefined ( , separated)

Copyright 2002 Douglas Crockford. All Rights Reserved Wrrrldwide and Beyond!  
Code Conventions for the JavaScript Programming Language.  
Join the JSLint Group.

[Home](#)
[JSLint](#)
[Join/Compress](#)
[Unit Tests](#)
[Documentation](#)

The JSLint static HTML page when first loaded. Click on the 'JSLint' button to see the results. Refresh the page if you change your JavaScript source code.



# JSLint

JSLint: The JavaScript Verifier:  
'clutch/src/string.js'  
Options, Documentation, Book  
Edition 2008-06-04

```

/*
 */

/*jshint evil: true */
/*global clutch, JSON */

if (!this.clutch) {
    clutch = {};
}

clutch.date = {
    toStandardJSON: function () {
        function tens(n) {
            // Format integers to have at least two digits.
            return n < 10 ? '0' + n : n;
        }
    }
}

```

JSLint

No new global variables introduced.

```

13 "toStandardJSON"()
    Closure hundreds, tens
    Global Date

/*members UTC, arg, clutch, date, endsWith, evalJSON, exec, fromJSON,
    getTime, getUTCDate, getUTCFullYear, getUTCHours, getUTCMillisecond,
    getUTCMinutes, getUTCMonth, getUTCSeconds, indexOf, inspect, isJSON,
    lastIndexOf, length, match, message, messagePack, messageUnpack, parse,
    prototype, replace, slice, startsWith, string, stringify, substring,
    toClutchJSON, toJSON, toMicrosoftJSON, toStandardJSON, toString, trim,
    unfilterJSON
*/

```

## Options

- |   |  |
|---|--|
| <input type="checkbox"/> Stop on first error                          | <input type="checkbox"/> Tolerate debugger statements  |
| <input type="checkbox"/> Strict whitespace                            | <input type="checkbox"/> Tolerate eval                 |
| <input checked="" type="checkbox"/> Assume a browser                  | <input type="checkbox"/> Tolerate HTML case            |
| <input type="checkbox"/> Assume a Yahoo Widget                        | <input type="checkbox"/> Tolerate HTML event handlers  |
| <input type="checkbox"/> Assume a Windows Sidebar Gadget              | <input type="checkbox"/> Tolerate HTML fragments       |
| <input type="checkbox"/> Assume Rhino                                 | <input type="checkbox"/> Tolerate sloppy line breaking |
| <input type="checkbox"/> ADsafe                                       | <input type="checkbox"/> Tolerate unfiltered for in    |
| <input checked="" type="checkbox"/> Disallow undefined variables      |  |
| <input checked="" type="checkbox"/> Disallow leading _ in identifiers |  |
| <input checked="" type="checkbox"/> Disallow == and !=                |  |
| <input checked="" type="checkbox"/> Disallow ++ and --                |  |
| <input checked="" type="checkbox"/> Disallow bitwise operators        |  |
| <input type="checkbox"/> Disallow . in RegExp literals                |  |
| <input checked="" type="checkbox"/> Disallow global var               |  |

Clear All Options

Recommended Options

Good Parts

Indentation

Predefined ( , separated)

Copyright 2002 Douglas Crockford. All Rights Reserved Wrrridwide and Beyond!  
Code Conventions for the JavaScript Programming Language.  
Join the JSLint Group.

The JSLint static HTML page after the 'JSLint' button has been pressed (note that the results have been truncated to fit on the page). Error messages are shown in a

shocking pink, probably to encourage you to correct them.

## The Join/Compress Page

---

[Home](#) [JSLint](#) [Join/Compress](#) [Unit Tests](#) [Documentation](#)

### Clutch Join/Compress File Creation

#### JSLint Infrastructure

- ◆ [Compress '/clutch/js/xhr.js'](#)
- ◆ [Compress '/clutch/js/jslint-loader.js'](#)
- ◆ [Compress '/clutch/js/jslint/webjslint.js'](#)

#### Unit Testing Infrastructure

- ◆ [Compress '/clutch/js/json2.js'](#)
- ◆ [Compress '/clutch/js/browser-saver.js'](#)

#### Unit Testing Infrastructure - Prototype Display

- ◆ [Compress '/clutch/js/display.js'](#)
- ◆ [Compress '/clutch/js/prototype/prototype.js'](#)
- ◆ [Compress '/clutch/js/prototype/builder.js'](#)

#### Unit Tests

- ◆ First: [Join 'all-tests'](#) then: [Compress 'all-tests'](#)
- ◆ First: [Join 'string-tests'](#) then: [Compress 'string-tests'](#)
- ◆ First: [Join 'unit-test-tests'](#) then: [Compress 'unit-test-tests'](#)

[Home](#) [JSLint](#) [Join/Compress](#) [Unit Tests](#) [Documentation](#)

The main Join/Compress HTML page provides links for the joining (concatenation) or compression of the principal JavaScript files that make up Clutch.

[Home](#) [JSLint](#) [Join/Compress](#) [Unit Tests](#) [Documentation](#)


### Join Results

From: joins/clutch/all-tests.js

To: [tests/clutch/all-tests.js](#) (12279 bytes)

[Home](#) [JSLint](#) [Join/Compress](#) [Unit Tests](#) [Documentation](#)


Each Join command produces a results page indicating the number of bytes in the final JavaScript file.

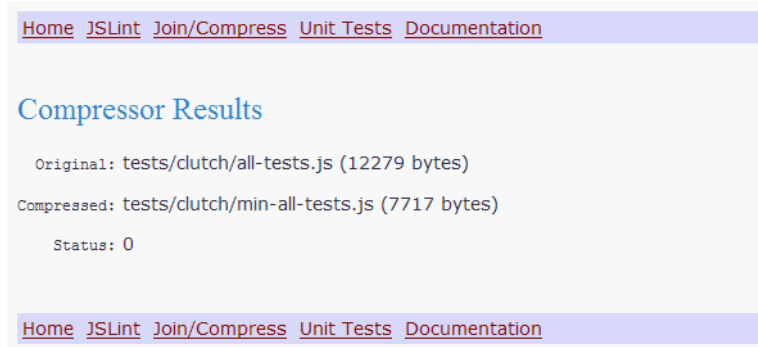


Each Compress command produces a results page indicating both the original JavaScript file byte size, and the compressed JavaScript file byte size.

## The Unit Tests Page


---

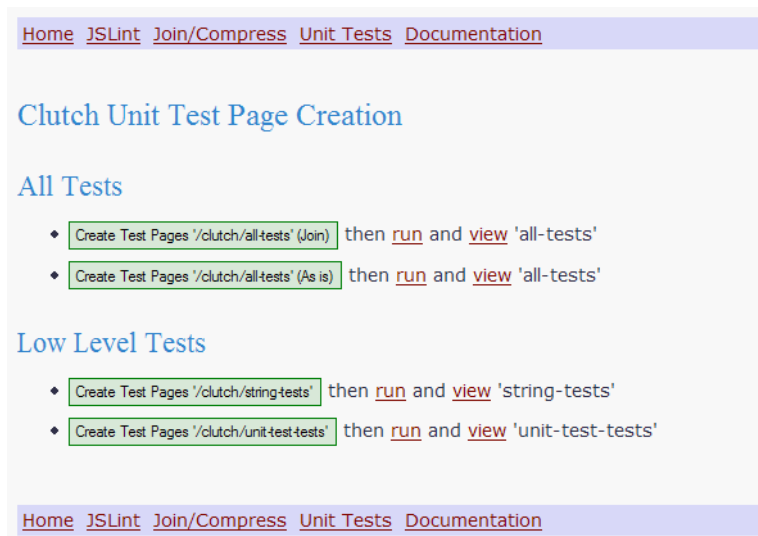

The main Unit Test page provides links both for the creation of the static HTML test pages, and for running or viewing the results.

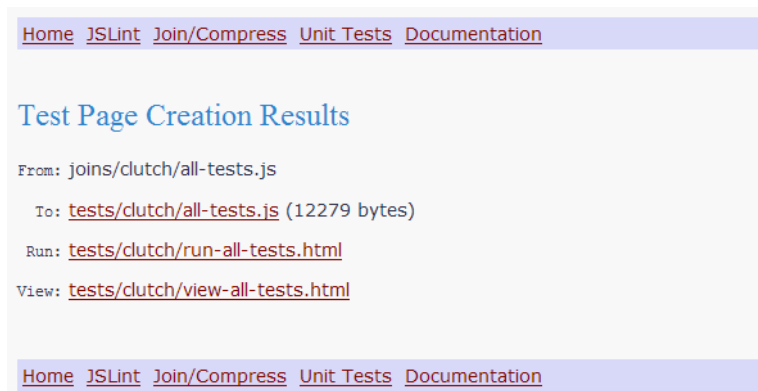

Each test page creation command produces a results page with links to the run test page, and the view test results page. In this example the JavaScript file was also joined (concatenated).

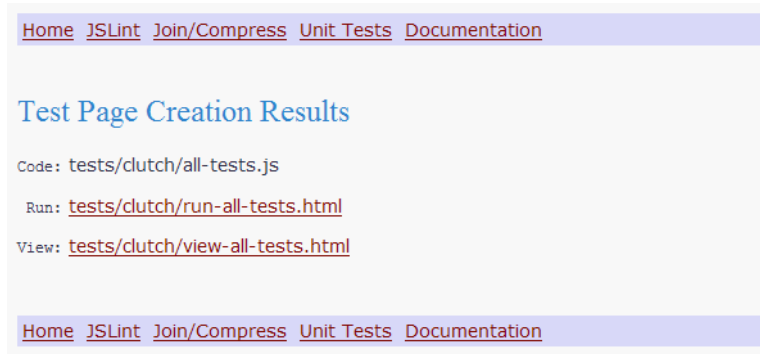

This example uses the JavaScript file 'as-is', again producing run tests and view results links.



The run test page will start running the unit tests automatically. Once the tests have been completed (and the results stored as a JSON file) the link to the view results page is displayed.

## Clutch View Test 'tests/clutch/all-tests.js'

There should be 2 Failures and 1 Error in these tests, `testFail` produces the failures, and `testError` produces the error.

### Summary:

Tests	Failures	Errors	Success Rate	Time (ms)
31	2	1	90.32%	0

### Unit Tests Summary:

Unit Test Name	Tests	Failures	Errors	Success Rate	Time (ms)
Assertion Tests	6	2	1	50.00%	0
String Tests	25	0	0	100.00%	0

### Unit Test: Assertion Tests

Function	Tests	Failures	Errors	Time (ms)
testPass	2	0	0	0
testFail	2	2	0	0
testError	1	0	1	0
testAssert	1	0	0	0

### Unit Test: String Tests

Function	Tests	Failures	Errors	Time (ms)
testTrim	2	0	0	0
testStartsWith	4	0	0	0
testEndsWith	4	0	0	0
testJsonObject	4	0	0	0
testJsonArray	4	0	0	0
testMessagePack	7	0	0	0


### All errors:

Unit Test Name	Function	Reason
Assertion Tests	testError	http://clutch.syger.it/tests/clutch/all-tests.js(314) Error: Test Error("Test error() call")@:0 ()@http://clutch.syger.it/tests/clutch/all-tests.js:314 ("testError")@http://clutch.syger.it/clutch/src/unit-test.js:67 ()@http://clutch.syger.it/clutch/src/unit-test.js:149 ()@http://clutch.syger.it/clutch/src/unit-test.js:176 storeClutchTests(runClutchTests,"/run-fixture/tests/clutch/all-test onload([object Event])@http://clutch.syger.it/tests/clutch/run-all- @:0

### All failures:

Unit Test Name	Function	Reason
Assertion Tests	testFail	Test fail() call assert(false) guaranteed to fail

The unit test results page displays the results (read from the intermediary JSON file). Errors and failures are displayed in separate lists.

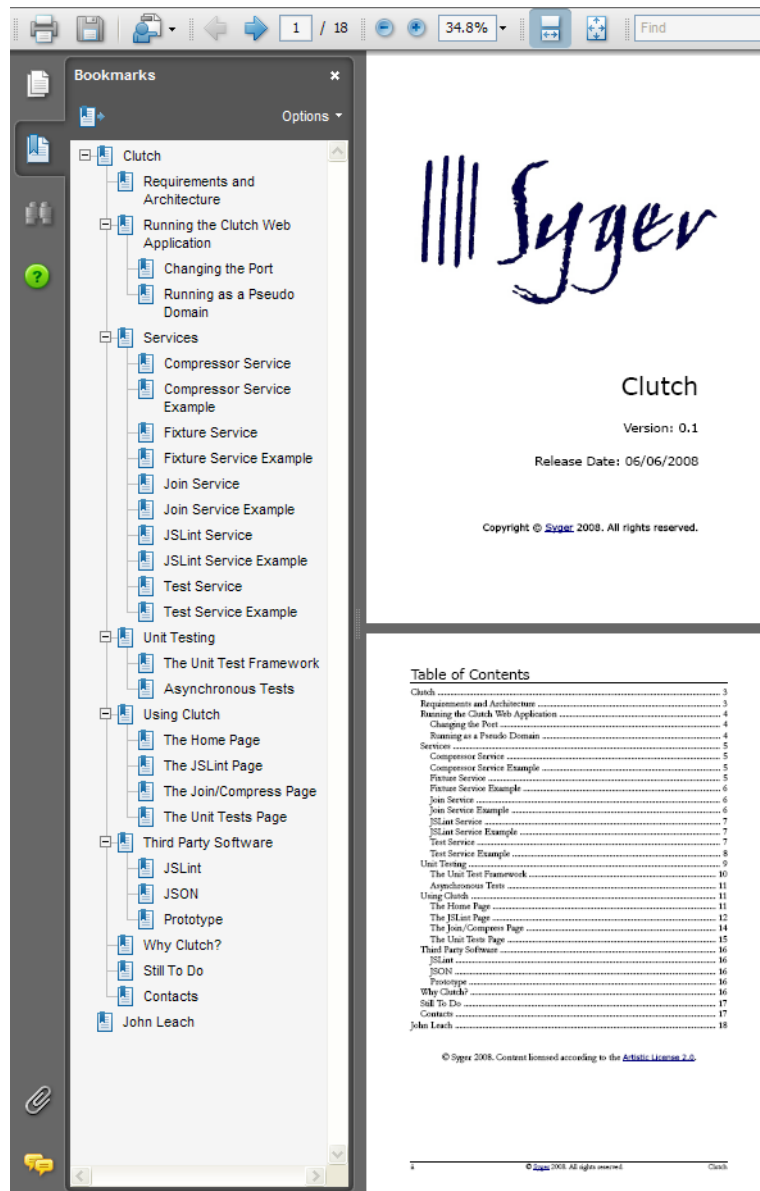

This document is also available from within the Clutch web application.

## Third Party Software

Clutch stands on the shoulders of giants. There are three important JavaScript files used by Clutch; JSLint, JSON, and Prototype. All three have been slightly modified for one reason or another, described below.

### JSLint

To overcome a parsing bug in Opera, the seven regular expressions, `ax`, `cx`, `tx`, `lx`, `ix`, `jx` and `ux` were converted to string syntax format (at about line 475).

## JSON

---

To overcome a parsing bug in Opera, the two regular expressions, `cx` and `escapable` were converted to string syntax format (at about line 180).

In order to run within a [WorkerPool](#), the `eval(text)` call is replaced with a new `Function(text)()` statement (at about line 456).

## Prototype

---

The Prototype library itself has not been modified, but the Clutch string library provides substitutions for `Date.prototype.toJSON()` and `String.prototype.evalJSON()` which allow for the [Microsoft Date format](#), and a Clutch derivative in JSON text.

## Why the Name Clutch?

---

Two reasons, firstly because I felt that I was clutching at straws, and secondly it is the mechanism that lies between the engine - your code - and the gearbox - the browser, or Gears, in my case. It is also the third pedal (the one on the left) in a motor car, which is usually missing on American cars, because they nearly all have automatic gearboxes. I felt it was also the 'missing pedal' in a Gears development environment.

## Contacts

---

Syger can be contacted for consultancy work on any of the topics mentioned in this article, by sending an email to [info@syger.it](mailto:info@syger.it).

# Frizione – Clutch Version History

---

[by John Leach](#)

This section notes changes made in the various version releases, in reverse chronological order.

## Version 0.2 - 18/06/2008

---

Added [JSMin](#) (the [Ruby version](#)), to provide some compression functionality to those who don't want to install Java on their computer.

Added `/projects` directory for user projects which won't be disturbed when updating the Clutch Subversion repository. Migrated Clutch JavaScript code to `/projects/clutch` (Clutch – the library, is the first project for Clutch – the framework, dog food, etc).

Completed the first (working) model for asynchronous unit testing.

## Version 0.1.1 – 10/06/2008

---

Never make changes at the last minute without running all your unit tests. Especially if it is 1 am in the morning. Such is life, and breaking this golden rule invokes numerous laws of Murphy, one of which was that the server stopped working. Fixed within half an hour, fortunately.

## Version 0.1 - 10/06/2008

---

The first public release. Unfortunately, I had to change the project name at the last moment, since `clutch` was already being used on the Google Code web site – hence the new name [frizione](#) (which is Clutch in Italian).



# John Leach

---

I'm a professional programmer, and Chief Technical Officer of a small software house in Verona, Italy, called Syger. The name came about from being influenced by a [drawing](#) by Roger Dean, of ferocious, intelligent badgers, which I transposed to the **Siberian Tiger**, my favourite animal from childhood, hence Syger.

Most of the work done by my company is consultancy and software development for other software houses.

I now spend most of my time divided between scripting languages and frameworks such as [Ruby](#), [Groovy](#), [Ruby on Rails](#), and [Grails](#), and my old time favourites, [Java](#) and [JavaScript](#).

