

Analysis of the ChickWeight dataset

MSc in Statistics 2026/27, Imperial College London, Data Science Workshop 1c

Sai Han Myo Htet


Introduction

In this report, we perform a rudimentary analysis of the built-in ChickWeight Dataset in R.

Table 1: Example rows of the ChickWeight Dataset.

weight	Time	Chick	Diet
42	0	1	1
51	2	1	1
59	4	1	1
64	6	1	1
76	8	1	1
93	10	1	1

Table 1 give example data entries from the ChickWeight dataset.

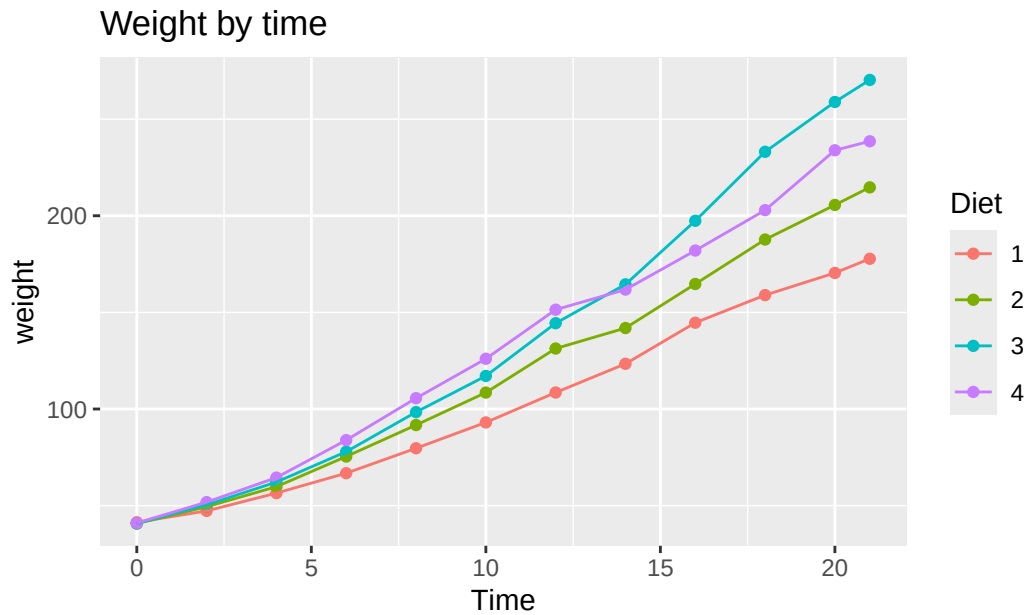

Weight by time, averaged over all chicks given the same diet type

Code appendix

```
knitr::opts_chunk$set(
  collapse = TRUE,
  comment = "#>"
)
include_solutions <- TRUE
library(rmarkdown)
library(knitr)
library(kableExtra)
library(magrittr)
library(ggplot2)
# Put any library imports and other preamble here.

chicks <- ChickWeight
kable(head(chicks))
averaged_chicks <- aggregate(weight ~ Diet + Time , data = chicks, FUN = mean)

#| label: average-chicks-plot
ggplot(averaged_chicks, aes(x = Time, y = weight, color = Diet, group = Diet)) +
```

```
geom_point() +  
geom_line() +  
labs(title = "Weight by time",  
      caption = "Weight by time, averaged over all chicks given the same diet type")
```

References