

Aufgabe 2

(2 a)

Zuerst wird ein Knoten erzeugt mit *node.key* = *inputstring*. Dann wird der Inputstring nach dem Operator mit der niedrigsten Priorität durchsucht. Falls es mehrere Operatoren mit gleicher Priorität gibt, so wird der Operator gewählt der weiter hinten im String ist. Dieser Operator wird als *node.key* gesetzt. Der Teil vom String links vom Operator wird in den Key von linkem Kindknoten geschrieben und der Stringteil rechts vom Operator wird in den Key von rechtem Kindknoten geschrieben. Nun werden die Kinderstring nach obigen Schema geteilt... Am Ende entsteht der gewünschte Baum.


Die Priorität von '+' und '-' ist 0 und die Priorität von '*' und '/' ist 1. Für jede offene Klammer, die im String vor dem Operator auftritt erhöht sich die Priorität des Operators um 2.

```
class Node:
    def __init__(self, key):
        self.key = key
        self.left = None
        self.right = None

def findBreakIndex(string_all):
    """ return operator of least priority """
    breakindex = 0
    pthesis = 0
    prio = 1000

    for ind, s in enumerate(string_all):
        if s == "(":
            pthesis += 1
        elif s == ")":
            pthesis -= 1
        elif s == "*" or s == "/":
            if 2*pthesis + 1 <= prio:
                prio = 2*pthesis + 1
                breakindex = ind
        elif s == "+" or s == "-":
            if 2*pthesis <= prio:
                prio = 2*pthesis
                breakindex = ind
    return breakindex

def evalChildren(node):
    """ build children nodes from node.key string expression
    if node.key is a string of size>1, then the expression is
    further broken down into its components. """
    if len(node.key) > 1:
        if node.key[0] == "(" and node.key[-1] == ")":
            node.key = node.key[1:-1]
        ind = findBreakIndex(node.key)
        string = node.key
        node.key = string[ind]
        node.left = Node(string[0:ind])
        node.right = Node(string[ind+1:])
        evalChildren(node.right)
        evalChildren(node.left)
```

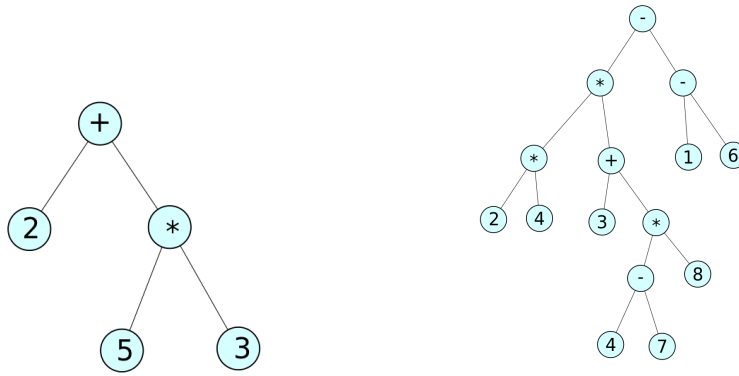

(a) first tree, build from string '2+g*3'

(b) second tree, build from string '2*4*(3+(4-7)*8)-(1-6)'

Abbildung 1: Trees build from string expressions by algorithm described in 2a

```

def buildTree(string_all):
    """ recursively build the tree, starting at root
    """

    root = Node(string_all)
    evalChildren(root)

    return root

```

(2b)

See figure ?? for trees.

(2c)

```

dic = {'+': operator.add, '-': operator.sub, "*": operator.mul,
       "/": operator.div, "0":0, "1":1, "2":2, "3":3, "4":4, "5":5, "6":6,
       "7":7, "8":8, "9":9}

```

```

def calculateFromTree(tree):
    """ calculate expression from tree
    """

    if tree.left.left != None: # left child is operator
        calculateFromTree(tree.left)
    if tree.right.left != None: #right child is operator
        calculateFromTree(tree.right)

    #both children are numbers -> do operation
    if tree.left.left == None and tree.right.left == None:
        tree.key = dic[tree.key](int(tree.left.key), int(tree.right.key))
        tree.left = None
        tree.right = None
    return tree.key

```

```

def evalString(string):
    """ evaluate expression given as string

```

```
build tree from string, then calculate expression from tree  
no checking that input string is correct...  
"""  
tree = buildTree(string)  
result = calculateFromTree(tree)  
  
return result
```