

MGAgencia → Salesforce Leads API — Functional Specification v1.0

Date: 2026-09-07 **Prepared by:** Grupo Cóndor

What's new (2026-09-17): 4 new optional request fields added: `platform`, `meta_form_id`, `campaign_name`, `campaign_description` (§4). Non-breaking additions — existing integrations are unaffected if these fields are omitted. **These fields are live in Sandbox now for testing; not yet deployed to Production.** Please validate against the Sandbox environment (§2) — we'll confirm here once they're live in Production.


What's new (2026-09-07): Production go-live. The production base URL and token endpoint are now confirmed (§2, §3). Credentials (`client_id` / `client_secret`) are pending delivery through our secure channel — see §3.

What's new (2026-09-03): 6 optional request fields were added, surfaced by MGAgencia's UAT: `interest_model`, `contact_preference`, `payment_method`, `purchase_timeline`, `trade_in`, and `test_drive_requested`. These are non-breaking additions within v1 (§1) — no changes required for existing integrations.

1. Overview

Purpose. MGAgencia collects advertising leads from marketing platforms and sends them to Grupo Cóndor's CRM (Salesforce) so they can be worked by our sales team, without manual data entry.

Flow

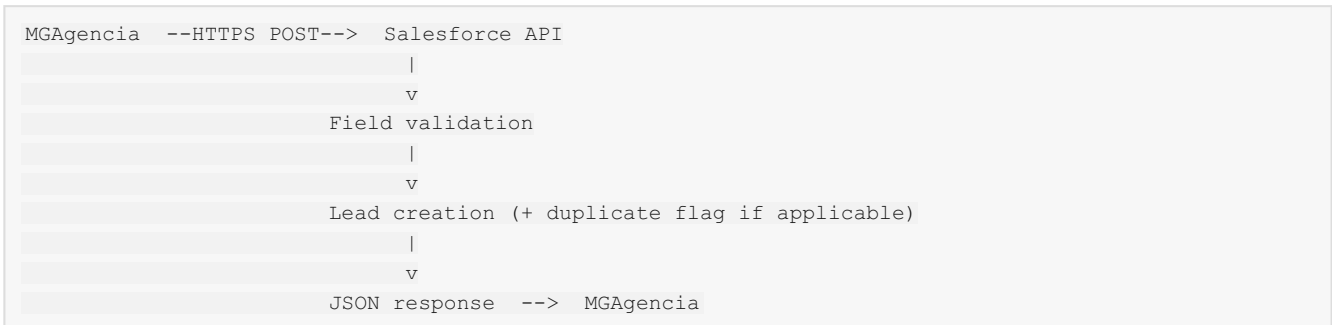

Versioning policy. The current contract is **v1**. Any breaking change (removed/renamed fields, changed status codes, changed semantics) will be released as a new version (e.g. `v2`) with its own endpoint path. Non-breaking additions (new optional fields, new catalog values) may be introduced within v1.

2. Environments

Environment	Base URL	Notes
Sandbox (UAT)	<code>https://condorsaci--qas.sandbox.my.salesforce.com</code>	For integration testing. Kept available after go-live.
Production	<code>https://condorsaci.my.salesforce.com</code>	Live as of 2026-09-07.

Important: the token must always be requested from the org's own domain (`*.my.salesforce.com` format), never from `test.salesforce.com` or `login.salesforce.com` — those generic domains reject this authentication flow.

Item	Value
Endpoint path	<code>/services/apexrest/mgagencia/v1/leads</code>
HTTP method	<code>POST</code>
Content-Type	<code>application/json; charset=UTF-8</code>
Transport	HTTPS only

3. Authentication

Grant type: OAuth 2.0 Client Credentials.

Environment	Token endpoint
Sandbox	<code>https://condorsaci--gas.sandbox.my.salesforce.com/services/oauth2/token</code>
Production	<code>https://condorsaci.my.salesforce.com/services/oauth2/token</code>

Request parameters (`application/x-www-form-urlencoded`):

Parameter	Value
<code>grant_type</code>	<code>client_credentials</code>
<code>client_id</code>	Provided by Grupo C3n3dor
<code>client_secret</code>	Provided by Grupo C3n3dor

Credentials (`client_id` / `client_secret`) will be delivered by Grupo C3n3dor through a secure channel (e.g. a password manager share). **They will never be sent by email or chat in plain text.** The production Connected App is provisioned; credential delivery is in progress.

Every API request must include the access token:

```
Authorization: Bearer <access_token>
```

Token expiry and renewal. Tokens expire according to the org's session policy. MGAgen3ia should request a new token whenever a request fails with `401 Unauthorized`, rather than caching a token indefinitely or assuming a fixed lifetime.

Example

```
# 1. Get an access token
curl -s -X POST "https://condorsaci--gas.sandbox.my.salesforce.com/services/oauth2/token" \
  -d "grant_type=client_credentials" \
  -d "client_id=<CLIENT_ID>" \
  -d "client_secret=<CLIENT_SECRET>"

# 2. Send a lead
curl -s -X POST "https://condorsaci--gas.sandbox.my.salesforce.com/services/apexrest/mgagencia/v1/leads" \
  -H "Authorization: Bearer <ACCESS_TOKEN>" \
```

```
-H "Content-Type: application/json" \  
-d '{  
  "first_name": "Maria",  
  "last_name": "Gonzalez",  
  "phone": "0981123456",  
  "email": "maria.gonzalez@example.com",  
  "branch_code": "ASUNCION"  
}'
```

The example above uses the sandbox host; swap in the production host from §2/§3 once you have production credentials. Credentials (`client_id` / `client_secret`) are **pending delivery** through our secure channel.

4. Request specification

One JSON object per request. No batch/array wrapping. Unknown properties sent by MGAgenia are ignored (not rejected).

Field	Type	Required	Max length	Format	Description	Example
<code>first_name</code>	string	Yes	—	Non-empty after trimming	Lead's first name.	"Maria"
<code>last_name</code>	string	Yes	—	Non-empty after trimming	Lead's last name.	"Gonzalez"
<code>phone</code>	string	Yes	—	Paraguayan mobile number	Accepted in local (0981123456) or international (595981123456) format. Normalized server-side to a single canonical format before storage and duplicate matching.	"0981123456"
<code>email</code>	string	No	—	Standard email format	Optional contact email.	"maria.gonzalez@example.com"
<code>branch_code</code>	string	No	—	One of the catalog values below	Preferred C�ndor branch. Omitting the field is valid; an unrecognized value is rejected.	"ASUNCION"
<code>external_lead_id</code>	string	No (see open questions)	—	Free text	Unique identifier MGAgenia may assign to a lead. Not required today; whether it becomes required and used as an idempotency	"neb-2026-0000123"

Field	Type	Required	Max length	Format	Description	Example
					key is open — see §10.	
<code>interest_model</code>	string	No	80 characters	Free text	Vehicle of interest (brand/ model/version/ year), sent as-is by MGAgenia. No catalog — any text within the max length is accepted.	"Toyota Hilux 2026"
<code>contact_preference</code>	string	No	—	One of the catalog values below	Customer's preferred contact channel.	"WhatsApp"
<code>payment_method</code>	string	No	50 characters	Free text	Payment/ financing method indicated by the customer.	"financiacion_bancaria"
<code>purchase_timeline</code>	string	No	50 characters	Free text	Purchase timeline estimated by the customer.	"inmediatamente"
<code>trade_in</code>	string	No	50 characters	Free text	Whether the customer is trading in their current vehicle.	"si"
<code>test_drive_requested</code>	boolean	No	—	<code>true / false</code>	Whether the customer requested a test drive. Stored as received.	<code>true</code>
<code>platform</code>	string	No	—	One of the catalog values below	Lead origin. Resolves our internal routing. Omitting the field keeps today's default behavior unchanged.	"fb"
<code>meta_form_id</code>	string	No	255 characters	Free text	Meta's lead form/ad identifier.	"1073658921844483"
<code>campaign_name</code>	string	No	250 characters	Free text	Campaign name. Also used to auto-link the lead to the matching campaign on our side.	"GIMC_MG_PY_Lead ads_MG3 HEV_0909"
<code>campaign_description</code>	string	No	32768 characters	Free text	Campaign description, if available.	"_"

`branch_code` **catalog**

Value
ASUNCION
CIUDAD_DEL_ESTE
CORONEL_OVIEDO
ENCARNACION

contact_preference catalog

Value
Correo Electrónico
WhatsApp
Teléfono

Values must match exactly (case and accents included). A value outside this catalog is rejected with 422 (UNKNOWN_VALUE); omitting the field is valid.

platform catalog

Value	Meaning
fb	Facebook
ig	Instagram
tiktok	TikTok <i>(not yet confirmed against real traffic on either side)</i>
web	Website / test drive form <i>(not yet confirmed against real traffic on either side)</i>

Lowercase, exact match. facebook/instagram (the full names) are **not** accepted — use fb/ig. A value outside this catalog is rejected with 422 (UNKNOWN_VALUE); omitting the field keeps today's default routing unchanged.

4.1 Example request

```
{
  "first_name": "Maria",
  "last_name": "Gonzalez",
  "phone": "0981123456",
  "email": "maria.gonzalez@example.com",
  "branch_code": "ASUNCION",
  "external_lead_id": "neb-2026-0000123",
  "interest_model": "Toyota Hilux 2026",
  "contact_preference": "WhatsApp",
  "payment_method": "financiacion_bancaria",
  "purchase_timeline": "inmediatamente",
  "trade_in": "si",
  "test_drive_requested": true,
  "platform": "fb",
  "meta_form_id": "1073658921844483",
  "campaign_name": "GIMC_MG_PY_Lead ads_MG3 HEV_0909"
}
```

Every field in this section except `interest_model`, `payment_method`, `purchase_timeline`, `trade_in`, `meta_form_id`, `campaign_name`, and `campaign_description` has no declared length limit; those return 422 (`INVALID_FORMAT`) when a value exceeds the stated maximum, rather than silently truncating it.

5. Response specification

5.1 Success — 201 Created

Field	Type	Description
<code>code</code>	string	Machine-readable outcome code (<code>LEAD_CREATED</code>).
<code>status</code>	string	<code>success</code> .
<code>message</code>	string	Human-readable summary.
<code>integration_id</code>	string (UUID)	Reference identifier for this request. MGAgencia must store it for support requests. It is not a Salesforce record identifier.
<code>duplicated</code>	boolean	<code>true</code> if this lead matched an existing one (see §7).

```
{
  "code": "LEAD_CREATED",
  "status": "success",
  "message": "Lead created successfully.",
  "integration_id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "duplicated": false
}
```

5.2 Error envelope

All error responses share this shape. When the failure is field-level, `errors[]` reports **every** problem found in a single pass, not just the first.

Field	Type	Description
<code>code</code>	string	Machine-readable outcome code.
<code>status</code>	string	<code>error</code> .
<code>message</code>	string	Human-readable, safe-to-log summary. Never a raw internal error.
<code>errors</code>	array	Present when the failure is field-level. Each item has <code>field</code> , <code>code</code> , <code>message</code> .

```
{
  "code": "VALIDATION_ERROR",
  "status": "error",
  "message": "One or more fields failed validation.",
  "errors": [
    { "field": "last_name", "code": "REQUIRED", "message": "last_name is required." },
    { "field": "phone", "code": "REQUIRED", "message": "phone is required." }
  ]
}
```

5.3 Error catalog

HTTP status	code	Meaning
400	MALFORMED_REQUEST	Body missing, not valid JSON, or not a JSON object. No field validation is attempted.
401	(auth error)	Missing or invalid access token.
403	(auth error)	Valid token, but not authorized for this operation.
422	VALIDATION_ERROR with sub-code REQUIRED	A required field is missing or empty.
422	VALIDATION_ERROR with sub-code INVALID_FORMAT	A field does not match the expected format (e.g. email).
422	VALIDATION_ERROR with sub-code UNKNOWN_VALUE	A field value is not in its catalog (e.g. an unrecognized branch_code).
500	INTERNAL_ERROR	Unexpected processing failure on our side. Never includes stack traces or internal error text.

Example — 400 malformed JSON

```
{
  "code": "MALFORMED_REQUEST",
  "status": "error",
  "message": "Request body is not valid JSON."
}
```

Example — 422 unknown branch code

```
{
  "code": "VALIDATION_ERROR",
  "status": "error",
  "message": "One or more fields failed validation.",
  "errors": [
    { "field": "branch_code", "code": "UNKNOWN_VALUE", "message": "branch_code does not match a known branch." }
  ]
}
```

6. Duplicate handling

Duplicate leads are **never rejected**. If an incoming lead matches an existing one, it is still created, and the response returns `"duplicate": true`.

Matching signals: normalized `phone`, or `email`, or `external_lead_id` when provided.

MGAgenzia does not need to take corrective action on a duplicate response — it is flagged internally for reporting. Even so, MGAgenzia should avoid blindly retrying an already-successful request, since every accepted request currently creates a new lead record (see the idempotency note in §10, item 1).

7. Operational behavior

Topic	Guidance
Timeout	Configure a reasonable client-side timeout (e.g. 30 seconds) per request.
Retries	Retry only on 5xx responses, with backoff between attempts. Do not retry 4xx responses — they indicate the request itself must be corrected, not resent as-is.
Rate limits	Not yet defined — see open question in §10.
Support traceability	Always log the <code>integration_id</code> returned on success. It is required to look up a request when contacting Grupo C�ndor for support.

8. UAT plan for MGAgenia

Run the following scenarios against the sandbox environment before go-live:

#	Scenario	Expected result
1	Valid lead with all fields	201, code: LEAD_CREATED, duplicated: false.
2	Duplicate lead (same phone/email/ <code>external_lead_id</code> as a previous one)	201, code: LEAD_CREATED, duplicated: true.
3	Missing required field(s) (<code>first_name</code> , <code>last_name</code> , or <code>phone</code>)	422, code: VALIDATION_ERROR, <code>errors[]</code> lists every missing field.
4	Invalid <code>branch_code</code> (not in catalog)	422, code: VALIDATION_ERROR, <code>errors[].code</code> : UNKNOWN_VALUE.
5	Malformed JSON body	400, code: MALFORMED_REQUEST.
6	Request without a valid access token	401.

9. Open questions for MGAgenia

#	Question	Why it matters	Proposed answer
1	Can you send a unique <code>external_lead_id</code> per lead?	If confirmed, it becomes a required field and the idempotency key for safe retries (avoiding duplicate creation on resubmission).	Yes — MGAgenia assigns and sends a stable, unique <code>external_lead_id</code> per lead.
2	How do you identify advertising campaigns?	Needed to attribute leads to campaigns for reporting.	MGAgenia sends a <code>campaign_code</code> from a catalog agreed with Grupo C�ndor; we resolve it internally.
3	Do you need to send the vehicle model of interest? Resolved (2026-09-03).	—	<code>interest_model</code> was implemented as free text (max 80 characters, no catalog) — see §4.
4			The synchronous creation response (<code>integration_id</code> ,

#	Question	Why it matters	Proposed answer
	Do you need to query lead status after creation, or is the creation response enough?	Determines whether a <code>GET</code> status endpoint is needed in a future phase.	<code>duplicate</code>) is sufficient for v1; no <code>GET</code> endpoint planned unless confirmed otherwise.
5	What request volume do you expect (leads/day, peak rate)?	Needed to size the endpoint and define rate limits.	Please share expected average and peak volumes.

10. Support & change management

Item	Detail
Contact	Hanssel Mirabal — <code>hanssel.mirabal@grupocondor.com.py</code>
Change communication	Any change to this contract (new/changed fields, status codes, or behavior) will be communicated to MGAgenia in writing before deployment. Breaking changes are released under a new API version (§1); non-breaking changes are documented as an update to this specification.

End of document.