

# Who uses Mingle?

Use case diagram: user goals inside the website boundary; associations do not imply execution order.

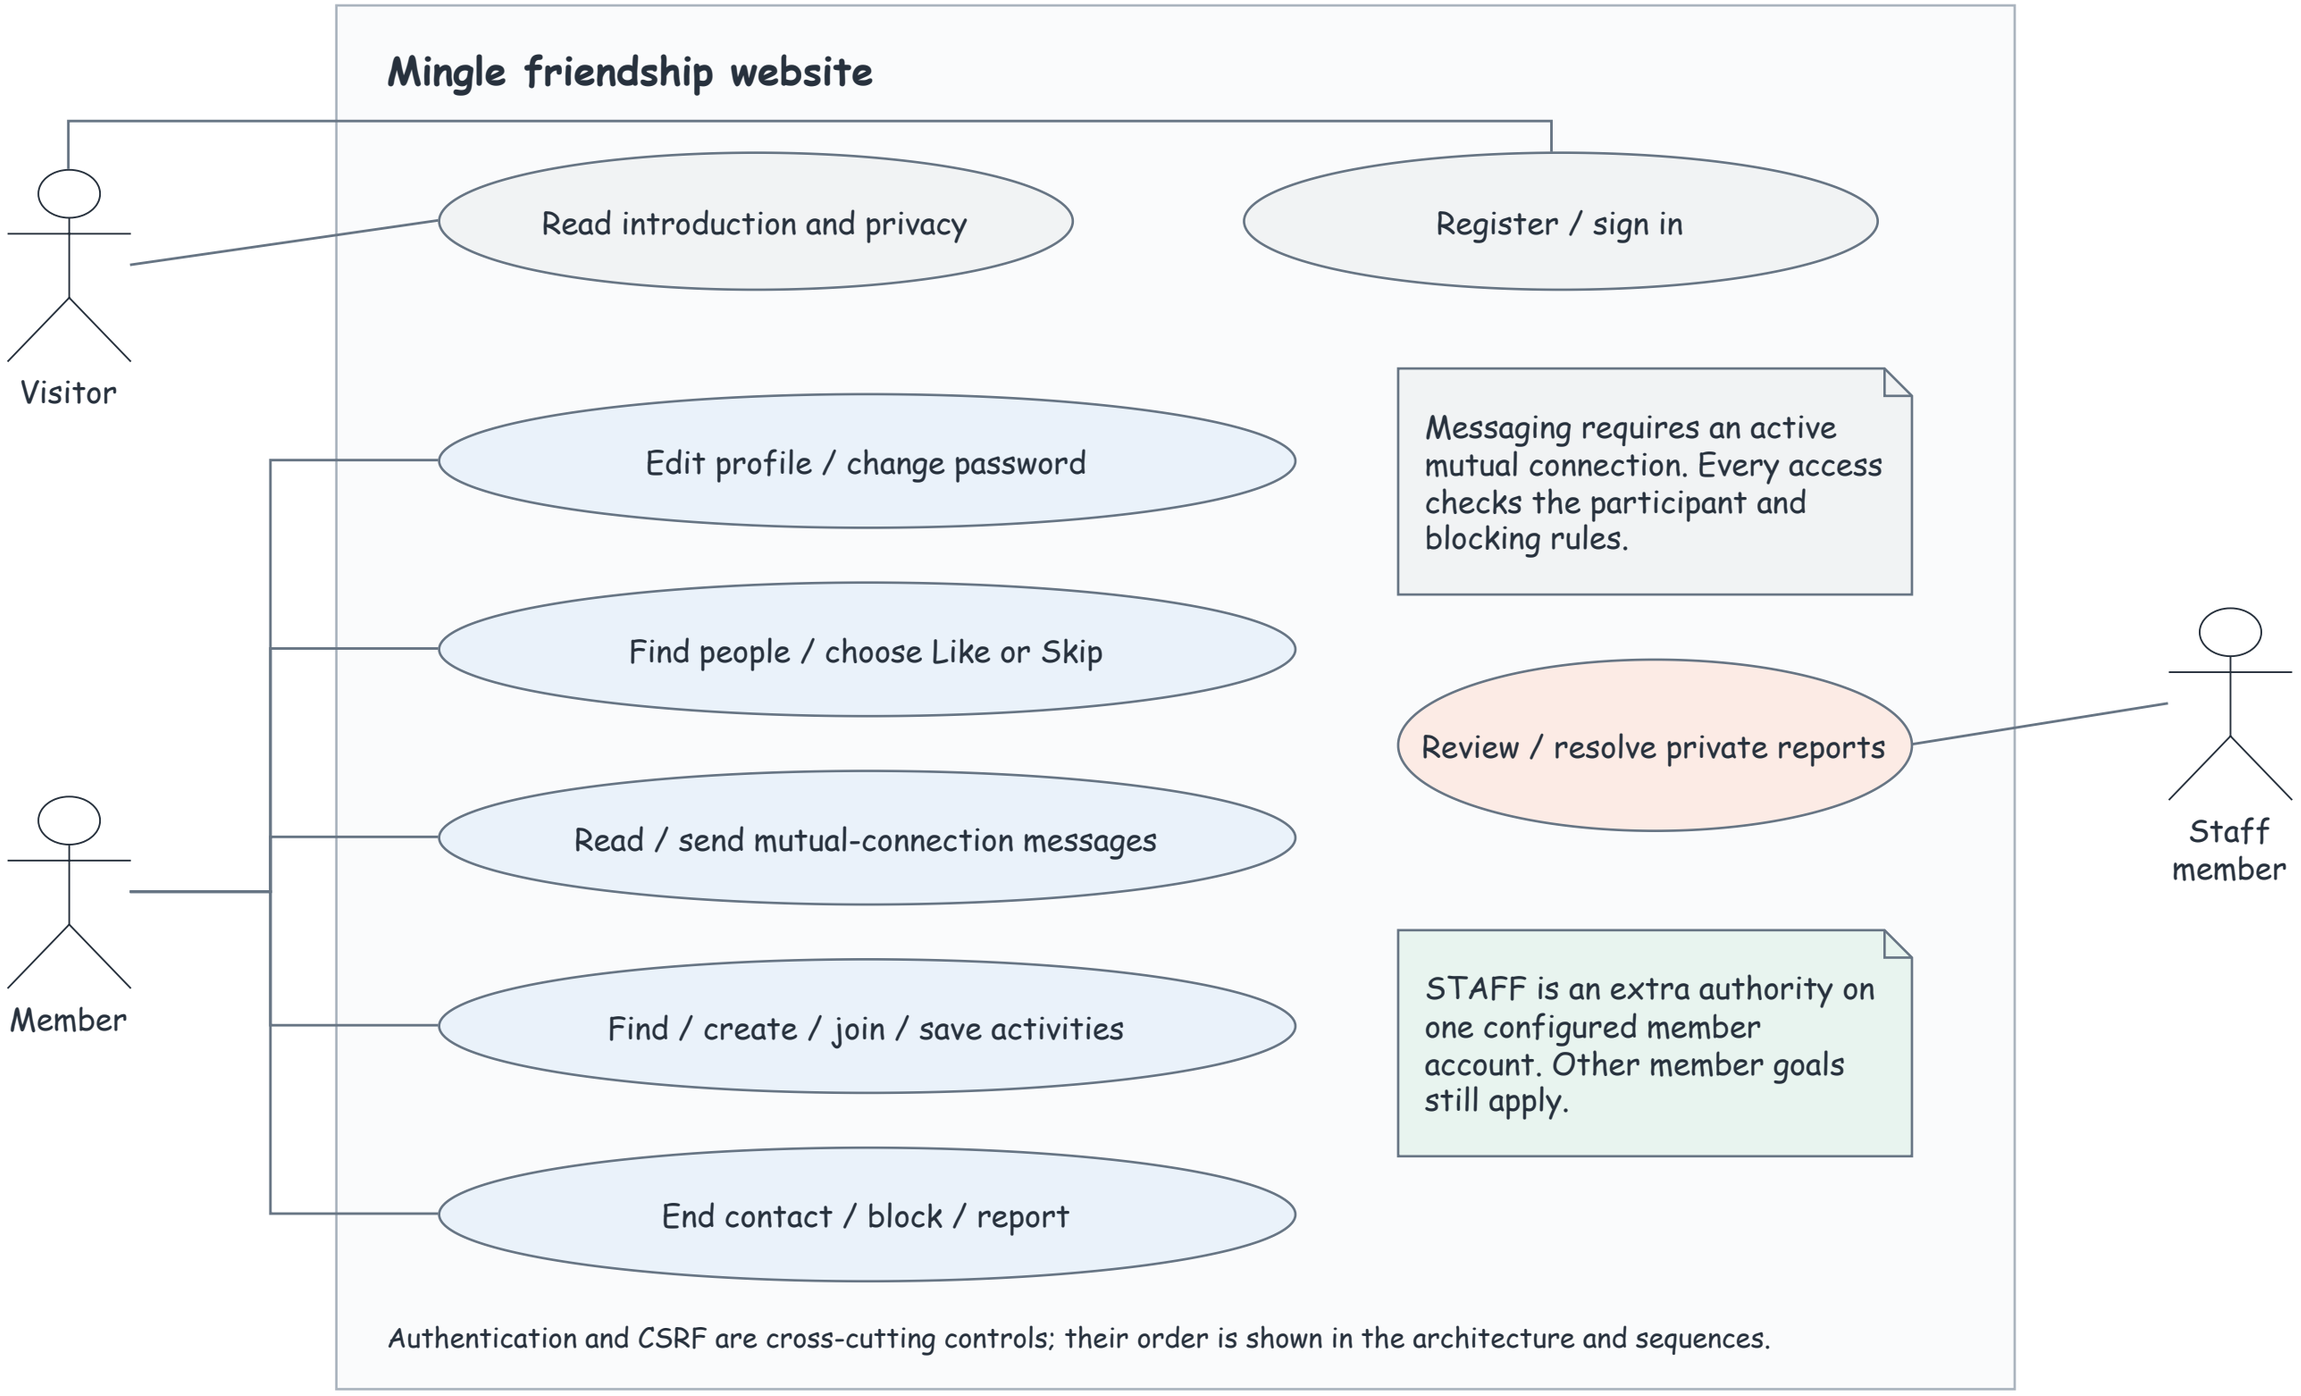

# How one browser request reaches the data


Layered Spring MVC architecture. This is one Java application with a local H2 database.

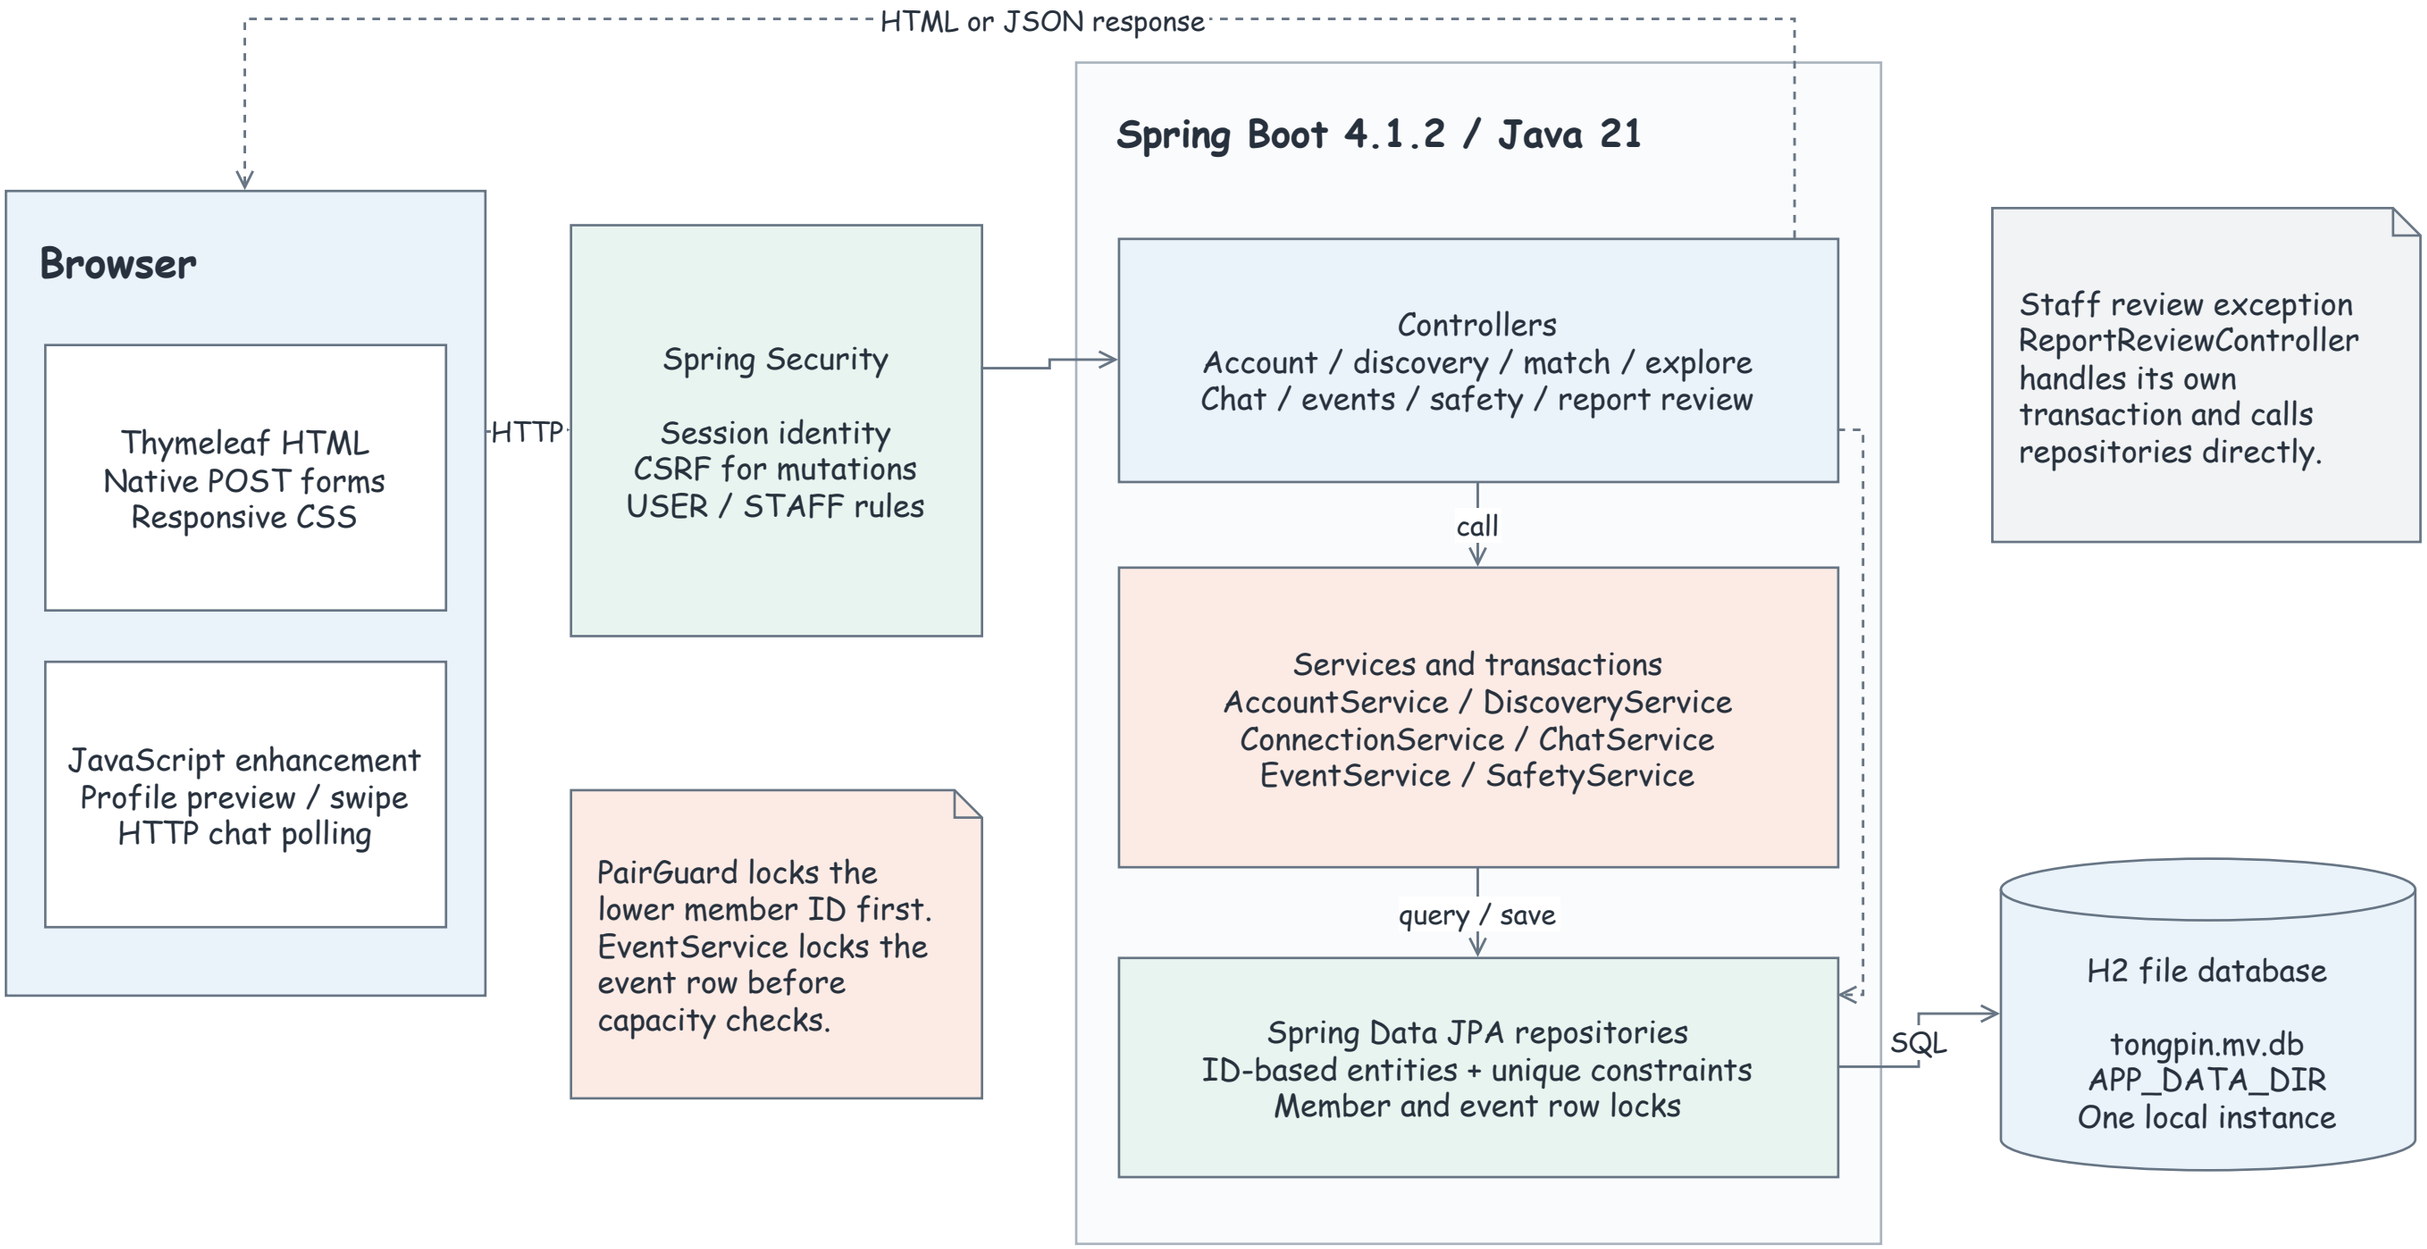


Local delivery: no external API or message broker is required. Deployment and backup boundaries are shown on page 08.


# People, choices and conversations

Selected class members. Associations describe the domain links stored as Long IDs, not JPA object references.

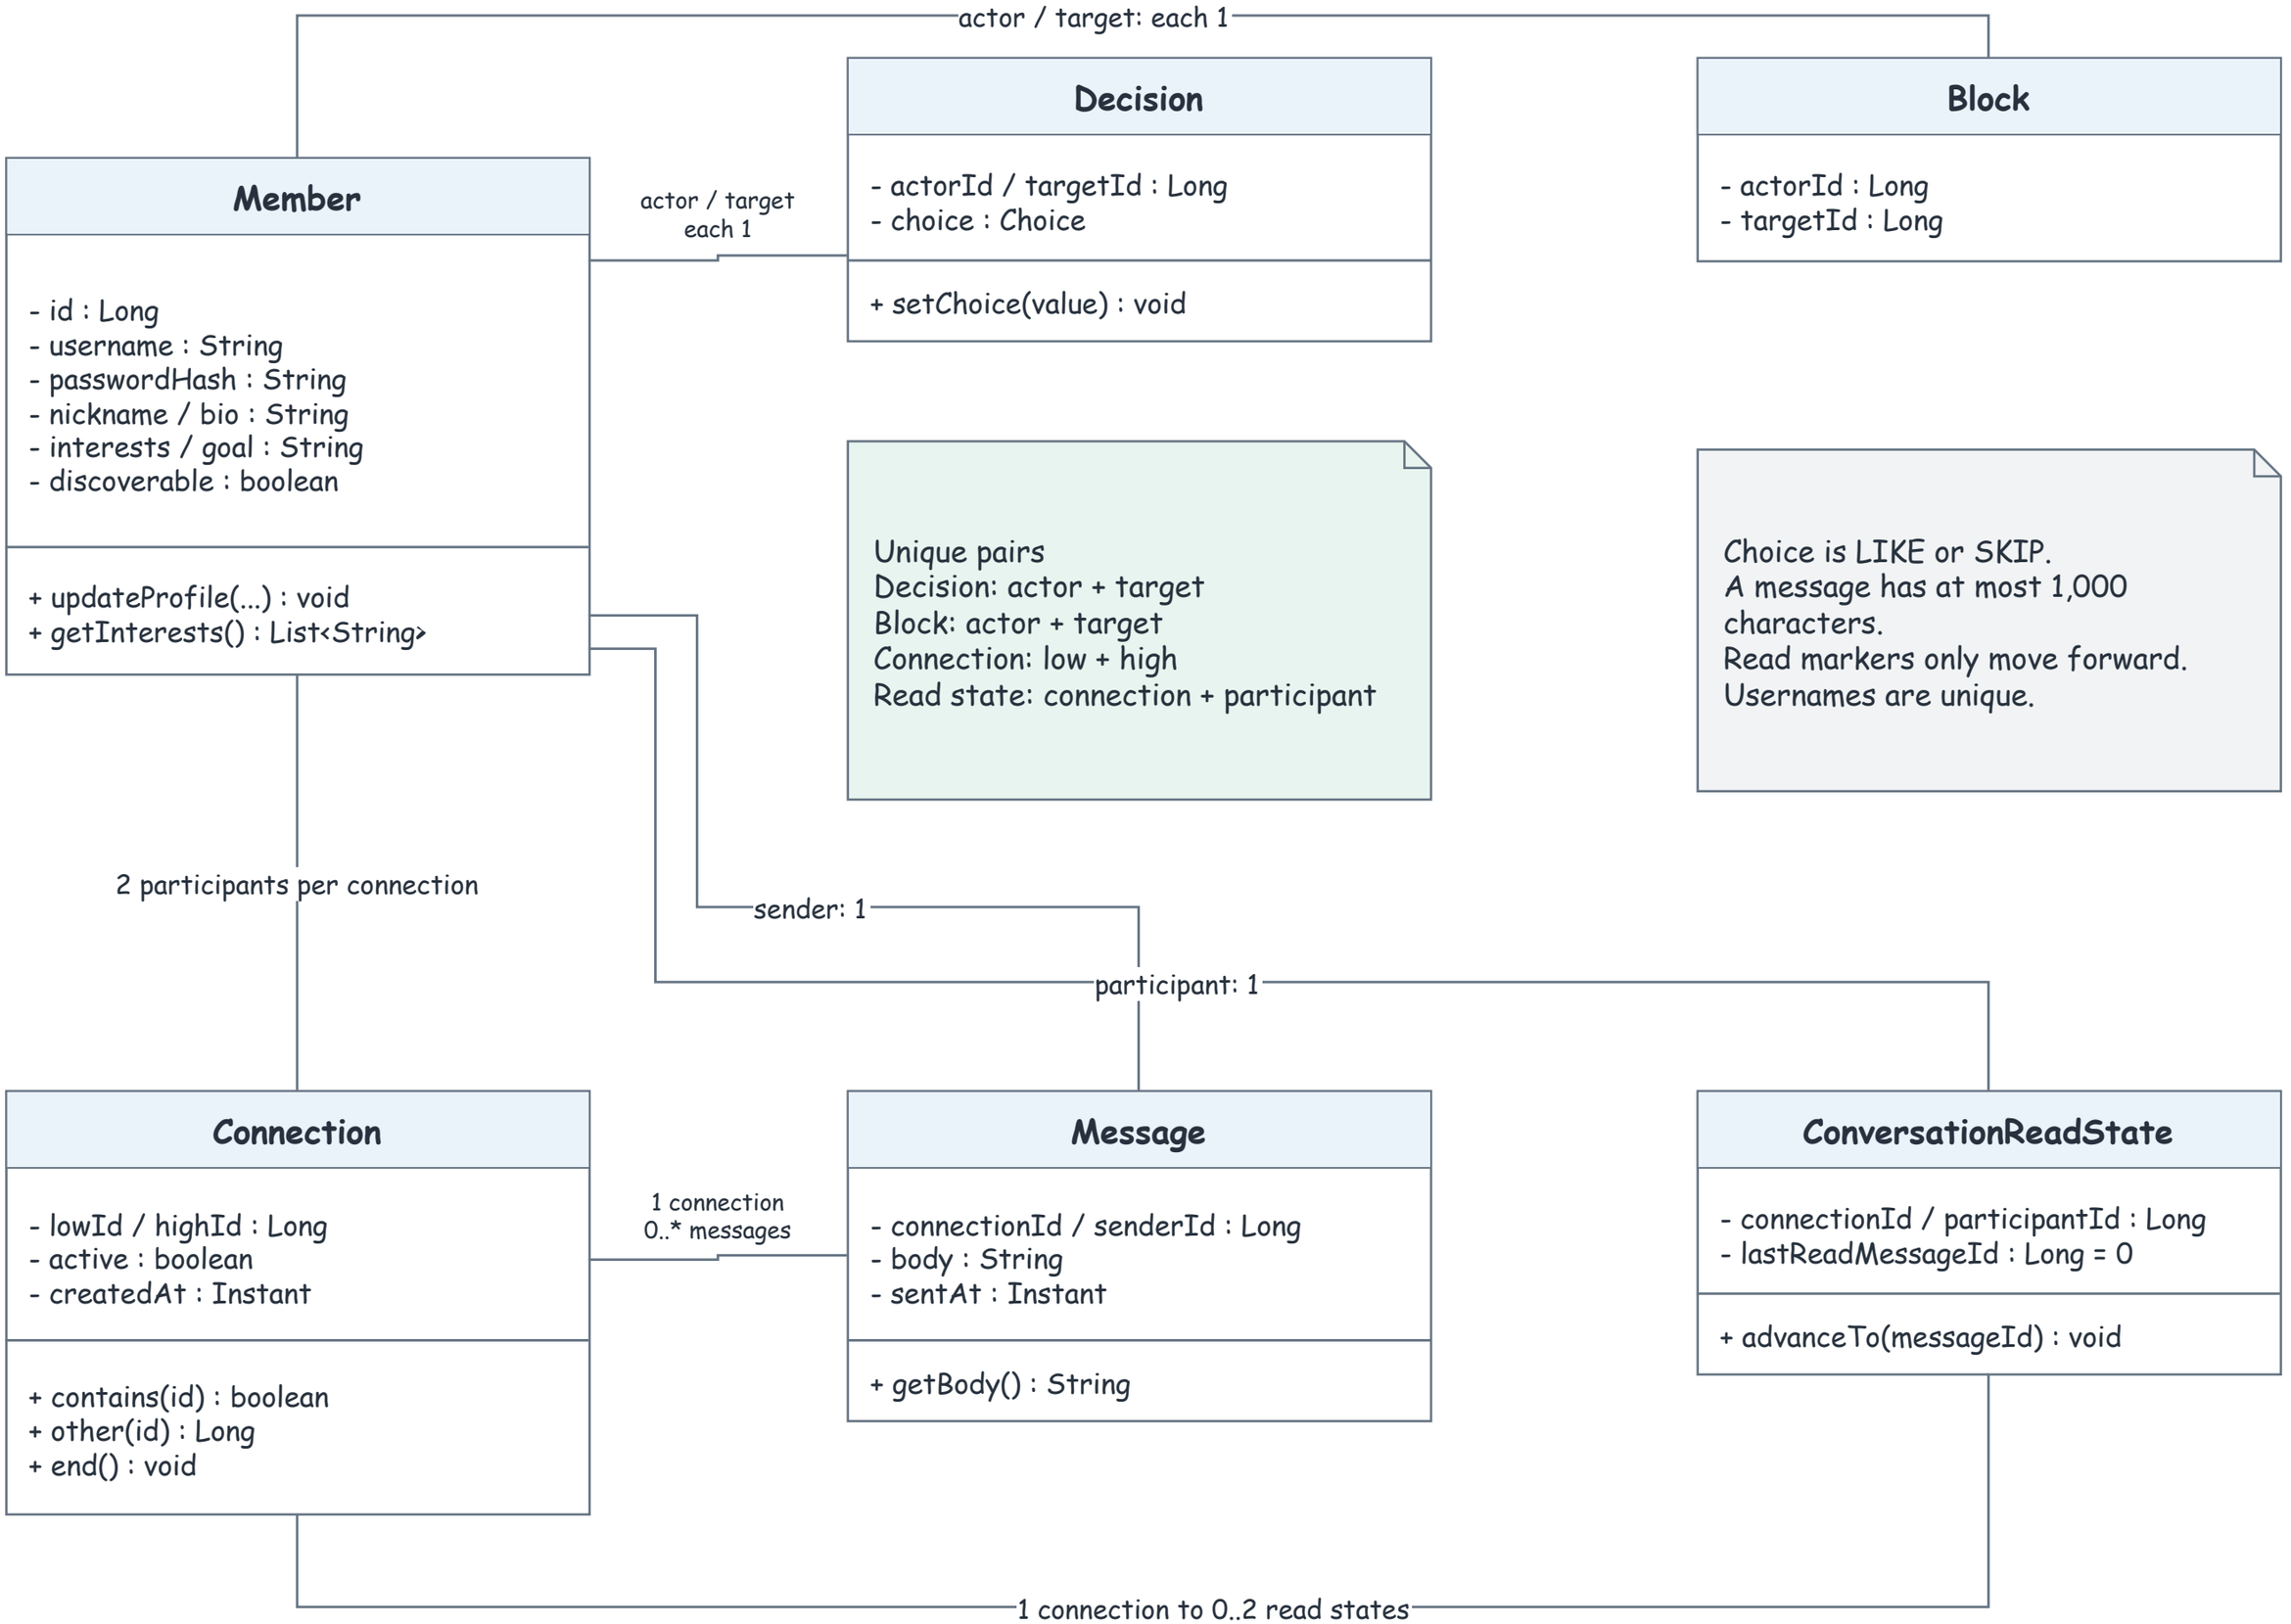


# Activities and private report review

Supporting domain classes, their ownership links and the state that is persisted.

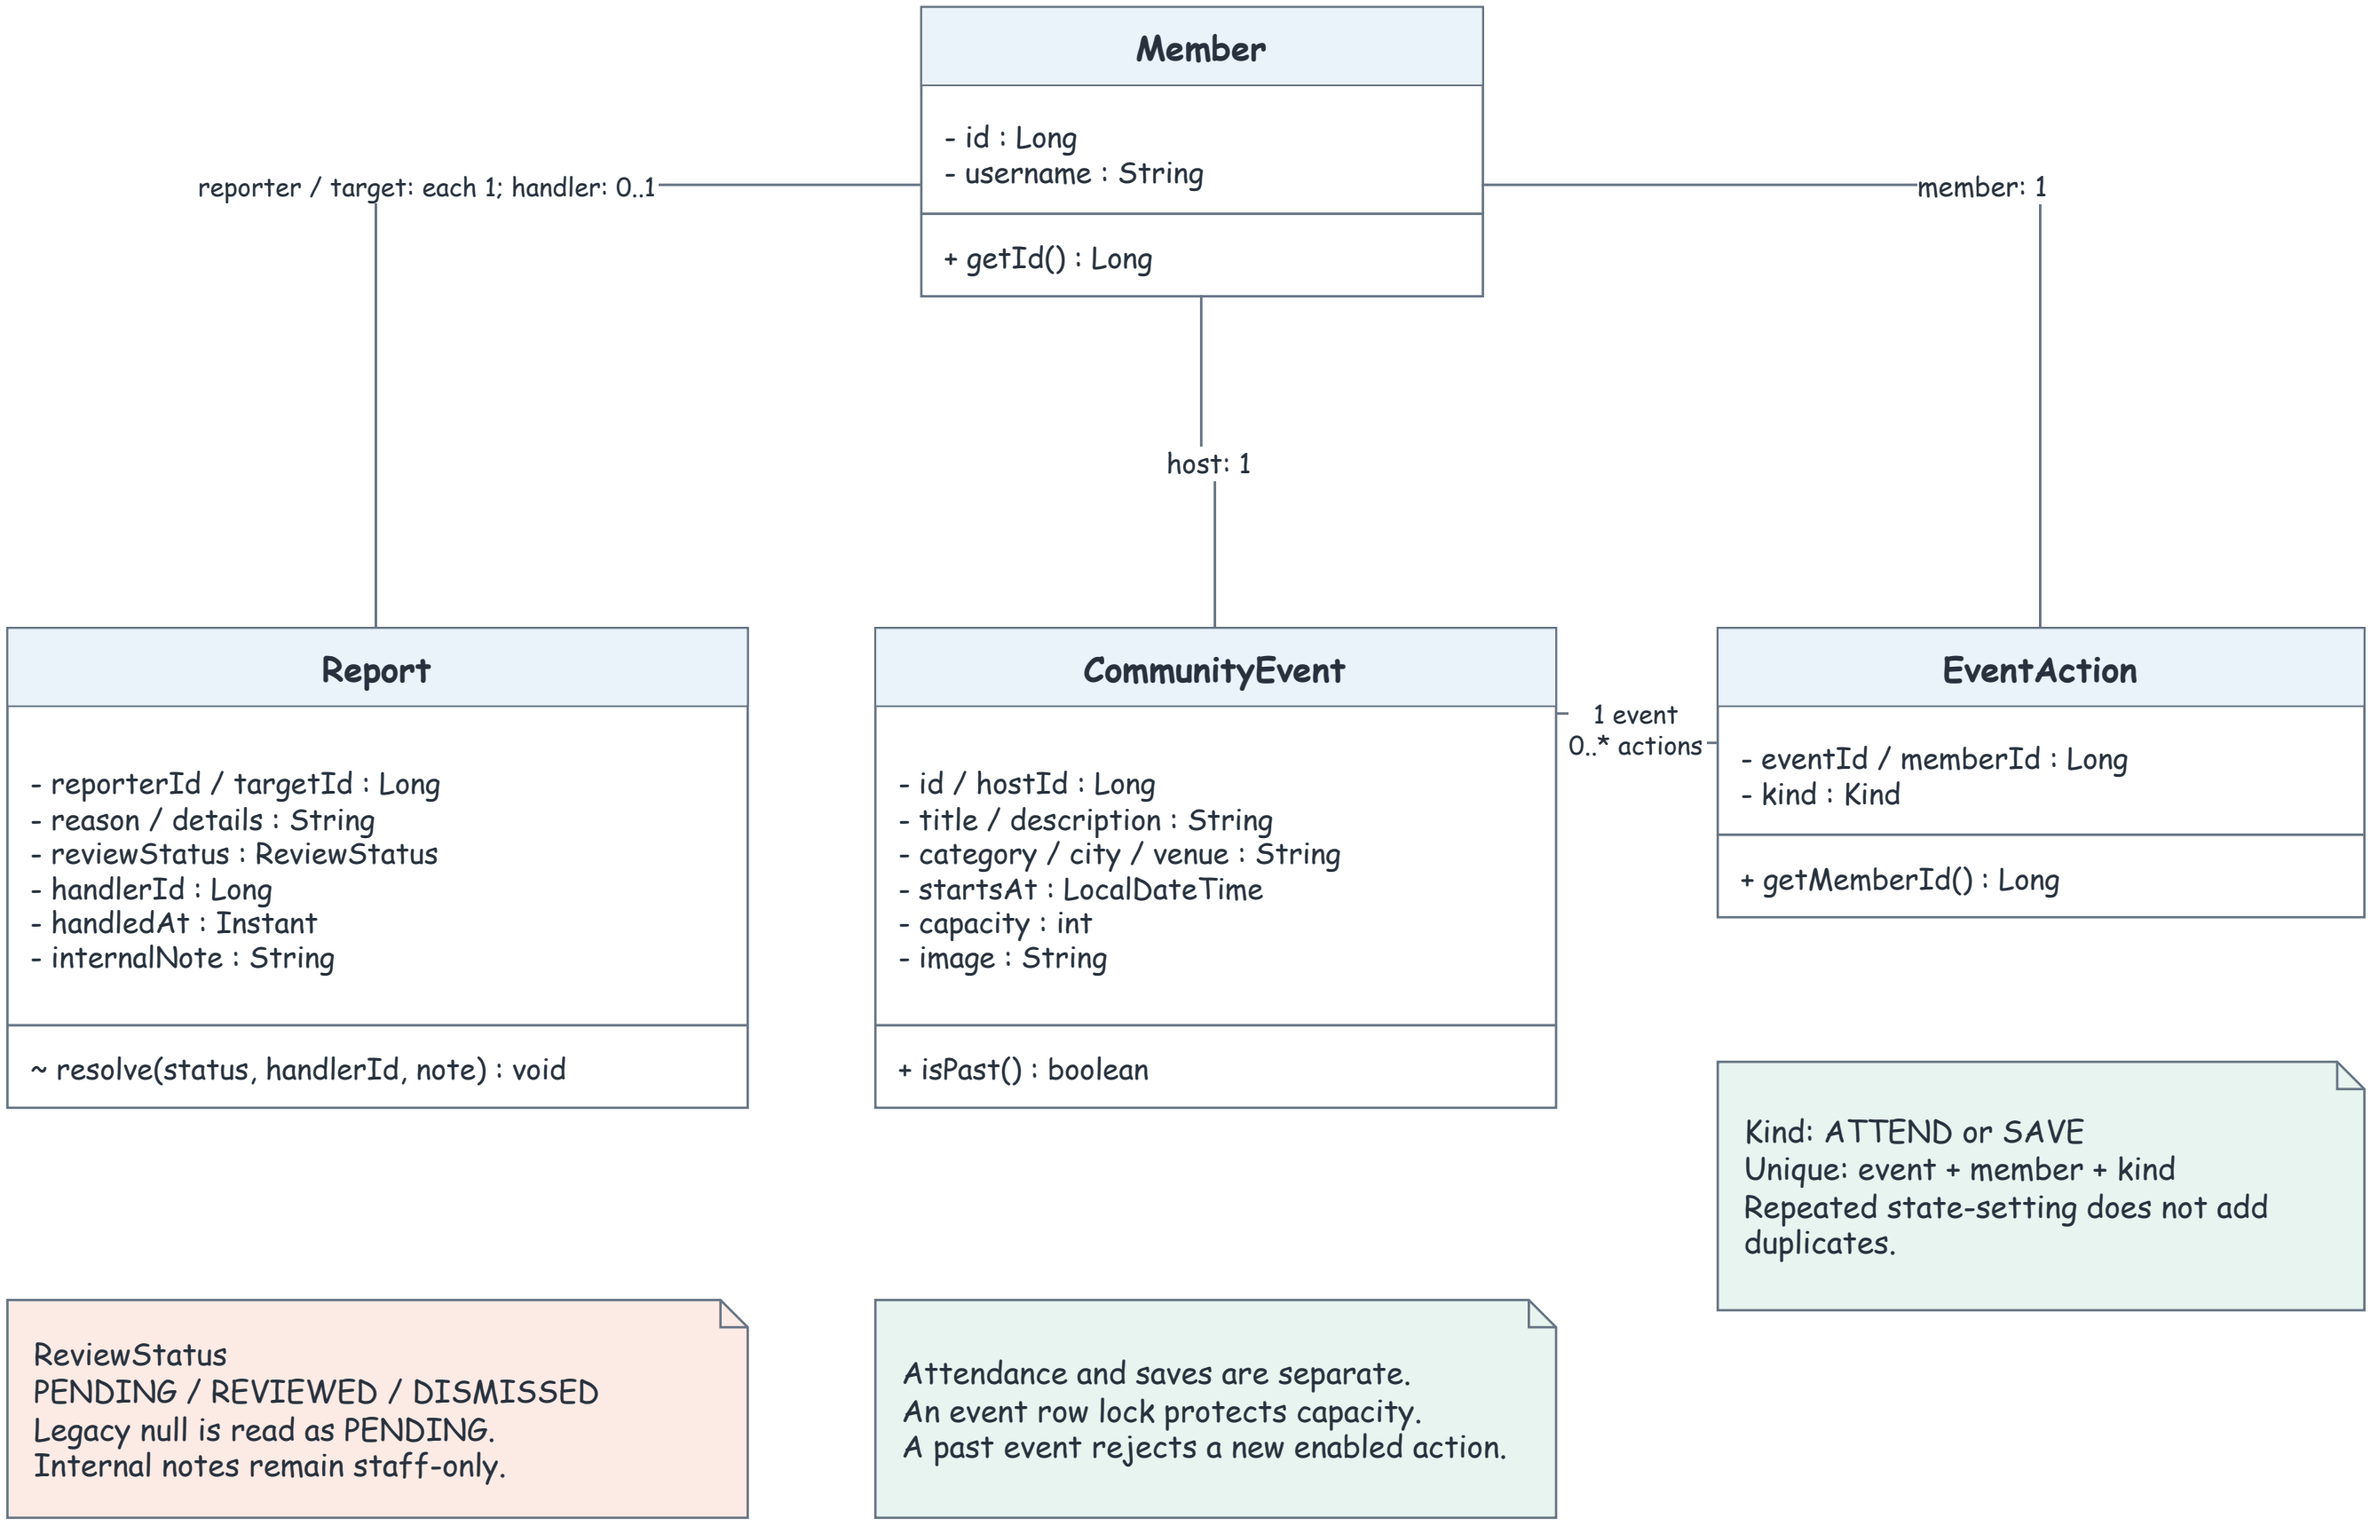


# From Like to a mutual connection

Sequence diagram: a valid authenticated POST; security and account lookup are summarized in the precondition.

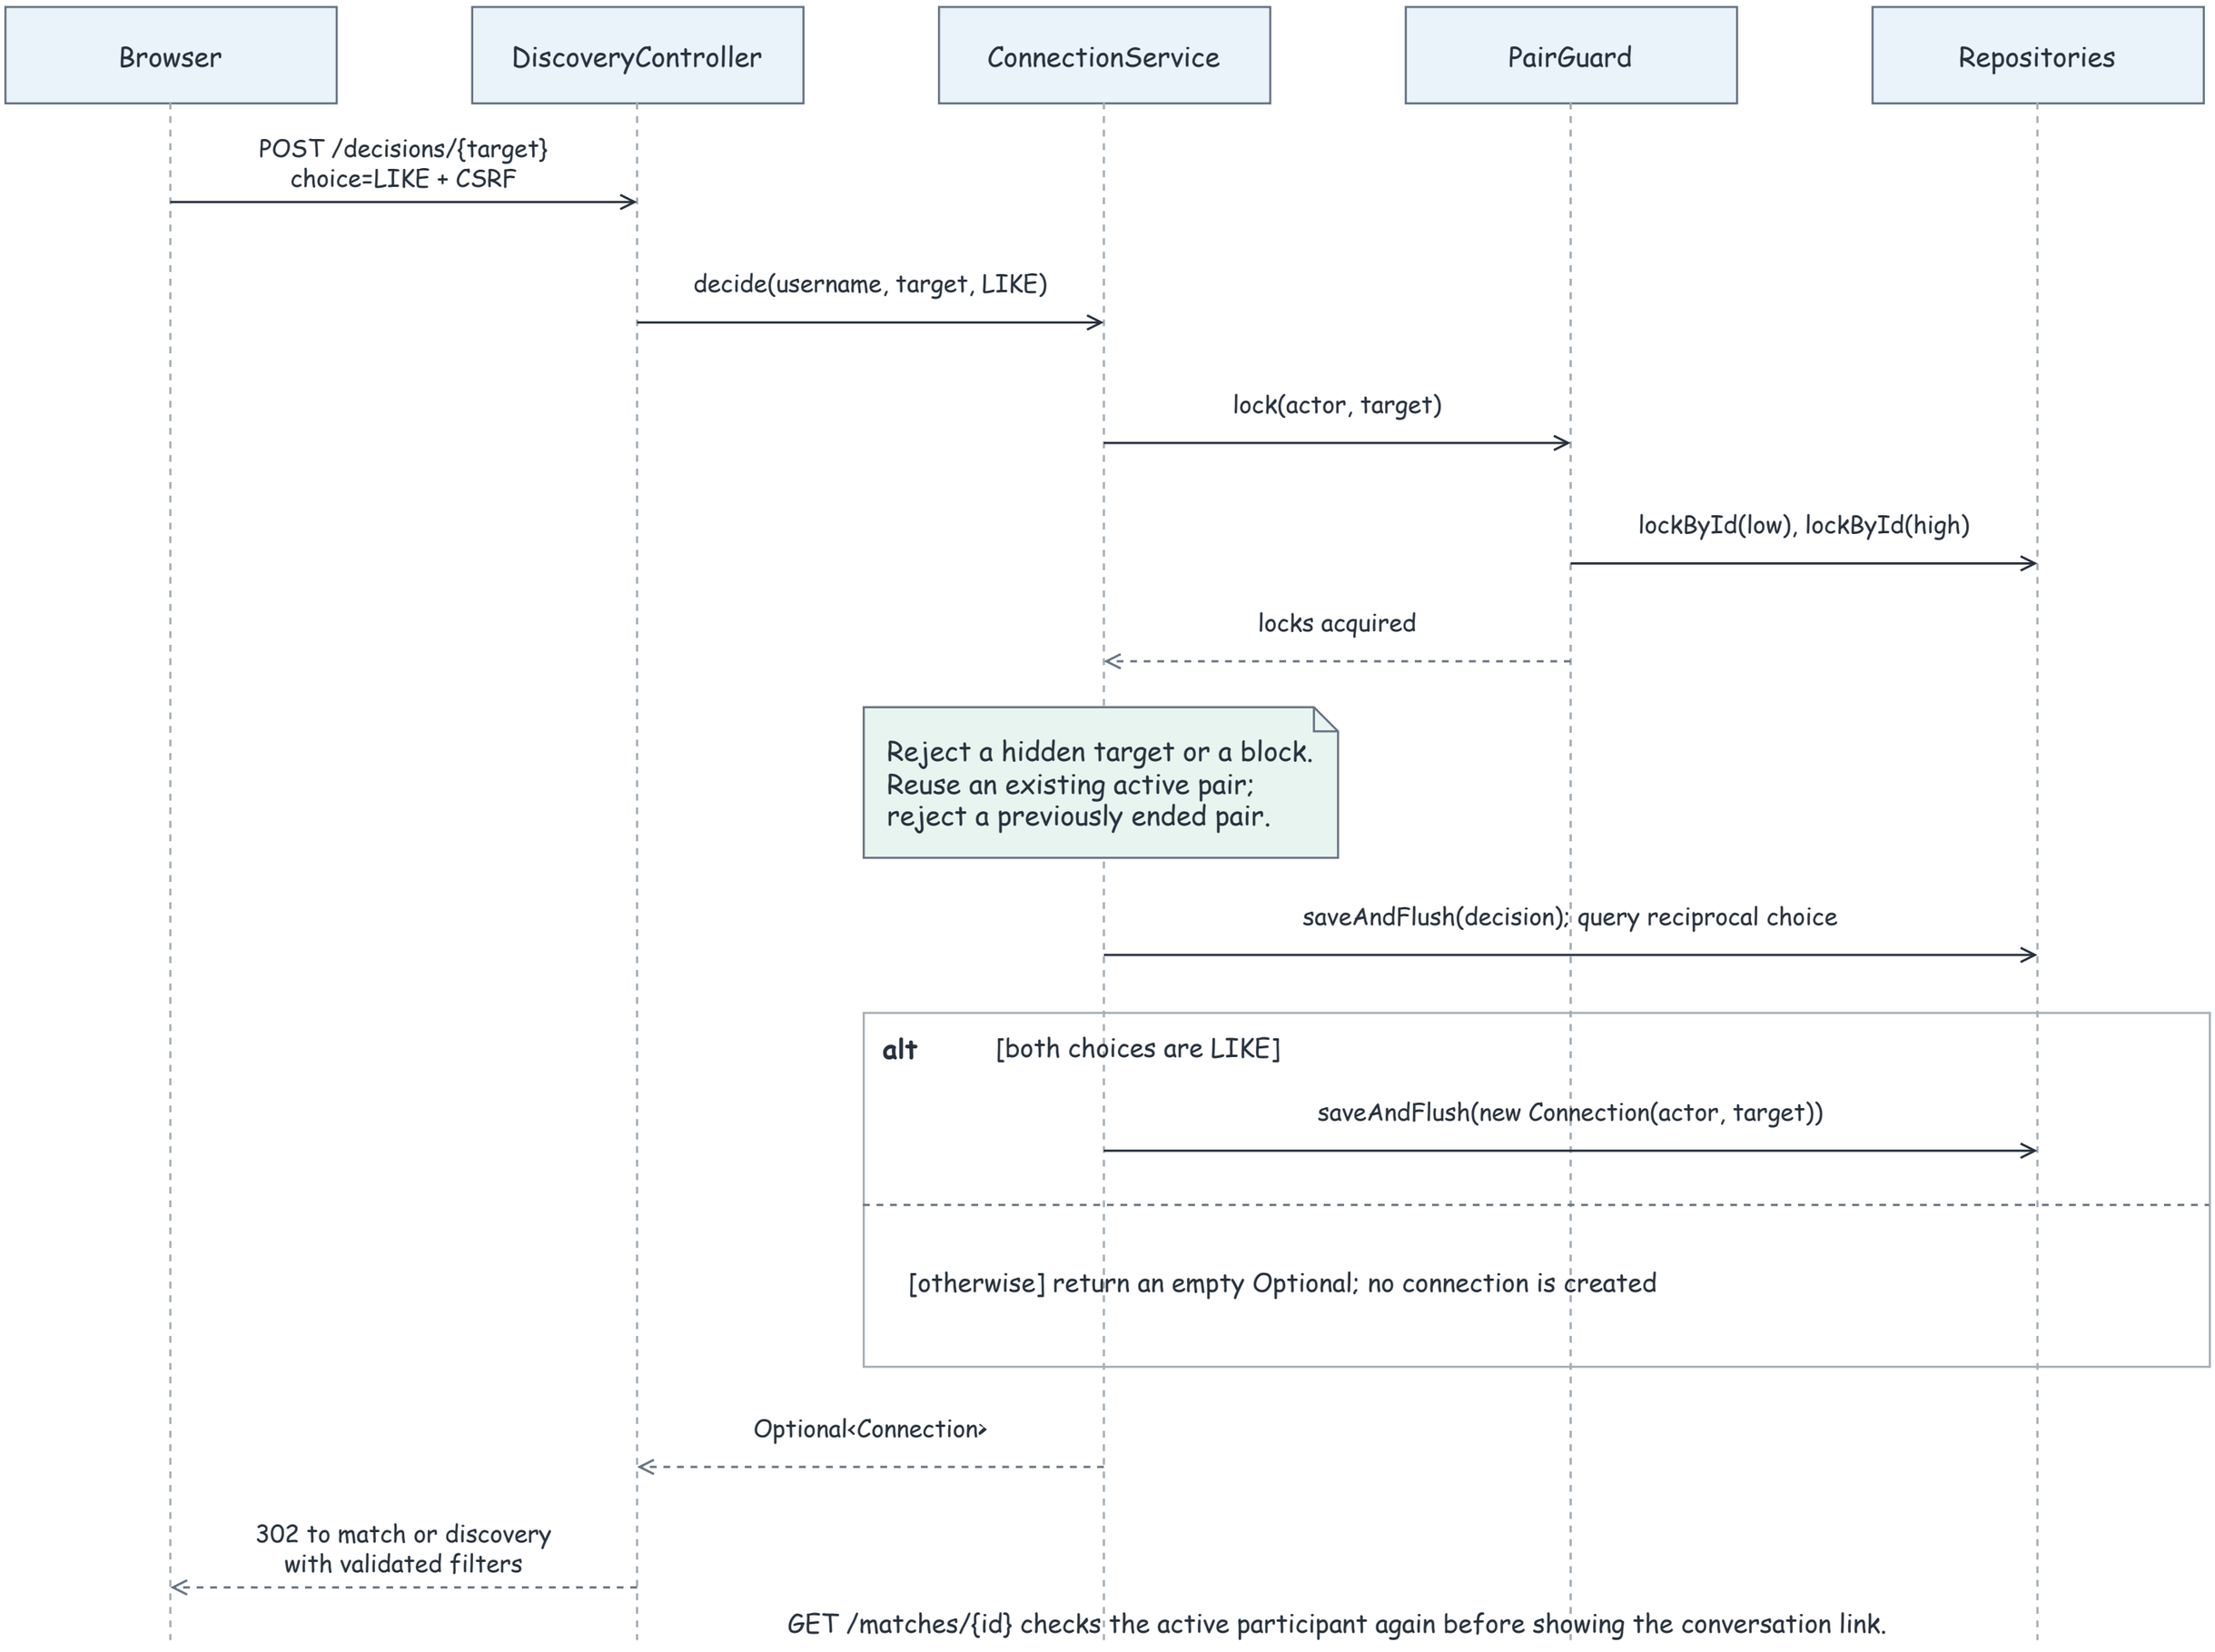

# Send, poll and acknowledge a message


Sequence diagram: HTTP requests, persisted message IDs and a read marker owned by the recipient.

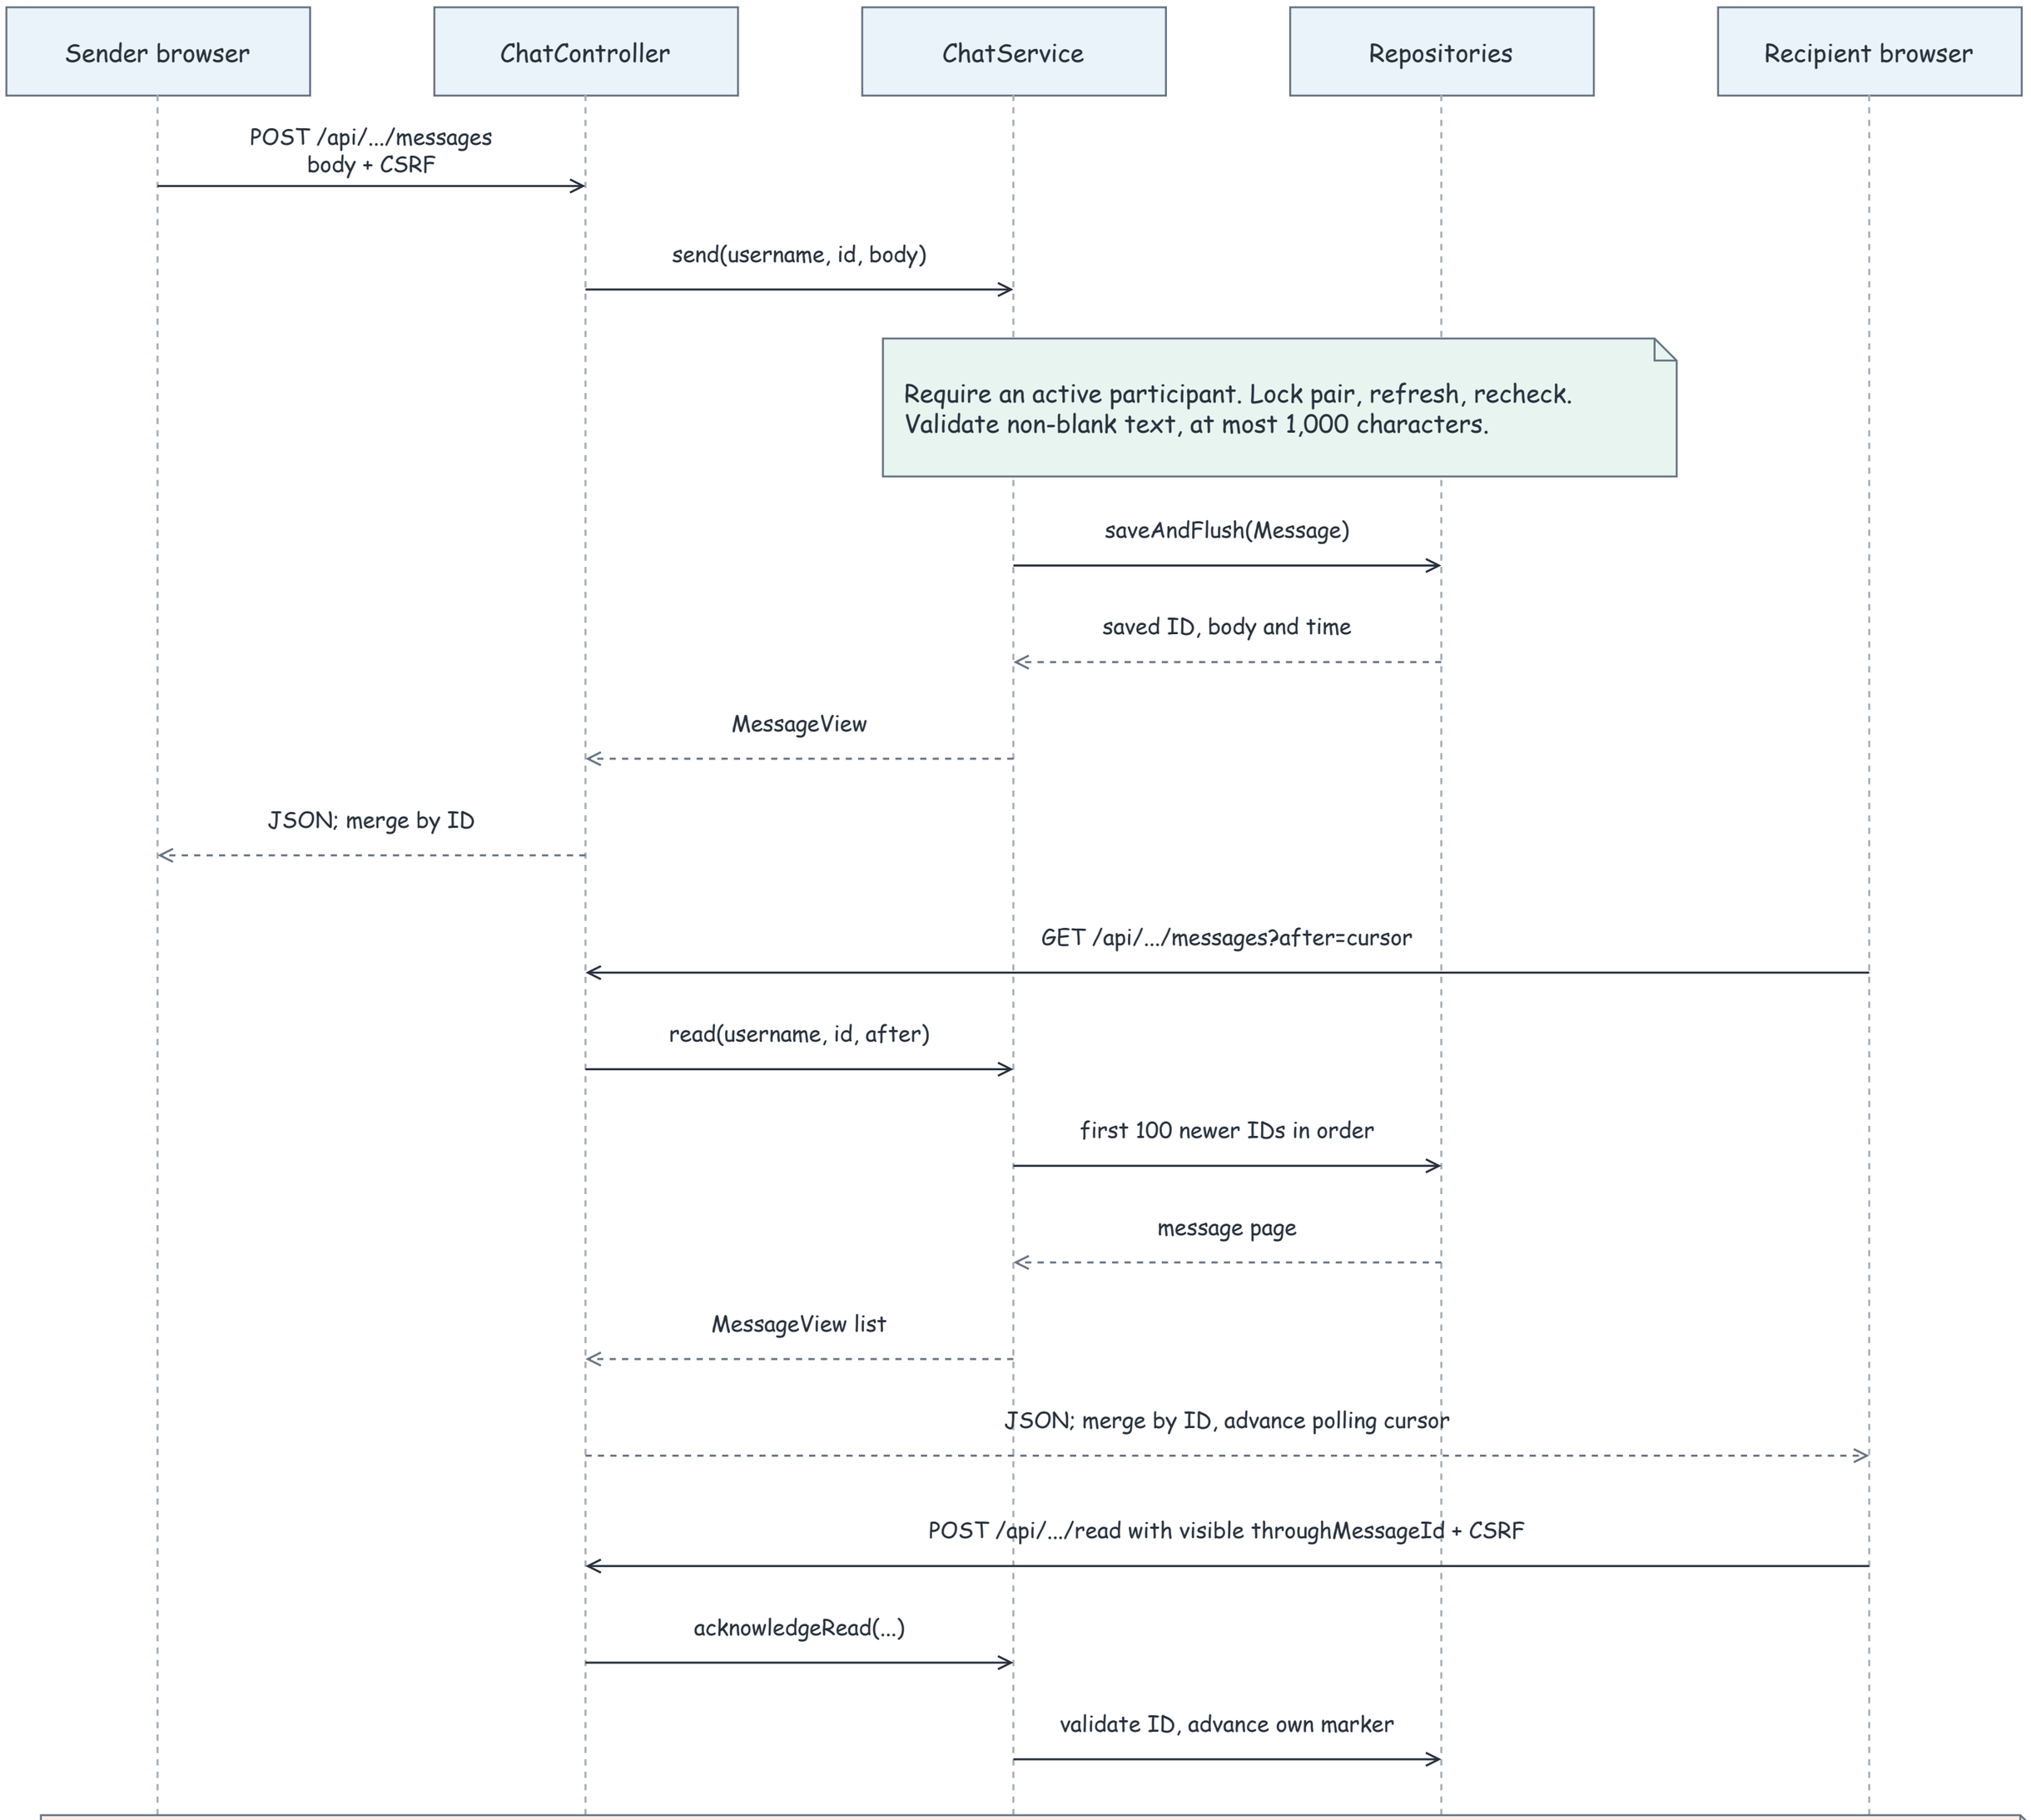


Read/history/poll also check contact access. Normal polling waits 3 s; a full backlog page retries after 100 ms.
A lost send response can still cause a duplicate retry: persistent logical-send deduplication is D's open task.

# When contact can open and close

State diagram: blocking is a separate directional record; ending a connection does not erase its history.

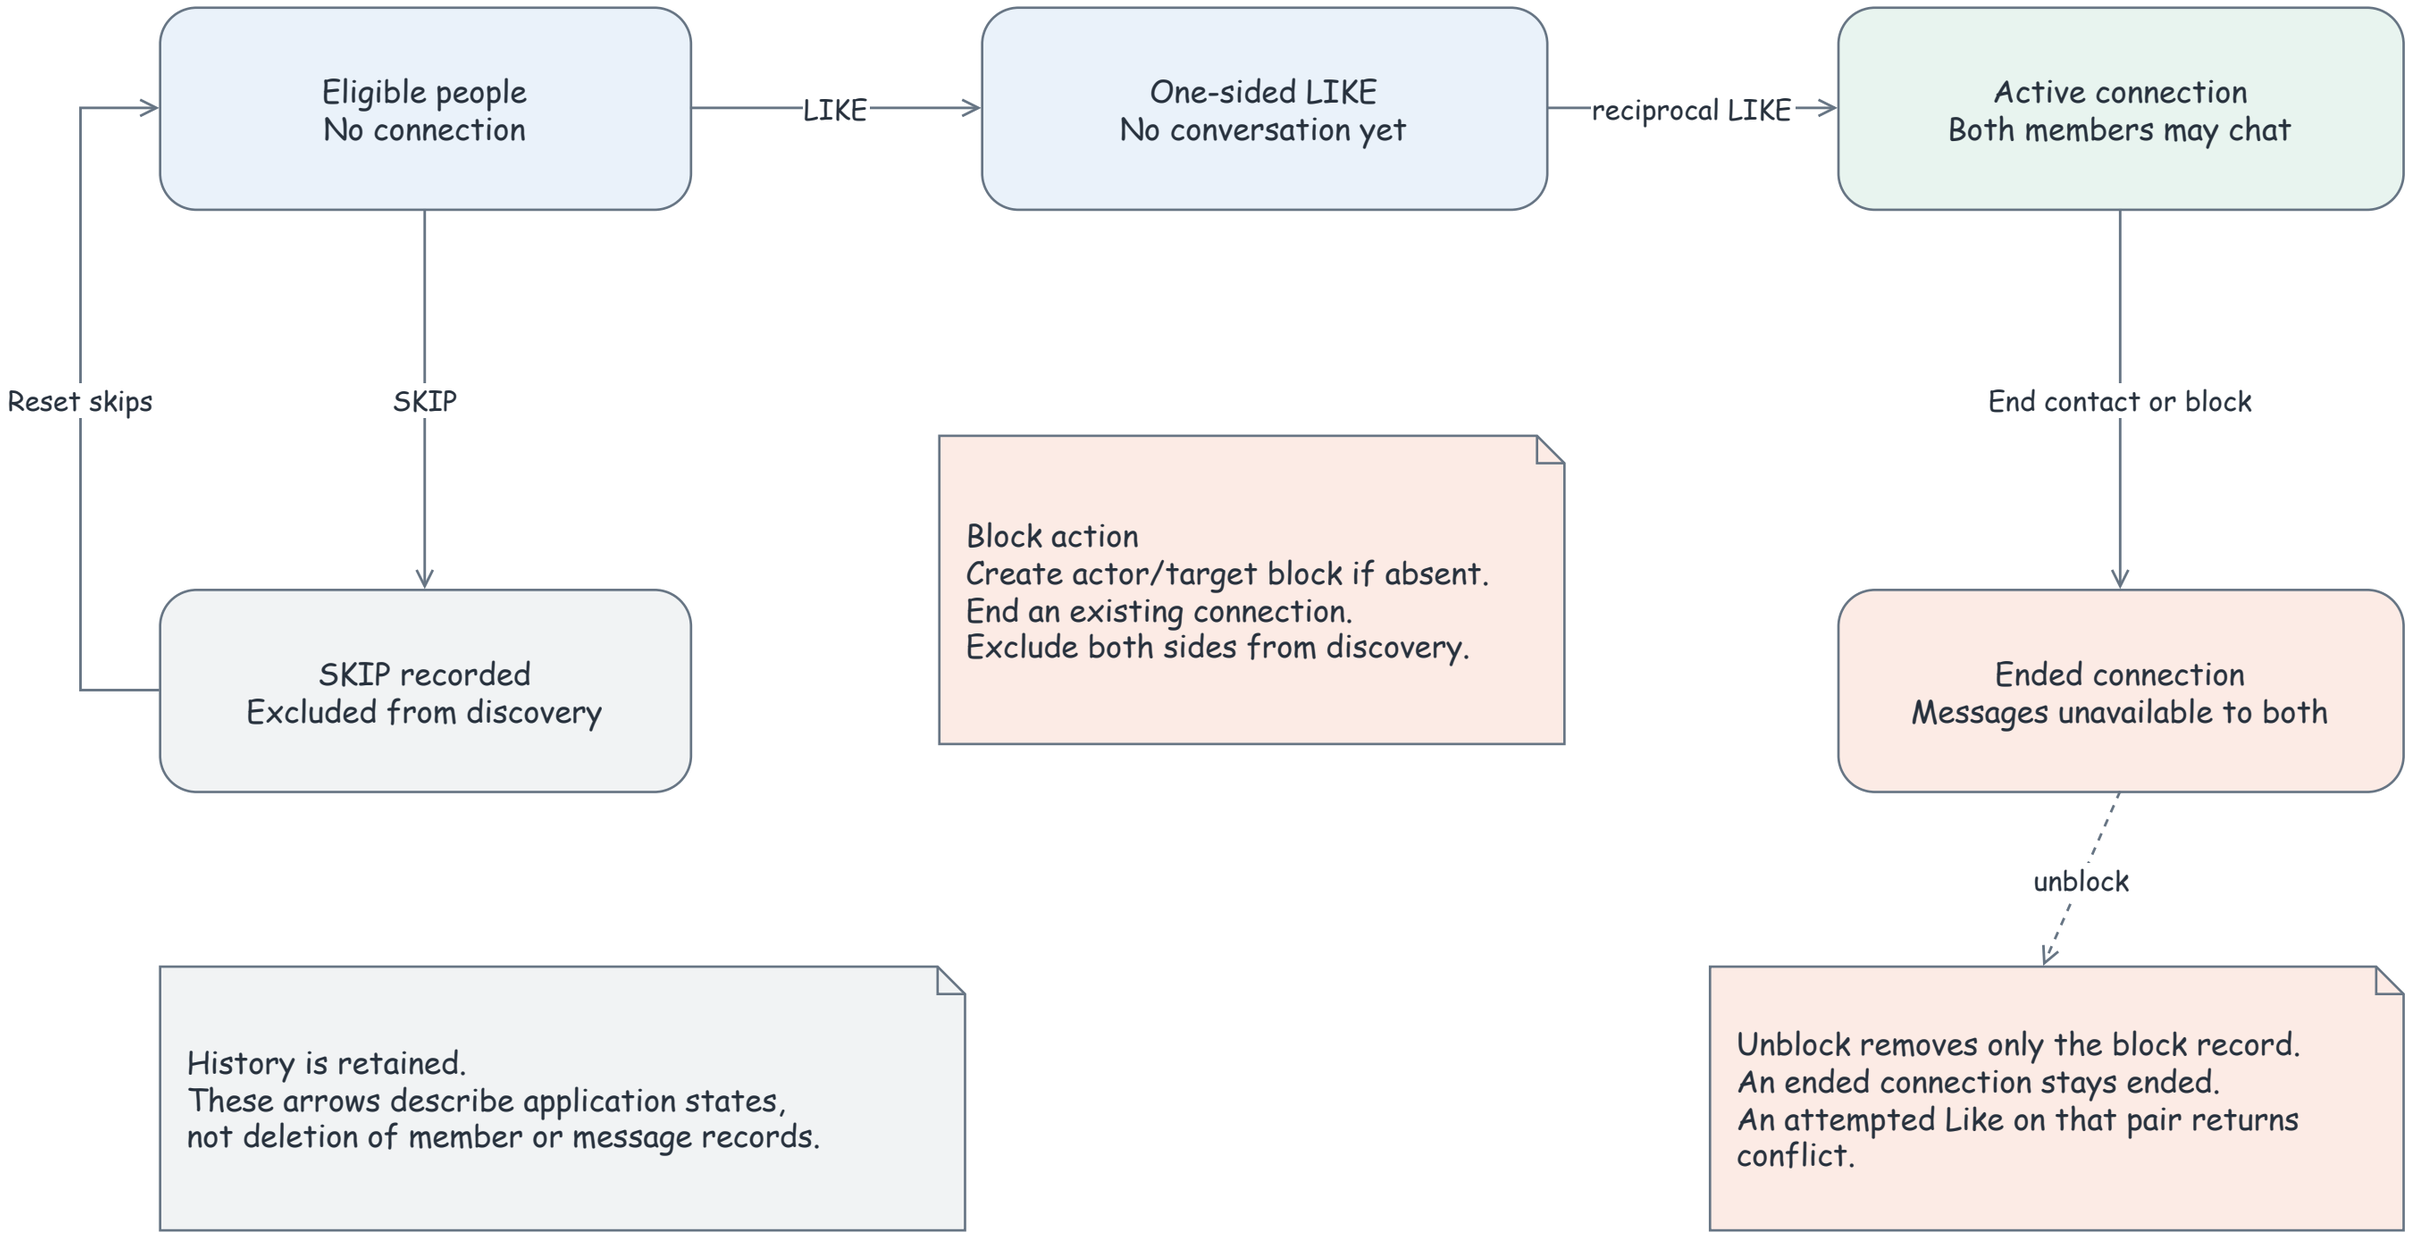



Every message read, send and acknowledgement requires membership, active state and no block in either direction.


# Local runtime and a recoverable database

Deployment and operations view: the current tested local delivery, with the real stopped-H2 restore check.

## One Windows development / demonstration computer

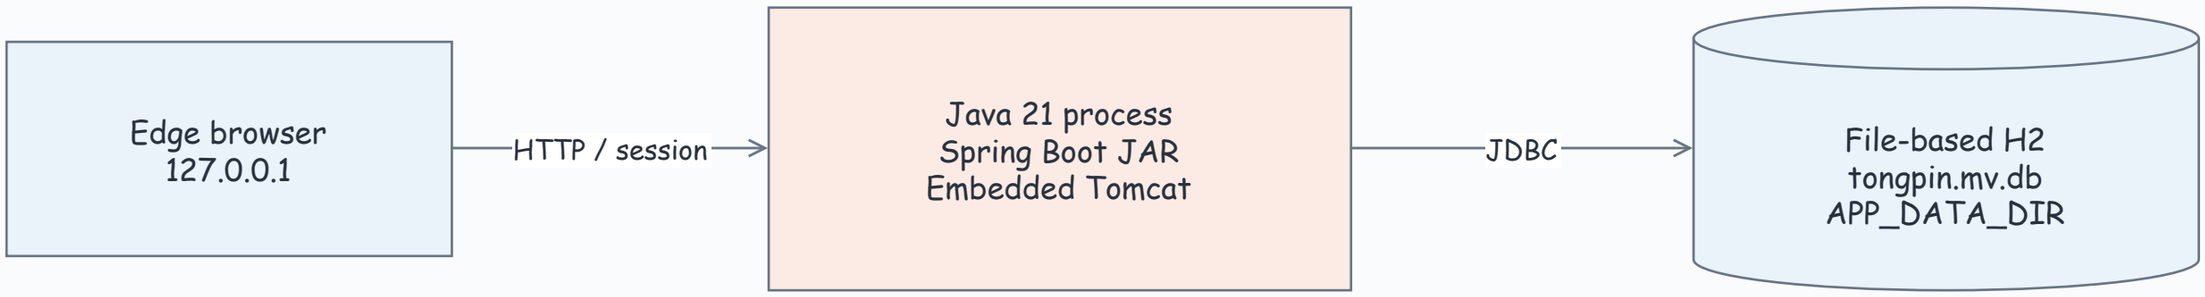


The runtime port is configurable. Fictional demo seeding is opt-in. This diagram does not claim public hosting.

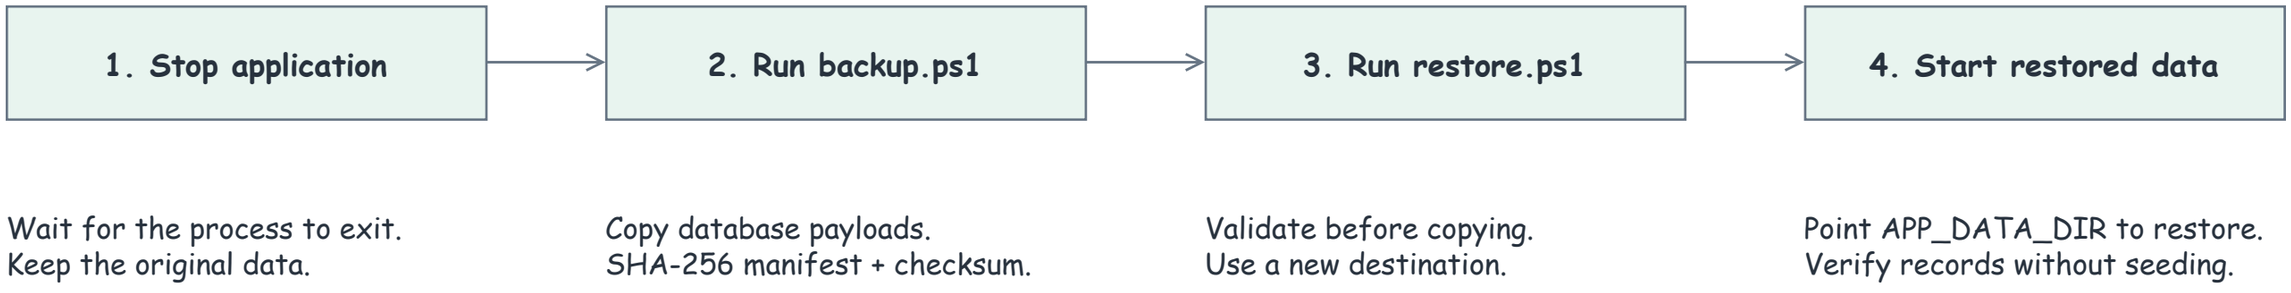



14 Nov automated check: retained passwords, profile edit, mutual connection, one message and personal saved event survive a real H2 backup/restore. The restored app starts without demo seeding.

F's independent reproduction and deployment choice remain open. Windows PowerShell reads the manifest explicitly as UTF-8.

# Why a repeated RSVP stays safe

Activity diagram: EventService.setAction handles ATTEND and SAVE under an event row lock.

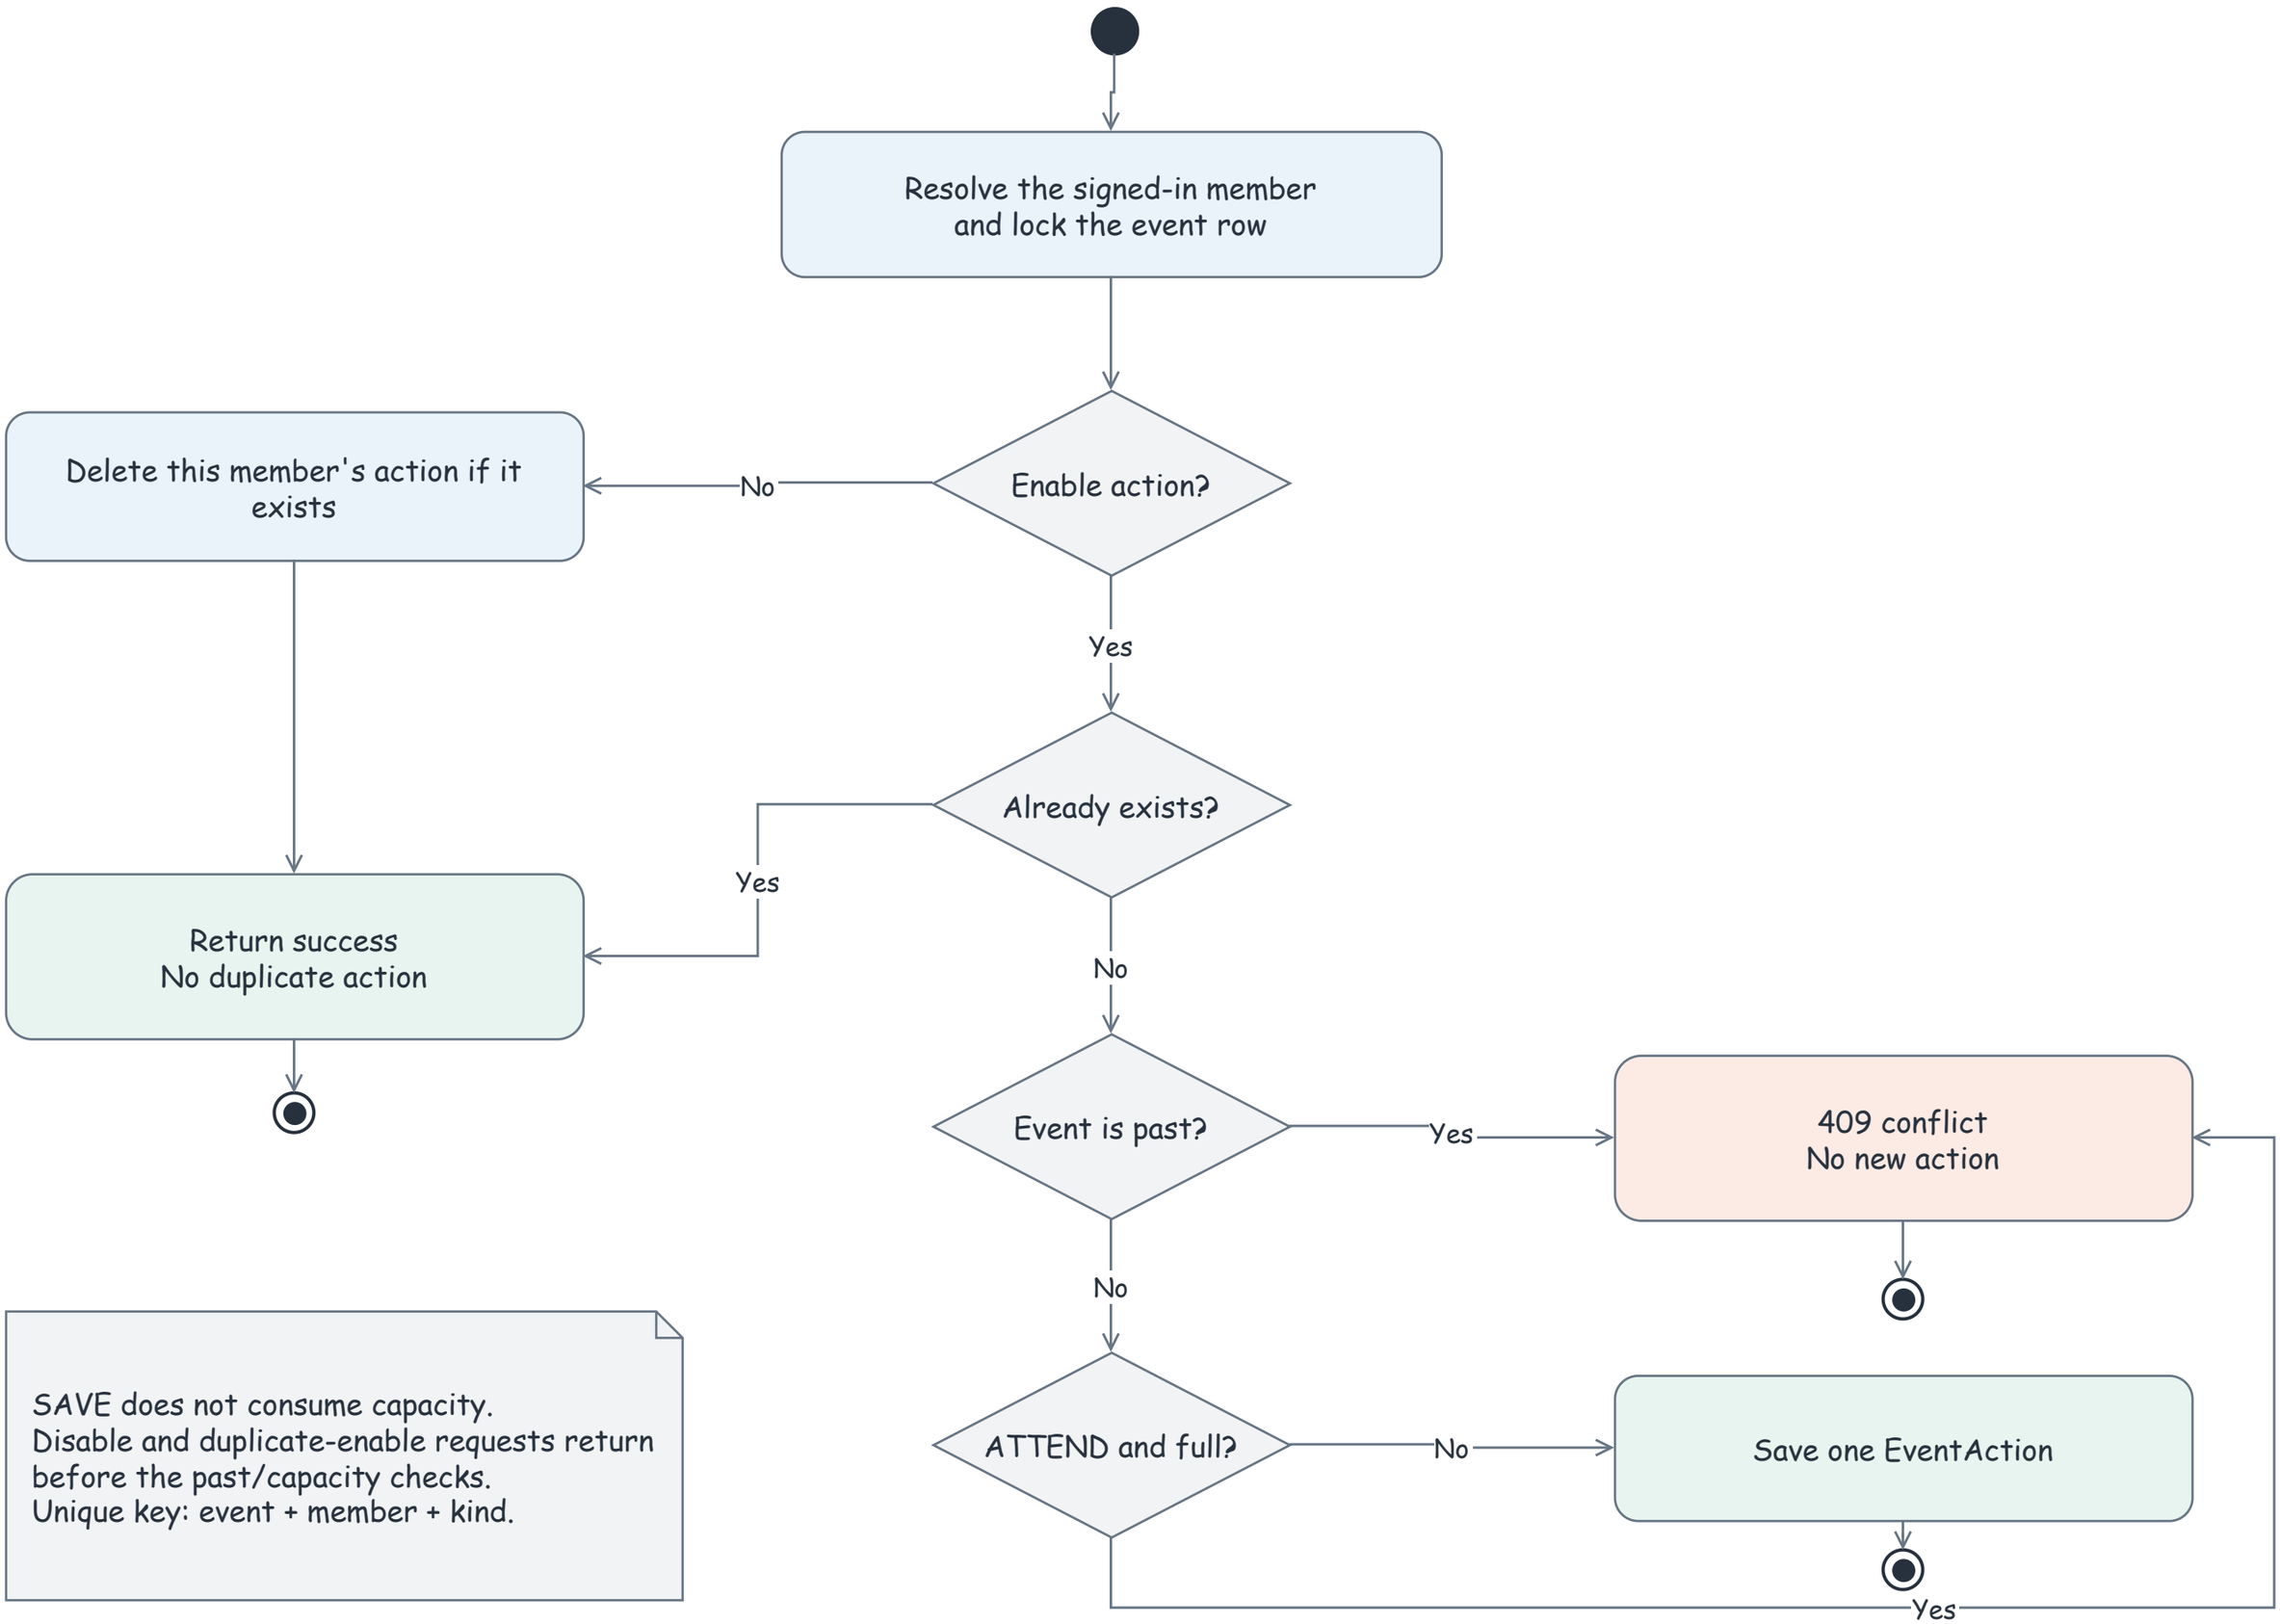


One transaction encloses the operation. Successful paths commit; a rejected request leaves data unchanged.


# Six teaching weeks, one delivery calendar

Prepared 14 Nov 2026. Historical windows summarize dated artifacts; future bars are plans, not completed work.

Blue: historical evidence window

Coral: scheduled work

Diamonds: dated artifact / check

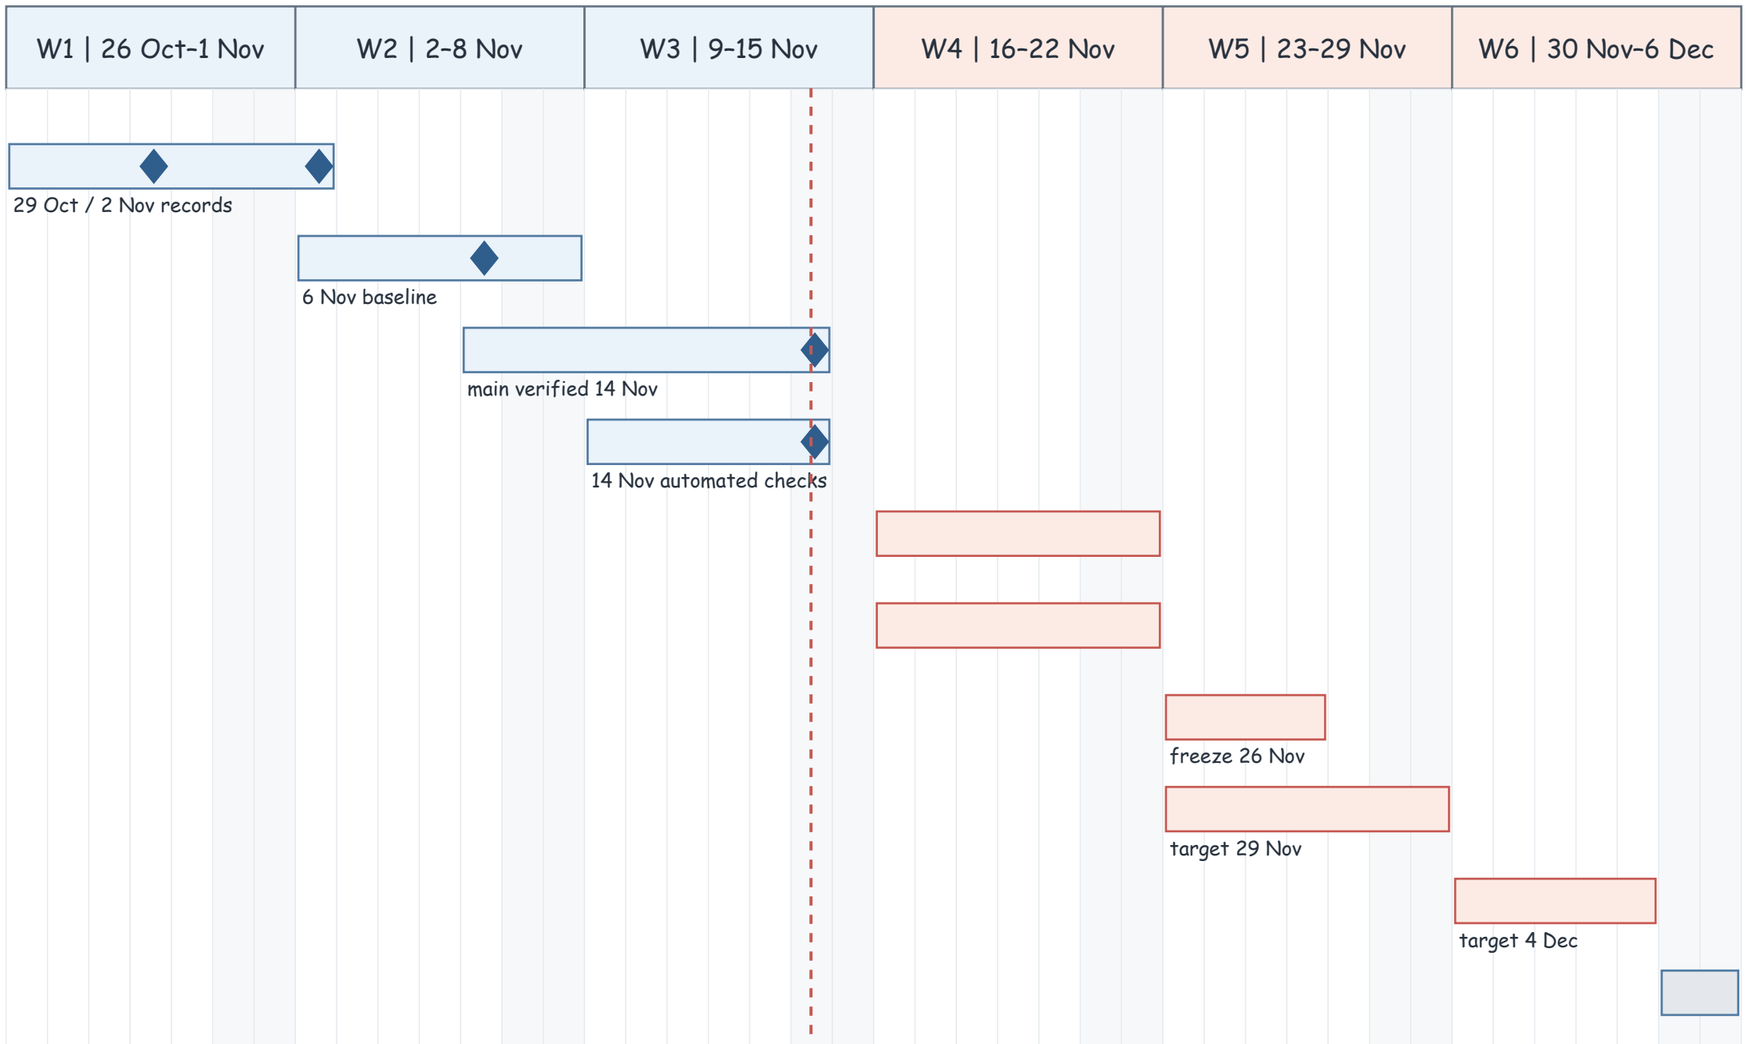


**Topic research and scope**
A / C + team

**Java baseline and task packages**
A

**Member increments and shared UI**
A–F

**Integrated verification and fixes**
A; automated checks by Codex

**Chat reliability follow-up**
D / A

**Observed tasks and acceptance**
B / C / E

**Selected fixes and feature freeze**
A–E

**Independent reproduction / handover**
F / A

**Evaluation, demo and reflections**
All

**Correction buffer**
All

Calendar anchor: 26 October is inferred from the teaching notes. Historical bars do not establish daily effort, attendance or completed meetings. Planned effort: A 50 h, C 40 h, D 34 h; B/E/F 28 h each. Capacity remains unconfirmed.

Internal finish: 4 Dec
Moodle: 18 Dec 2026, 13:00
Timezone not visible in supplied image.