

— FROZEN ENCODERS · PROGRAM SEARCH · INFERENCE

Autoresearch & Test-Time Compute for Information Retrieval

Han Xiao

VP of AI, Elastic

@hxiao · [in/hxiao87](#) · [arXiv:2605.11374](#)

SCAN FOR THE SLIDES



hanxiao.io/ttc-aie-sf

Spend more compute at inference, get a better answer.

Trade inference compute for quality: rather than a bigger model, the model does more work per query, along a smooth cost-versus-quality curve.

- | BEST-OF-N sample many candidates, keep the best.
- | SELF-CONSISTENCY majority-vote over sampled chains of thought.
- | VERIFIER SEARCH spend inference FLOPs, climb a Pareto curve.

Having a bot think for just **20 seconds** in a hand of poker got the same performance boost as scaling up the model by **100,000×** and training it for 100,000 times longer.

Noam Brown, OpenAI · TED AI, San Francisco

Search is test-time compute.

You wire trained embeddings, rerankers, multi-vector retrievers, and query expanders into a **pipeline at inference** to squeeze out relevance. You do not need a bigger model. You assemble more search at test time.

DON'T SCALE IT

one keyword match. Cheap, and probably not good enough.

SCALE IT

embed, retrieve, rerank, expand, fuse. More inference can buy more relevance.

The question is not whether the model is big enough. It is how much search pipeline you assemble at test time, and whether it pays off.

Two ways to manufacture that pipeline at test time.

A RECOMBINE THE GEOMETRY

An agentic loop writes **programs** over one frozen encoder: chunk, z-score, fuse channels, feed back. The pipeline is multi-pass embedding algebra.

[the paper](#) · [this talk's core](#)

B COMPOSE THE TOOLS


A small agent LLM **wires retrieval tools** (grep, embed, rerank, select_diverse) over a corpus under a budget. The pipeline is an agentic tool chain.

[searchbox](#) · [later](#)

Same move at two altitudes:
[assemble structure at inference, not a bigger model.](#)

"Small models gain nothing." But they are distilled from LLMs.

Test-time compute is said to belong to large reasoning models, with small models having nothing to gain. Yet today's embedders - including the small deployable ones - are distilled or adapted from LLM backbones:

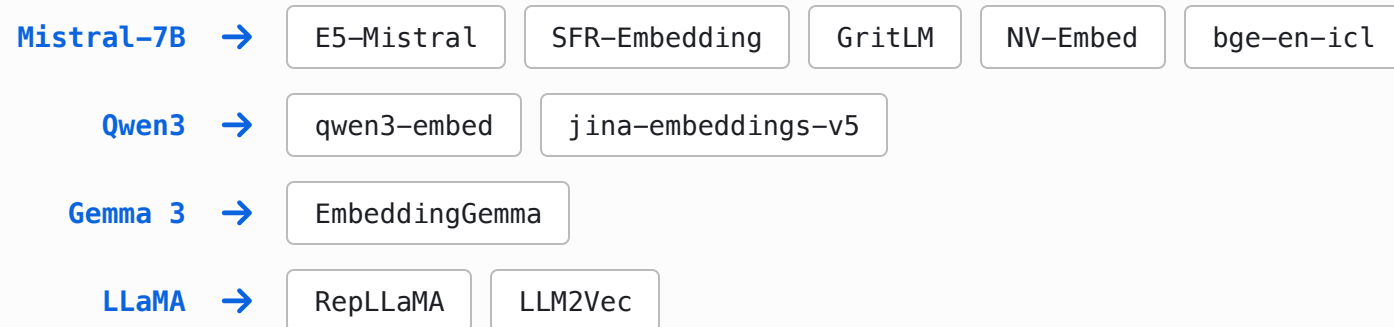

The lineage from a large language model to a small deployable encoder is now the dominant recipe, not the exception.

If test-time compute lives in the LLM representation space, these distilled encoders should inherit it. [Do they?](#)

Scoring runs from one cosine to late interaction.

SINGLE-VECTOR COSINE



$$\cos(q, d)$$

one vector per document

FROZEN BASELINE

SENTENCE MAXSIM




$$\max_s \cos(q, s)$$

same encoder, document split into
sentence vectors

TEST-TIME STRUCTURE

COLBERT MULTI-VECTOR



$$\sum_i \max_j \cos(q_i, d_j)$$

every query token, max over all doc
tokens

NEEDS A MULTI-VECTOR MODEL

Test-time compute adds **structure over the same frozen vectors**: chunk,
feed back, fuse, and climb toward late interaction with no new model.

How much can a frozen single-vector encoder gain at inference alone?

NO RETRAINING

NO AUXILIARY MODEL

NO LEARNED PARAMETERS

ONE FROZEN ENCODER API

The prominent recent test-time methods for retrieval each break at least one rule:

- | HYDE / QUERY2DOC an external LLM in the query path.
- | GQR a second, supervisory retriever.
- | METAEMBED trained extra parameters at deployment.

We forbid all three, and ask whether the gain scales with the compute spent.

Autoresearch: let the agent climb the hill.

An agent runs the research loop itself: change one file, run a short fixed-budget experiment, keep the change if the metric improved, otherwise revert. Repeat, overnight. It is hill-climbing, with an LLM as the mutation function.

change a file



run a short experiment



keep if better, else revert




You're not touching any of the Python files like you normally would as a researcher. Instead, you are programming the `program.md` files that set up your autonomous research org.


Andrej Karpathy, Anthropic · AutoResearch, 2026

METHOD

An LLM agent writes programs over the frozen encoder, and a harness scores them.

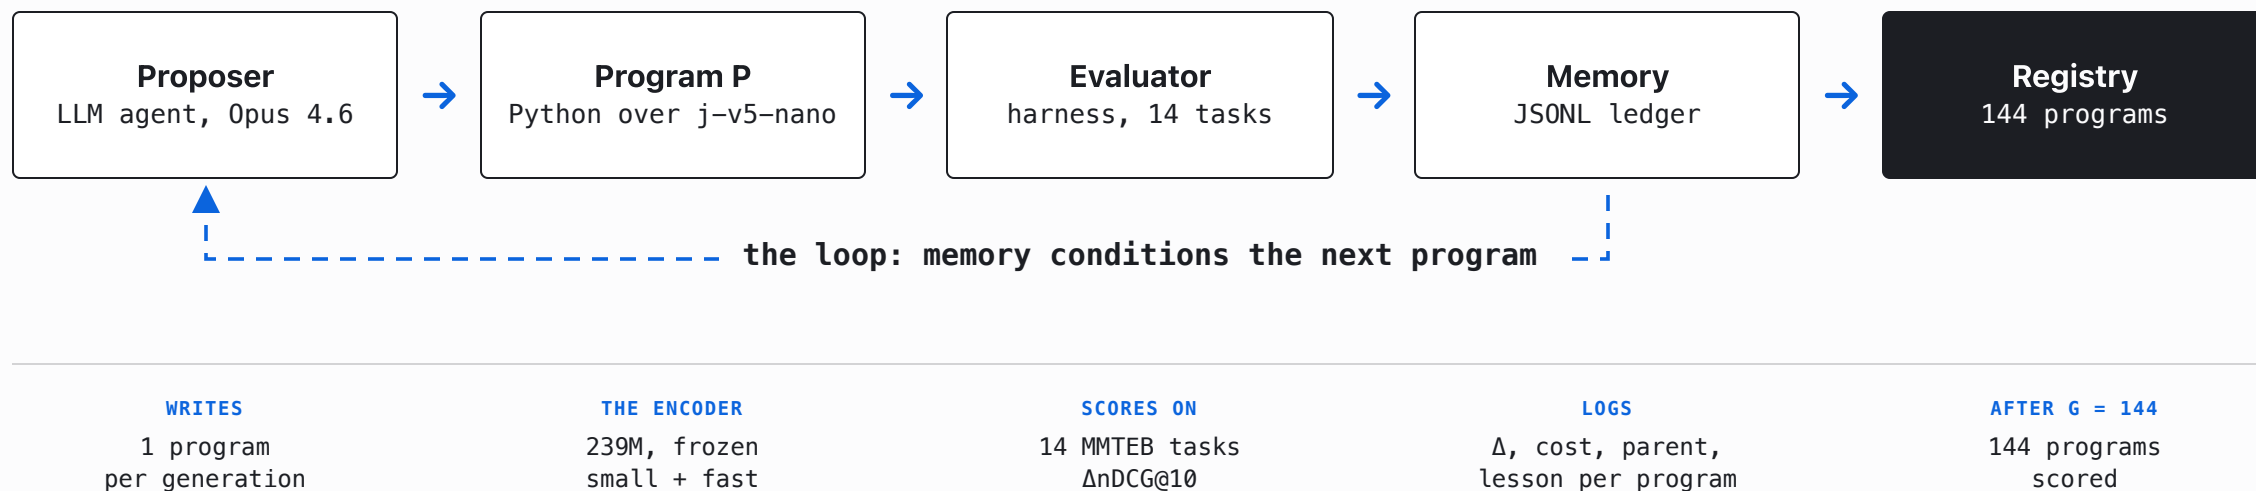

The proposer is an LLM, used as the mutation function.

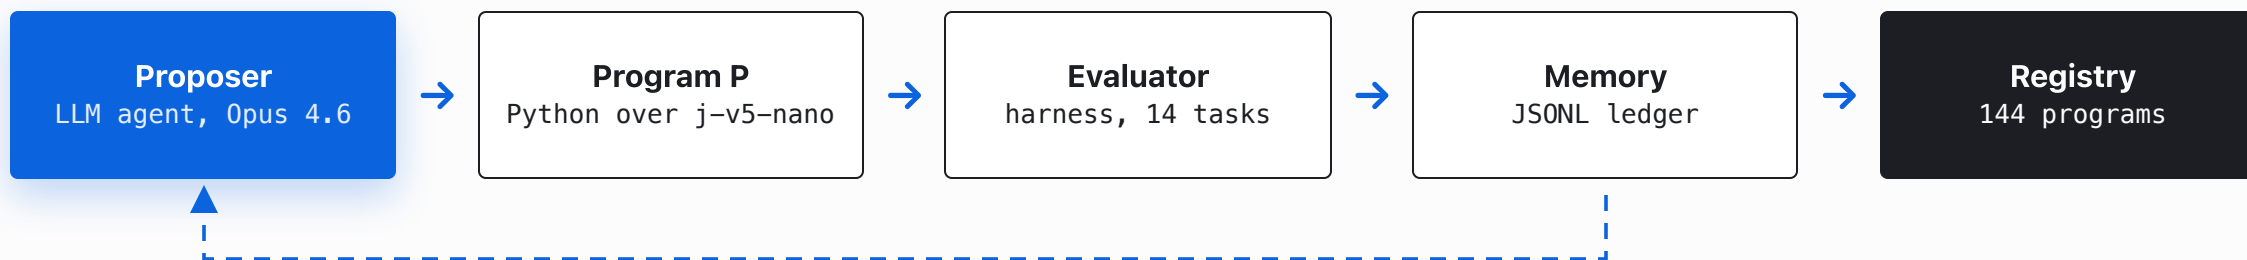


DESIGN

Opus 4.6 reads the current frontier source and the memory ledger, edits **one** Python program, and proposes the next. Keep it if the metric improves, else revert. No human in the inner loop.

CAVEAT

It optimizes **exactly** the metric you hand it - not the one you mean. Reward the in-domain mean and reward spending compute, and that is what it will chase. Whether the gain survives out of domain is a separate question. The objective is the steering wheel.

The program is arbitrary Python over the frozen encoder.

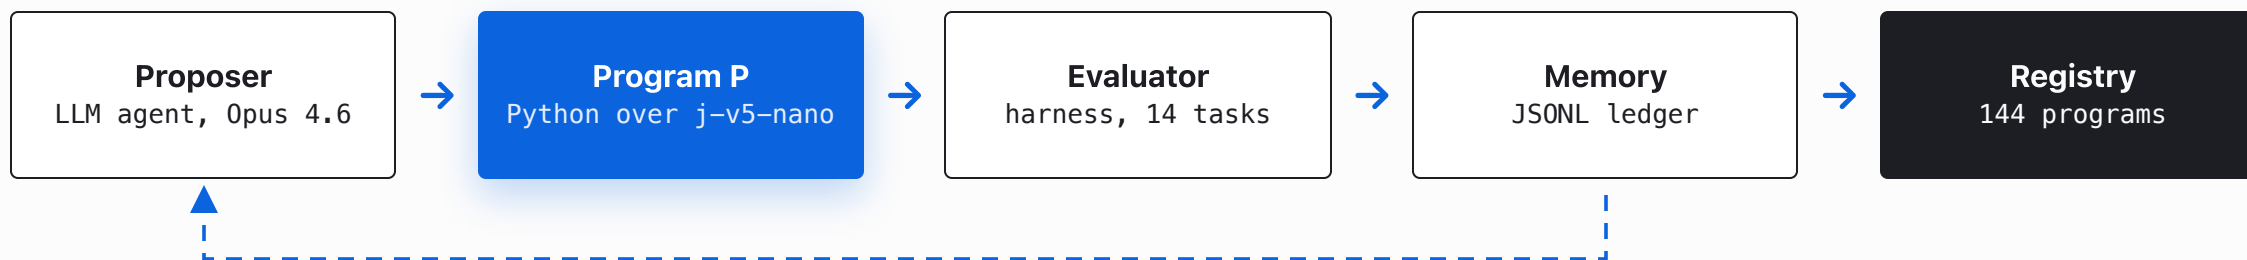

DESIGN


```
rerank(q_emb, d_emb, sim, *,
      embed_fn, q_texts, d_texts) -> scores
```

embed_fn is the test-time-compute budget. It re-embeds any text, switches the LoRA adapter (retrieval / passage / classification / matching), picks a Matryoshka dimension, or caps length. One call is one unit of compute.

CAVEAT

Auto-rejected: hyperparameters, stochastic ops, task-specific routing, external models, learned parameters, trivial constant-only variants. The taboos force **task-agnostic structure**, not a per-task tuned config.

The harness scores every program on the same 14 tasks.

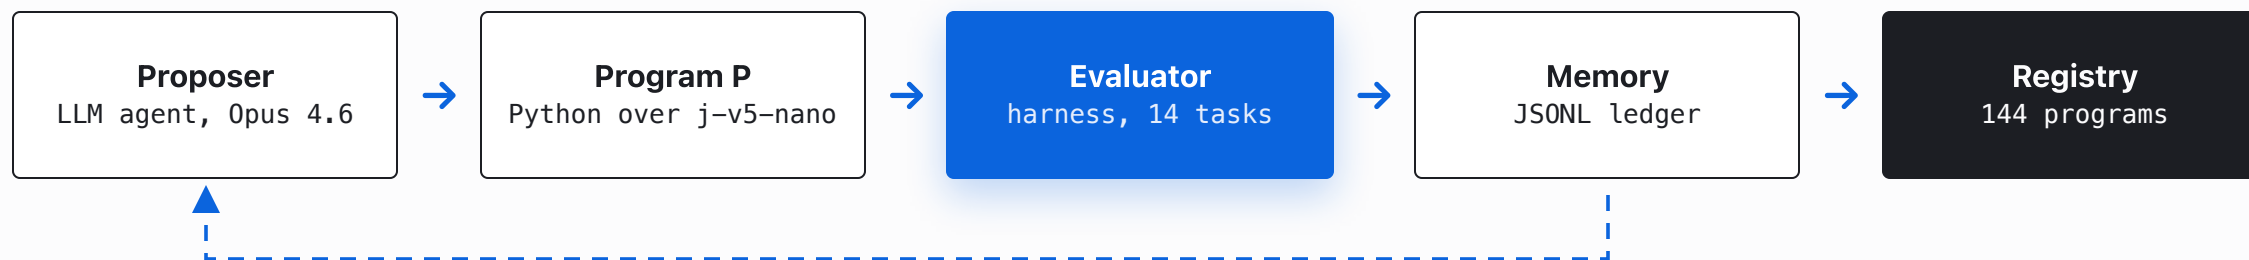


DESIGN

Every program runs on the same **14 MMTEB Tier-1 discovery tasks** (legal, financial, long-document, general). The harness scores $\Delta nDCG@10$ against the cosine baseline, plus a cost ratio (`embed_fn` calls per query). The same fixed budget every generation.

CAVEAT

The loop only ever sees these 14 tasks. The **19 held-out tasks never enter the loop**, so a program can win in-domain and still fail out of domain. That gap is the entire experiment.

Every program is logged, and the log conditions the next one.

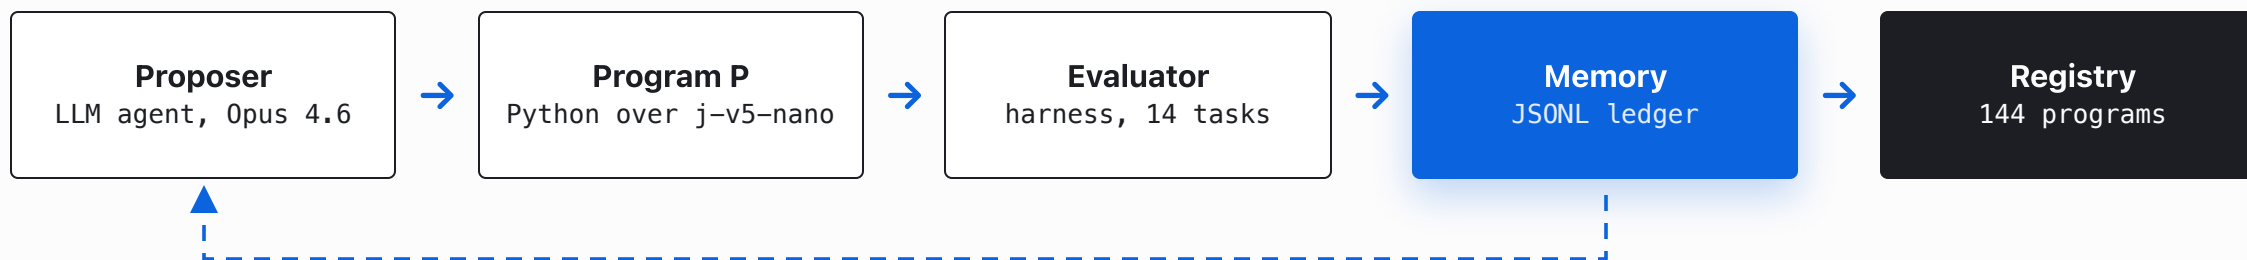


DESIGN

A JSONL ledger, one row per program: per-task $\Delta nDCG@10$, win/tie/loss, cost ratio, parent, a novelty claim, and a post-hoc lesson. The proposer reads the frontier source plus this history, so each round builds on the last.

CAVEAT

Compounding cuts both ways: memory builds on real wins, but it also compounds whatever bias the objective has. A biased metric does not just mislead one program, it steers the whole lineage.

What we search on, and what we test on.

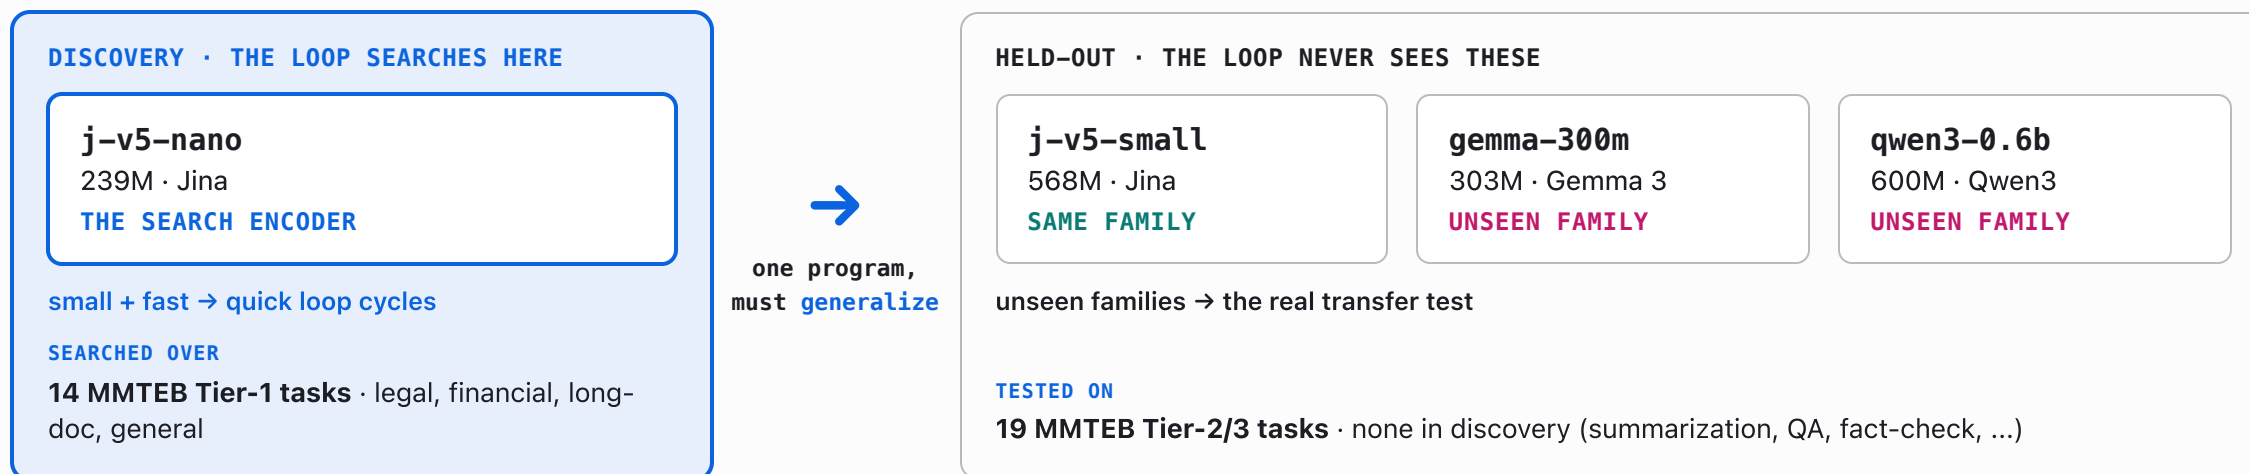

Metric: $\Delta \text{nDCG@10}$, the program's nDCG@10 minus the cosine baseline. Gemma and Qwen share no training data, tokenizer, or adapter with the discovery model; qwen3-0.6b runs under a token-length cap.

Cost is one number: extra forward passes through the encoder.

$$c = 1 + \frac{\text{extra forward passes}}{\text{baseline passes}}$$

TEST-TIME STRUCTURE · $C = 1$

SoftCentroid: average the top-k document vectors you *already* computed, mix into the query, re-score.

$$q' = q + \text{mean}(d_emb[\text{top-k}])$$

Zero extra forward passes - only algebra on vectors you already have.

TEST-TIME COMPUTE · $C > 1$

FirstSent: take the top doc, *re-embed* its first sentence, mix into the query, re-score.

$$q' = q + \text{embed_fn}(\text{first sentence})$$

One extra forward pass per query - new text through the encoder.

One reuses the geometry you already have; the other spends a forward pass on new text. Which converts into quality that transfers?

`c` counts forward passes, the term that dominates serving cost; the structural algebra is $O(n \cdot d)$, a fraction of a percent of latency – so a pure-structure program sits at $c = 1$ exactly.

We run the search under two admission rules.

COMPUTE-SPENDING

Admit a program if its in-domain mean $\Delta nDCG@10$ beats every prior one. The proposer is encouraged to spend more inference.

→ how high can the in-domain frontier climb?


TRANSFER-SELECTING

Admit only if a held-out validation split improves with no task regressing past 0.05. No reward for spending compute.

→ what holds up out of domain?

Neither search ever sees the 19 held-out evaluation tasks or the unseen encoder families.

Told to spend compute, the search draws a clean Pareto curve.

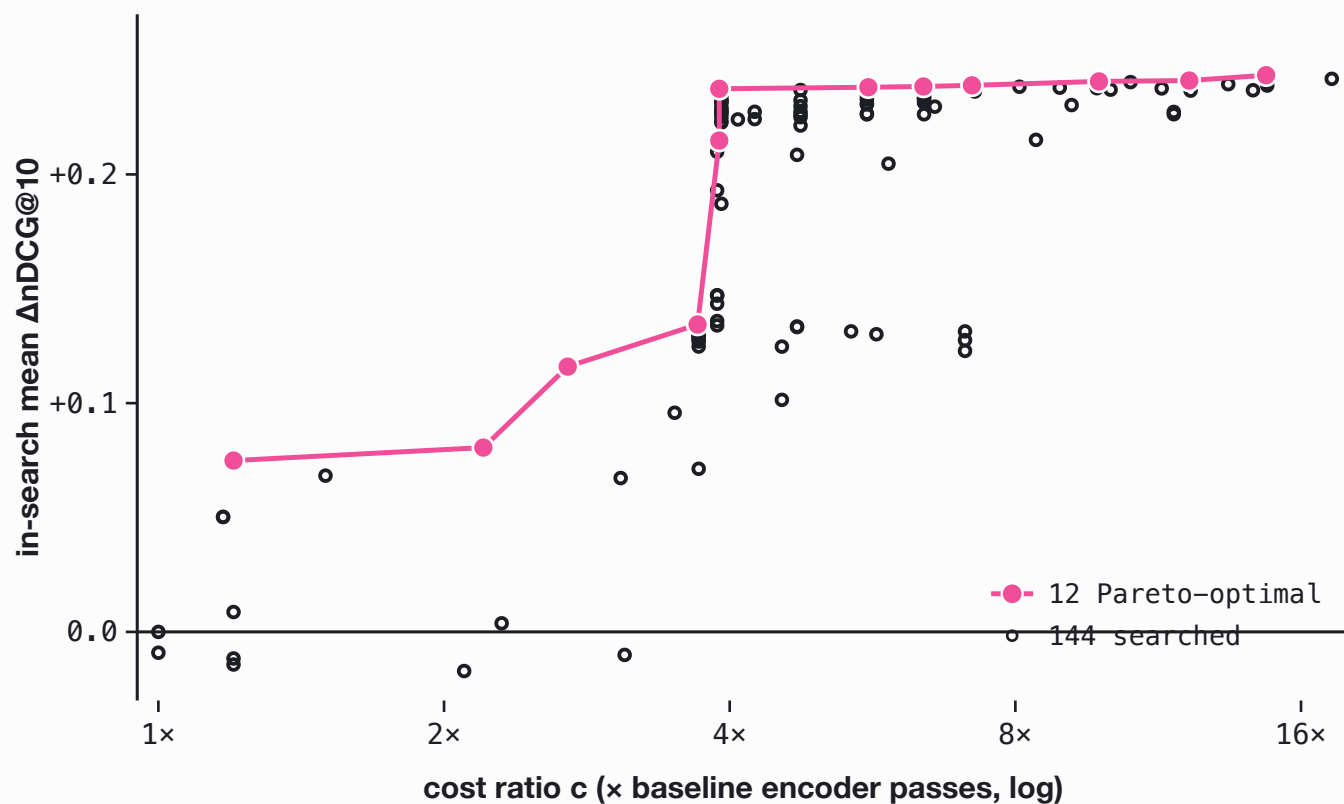

144

programs searched over 144 generations


12

Pareto-optimal, from $c = 1.2$ to 14.7

In-search mean $\Delta nDCG@10$ climbs from +0.07 to +0.24. This looks exactly like test-time-compute scaling.

In-search only. The held-out test comes next.

Twelve programs on the frontier, one frozen encoder.

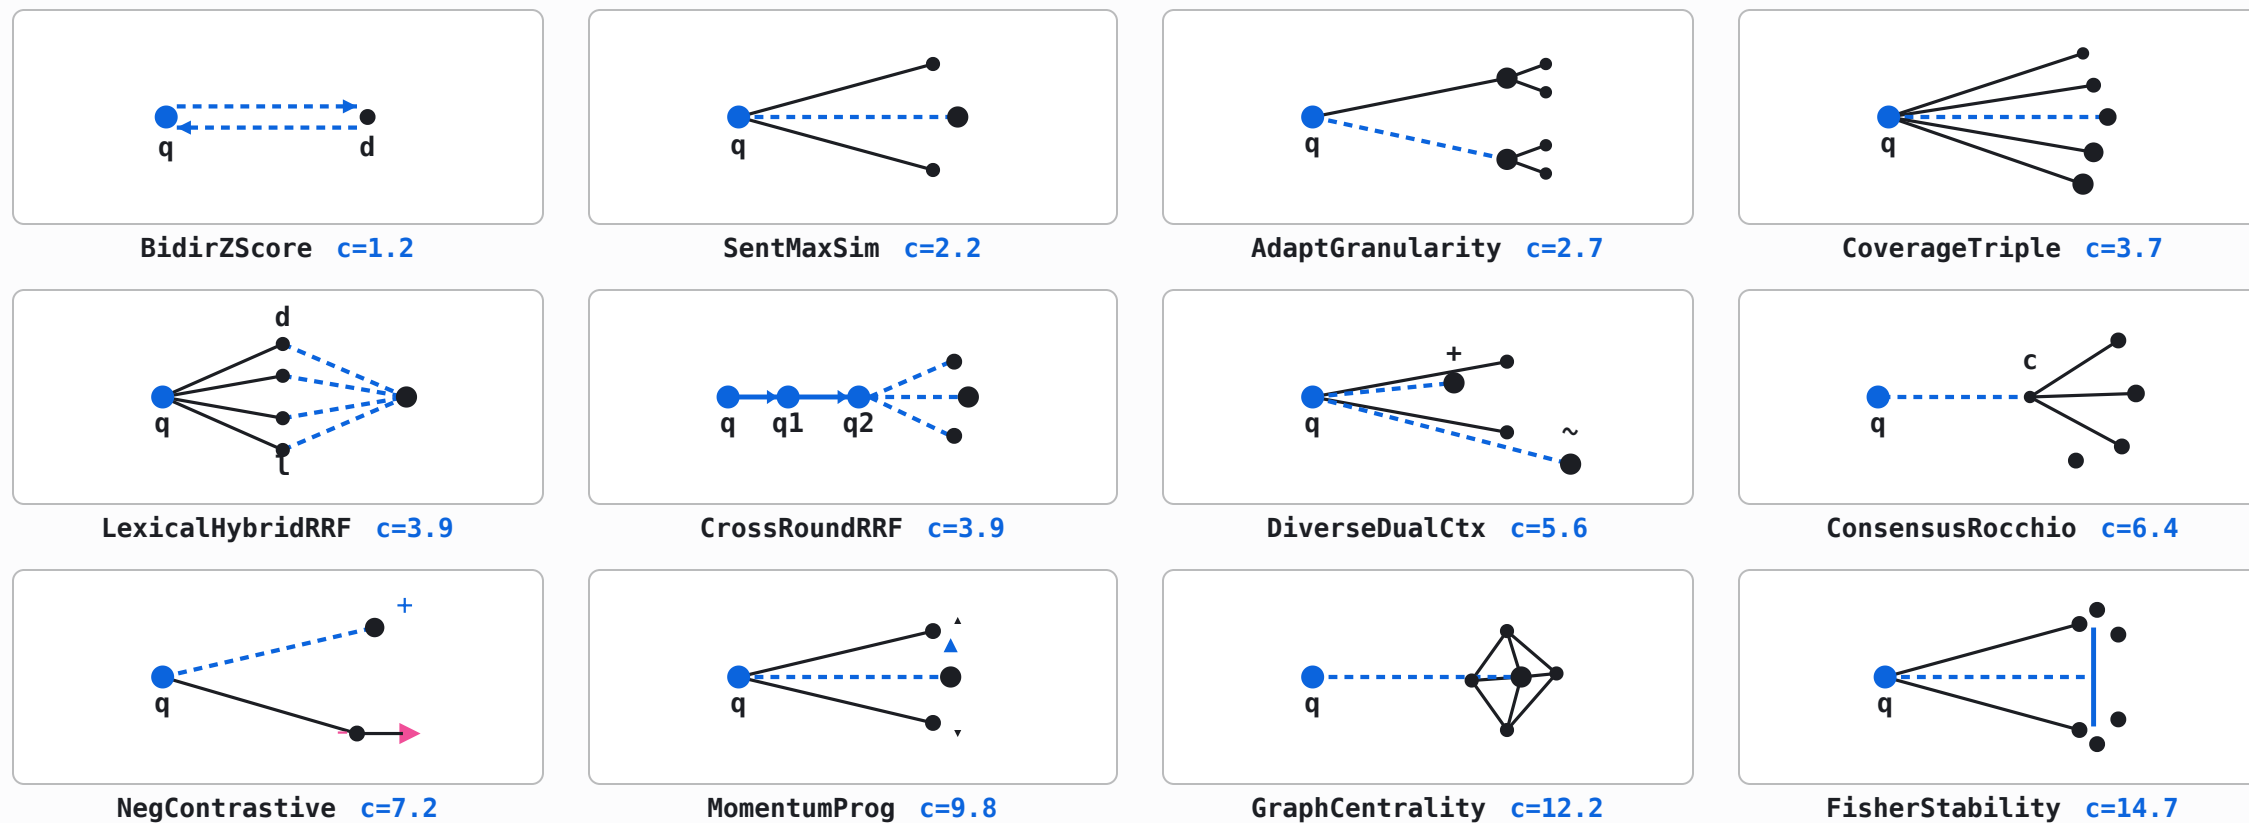


Every one is a training-free recombination of the same frozen vectors: chunking, z-scoring, feedback, fusion. Cost climbs left to right; the gains, as the next slide shows, do not.

WHAT IT BUYS ON HELD-OUT DATA

On unseen encoders, compute is flat. Cheap structure is not.

compute-spending transfer-selecting (structure)

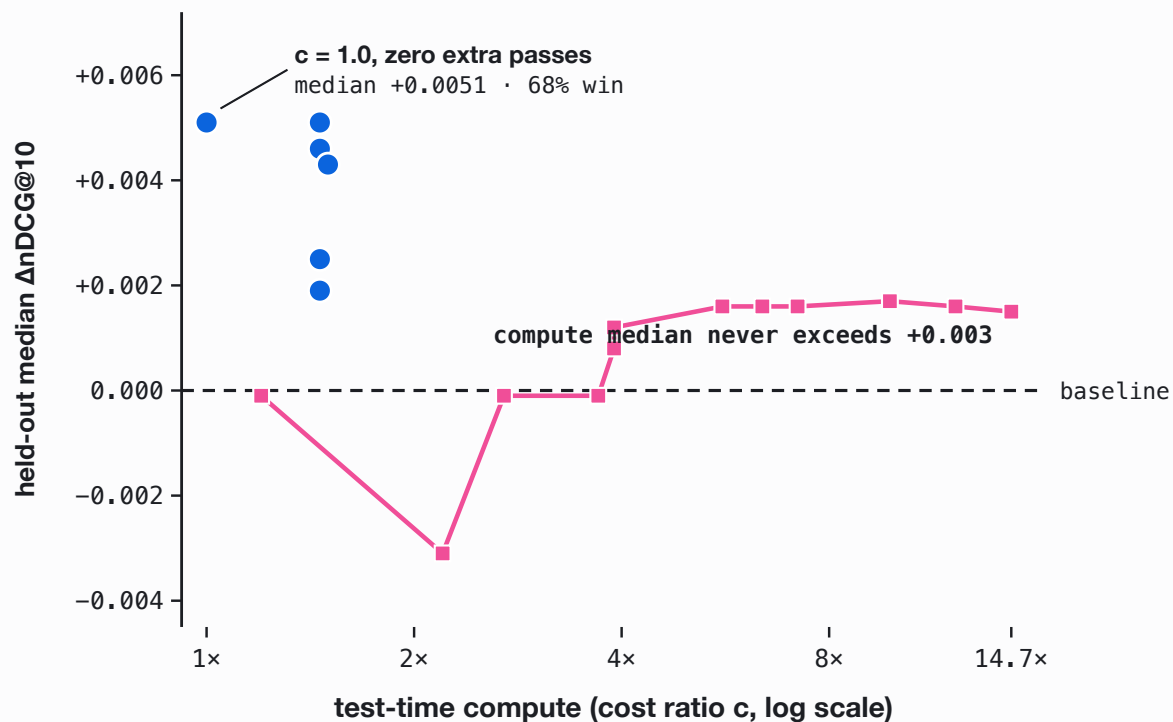

14.7x

the most compute a program spends, beaten flat by a zero-pass program at $c = 1.0$

-0.016


compute's pooled held-out mean, below baseline

-0.98

its worst per-query cell

The transfer-selecting program at $c = 1.0$, zero extra forward passes, already beats the most expensive compute program at $c = 14.7$. Median is plotted, robust to the -0.98 tail; the pooled mean is negative too.

Compute helps about half the cells, and collapses the rest.

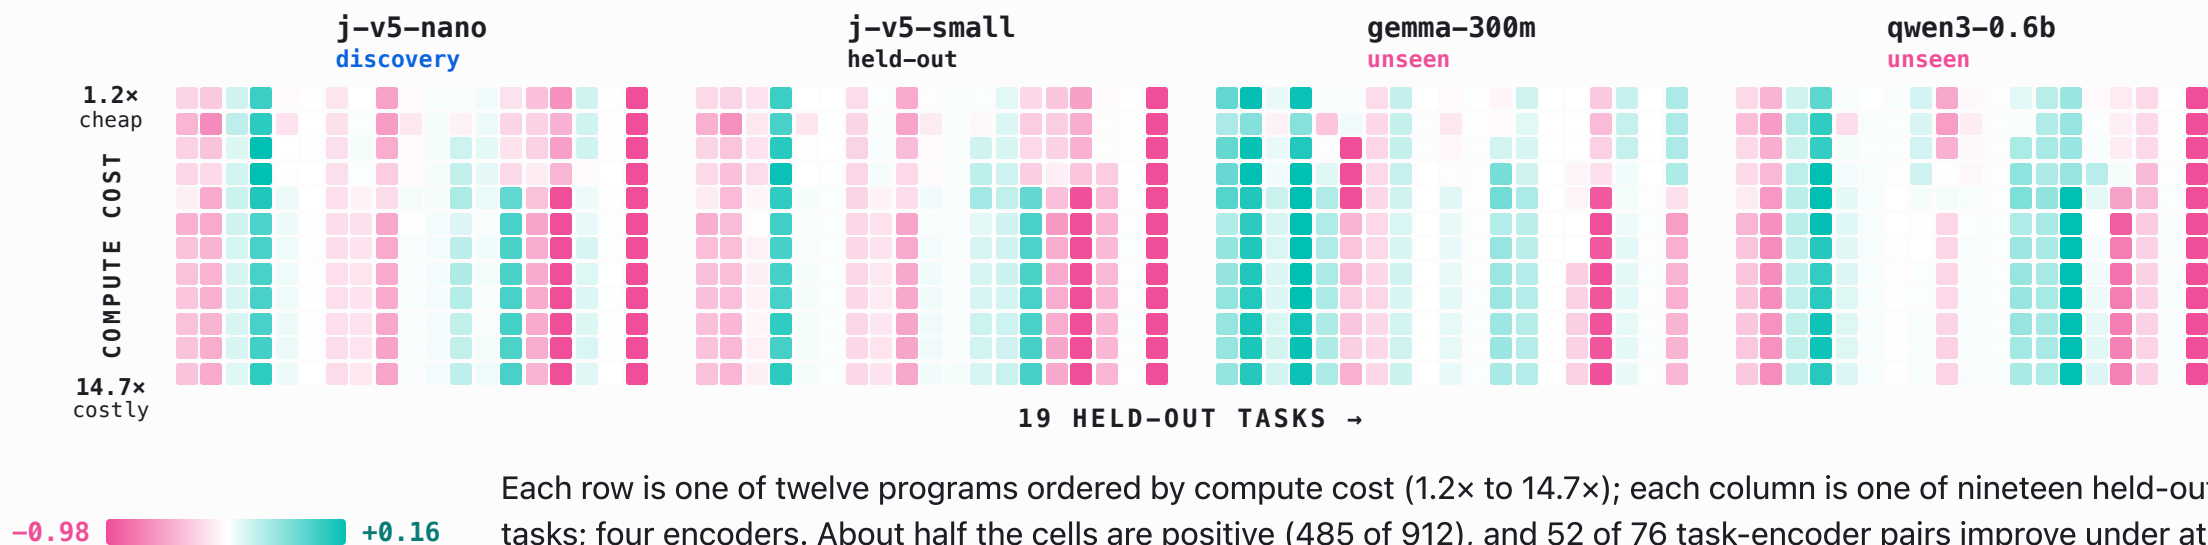

Each row is one of twelve programs ordered by compute cost (1.2x to 14.7x); each column is one of nineteen held-out tasks; four encoders. About half the cells are positive (485 of 912), and 52 of 76 task-encoder pairs improve under at least one program - yet the deep-pink cells fall to -0.98, so the pooled mean stays negative at -0.016.

Transferable programs cost at most 1.5x. The best adds zero forward passes.

PROGRAM	<i>c</i>	MEDIAN	WIN-RATE	MEAN	WORST CELL
ZeroCost-Consensus	1.00	+0.0051	68.4%	+0.0148	-0.1070
Deca-Axis	1.46	+0.0051	68.4%	+0.0133	-0.0365
Dodeca-v077	1.46	+0.0046	66.7%	+0.0126	-0.0420
Transpose-Consensus	1.50	+0.0043	83.3%	+0.0219	0.0000
Cross-Axis	1.46	+0.0025	64.9%	+0.0097	-0.0240
Penta-Axis	1.46	+0.0019	59.6%	+0.0107	-0.0485




losing cells: Transpose-Consensus, at an 83% held-out win-rate

Across the surviving programs, higher cost trends with lower held-out quality. The worst cell over the whole table is -0.107: nine times smaller than the compute frontier's -0.98 collapse. The transfer frontier turns the held-out mean positive mainly by bounding the worst cell, not merely by a higher win-rate.

Gains are largest on encoder families never seen in discovery.

mean median

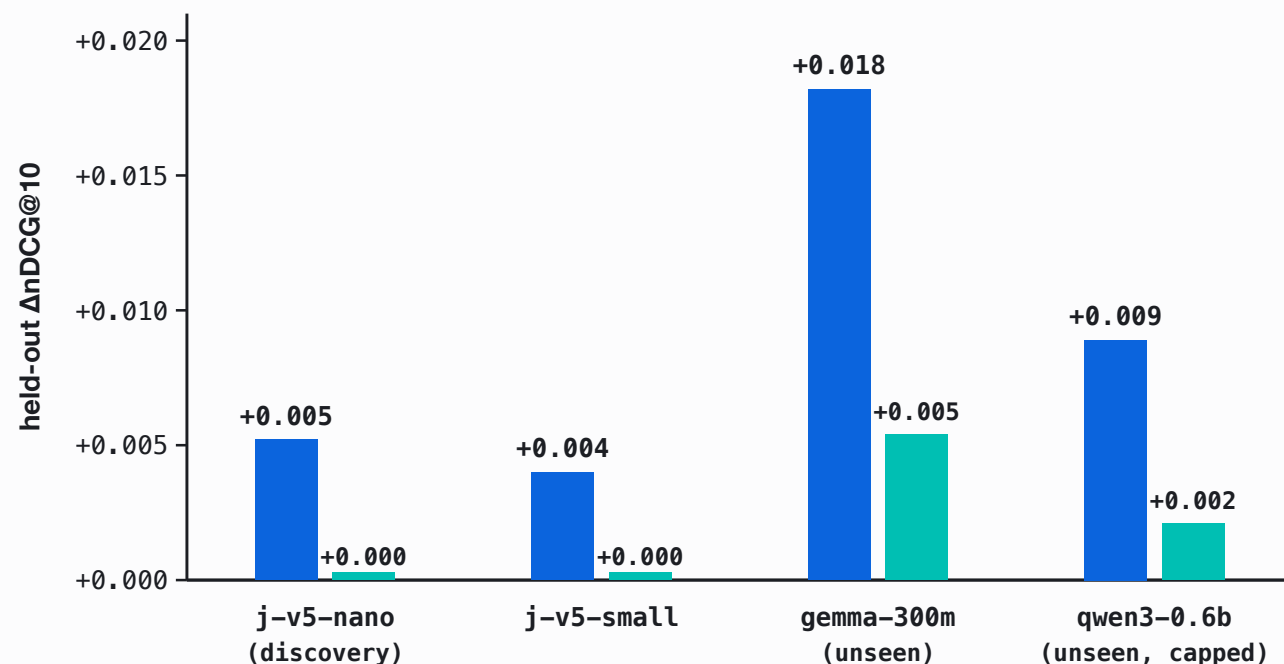

Discovered on j-v5-nano. Mean $\Delta nDCG@10$ is positive on all four families and largest on the two never seen during discovery; the medians sit near zero on the discovery families, so the gain is concentrated in a positive tail, not broad. The transfer follows general embedding geometry, not artifacts of the discovery encoder.


ACROSS LANGUAGES, T00

Applied unmodified to French and Greek: median **+0.016**, an **86%** win-rate, and every held-out cell positive on gemma-300m.

— WHY NOT JUST TRAIN A HEAD?

A matched-budget learned head memorizes. Structure transfers.


□ in-domain ■ held-out ■ structure (ref)

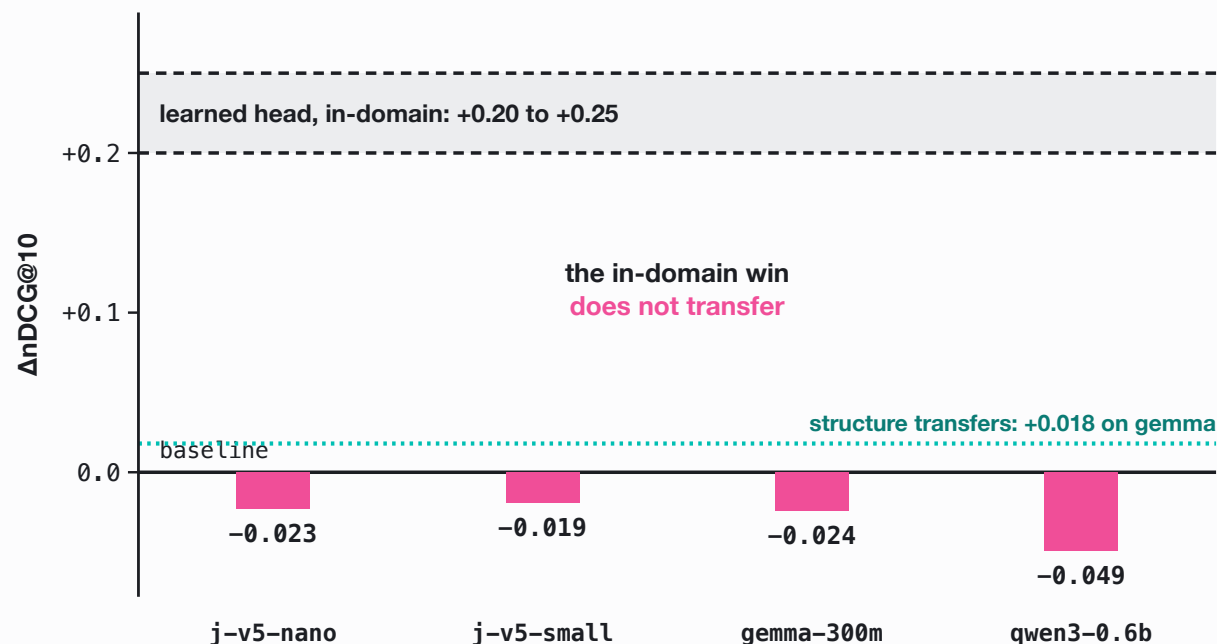

Trained on the same 14 discovery tasks, a linear, low-rank, or MLP head improves in-domain retrieval by **+0.20 to +0.25** $\Delta nDCG@10$, yet falls below baseline on **every** held-out encoder.

Adding parameters at the same data budget does not transfer. Recombining the frozen geometry does.

The transferable programs are classical IR, re-derived in embedding space.



Reciprocal Rank Fusion

REDISCOVERED, NOT SEEDED


fuse two rankings into one consensus



Fisher Linear Discriminant

REDISCOVERED, NOT SEEDED


the axis that best separates relevant from not



Rocchio Pseudo-Relevance Feedback

OPERATIONALIZED FROM A SEEDED IDEA

pull the query toward the relevant centroid



Sentence-level MaxSim


OPERATIONALIZED FROM A SEEDED IDEA

score the best sentence, not the mean


The reusable structure is geometric and old: z-scoring, sub-document granularity, centroid feedback. It depends on cosine geometry, not on model-specific training, which is why it carries to encoder families never seen during discovery.

Test-time compute is moving off the web and onto local files.

2025 · Deep Research

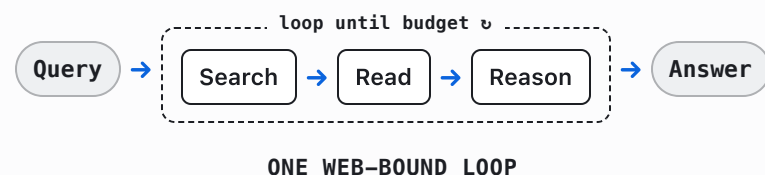


2026 · Long-Horizon Tasks

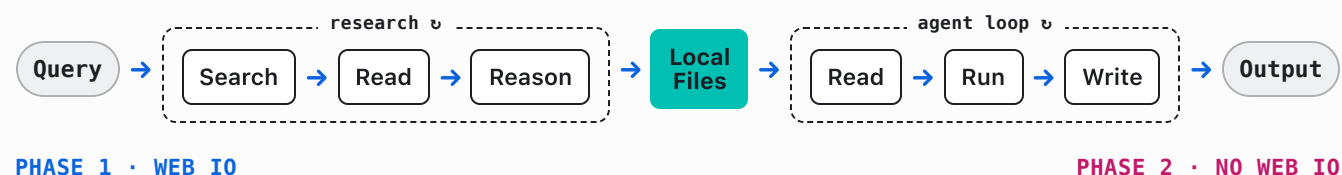


The 2026 shape – research into a local corpus, then an offline agent loop
– is exactly **dataroom** building the **.zip** and **searchbox** running on it, next.

dataroom: a small model builds the corpus first.

A local model loops **search-read-write** into a fully cited .zip corpus, built for a machine to consume rather than a human to skim. Research is mechanical, so it runs on your own GPU at near-zero token cost until the dataroom is comprehensive.

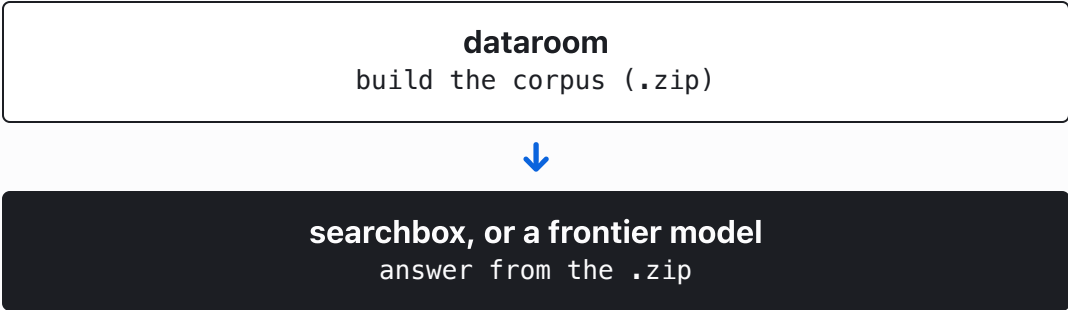

Stage one of two: the grounded .zip then goes to searchbox (next) or a frontier model for the expensive second stage.

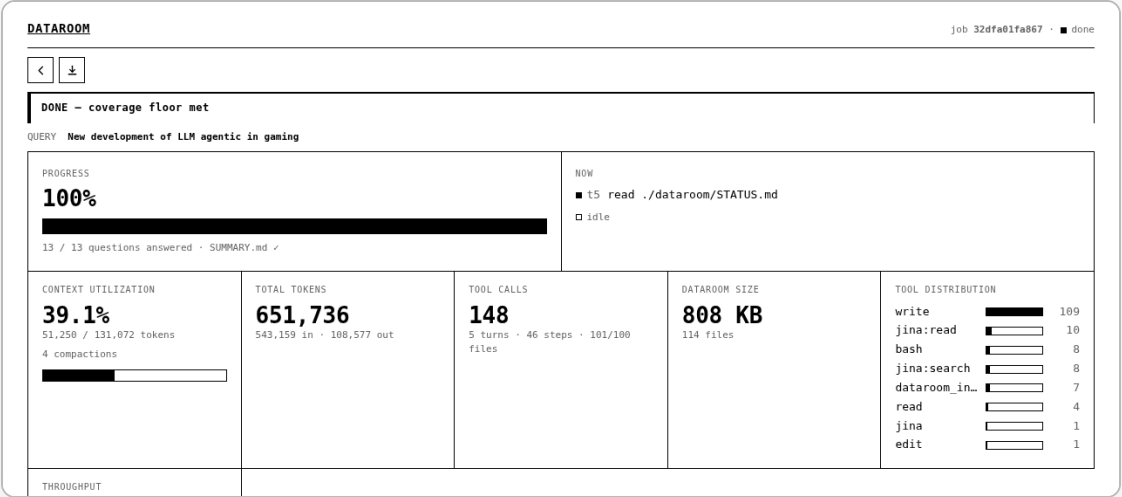


Live job page: progress to the coverage floor, token usage, and the tool-call distribution. Outcome-based stopping, not a token budget.

searchbox: a small agent wires the pipeline itself.

A self-hosted Qwen3.6-35B-A3B (~3B active) in an **airgapped** harness explores the .zip dataroom under a budget, composing its own pipeline from local tools: grep, embed, rerank, similarity, cluster, select_diverse. No network, near-zero token cost. **EXPERIMENTAL**

OPEN RESEARCH QUESTIONS

- Which tool does the agent reach for first?
- Is grep all you need: where does a dense retriever add nothing?
- Does forcing more token budget (scaling TTC) help on the hard questions?

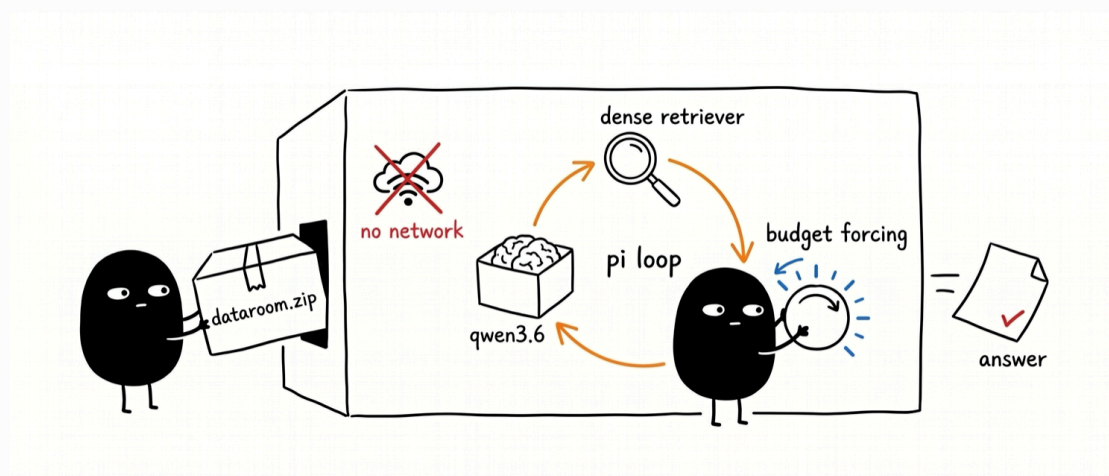

the airgapped loop, illustrated · live at hanxiao.io/searchbox

Both manufacture a search pipeline at test time. Neither grows the model.

	A EMBEDDING PROGRAMS	B SEARCHBOX
who assembles it	an agentic search loop, offline	a small agent LLM, at query time
the pipeline is	multi-pass embedding algebra	a chain of retrieval tools
the model	frozen encoder, 239M	Qwen3.6-35B, ~3B active
what scales	structure, not forward passes	tool composition, not parameters

Test-time compute for small models is **pipeline assembly**, not raw compute.

For frozen retrieval, test-time structure substitutes for model size. Test-time compute does not.

- 01 Small distilled models have real, transferable test-time potential, realized as structure, not raw compute.
- 02 Two ways to spend it: recombine the encoder's geometry, or let an agent compose the tools. Both assemble a pipeline at inference.
- 03 Trust the gain only when the loop optimizes transfer, with a held-out gate it cannot see and a worst-case floor.

~1x

query-time cost. 0.011 s of algebra against 40 s of encoding: the axis that transfers is also the cheapest to serve.

Honest caveat: absolute held-out gains are modest, pooled means of +0.004 to +0.018 Δ nDCG@10. The claim is about the shape of the compute-quality relation and the tail, not magnitude.

— THANK YOU

Spend structure, not compute.

Zero training. Across frozen encoders. About 1× serving cost.

Han Xiao · VP of AI, Elastic

`github.com/hanxiao / embedding-ttc · searchbox · dataroom`

`arXiv:2605.11374`

`@hxiao · in/hxiao87`

THESE SLIDES



`hanxiao.io/ttc-aie-sf`