

## 2-3. Quiz Array

---

```
import Foundation
```

```
struct Quiz {  
    var index: Int  
    var description: String  
    var options : [Option]  
}
```


```
struct Option: Identifiable {  
    let id = UUID()  
    var name: String  
    var isCorrect: Bool  
}
```

10:05



2 / 3

What is the name of this component?

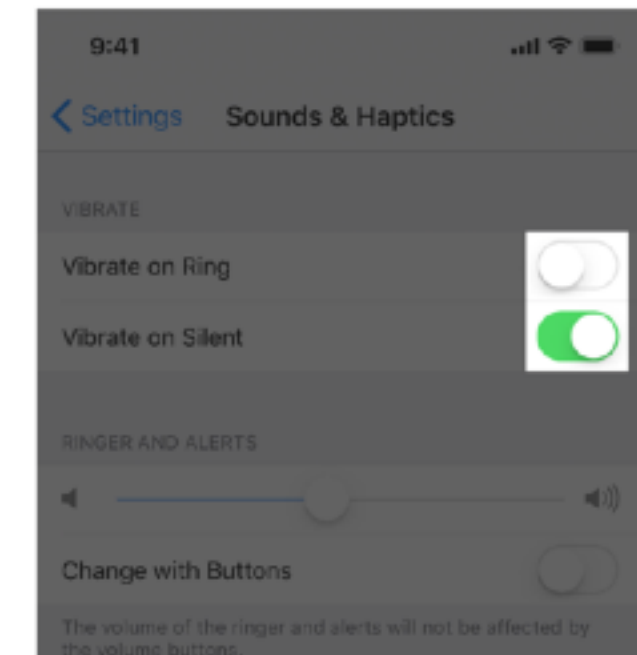

Steppers  
switches  
Text Fields

# 2-3. Quiz Array

```
import Foundation


let QuizArray : [Quiz] = [
    //Quiz 1
    Quiz(
        index: 1,
        description: "https://developer.apple.com/design/human-interface-guidelines/ios/images/steppers_2x.png",
        options: [
            Option(name: "Steppers", isCorrect: true),
            Option(name: "Switches", isCorrect: false),
            Option(name: "Text Fields", isCorrect: false)
        ]
    ),
    // Quiz 2
    Quiz(
        index: 2,
        description: "https://developer.apple.com/design/human-interface-guidelines/ios/images/switches-
default_2x.png",
        options: [
            Option(name: "Steppers", isCorrect: false),
            Option(name: "switches", isCorrect: true),
            Option(name: "Text Fields", isCorrect: false)
        ]
    ),
    // Quiz 3
    Quiz(
        index: 3,
        description: "https://developer.apple.com/design/human-interface-guidelines/ios/images/Text_Fields_2x.png",
        options: [
            Option(name: "Steppers", isCorrect: false),
            Option(name: "Switches", isCorrect: false),
            Option(name: "TextFields", isCorrect: true)
        ]
    )
]
```

10:05



3 / 3

What is the name of this component?

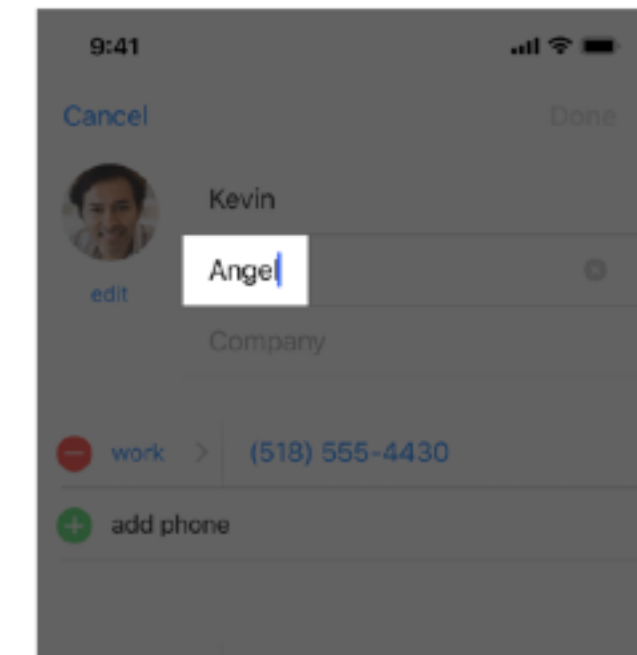

Steppers  
Switches  
TextFields