PUBLIC VISUAL CATALOG

WildChat EDA

What is stored, how use varies, and where the evidence stops.

3,199,860	10,334,364	83.5%	76
released records	stored messages	one-user-message records	source language labels

1. Source census — Language, model mix, timestamps, conversation depth and English text length.

2. Classification — Microsoft whole-record topic/task labels and a separate 2,000-request AI-label sample.

3. Evidence checks — Sampling comparison and aggregate cross-record metadata matches.

4. Archive — Twelve original figures, retained with their narrower sample scopes.


Unit: a released record is a stored conversation object, not a unique person or an account. It may contain several messages or pasted material. Source: allenai/WildChat-4.8M, default/train, all 86 shards at the revision below. The release name does not equal the row count at this pinned revision.

https://huggingface.co/datasets/allenai/WildChat-4.8M/tree/c827c6df8fcf008219ffaffa4d1dd77491099367

Language and models

English is just over half of released records

Full pinned release | 3,199,860 records | source language labels

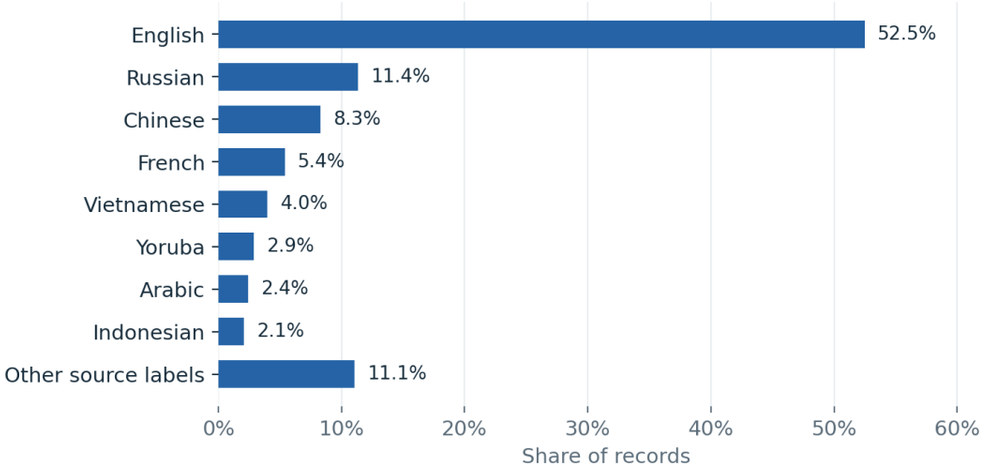

3,199,860 | denominator


English accounts for 52.5%; language-specific conclusions need their own scope.

All 86 source shards; no additional filters

Saved pinned-release aggregate analysis

Model versions are mixed across the release

Full pinned release | 3,199,860 records | model families

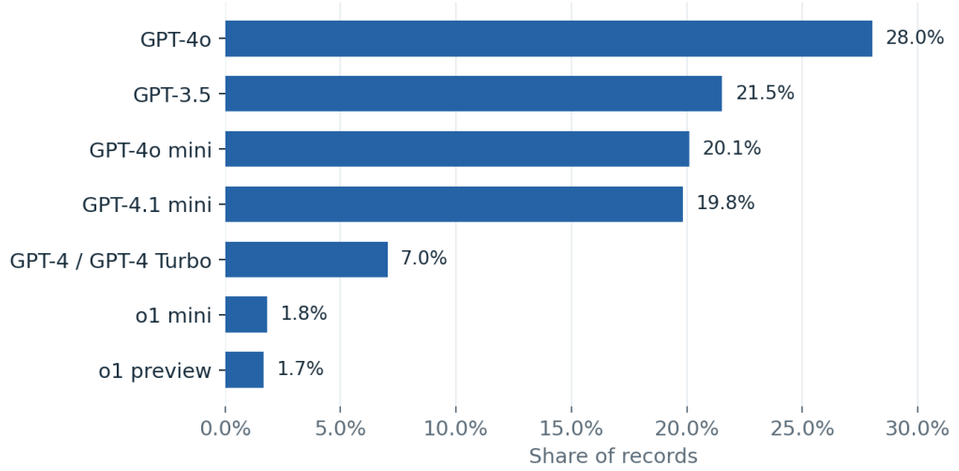

3,199,860 | denominator

This is a mixture of model generations, not a snapshot of one current assistant.


All 86 source shards; model family aggregation

Saved pinned-release aggregate analysis

Time and conversation depth

Collection volume varies strongly over time

Full pinned release | 3,199,860 records | source timestamps

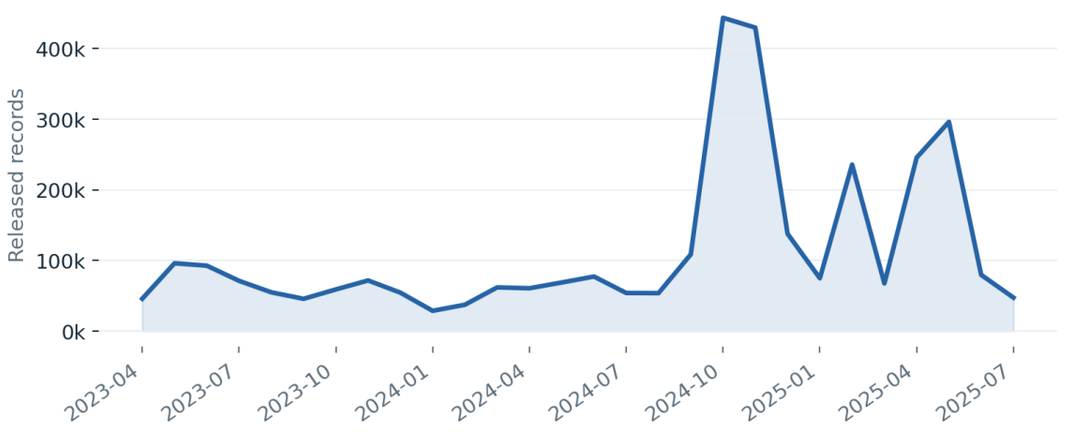

3,199,860 | denominator


More records in a month reflect collection volume, not necessarily more users or greater demand.

All records; month of source timestamp

Saved pinned-release aggregate analysis

Most records contain one user message

Full pinned release | 3,199,860 records | stored user-message counts

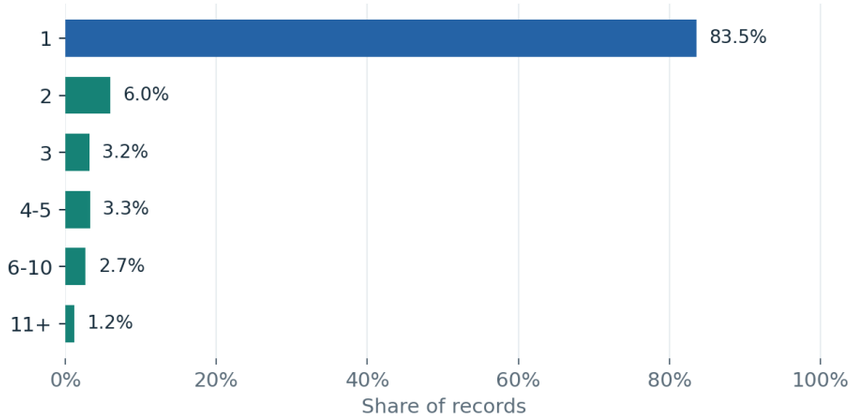


3,199,860 | denominator


83.5% contain one stored user message; that does not describe a person's complete AI usage.

All source records; counted stored user messages

Saved pinned-release aggregate analysis

Text length and sample checks

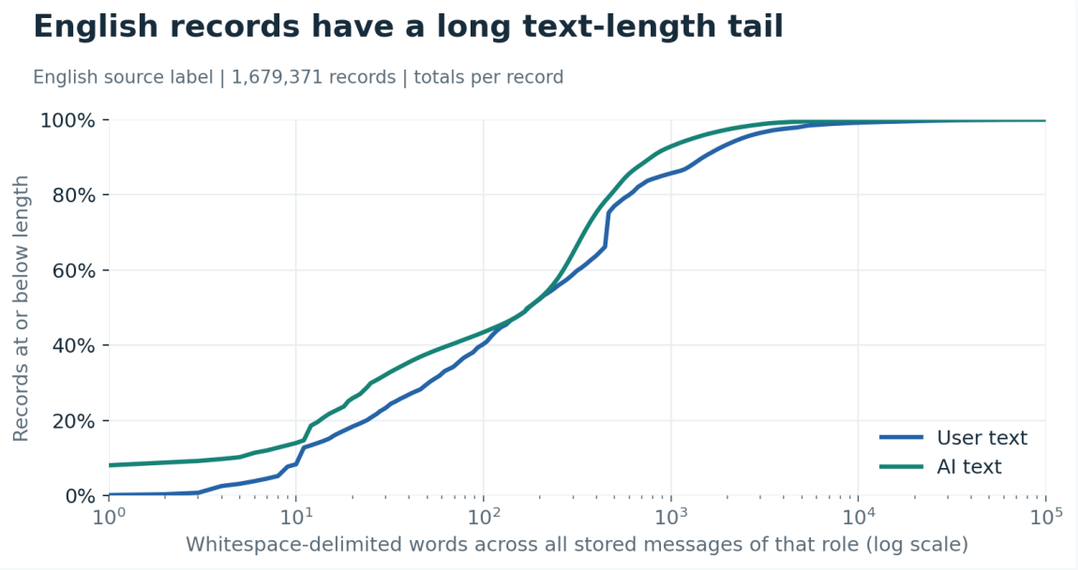

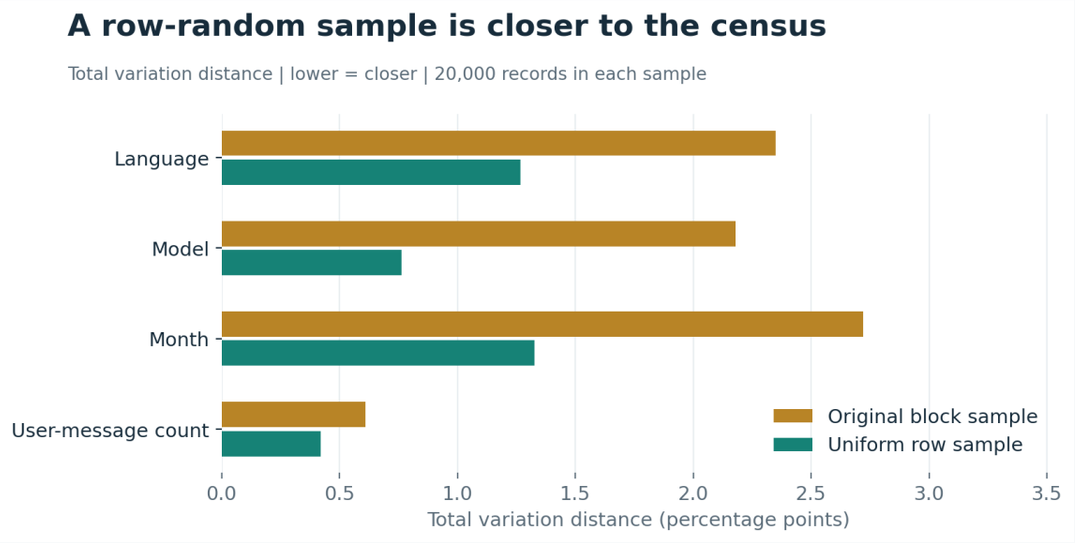

1,679,371 | denominator

Median total user text is 176 words; large pasted inputs contribute to the upper tail.

English-labeled records; total words per role per record

Saved pinned-release aggregate analysis

20,000 | denominator

The original block sample differs most in month/model mix; full-release counts now replace sample estimates.


Two separate 20,000-record samples compared with the full release

Saved pinned-release aggregate analysis

Task and topic

Writing and information lookup lead task labels

Microsoft GPT-4o-mini labels | 3,199,860 released records | one label per record

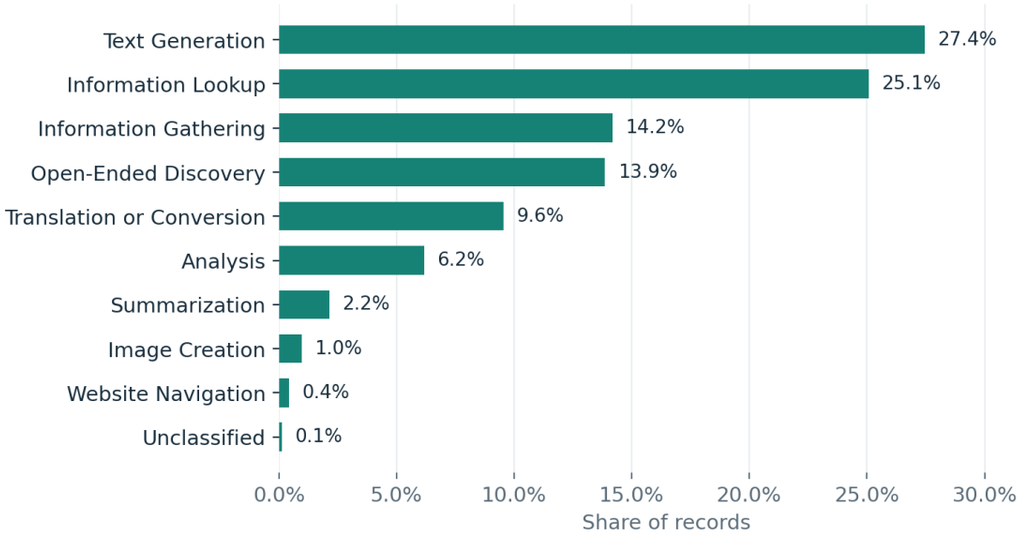

3,199,860 | denominator


AI classifications describe stored content; label accuracy has not been human-validated in this audit.

Microsoft released classifications aligned row-by-row to the pinned release

Microsoft released classifications

Topic labels span many domains

Microsoft GPT-4o-mini labels | 3,199,860 released records | one label per record

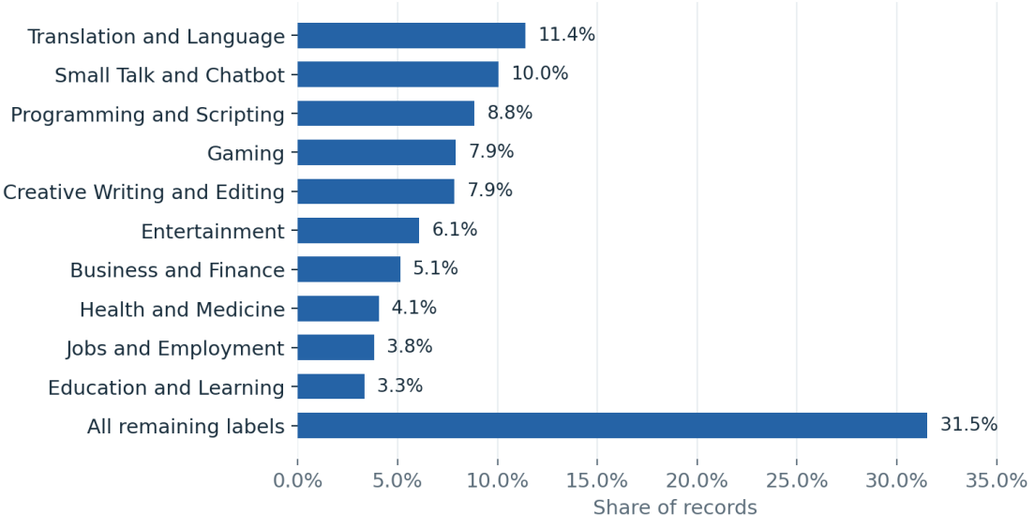

3,199,860 | denominator

AI classifications describe stored content; label accuracy has not been human-validated in this audit.


Microsoft released classifications aligned row-by-row to the pinned release

Microsoft released classifications

Final-request content

Interpersonal content has several distinct forms

Uniform row sample | 2,000 final stored requests | AI labels; no human validation

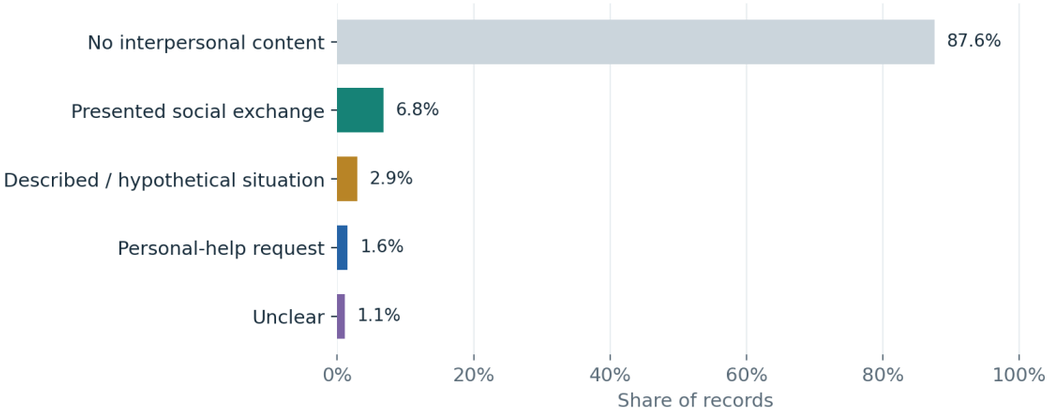

2,000 | denominator


31 of 2,000 final requests are labeled personal help; a social topic alone does not establish a real relationship event.

2,000 rows sampled uniformly without replacement; final request classified using stored history

Saved pinned-release aggregate analysis

Text work also dominates the 2,000-request sample

Uniform row sample | 2,000 final stored requests | separate AI annotation scheme

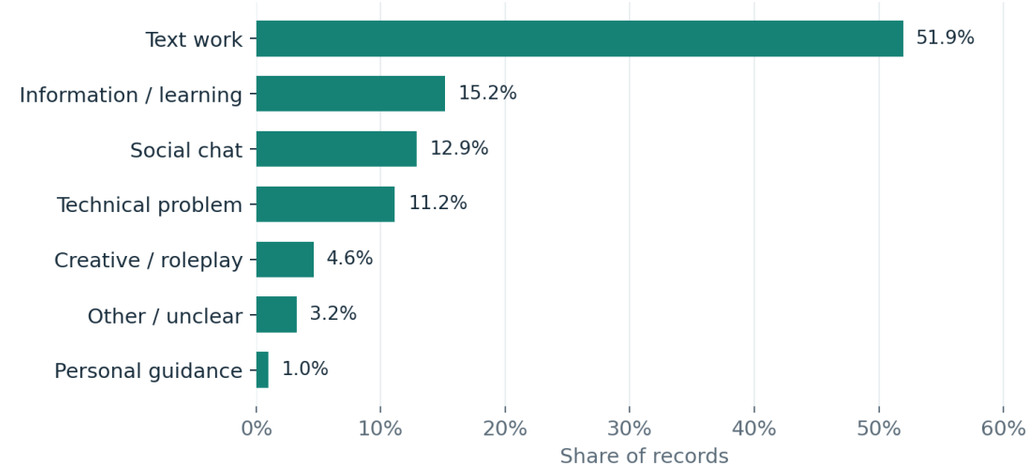

2,000 | denominator

These final-request labels use a different unit and taxonomy from Microsoft whole-record labels.

2,000 uniformly selected records; final active request is the annotation unit

Saved pinned-release aggregate analysis


AI annotations only. No human validation. Sampling intervals do not cover label error.

AGGREGATE LINKAGE

Cross-record metadata matches

Most exact metadata combinations occur once

Complete metadata only | 1,921,755 combinations | combinations are not people

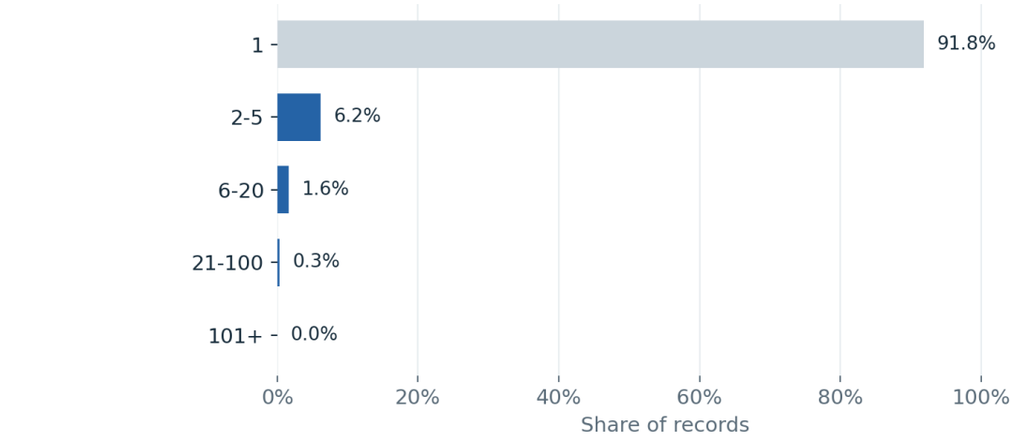

1,921,755 | denominator


156,930 combinations occur in multiple records; a repeated combination does not establish identity.

Exact hashed IP + accept-language + user-agent; all three components nonblank

Saved pinned-release aggregate analysis

Most repeated combinations have short spans

Repeated exact metadata combinations | 156,930 combinations | last-turn UTC timestamps

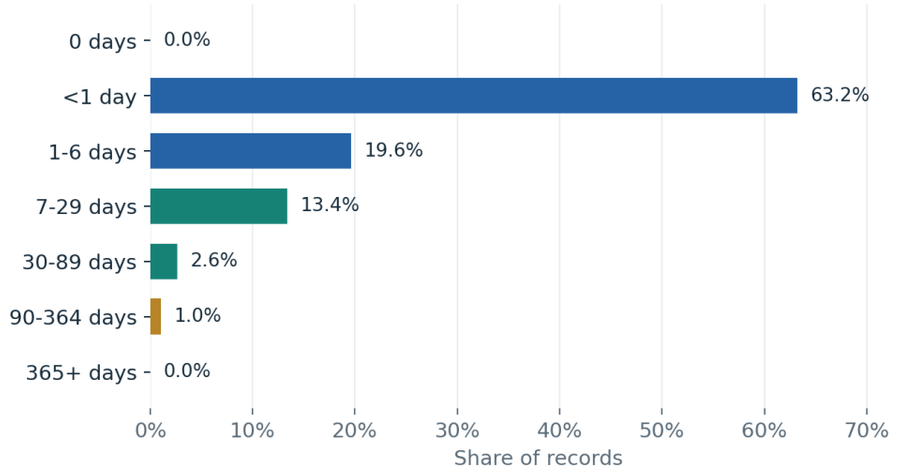

156,930 | denominator

66 combinations span at least one year; their identity, continuous use and topic continuity are not established.


Repeated complete metadata combinations only; latest minus earliest record timestamp

Saved pinned-release aggregate analysis

Repeated exact metadata combinations are not verified users. No identifiers are published.

Original figures 1-4


20,000 sampled records · automatic labels, not verified request languages

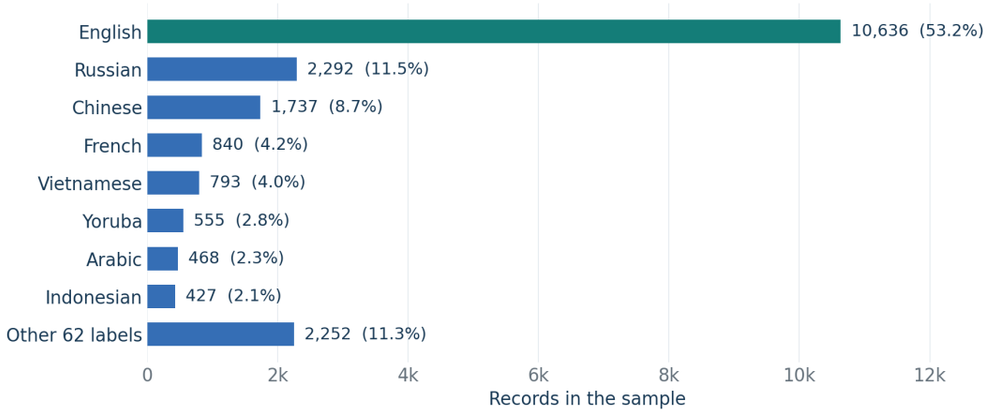

Language labels

20,000-record original block sample | denominator 20,000


20,000 sampled records · model-name groups describe coverage, not capability

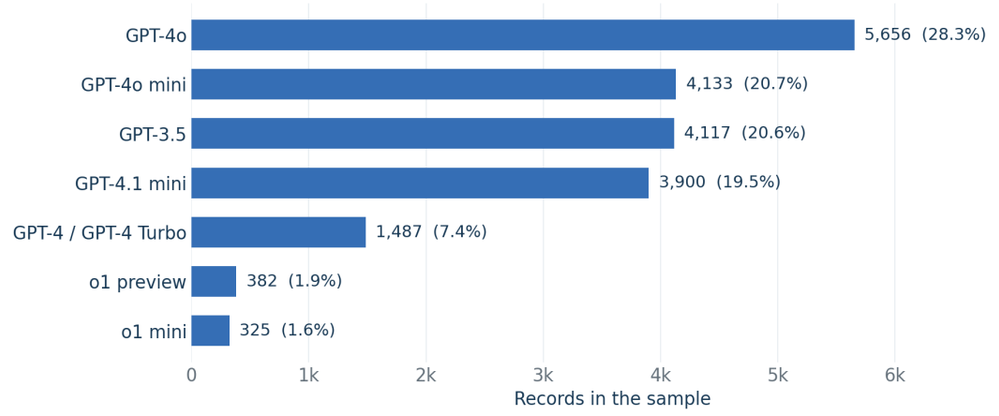

Model mix

20,000-record original block sample | denominator 20,000


Share within each sampled year (rounded) · model and date coverage are coupled

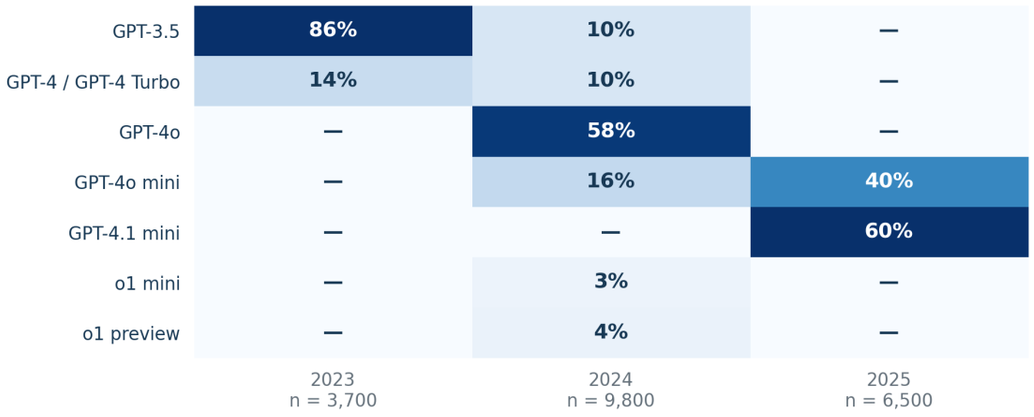

Model mix by year

20,000-record original block sample | denominator 20,000

All 20,000 records · one stored message can still contain an embedded conversation

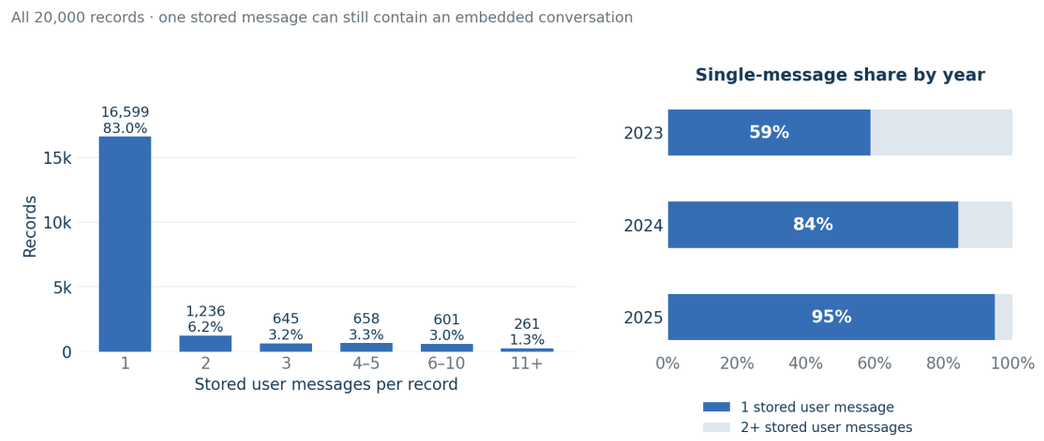


Stored user-message counts

20,000-record original block sample | denominator 20,000

Original block sample: 20,000 records. Pilot: 120 AI-labeled inputs. These scopes are not pooled.

Original figures 5-8


10,636 English-labeled records · median input 193 words; output 170 words

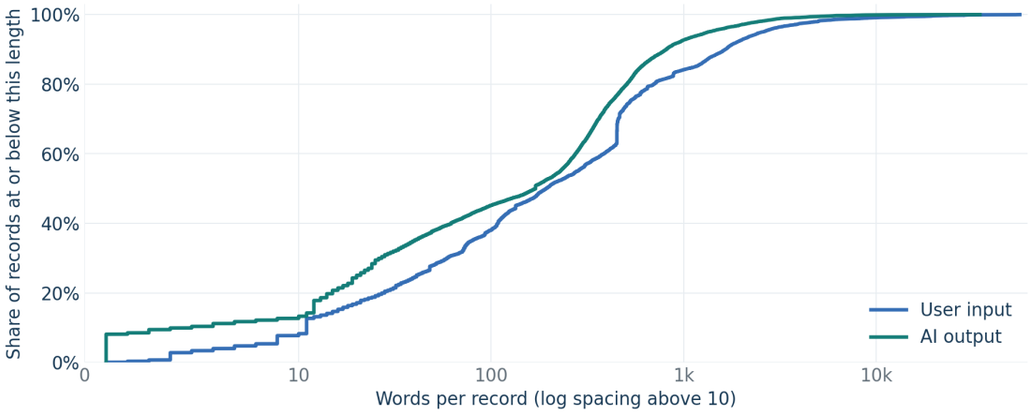

Text-length ECDF

English-labeled subset of original block sample | denominator 10,636


English-labeled records · template: bot rules + game-group data + current request

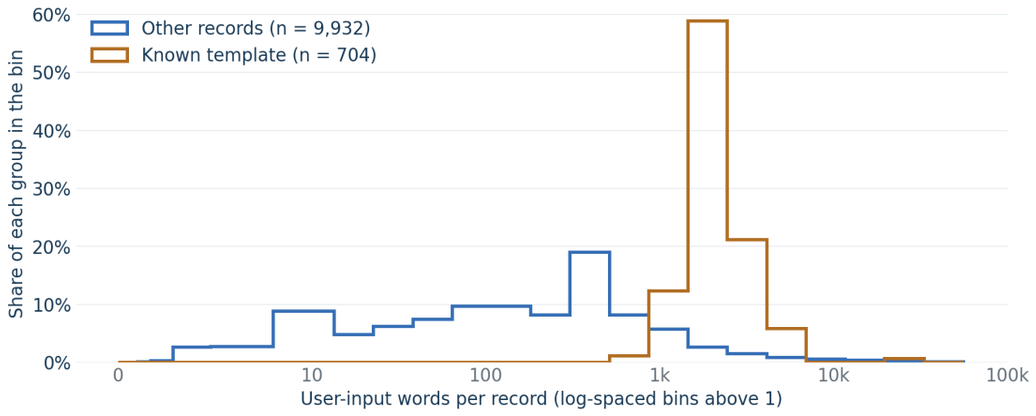

Template text lengths

English-labeled subset of original block sample; see chart subgroups | denominator 10,636

20,000 sampled records · measures overlap; repeated opening text alone does not prove a duplicate conversation

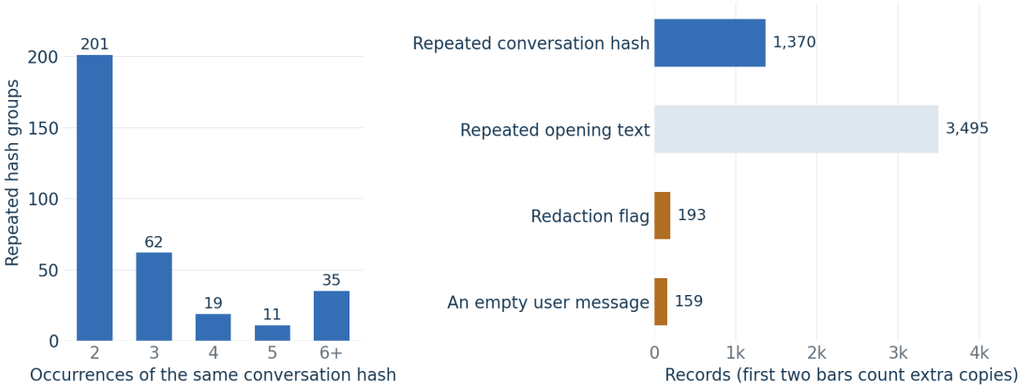


Repeated content and source flags

20,000-record original block sample | denominator 20,000

Original block sample: 20,000 records. Pilot: 120 AI-labeled inputs. These scopes are not pooled.


200 sampled blocks of 100 rows · this describes sample coverage, not a platform usage trend

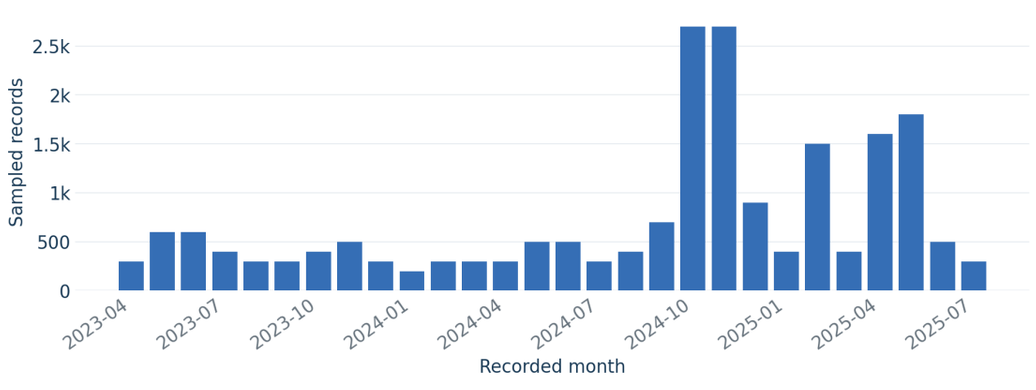

Month coverage

20,000-record original block sample | denominator 20,000

Original figures 9-12

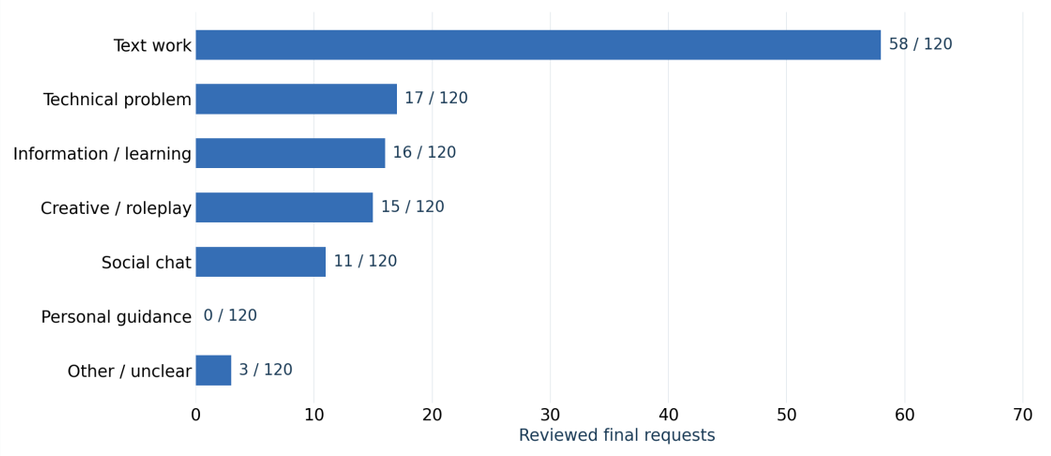


Request purpose

120-input AI-label pilot; not a population sample | denominator 120

	Direct request	Supplied document / code	Embedded dialogue	Unclear
Text work	20	35	3	0
Technical problem	6	10	1	0
Information / learning	14	1	1	0
Creative / roleplay	15	0	0	0
Social chat	8	0	3	0
Personal guidance	0	0	0	0
Other / unclear	3	0	0	0


Purpose and supplied material

120-input AI-label pilot; not a population sample | denominator 120

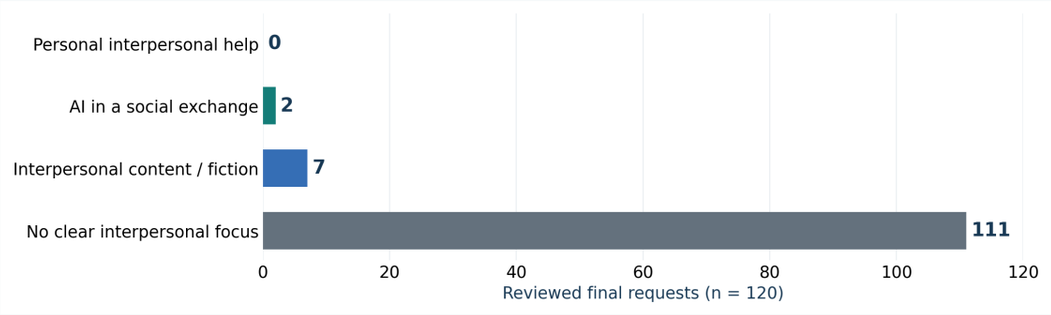

Interpersonal content modes

120-input AI-label pilot; not a population sample | denominator 120

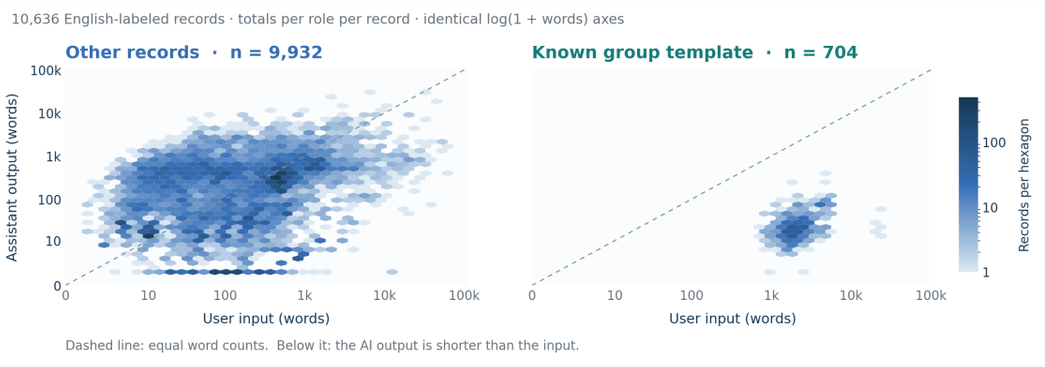

Input and response lengths

English-labeled subset of original block sample | denominator 10,636

Original block sample: 20,000 records. Pilot: 120 AI-labeled inputs. These scopes are not pooled.