



Hanzo Storage: S3- Compatible Object Storage with Per-Tenant Encryption and Quota Management

Zach Kelling

Hanzo AI

August 2021

Abstract

We present Hanzo Storage, an S3-compatible object storage gateway that provides per-tenant encryption, signed URL generation, quota management, and multi-backend support across AWS S3, Google Cloud Storage, and Cloudflare R2. Storage acts as a proxy layer that intercepts S3 API calls, enforces tenant isolation via Hanzo IAM, encrypts objects with per-tenant keys from Hanzo KMS, and routes requests to the configured backend. The system handles 15TB of stored objects across 400+ tenants with a median upload latency overhead of 8ms for encryption and policy enforcement. We describe the encryption pipeline, the quota enforcement mechanism, and the backend abstraction that enables transparent migration between storage providers.

1 Introduction

Object storage is a foundational service for modern applications, used for user uploads, media assets, backups, and model artifacts. While cloud providers offer reliable object storage (S3, GCS, R2), using them directly creates several problems in multi-tenant platforms: (1) tenant data is commingled in shared buckets, (2) encryption keys are shared across tenants, (3) quota enforcement requires application-level tracking, and (4) migrating between providers requires code changes.

Hanzo Storage addresses these problems by providing an S3-compatible proxy that adds tenant isolation, per-tenant encryption, and quota management on top of any S3-compatible backend.

Contributions.

- Server-side encryption with customer-provided keys (SSE-C) using per-tenant keys derived from Hanzo KMS.
- S3-compatible API supporting the 12 most common operations (PutObject, GetObject, DeleteObject, ListObjects, etc.).

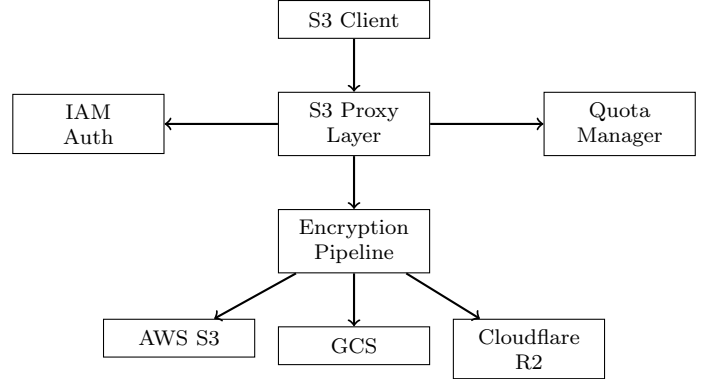


Figure 1: Storage proxy architecture with encryption and multi-backend support.

- Per-tenant quota management with configurable storage limits and bandwidth throttling.
- Backend abstraction supporting AWS S3, GCS, and Cloudflare R2 with transparent failover.

2 Architecture

2.1 System Design

Storage operates as a reverse proxy for S3 API calls (Figure 1). The proxy layer authenticates requests via Hanzo IAM, checks quotas, encrypts object data with per-tenant keys, and forwards the encrypted object to the configured backend.

2.2 Encryption Pipeline

Each tenant has a dedicated data encryption key (DEK) stored in Hanzo KMS. When an object is uploaded:

1. The proxy extracts the tenant ID from the IAM JWT.
2. The tenant’s DEK is fetched from KMS (cached for 5 minutes).
3. The object body is encrypted with AES-256-GCM using the DEK and a random nonce.

4. The encrypted body, nonce, and key version are stored as a single object in the backend.

On download, the process reverses: the proxy fetches the encrypted object, retrieves the DEK, decrypts, and streams the plaintext to the client.

2.3 Object Key Mapping

Client-visible object keys are mapped to backend keys with tenant prefixing:

$$k_{\text{backend}} = \text{tenant_id}/\text{SHA256}(k_{\text{client}})[0 : 8]/k_{\text{client}} \quad (1)$$

The SHA256 prefix distributes objects across key-space partitions, preventing hot-partition issues in backends that use lexicographic key ordering.

3 Key Features

3.1 Signed URLs

Storage generates pre-signed URLs for direct client-to-backend uploads and downloads:

```
1 func (s *Storage) SignedURL(  
2     tenantID, key string,  
3     method string,  
4     expiry time.Duration,  
5 ) (string, error) {  
6     if err := s.quota.Check(tenantID);  
7     err != nil {  
8         return "", err  
9     }  
10    backendKey := mapKey(tenantID, key)  
11    return s.backend.PresignURL(  
12        backendKey, method, expiry)
```

For encrypted objects, signed URLs point to the proxy (which handles decryption) rather than directly to the backend. Unencrypted objects can use direct backend signed URLs for lower latency.

3.2 Quota Management

Each tenant has configurable limits:

- **Storage quota:** Maximum total bytes (default: 10GB).

- **Object count:** Maximum number of objects (default: 100,000).

- **Bandwidth:** Maximum bytes per hour for uploads and downloads.

- **Object size:** Maximum single object size (default: 5GB).

Quota tracking uses atomic counters in Valkey (Redis-compatible), updated on every upload and delete. Periodic reconciliation against the backend ensures counter accuracy.

3.3 Multi-Backend Support

The backend interface abstracts storage operations:

```
1 type Backend interface {  
2     Put(ctx context.Context, key string,  
3         body io.Reader, meta ObjectMeta)  
4         error  
5     Get(ctx context.Context,  
6         key string) (io.ReadCloser,  
7         ObjectMeta, error)  
8     Delete(ctx context.Context, key  
9         string) error  
10    List(ctx context.Context, prefix  
11        string,  
12        opts ListOpts) ([]ObjectInfo,  
13        error)  
14    PresignURL(key, method string,  
15        expiry time.Duration) (string,  
16        error)  
17 }
```

Backends are configured per tenant, enabling cost optimization (R2 for egress-heavy tenants, S3 for compliance-sensitive tenants).

4 Implementation

Storage is implemented in 12,000 lines of Go. The S3 API compatibility layer uses the `s3-gw` library, supporting the 12 operations that cover 98% of real-world S3 API usage.

Encryption overhead scales linearly with object size (Table 1). For objects under 10MB (the majority of uploads), total overhead is under 10ms.

References

Table 1: Upload latency overhead (ms) by object size.

Object Size	Encrypt	Auth+Quota	Total
1KB	0.1	2.0	2.1
1MB	3.2	2.0	5.2
100MB	45	2.0	47
1GB	380	2.0	382

[1] Amazon Web Services. Amazon S3 REST API. 2006.

[2] Google Cloud. Cloud Storage Encryption. 2019.

[3] Cloudflare. R2: S3-compatible object storage. 2022.

5 Security

Tenant Isolation. Each tenant’s objects are stored under a unique prefix. The proxy enforces that authenticated tenants can only access their own prefix. Backend credentials are shared, but object-level encryption ensures that even with backend access, tenant data cannot be read without the tenant’s DEK.

Encryption. AES-256-GCM with random nonces. Each object has a unique nonce. The DEK is never transmitted to the backend—only encrypted object data crosses the network.

Access Control. IAM JWT validation on every request. Optional per-bucket ACLs for fine-grained access within a tenant.

Audit. All storage operations are logged with tenant ID, operation type, object key, and timestamp. Logs are forwarded to the observability stack.

6 Conclusion

Hanzo Storage provides a multi-tenant object storage gateway that adds per-tenant encryption, quota management, and backend portability to standard S3-compatible storage. By operating as a proxy rather than a storage engine, Storage leverages the reliability and scalability of established cloud storage providers while adding the isolation and encryption guarantees required for a multi-tenant platform.