


0 1 ... $T-O-1$ $T-O$ $T-O+1$... $T-1$ T ... $2T-O-1$... Time

Iter 0

start = 0

$n_{hist} = 0$

no history

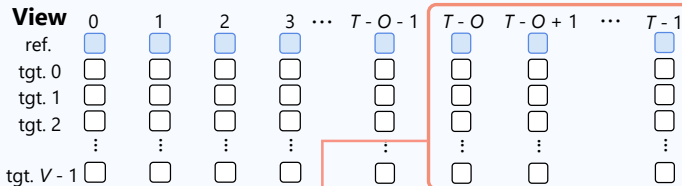


Iter 1

start = $T-O$

$n_{hist} = O$

history =

frames $T-O \dots T-1$

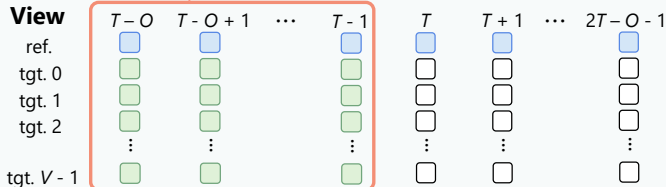

history ($n_{hist} = O$)

new frames denoised

☐ Reference view tokens ☐ Target view historical tokens ☐ Target view tokens