

2026/08/15 - 2026/08/16

2026 新北市AI智慧城市黑客松競賽 實戰工作坊

Aaron Huang

Cloud Consultant
AWS Professional Services

Joe Yang

Cloud Architect
AWS Professional Services




© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Agenda

- 什麼是生成式 AI
- **AWS AI portfolio**
- **Amazon Bedrock AgentCore**
- **Hands On Time – Workshop Studio**
- **Amazon SageMaker AI Demo**

什麼是生成式 AI

Amazon has been innovating with AI for over 25 years

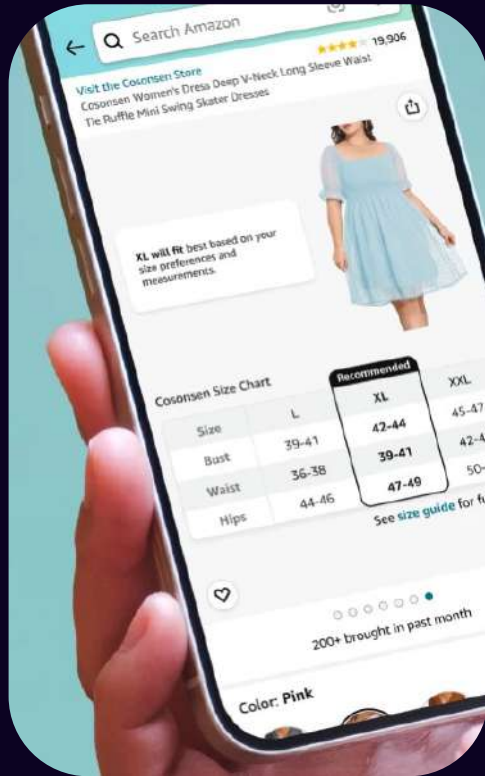

每分鐘銷售超過
4000項產品



從**2016**開始採用無
人機運送




每週與Alexa超過
1億次的互動



每天**160萬件**包裹
運送

Amazon 的生成式 AI 創新

GENERATIVE AI INNOVATIONS AT AMAZON

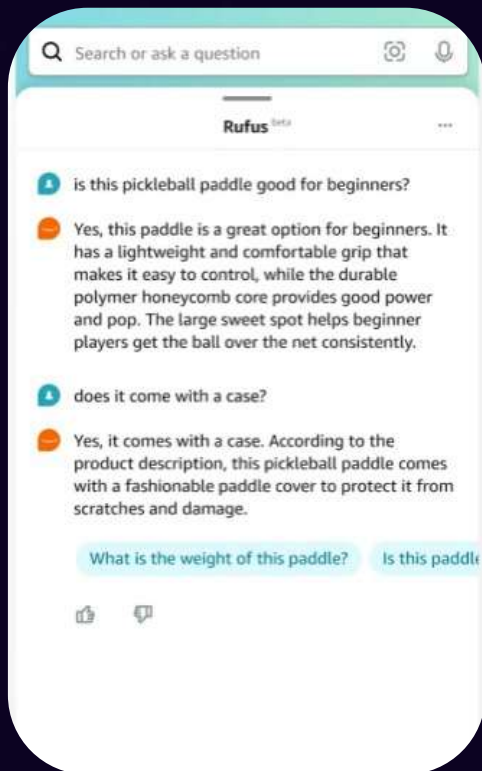

Rufus

智能導購助理



AWS

客戶報告生成



Ads


生活風格背景生成



Alexa+


智慧語音助理

生成式 AI 建立在 60 年進步的基礎上

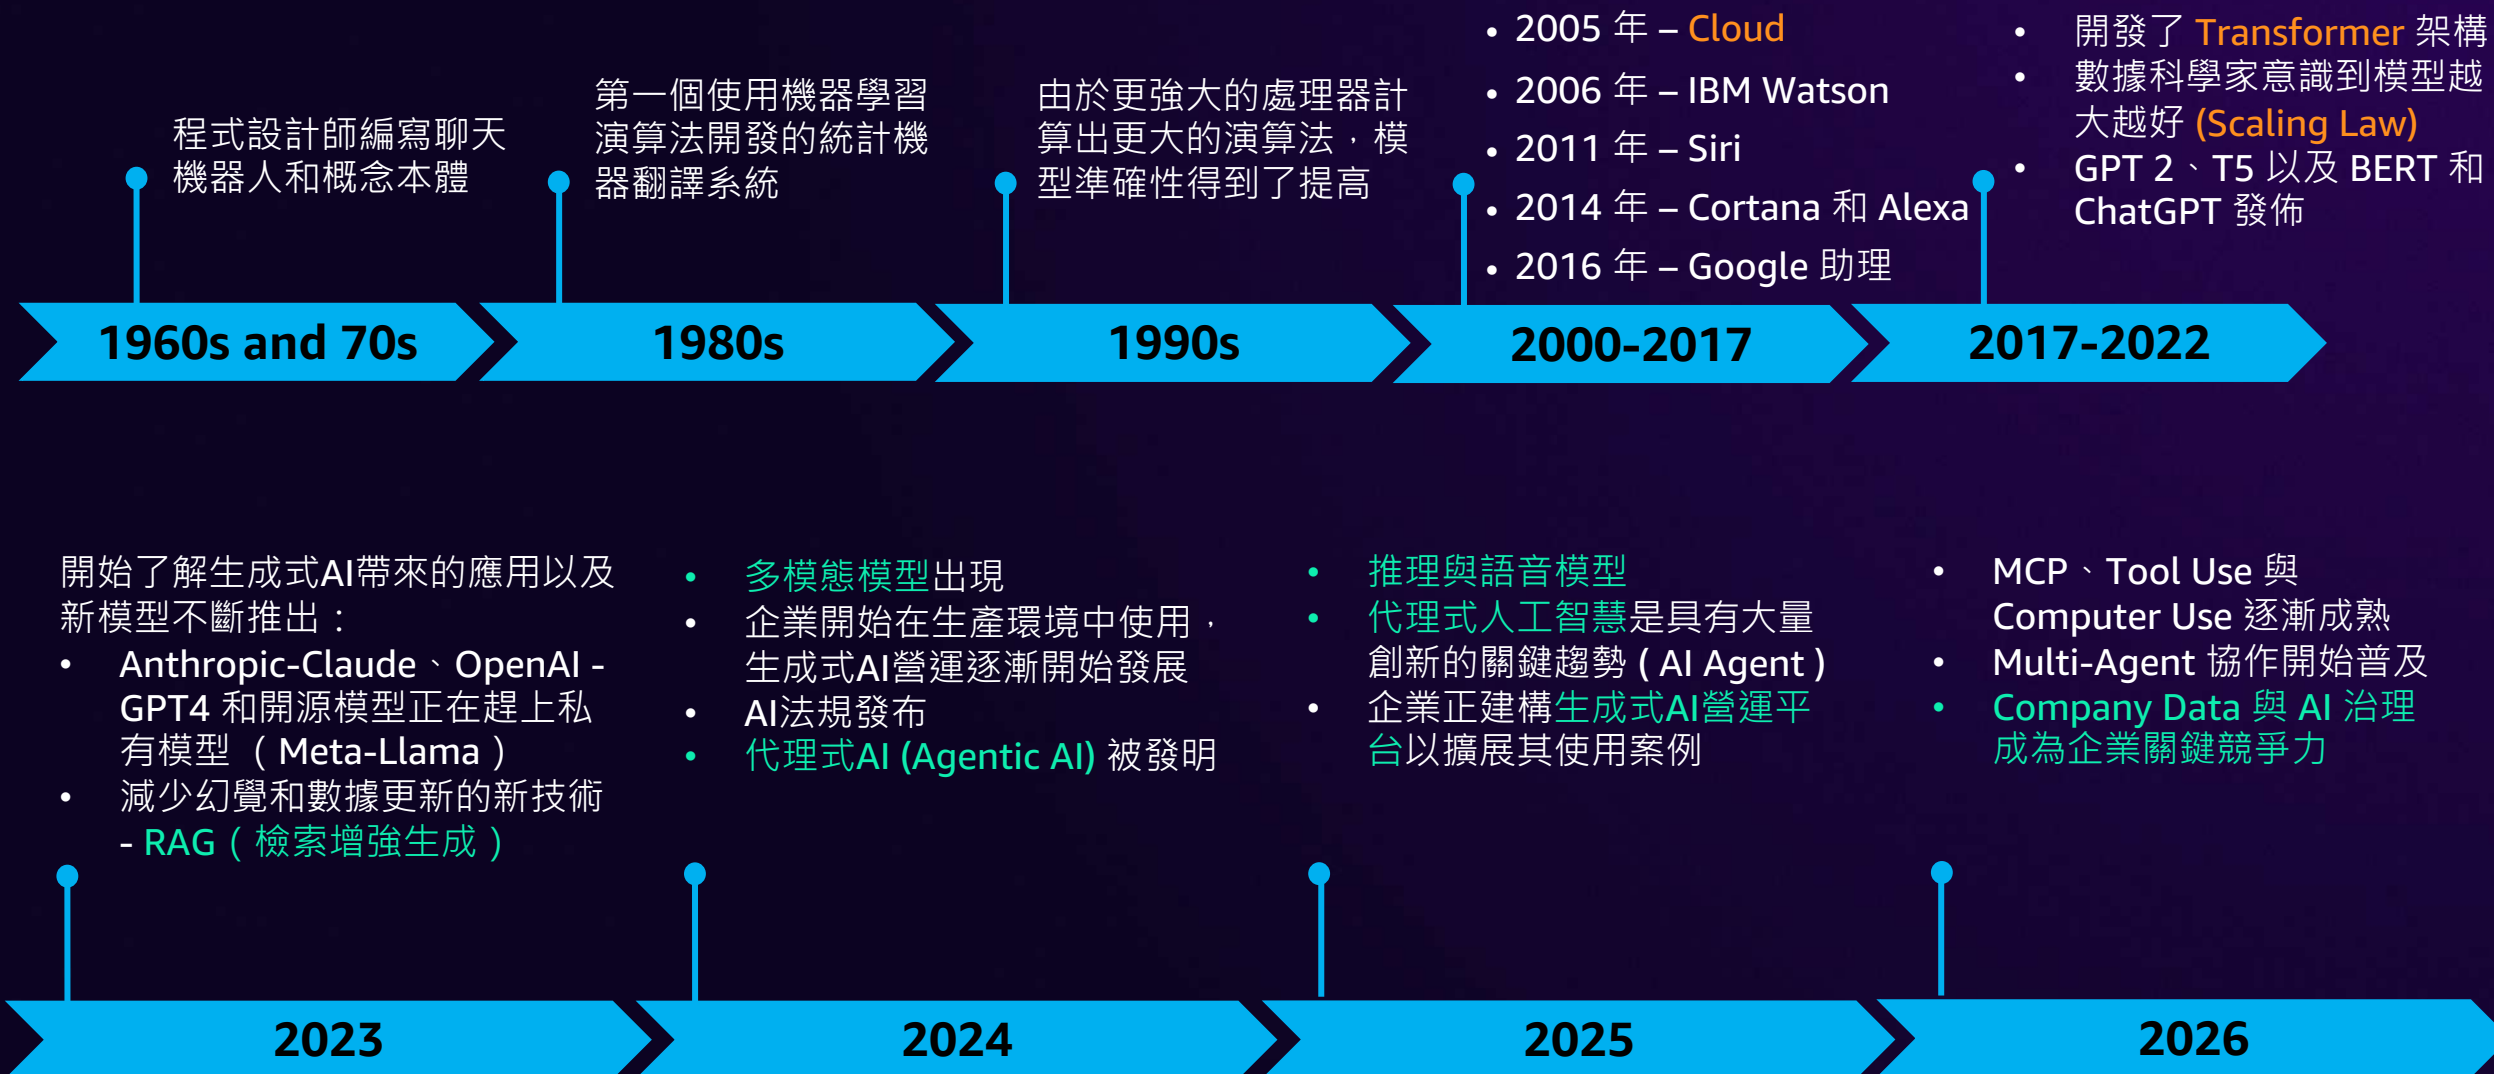

生成式 AI 與其他 AI 有何不同？

GEN AI 的工作原理

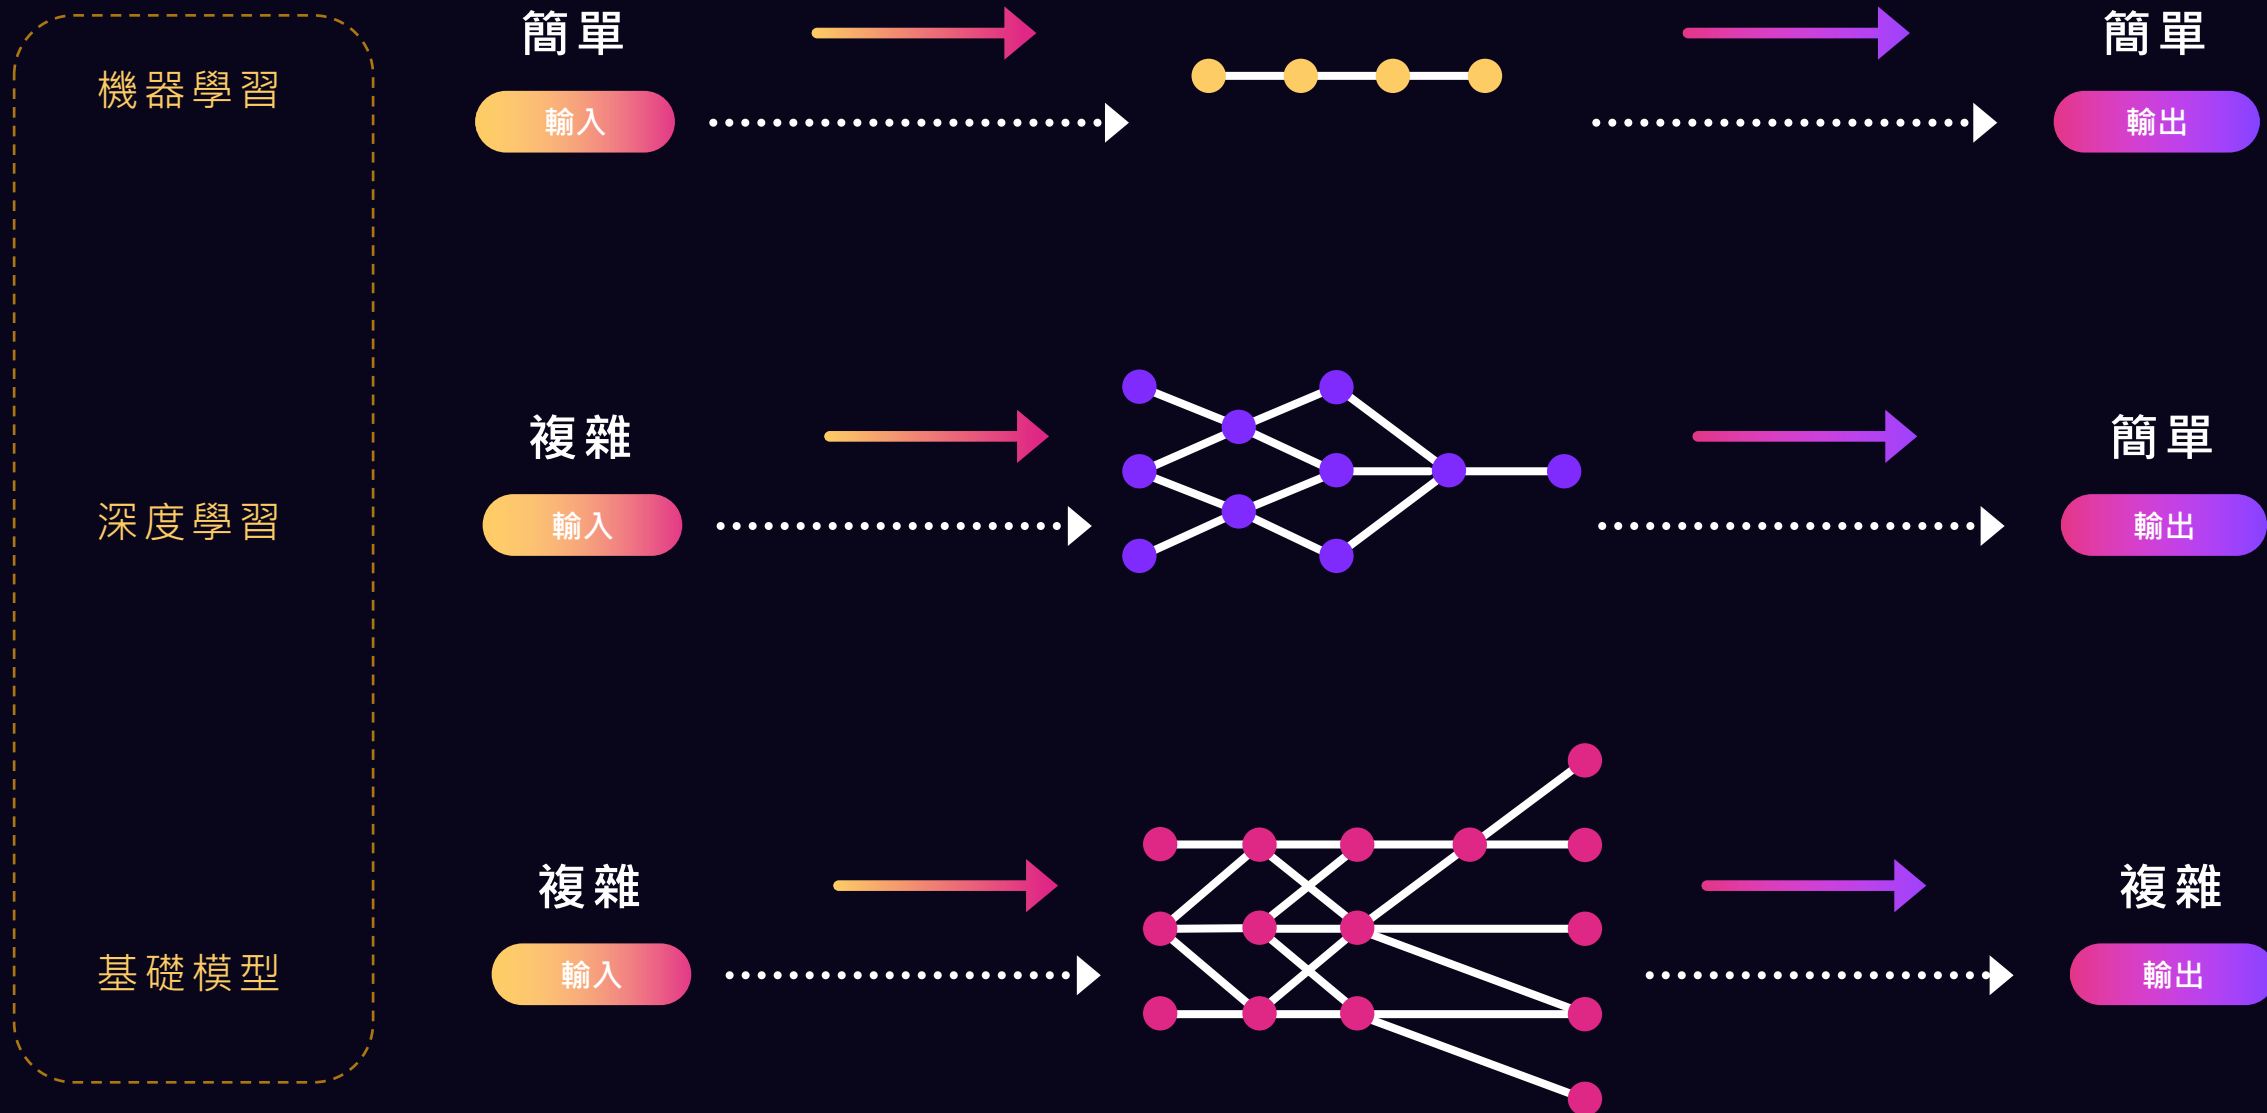

揭開 GenAI 常用術語的神秘面紗

向量 (Vector)

將文字、圖片等內容轉換成 AI 可理解的數字表示，用來描述語意之間的關係

嵌入 (Embedding)

將文字轉換成 Vector 的結果，可用於搜尋、推薦與 RAG

Few-shot Learning

透過在 Prompt 中提供少量範例，引導模型生成更準確的回答。

檢索增強生成 (RAG)

從外部資料或知識庫搜尋相關內容，再提供給 LLM 生成答案，以提升準確性

代理 (Agent)

能使用工具、規劃步驟並自主執行任務的 AI 系統

幻覺 (Hallucination)

模型產生看似合理、但實際上錯誤或虛構資訊的現象

多模態 (Multi-modal)

能同時理解與處理文字、圖片、語音、影片等不同形式的輸入



推論 (Inference)

模型接收到輸入後，產生回答或結果的執行過程

安全防護 (Guardrails)

限制與監控模型輸出，避免產生不當、危險或違規內容


什麼是Embedding? 他是用來做啥的?

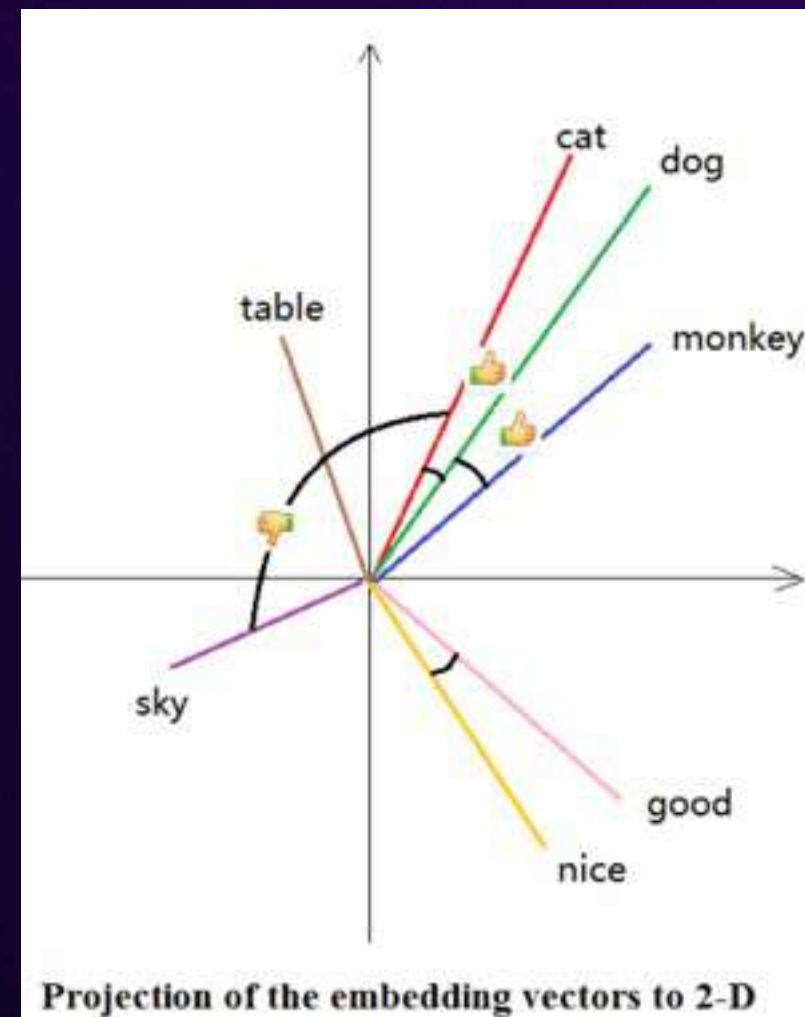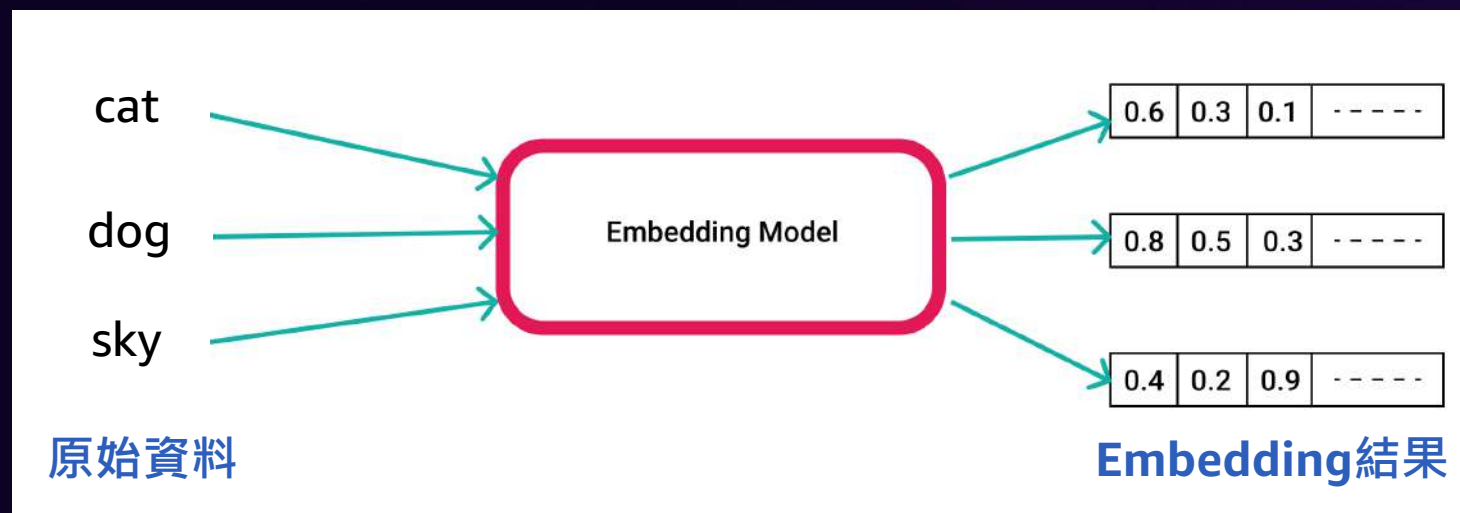


當我們在使用 ChatGPT 時...



RAG 是怎麼實現的？

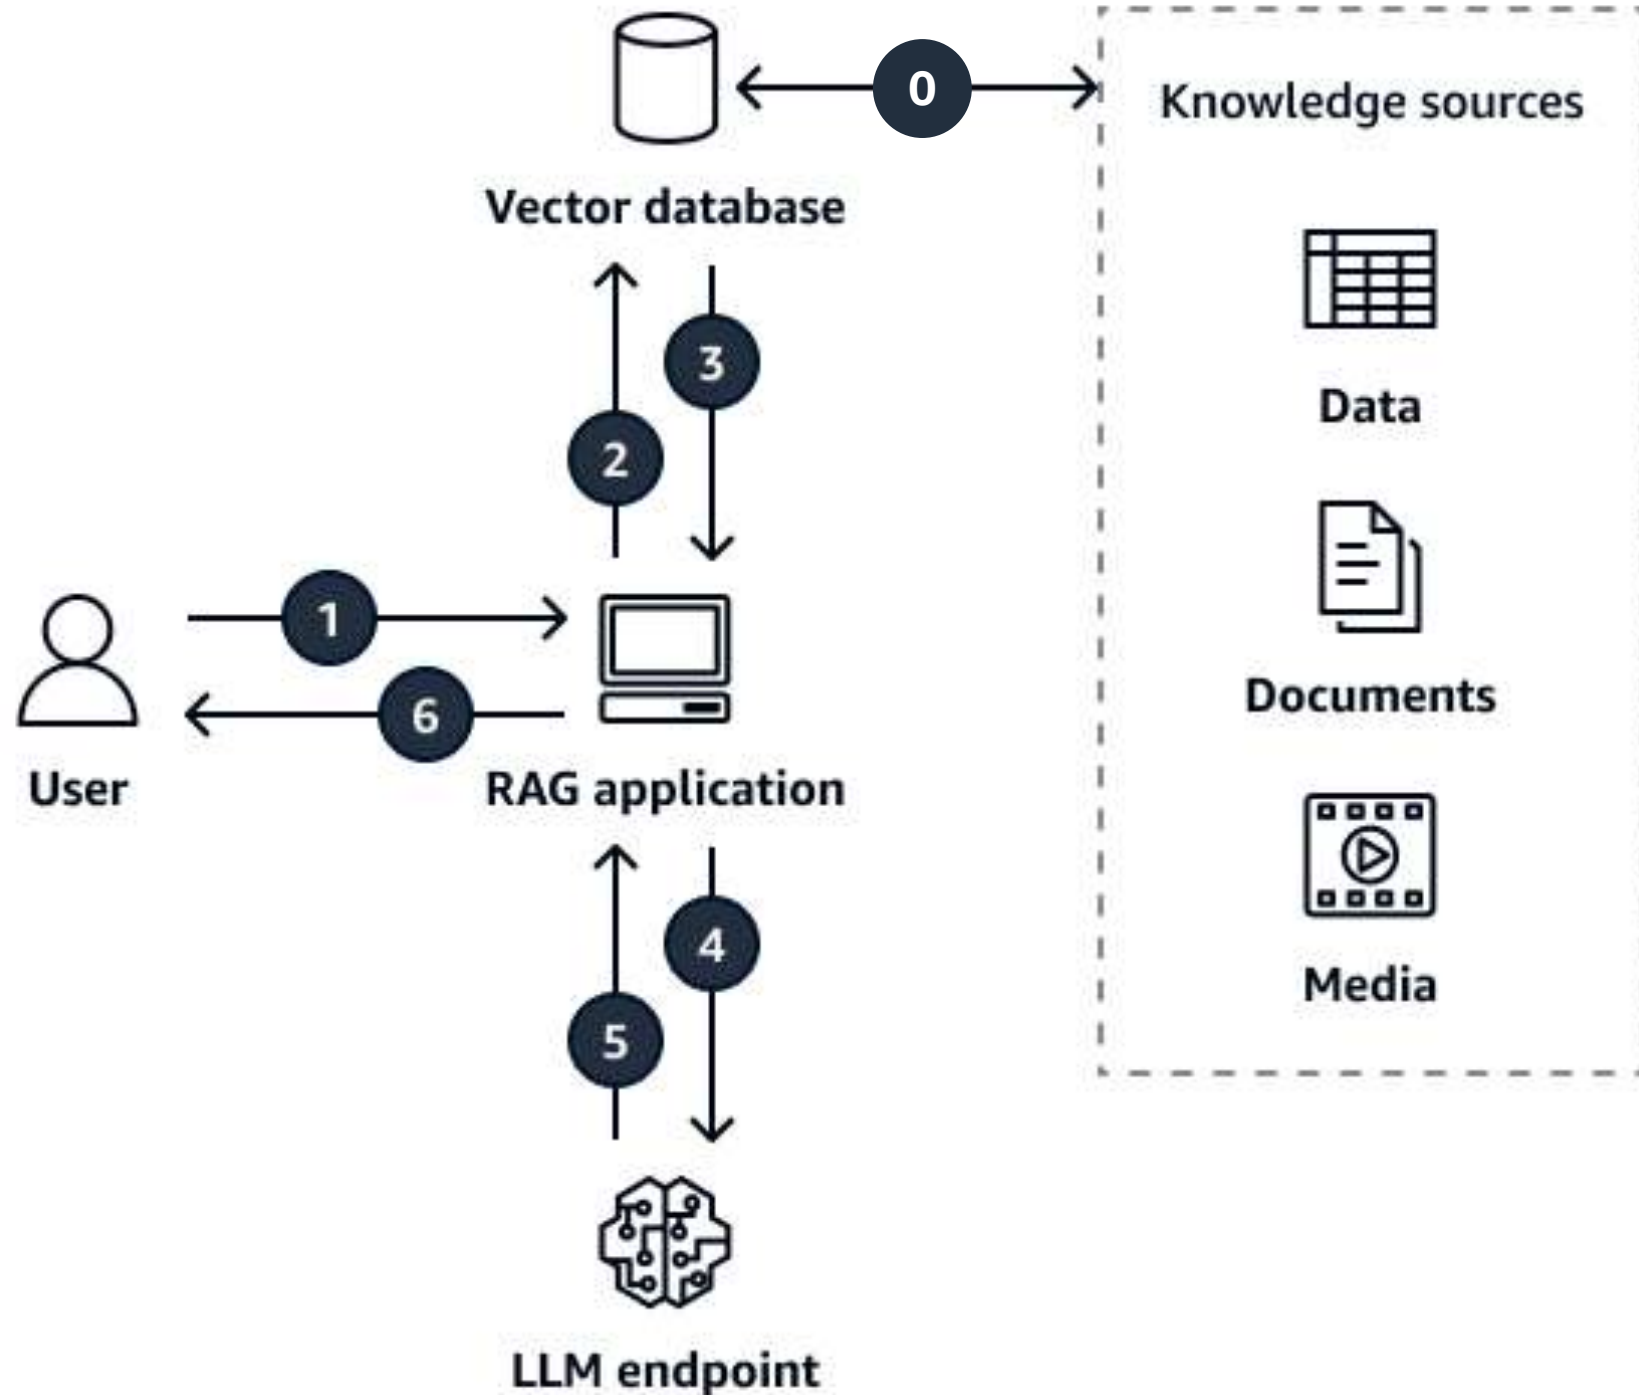

What is agentic AI?

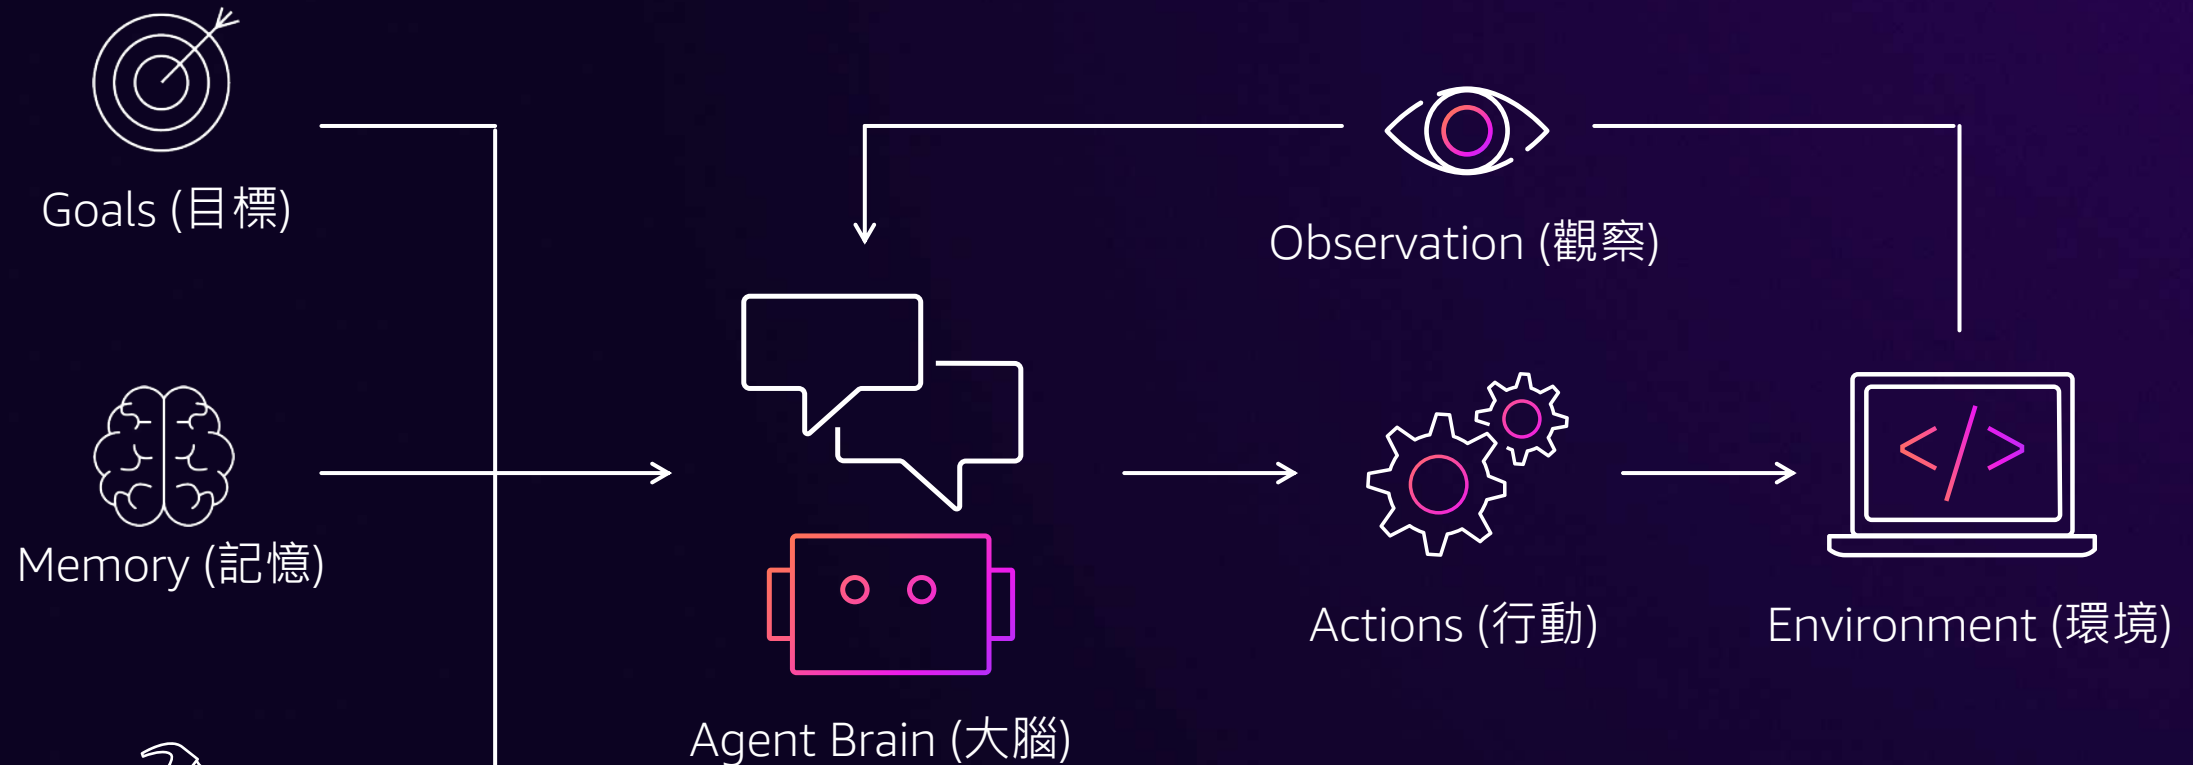

AI agents 是能夠理解、規劃並執行行動以達成目標的自主系統
AI agents are autonomous systems that understand, plan, and execute actions to achieve specific goals.

AWS AI portfolio

APPLICATIONS

Kiro

Amazon Quick Suite

AWS Transform

Amazon Connect

AWS Marketplace

AI & AGENT DEVELOPMENT SOFTWARE & SERVICES

SDKS FOR AGENTS

Vertically Integrated

Nova Act

Flexible/OSS

Strands Agents

AMAZON BEDROCK

Models

Amazon Nova

3P Models

Capabilities

Optimization

Guardrails

Customization

AgentCore

Runtime

1P Tools

Gateway

Identity

Memory

Observability

Knowledge Bases

INFRASTRUCTURE

AMAZON SAGEMAKER

Custom Model Building

Model building

Model training

MLOps

Deployment

Hyperpod

Data Foundation for AI

Data Processing

Governance

Storage and Databases

Vector Search

AI COMPUTE

Trainium

Inferentia

GPUs

INTERFACES & PROTOCOLS
(MCP/A2A)

AWS SECURITY, IDENTITY, AND COMPLIANCE SERVICES
AWS CLOUD OPS, NETWORKING, AND STORAGE



Amazon Bedrock AgentCore



© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

企業級 Agentic 平臺構建的痛點和挑戰

構建 Demo 容易

走向生產過程中面臨的幾點主要挑戰

實現商業價值困難



POC



性價比



維運和擴充套件



安全和治理



觀測和最佳化



生產級 Agents

“平均而言，組織會在投入生產前放棄46%的AI的 POC 專案。”

Key Findings - Voice of the Enterprise: AI & Machine Learning, Use Cases 2025 S&P Global


Amazon Bedrock AgentCore

全面的Agent平臺：提供將Agent投入生產所需的一切

原子化能力：按需拆組

靈活適配：任意框架/模型適配

企業級能力：隔離/擴充套件/併發/成本可控

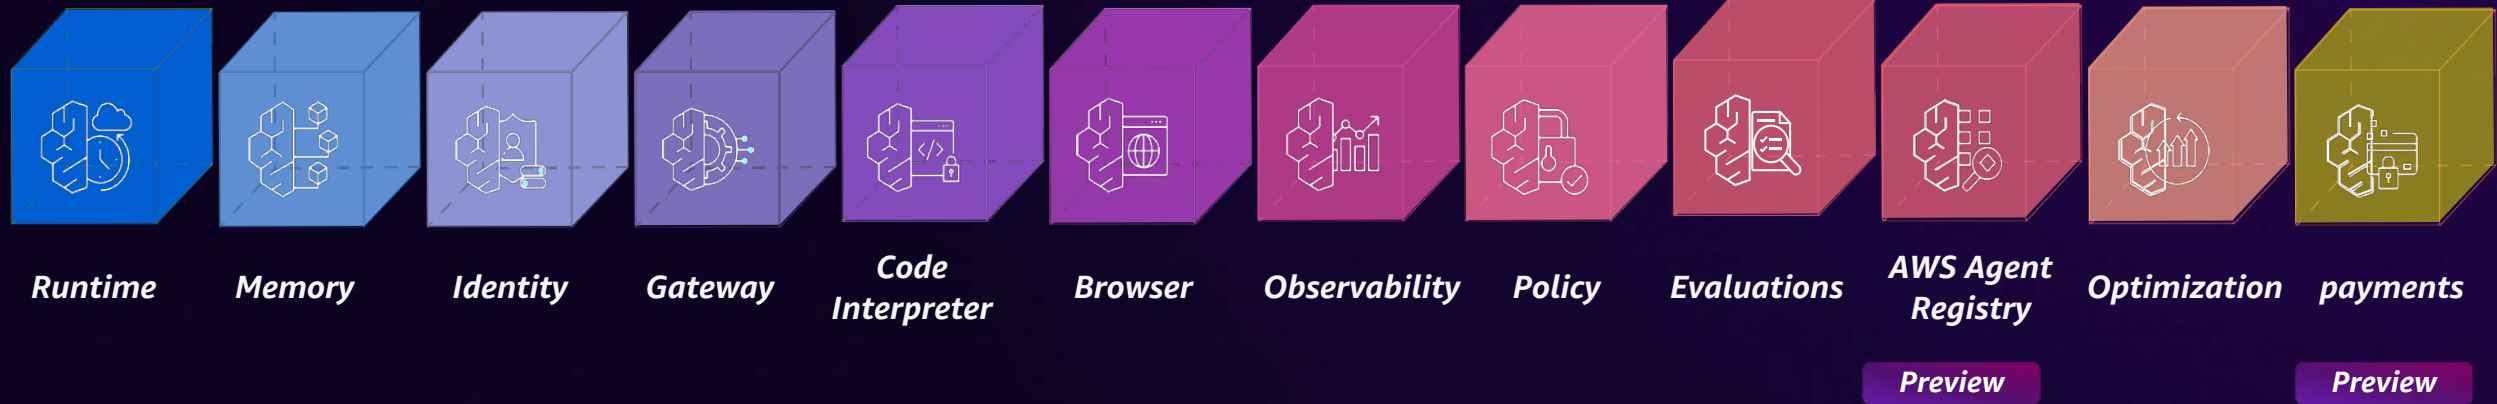

Protocols:

Model Context Protocol (MCP), Agent-to-Agent (A2A),
Open Telemetry (OTEL)

Frameworks:

Strands Agents, LangGraph, LlamaIndex,
Crew AI, OpenAI Agents SDK, Claude Agent SDK, etc.

開啟方式


控制台

Harness

AgentCore CLI/SDK

AgentCore Harness

把 AgentCore 能力封裝成幾個 higher-level API，快速構建你的 Agent

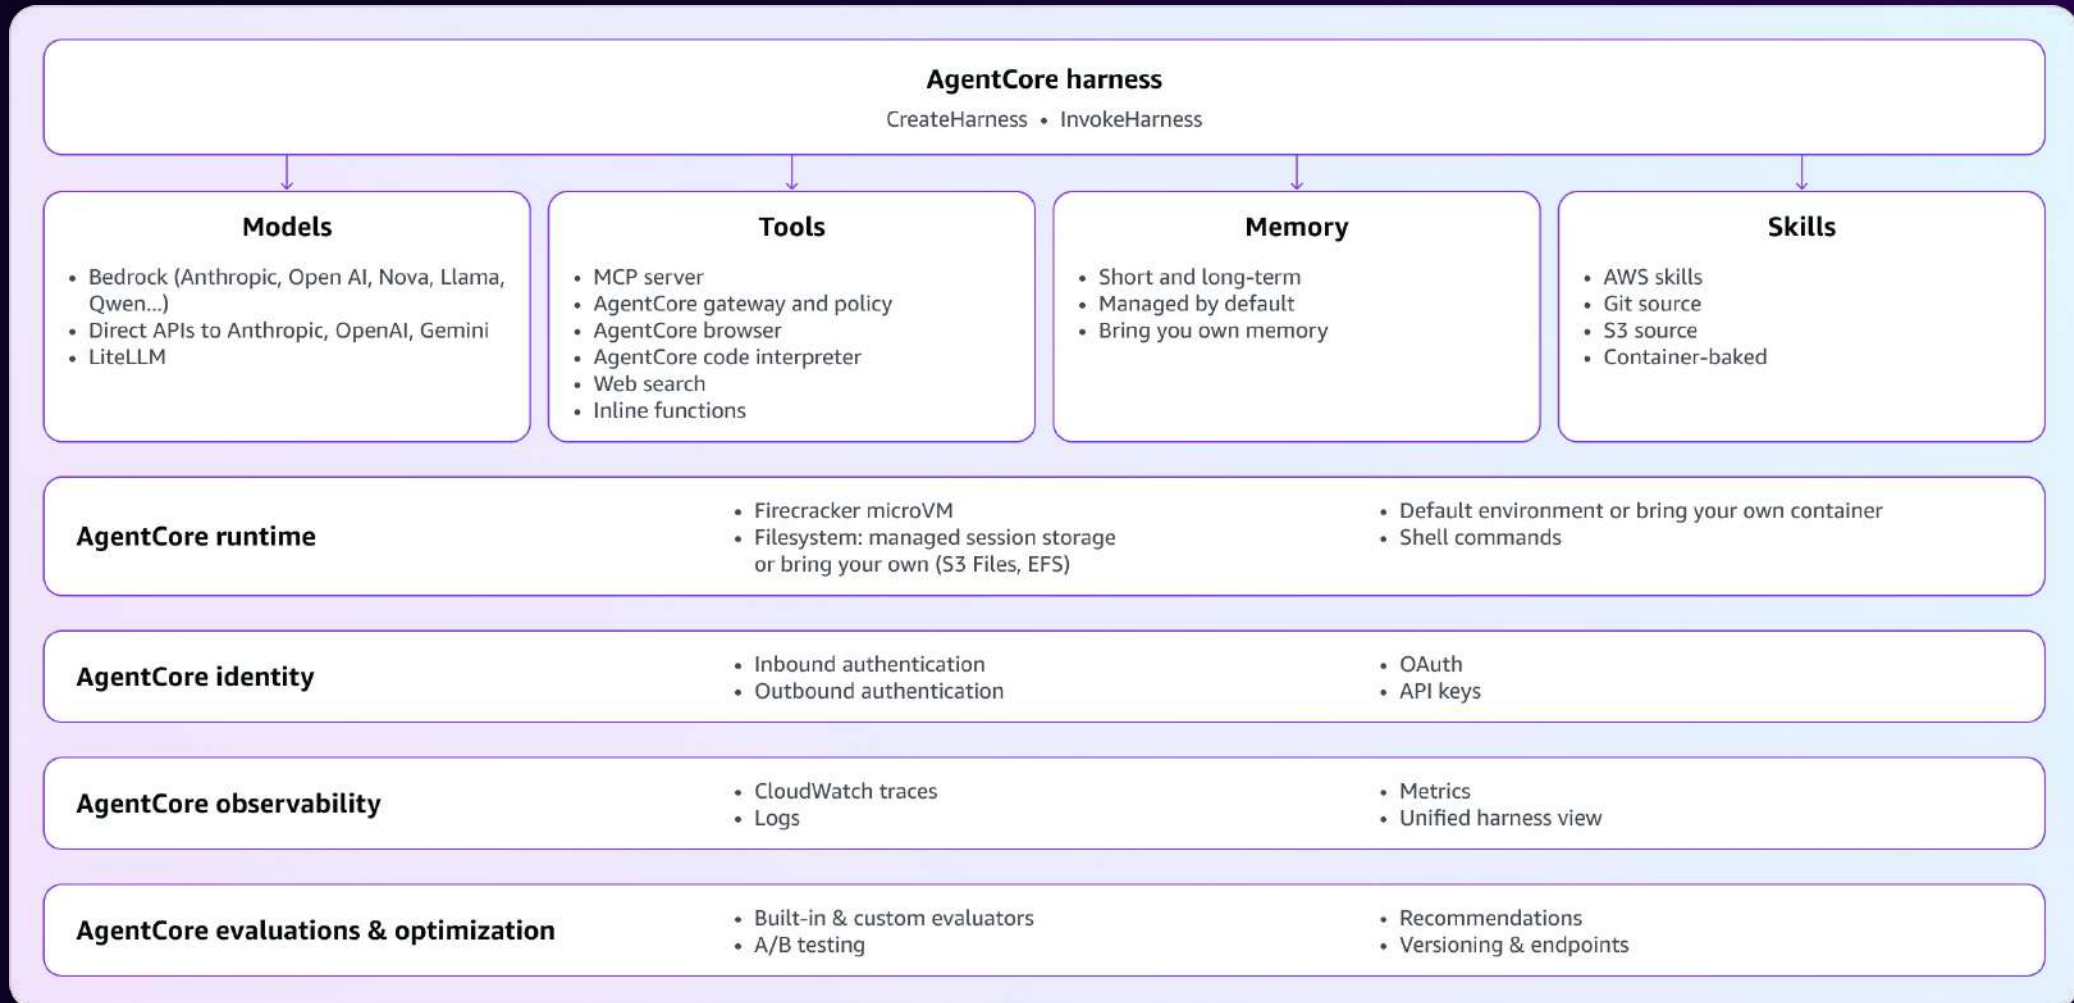

AgentCore Harness

幾分鐘內從想法到可工作的 AGENT

在配置中定義

透過定義模型、Prompt、Tools 和技能來構建您的 Agent，無需編寫 Orchestration 程式碼

使用完整的 AgentCore Skill Set

使用 harness 構建的 Agent 獲得 microVM 隔離、跨會話 Memory 和端到端 Observability

匯出為程式碼

當您需要更多控制時，可以從配置定義的 harness 轉移到完全程式碼控制

```
harness > harness-invoke > demo.py
88 # =====
89 print("⚠ Invoking harness...", flush=True)
90 t1 = time.perf_counter()
91
92 response = dp.invoke_harness(
93     harnessArn=harness_arn,
94     runtimeSessionId=str(uuid.uuid4()).upper(),
95     messages=[{
96         "role": "user",
97         "content": [{"text": "Write a Python script that prints the Fibonacci sequence up
98     }],
99 )
100
101 # Stream response
102 t_first = None
103 for event in response["stream"]:
104     if t_first is None:
105         t_first = time.perf_counter()
106     if "contentBlockStart" in event:
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS


```
harness-invoke % uv run demo.py
⚠ Creating harness...
  Harness ID: QuickDemo_b99e1c-Zcam4lce69
  Get response keys: ['harnessId', 'harnessName', 'arn', 'status', 'createdAt', 'updatedAt', '
model', 'systemPrompt', 'tools', 'skills', 'allowedTools', 'truncation', 'environment', 'enviro
nmentArtifact', 'maxIterations', 'timeoutSeconds']
✅ Harness ready in 28.2s

⚠ Invoking harness...
```

zsh harness...
Kiro
uv harness...

AgentCore Runtime

Session 隔離與長期執行支援，
讓 Agent 安全執行無交叉汙染



Runtime




AgentCore Runtime: Serverless Agent 部署

縮短產品上市週期



- 只需幾行程式碼，即可將任何 Agent 從POC階段部署到生產環境。
- 使用 Python zip 檔案上傳即可在幾秒鐘內完成部署，或者使用容器（Docker）。

無縫擴充套件



- 無需額外基礎設施開銷，即可自動擴充套件至數千個併發會話。
- 透過支援websocket 協議，來提供雙向流式傳輸，構建引人入勝的對話體驗。

企業級安全



- 透過真正的會話隔離、VPC 和 PrivateLink 支援來保護敏感資料。
- 與現有身份提供商無縫整合。



AgentCore Runtime : 輕鬆將Agent部署到生產環境

1

本地部署你的 Agent



2

Push code 到 ECR 或者 S3




3

建立 Agent



4

建立 Endpoint

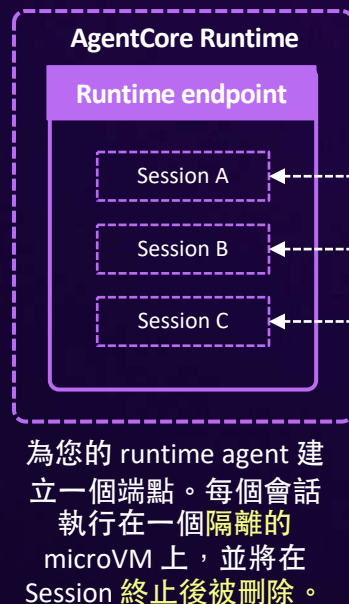

5


呼叫該 Endpoint



- 簡易性：使用 AgentCore runtime，60s 可以部署一個 Agent.
- 靈活性：任何模型，任何框架

AgentCore Memory

情景記憶自動儲存 + 短期長期記憶智慧檢索，
讓 Agent 對話有溫度無需管理向量資料庫



Runtime



AgentCore Memory: 構建具有上下文感知的 Agent

簡化記憶系統管理



- 只需幾行程式碼即可儲存和檢索記憶。
- 自動完成向量嵌入、儲存、記憶整合和反思過程。

企業級安全



- 在基於 Namespaces 的加密儲存中，按用戶、項目或業務單位分配 Memory。
- 在安全的 VPC 環境中，保持資料隔離且易於檢索。


深度客制化



- 通過跨 Session 和跨 Agent 的短期和長期記憶功能，實現行業領先的準確性。
- 支持使用預定義的提取策略，使用任何模型創建自定義邏輯。



AgentCore Memory

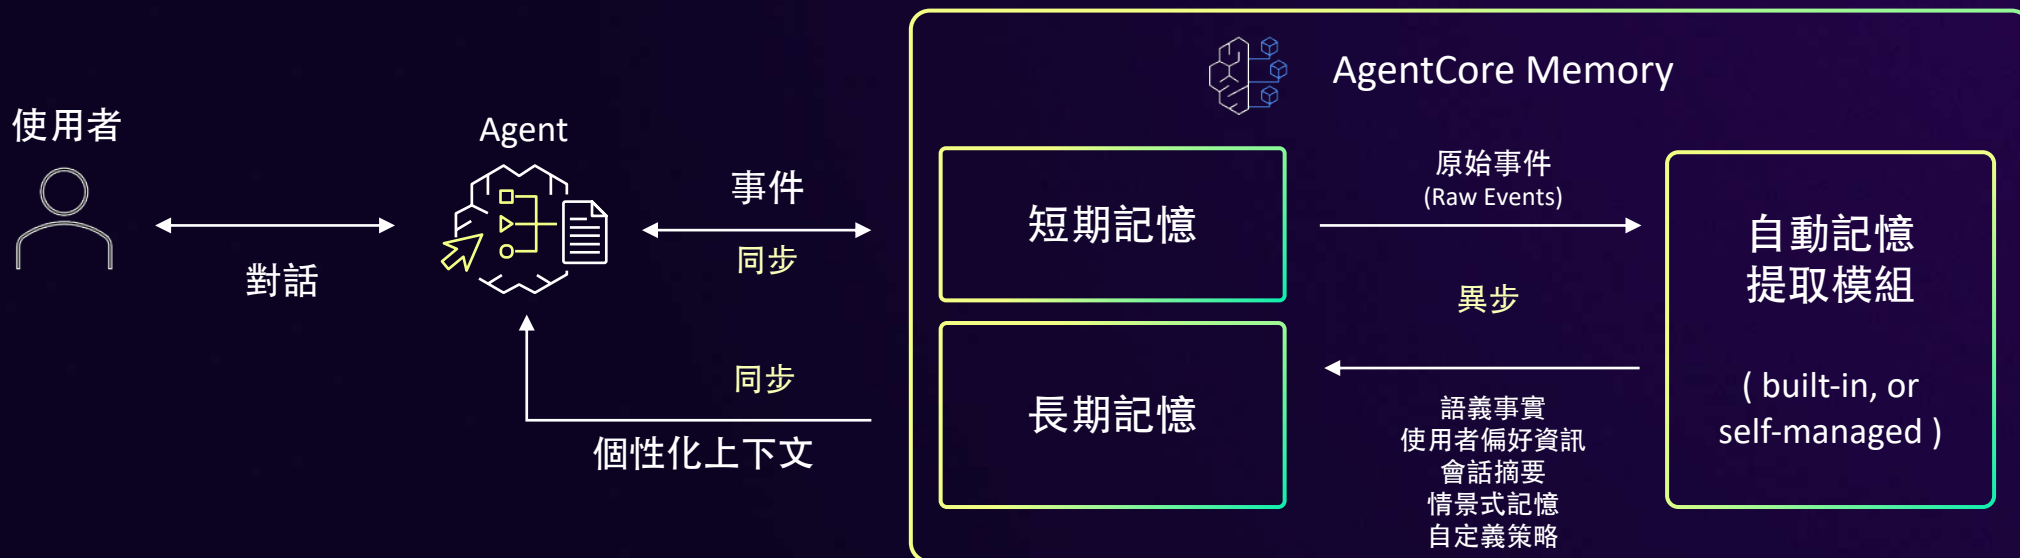

靈活抽取

語義事實、使用者偏好資訊、會話摘要、情景式記憶、自定義策略

Serverless

設定簡單，無需基礎設施管理

安全

靜態資料加密和傳輸中資料加密，訪問控制

靈活的 Namespaces

整理和分享回憶

整合進 Agent 框架


LangGraph, Strands, ...

內建可觀測性

與 Amazon CloudWatch 整合

AgentCore Gateway


全託管 AI Gateway：一個端點統一連線工具、
Agent、模型，雙向認證開箱即用



Gateway

AgentCore Gateway: 輕鬆將 Agent 連到工具和資料

統一訪問



- 將多個工具源（API、Lambda函式、MCP伺服器）合併為一個統一的端點

簡化的工具整合



- 只需幾行程式碼即可將現有企業資源轉換為可供 Agent 使用的工具
- 連線到現有的MCP Server 和 Salesforce、Slack、Asana等流行工具

智能工具發現



- 通過上下文語意搜索，讓Agent找到正確的工具
- 隨著Skill Set的增長，確保工具可以有效利用

Built-in tools - Knowledge Base

透過完全託管的RAG基礎設施將AI基於企業知識

完全託管的攝取和儲存


原生聯結器支援SharePoint、Confluence、Google Drive、S3、One Drive — 帶有訪問控制列表。自動擴充套件基礎設施，針對每種文件型別最佳化模型。構建者專注於應用程式，而非RAG管道和基礎設施。使用預設設定或選擇您的模型。

Agentic檢索 – 檢索、推理、重新排序

跨知識庫規劃查詢，連線文件間的概念，評估並重新排序。提供最佳答案 - 而非最接近的向量匹配。

原生 AgentCore 整合

在 AgentCore 中作為工具使用，或在Bedrock中使用。內建Gateway策略、可觀測性、訪問控制。支援MCP。與Quick無縫整合。

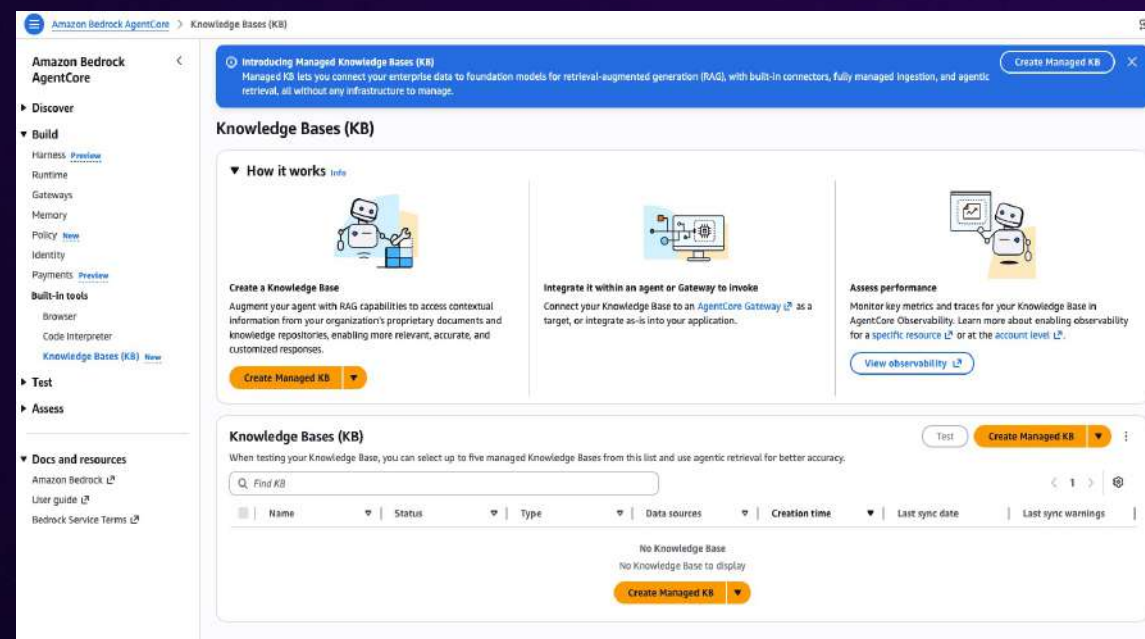

Built-in tools - Browser

啟用 AGENT WEB 工作流程

全托管、可擴展的 Serverless 瀏覽器



- 無需基礎設施管理 - 完全托管的服務
- 低啟動延遲 – 快速啟動瀏覽器 Session
- 靈活的Session時長 – Session 最長可運行8小時
- 高擴展性 - 支持最多1000個併發 Session

企業級安全




- 提供 session 級隔離計算，具備 microVM 級安全性，每次使用後自動重置環境。
- 支援VPC、PrivateLink 和 CloudFormation，實現私有資源的安全訪問。
- 自動處理CAPTCHA (人機驗證) 並提供安全憑證管理功能。

企業級可觀測性



- 通過 CloudTrail log紀錄、session 回顧、即時查看(Live view) 功能排查問題。
- 通過即時的可見性和所有瀏覽器的交互紀錄，確保合規性、控制和品質。

AgentCore Browser Tool 如何工作

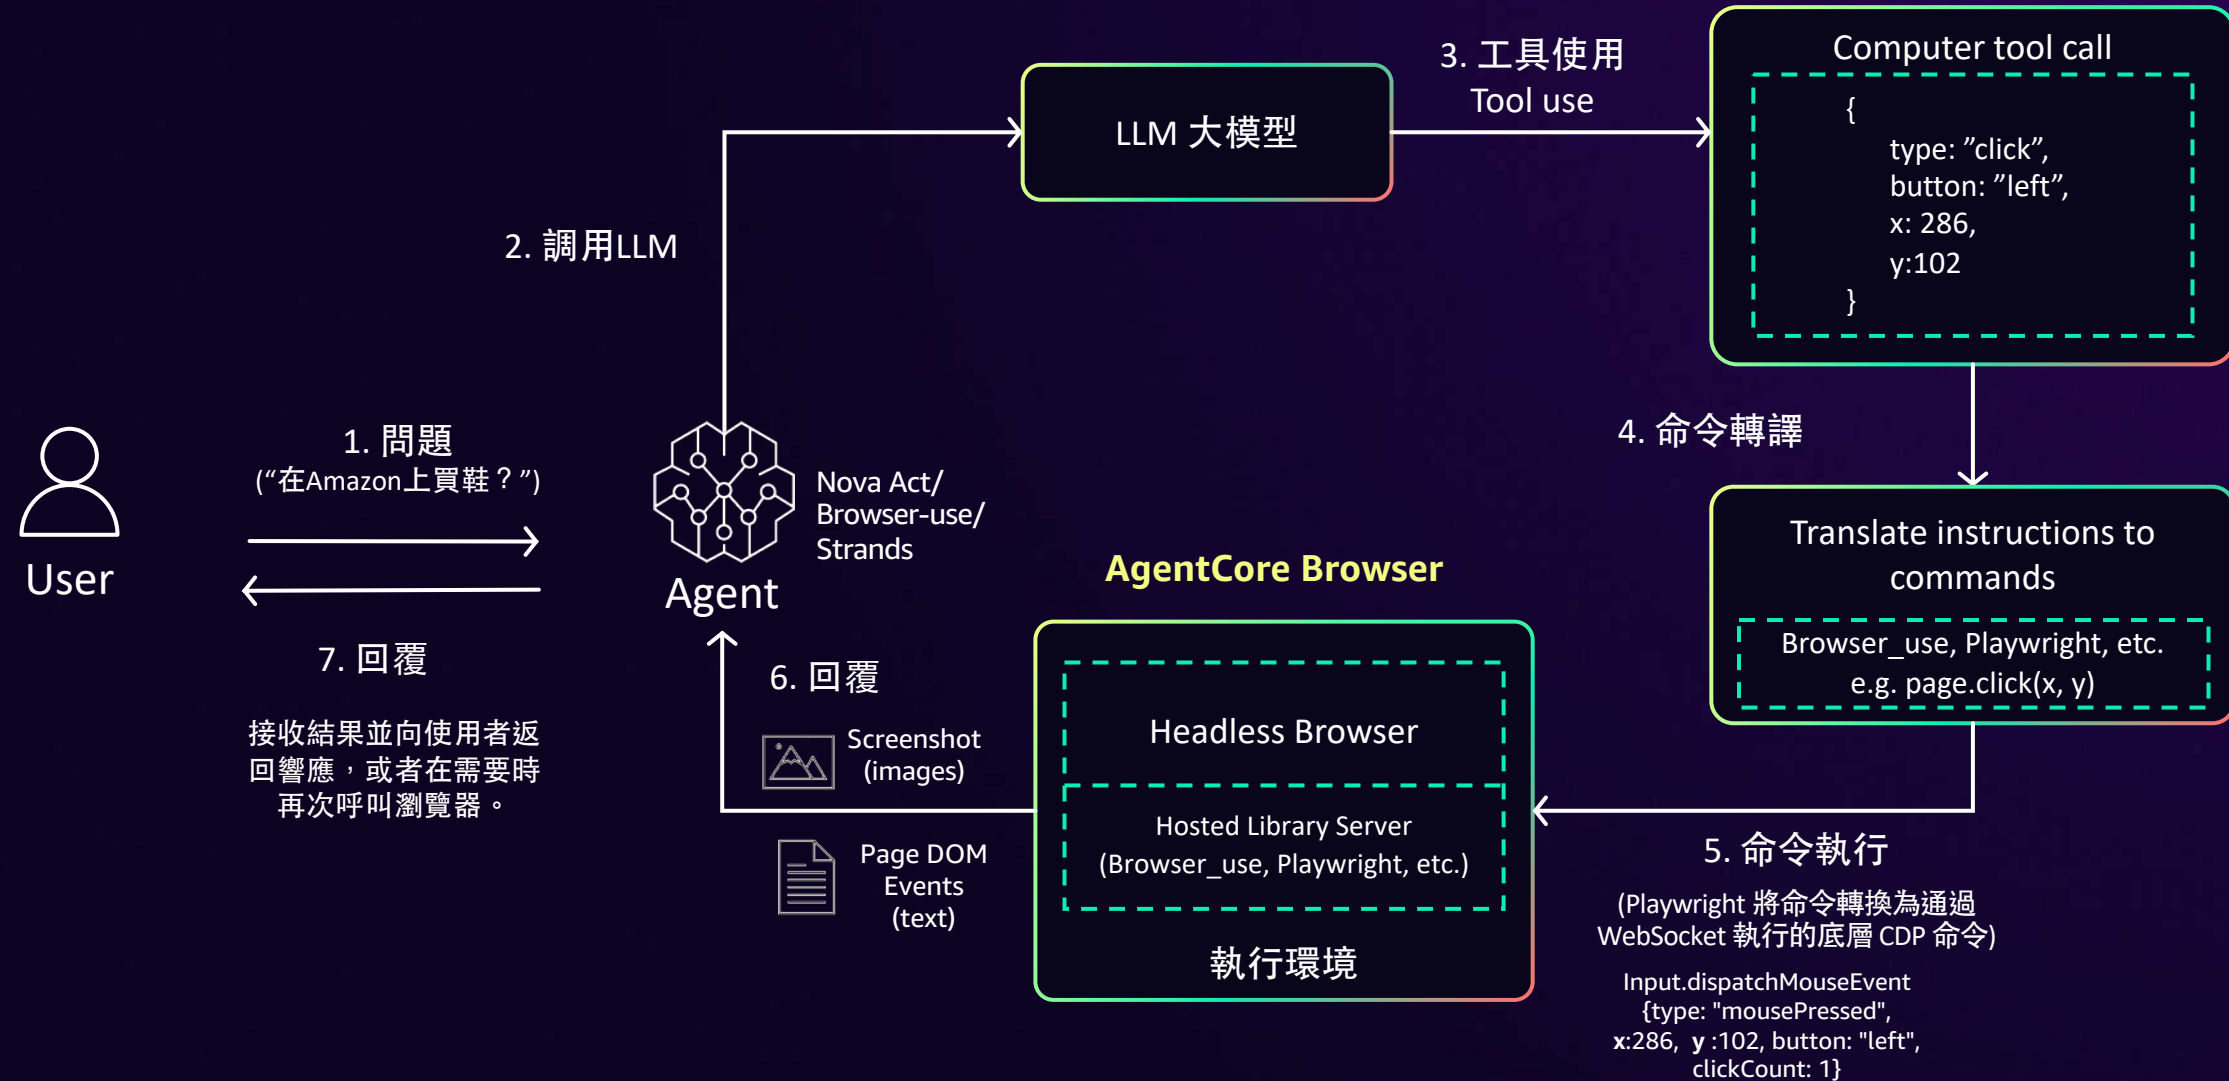

Built-in tools - Code Interpreter

安全地編寫和執行程式碼

安全程式碼執行



- 在隔離的 Sandbox 環境中執行複雜的工作流程和資料分析。
- 透過 VPC 安全地訪問內部資料來源，而無需洩露敏感資料。

大規模資料處理




- 利用 Amazon S3 集成，高效處理大規模的資料集，不受 API 限制。
- 多格式支持：處理結構化數據，包括 CSV、Excel、JSON 等多種格式

易用性



- 使用預先建立的 JavaScript、TypeScript 和 Python Runtime，快速上手。

AgentCore Code Interpreter 如何工作

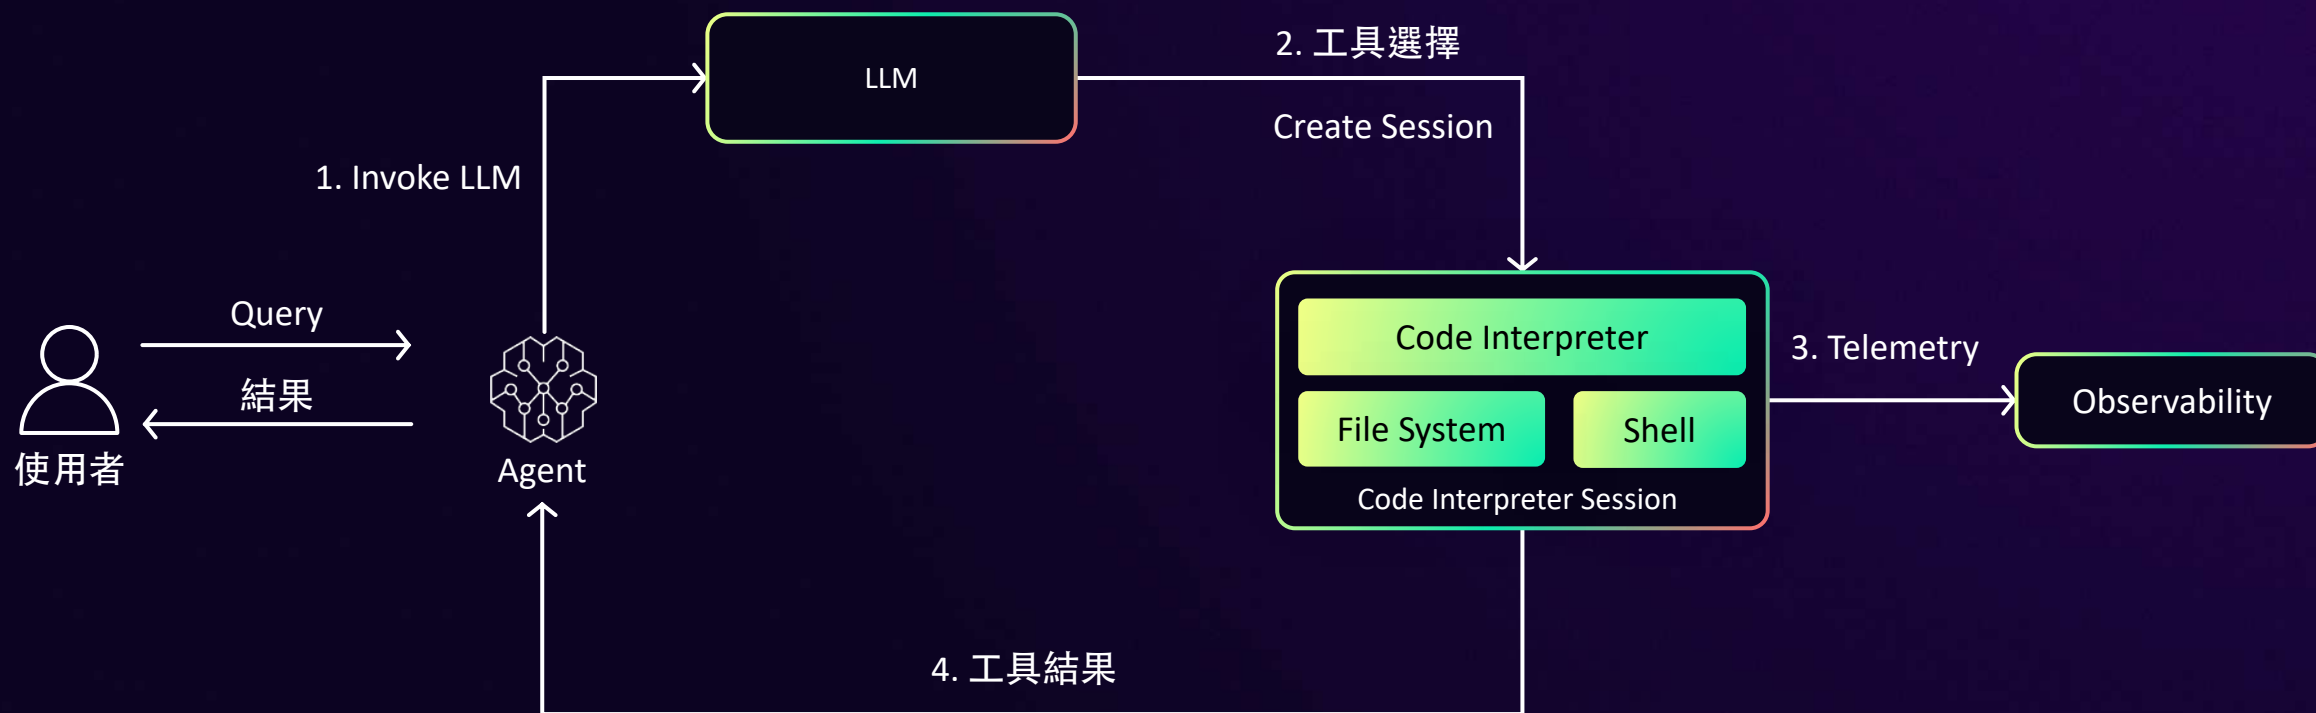

Hands On Time!




© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

<https://catalog.us-east-1.prod.workshops.aws/join>

Access-code: 請參考參賽信箱

Join Workshop Event

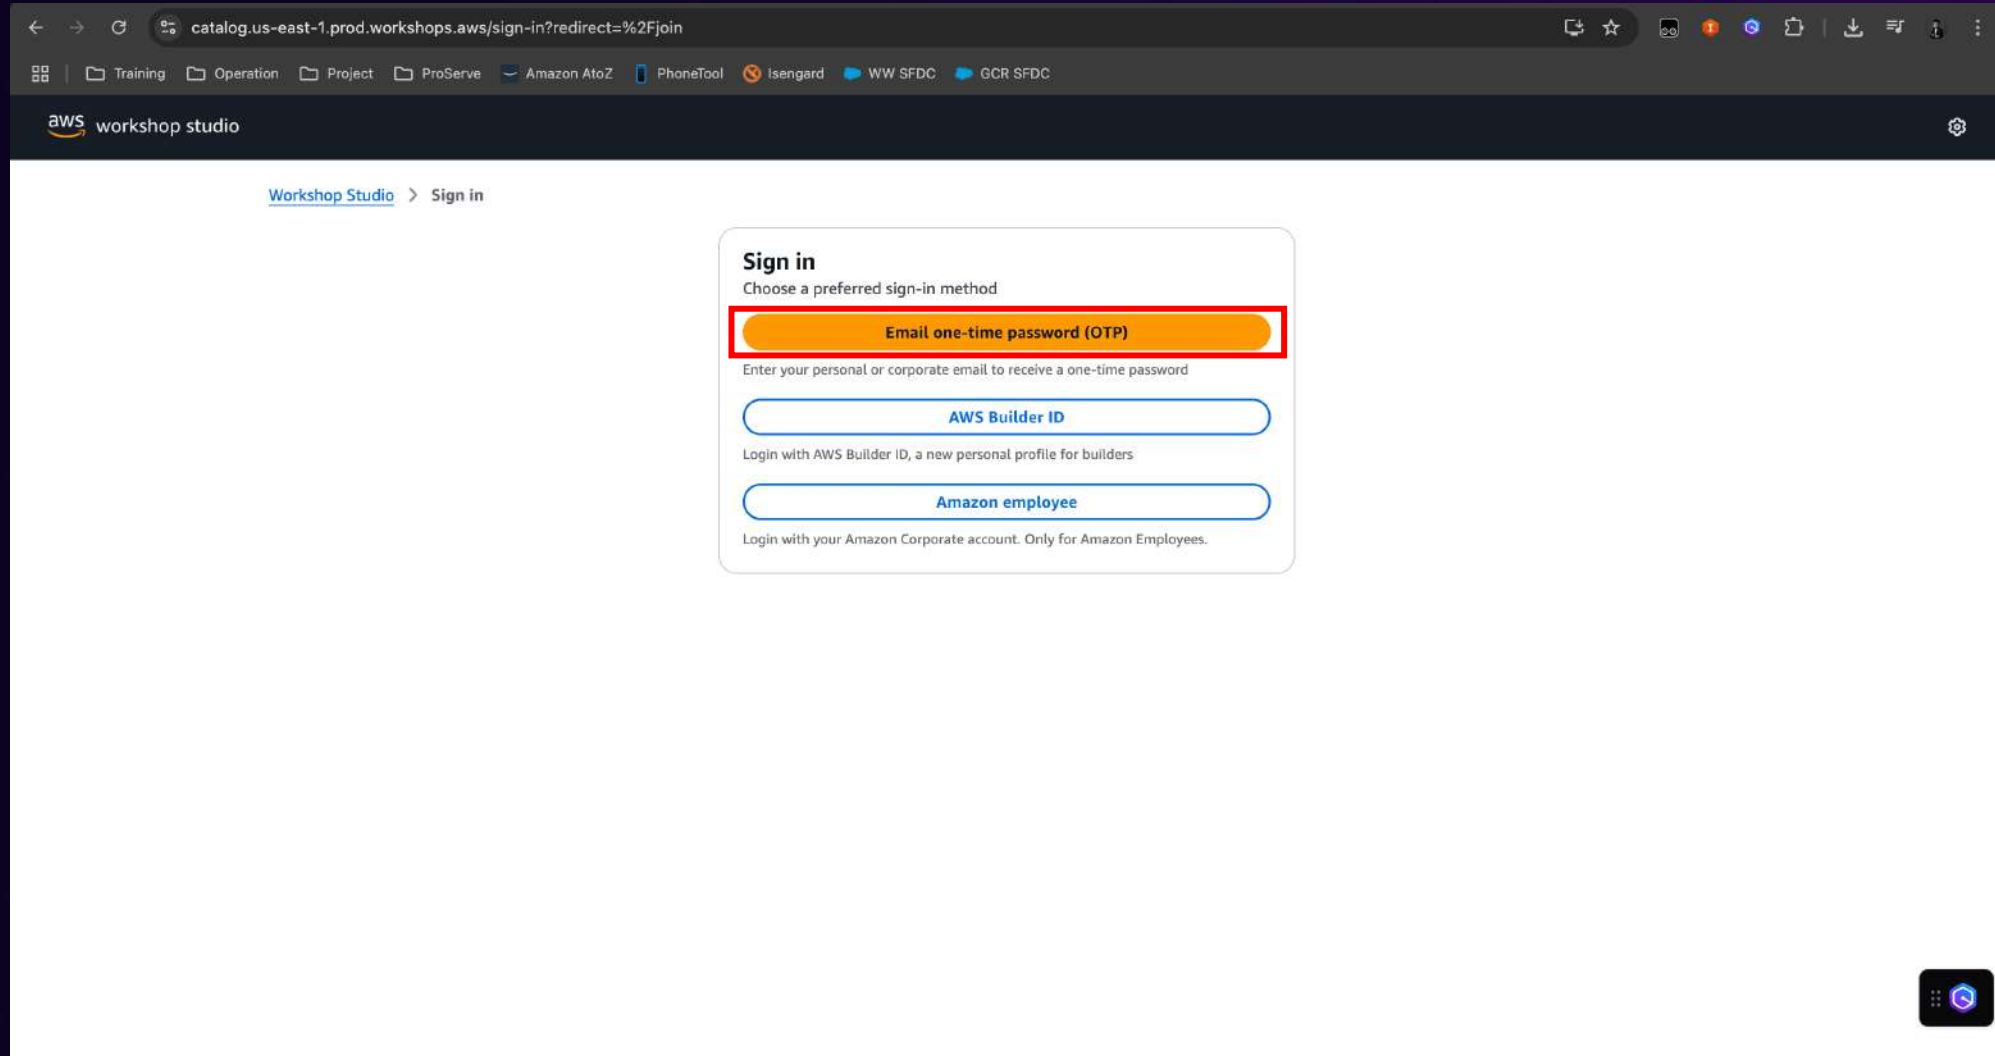

Join Workshop Event

login.us-east-1.auth.skillbuilder.aws/otp/input/response?redirect_uri=https%3A%2F%2Fgandalf-prod.auth.us-east-1.amazoncognito.com%2Foauth2%2Fidpresponse&state=H4slAA...

Training Operation Project ProServe Amazon AtoZ PhoneTool Isengard WW SFDC GCR SFDC

aws Training and Certification English ▾

One-time email passcode
Send a passcode to the email below.



Email

1 aaronclh@amazon.com

Back Send passcode 2

[Get help signing in](#)

Join Workshop Event

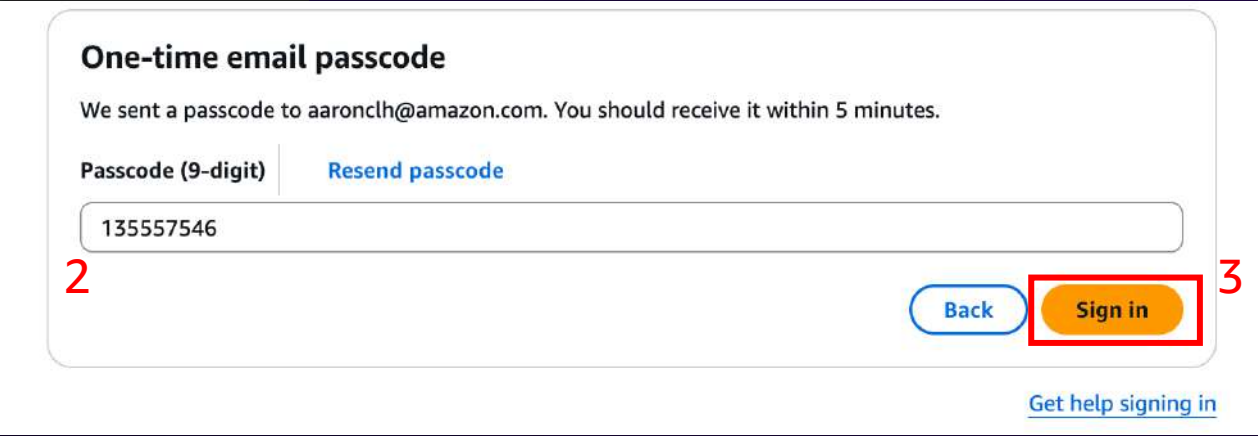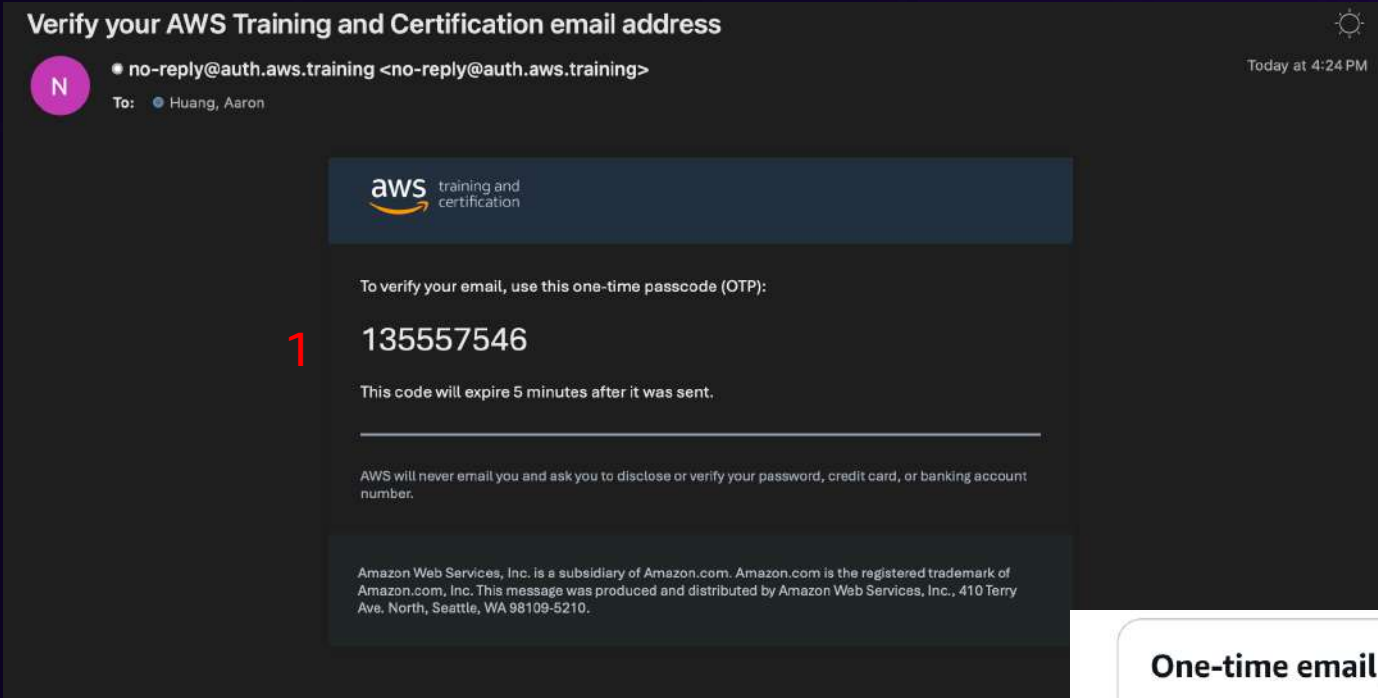

Join Workshop Event

catalog.us-east-1.prod.workshops.aws/join

aws workshop studio

Workshop Studio > Join event

Step 1
Enter event access code

Step 2
Review and join

Enter event access code

Event access code
A 12 digit code that was given to you for this event

abcd-012345-ef

Cancel Next

Join Workshop Event

Step 1
Enter event access code

Step 2
Review and join

Event details

Name

0527 bedrock ws testing

Start time

5/27/2025 04:15 PM

Description

0527 bedrock ws testing

Terms and Conditions

Read and accept before joining the event

Read and accept before joining the event:

1. By using AWS Workshop Studio for the relevant event, You agree to [AWS Acceptable Use Policy](#).

2. If You are under 18 years old, you may participate in the relevant event based on the country or region in which You reside, and (b) with the following restrictions:

Country or region

All countries or regions not listed below (including the United States)

Canada, China, Republic of Korea (South Korea)

Australia

Japan, Switzerland, Vietnam, and countries in the European Economic Area

Azerbaijan, Bolivia, Colombia, Dominican Republic, Indonesia, Lebanon, Malaysia, Mexico, Montenegro, Nepal, Philippines, Thailand, Turkey, and countries in Africa

1

☒ I agree with the Terms and Conditions

2

Join event

catalog.us-east-1.prod.workshops.aws/join

Training Operation Project ProServe Amazon AIoZ PhoneTool Isengard WW SFDC GCR SFDC

aws workshop studio

Canada, China, Republic of Korea (South Korea)

14

Australia

15

Japan, Switzerland, Vietnam, and countries in the European Economic Area

16

Azerbaijan, Bolivia, Colombia, Dominican Republic, Indonesia, Lebanon, Malaysia, Mexico, Montenegro, Nepal, Philippines, Thailand, Turkey, and countries in Africa

18

3. You acknowledge and agree that You are using an AWS-owned account that You will only be able to access during the relevant event. You have no ownership rights over this AWS-owned account.

4. During the relevant event, while using this AWS-owned account, You will not use, import, input, or introduce any data, dataset, or other material that contains personal data, financial information, or any other data or materials that may be subject to laws and regulations (such as the General Data Protection Regulation or The Health Insurance Portability and Accountability Act of 1996).

5. If You find residual resources or materials in this AWS-owned account, You will notify your Event Operator immediately.

6. AWS, its affiliates, and any entities or persons acting on AWS's behalf reserves the right to terminate this AWS-owned account and to delete its contents at any time, without any notice to You.

7. During the relevant event, while using this AWS-owned account, You will not process or run any operation on any data other than test datasets or lab materials that have been approved by AWS.

8. You will not copy, import, export or otherwise create derivative works of materials provided by AWS for use outside of the relevant event.

9. AWS, its affiliates, and any entities or persons acting on AWS's behalf have no obligation to enable the transmission of Your materials through AWS Workshop Studio, and may, in their discretion, edit, block, refuse to post, or remove Your materials at any time, without notice to You.

10. If You access and use a service and/or third-party models that have their own terms during the relevant event, while in the AWS-owned account, You agree to review those terms and comply with them during the event.

11. If You are an AWS Partner using AWS Workshop Studio as part of Your participation in the AWS Partner Network Program, Your use of AWS Workshop Studio is governed by these terms, the AWS Partner Network Terms and Conditions, and the AWS Customer Agreement or other agreement with us governing your use of AWS Services.

12. Your use of AWS Workshop Studio will comply with these terms and all applicable laws. If You fail to comply with any of these terms, Your access to AWS Workshop Studio may be immediately terminated, without notice to You.

Cancel

Previous

Join event



Join Workshop Event

0527 bedrock ws testing

Build Chatbots with Amazon Bedrock Knowledge Bases and Agents

Introduction

Running at an AWS-facilitated event

Running from your own AWS account

Knowledge base for Amazon Bedrock

Agents for Amazon Bedrock

Amazon Bedrock Flows

Guardrails for Amazon Bedrock

Clean-up (when running from your own AWS account)

Summary

AWS account access

Open AWS console (us-west-2)

Get AWS CLI credentials

Content preferences

Language

English

Exit event

Event ends in 2 days 23 hours 49 minutes.

Event dashboard > Build Chatbots with Amazon Bedrock Knowledge Bases and Agents

0527 bedrock ws testing

Event information

Start time

5/27/2025 04:15 PM

Duration

72 hours

Accessible regions

us-west-2, us-east-1

Description

0527 bedrock ws testing

Workshop

Title

Build Chatbots with Amazon Bedrock Knowledge Bases, Agents, Prompt flows and Guardrails

Complexity level

300

AWS services

Amazon Bedrock

Topics

Machine Learning (ML/AI), Generative AI

Get started

Description

Add Generative AI capabilities to your existing applications using Bedrock Agents and Knowledge Bases

Event Outputs (0)

Search

Key

Value

Stack name

Description

Type

No stack outputs

No stack outputs to display.



Done!

us-west-2.console.aws.amazon.com/console/home?region=us-west-2#

Training Operation Project ProServe Amazon AtoZ PhoneTool Isengard WW SFDC GCR SFDC

undefined - 215670630751 / WSParticipantRole (Unclassified Account)

aws Search [Option+S] United States (Oregon) WSParticipantRole/Participant @ 2156-7063-0751

Console Home Info

[Reset to default layout](#) [+ Add widgets](#)

Recently visited Info

No recently visited services

Explore one of these commonly visited AWS services.

[EC2](#) [S3](#) [Aurora and RDS](#) [Lambda](#)

[View all services](#)

Applications (0) Info

[Create application](#)

Region: US West (Oregon)

Select Region: us-west-2 (Current Region) [Find applications](#)

Name	Description	Region	Originati.	★ ▲
No applications				
Get started by creating an application.				
Create application				

[Go to myApplications](#)

Welcome to AWS

[Getting started with AWS](#)

Learn the fundamentals and find valuable information to get the most out of AWS.

[Training and](#)

AWS Health Info

Open issues: 0 Past 7 days

Scheduled changes: 0 Upcoming and past 7 days

Cost and usage Info

Current month costs: **\$0.00**


Forecasted month end costs: **\$0.00**

Cost (\$)

[AWS Cost Explorer](#)

Download sample documents

文件	下載連結
Framework (總覽, 必下載)	https://docs.aws.amazon.com/pdfs/wellarchitected/latest/framework/wellarchitected-framework.pdf
Cost Optimization Pillar (必下載)	https://docs.aws.amazon.com/pdfs/wellarchitected/latest/cost-optimization-pillar/wellarchitected-cost-optimization-pillar.pdf
Security Pillar (選擇性)	https://docs.aws.amazon.com/pdfs/wellarchitected/latest/security-pillar/wellarchitected-security-pillar.pdf
Reliability Pillar (選擇性)	https://docs.aws.amazon.com/pdfs/wellarchitected/latest/reliability-pillar/wellarchitected-reliability-pillar.pdf
Performance Efficiency Pillar (選擇性)	https://docs.aws.amazon.com/pdfs/wellarchitected/latest/performance-efficiency-pillar/wellarchitected-performance-efficiency-pillar.pdf

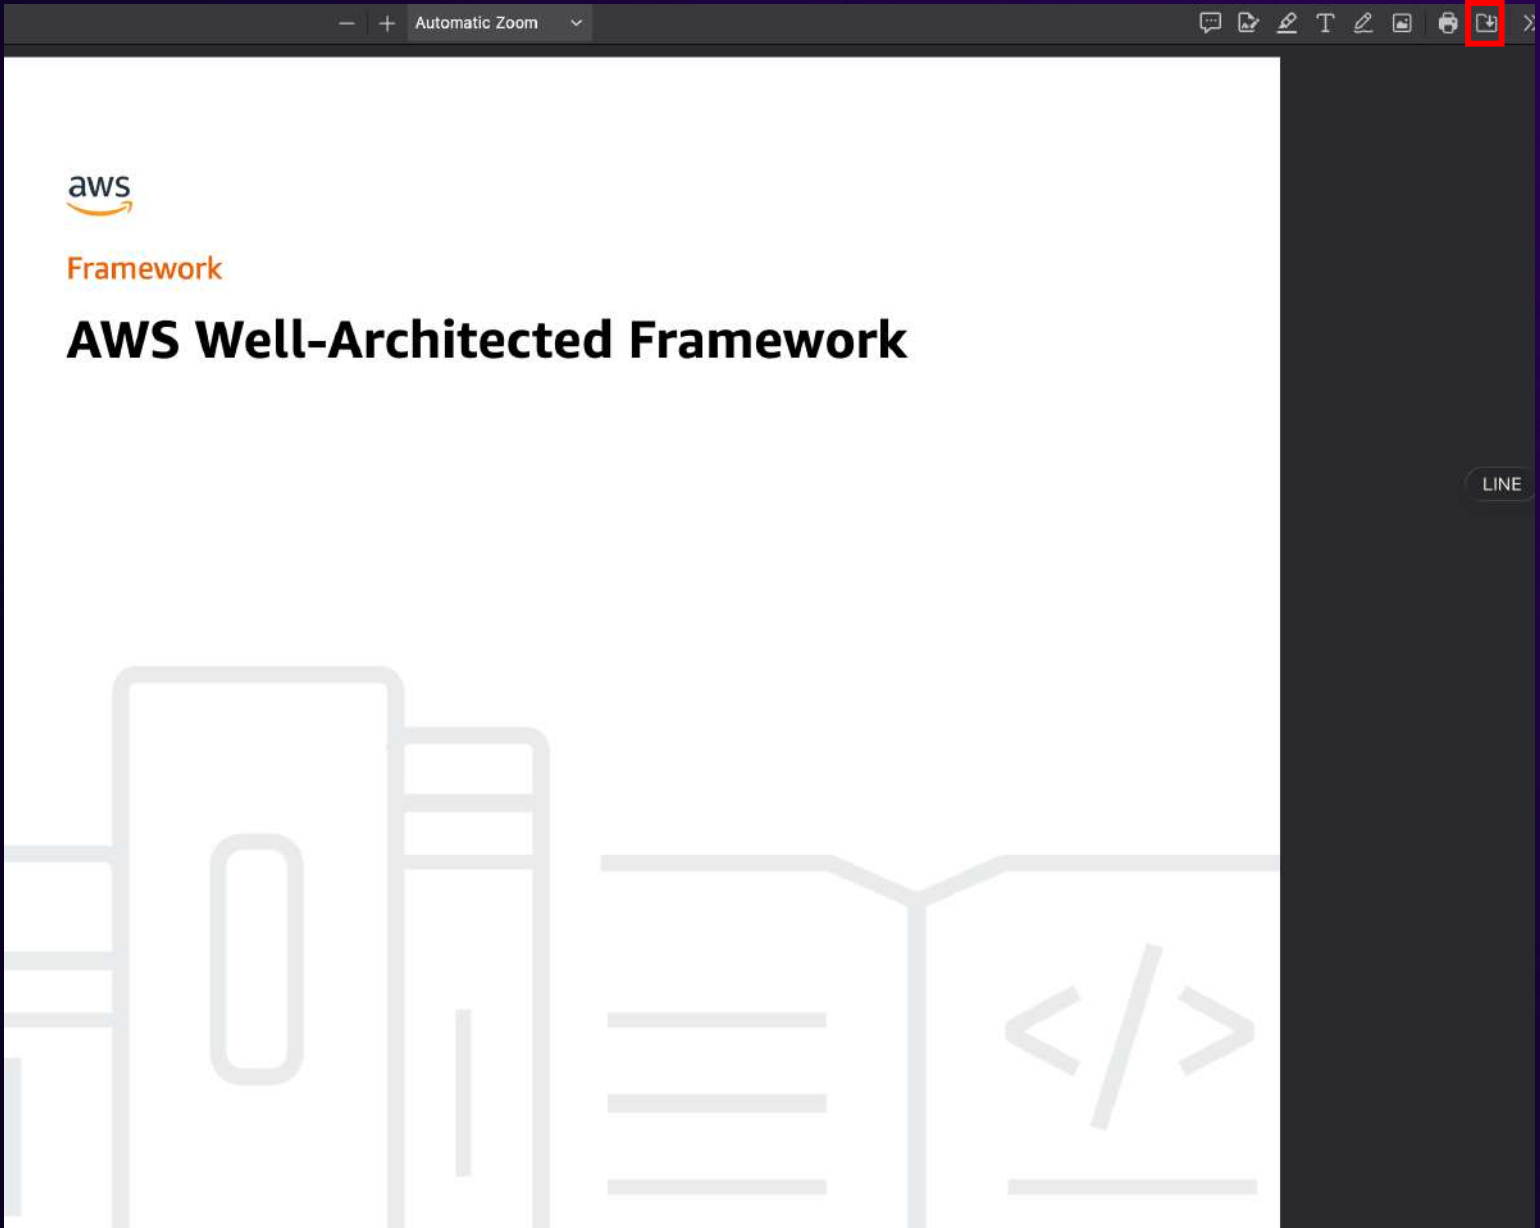

Create S3 bucket

aws

Q s3

Ask Amazon Q

Services

Features

Resources

Documentation

Knowledge articles

Marketplace

Blog posts

Events

Tutorials

S3

Scalable Storage in the Cloud

S3 Glacier

Amazon S3 Glacier API for vaults only. For the Glacier Deep Archive, Glacier Flexible Ret...

AWS Snow Family

Large Scale Data Transport

Features

S3 Files

S3 feature

S3 on Outposts

AWS Outposts feature

Exports to S3

DynamoDB feature

Storage

Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

Pricing

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS Simple Monthly Calculator](#)

[View pricing details](#)

How it works

aws

Introduction to Amazon S3 | Amazon Web Services

Amazon Web Services

Create S3 bucket

Create bucket

Info

Buckets are containers for data stored in S3.

General configuration

AWS Region

US West (Oregon) us-west-2

Bucket type

Info

General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

Directory

Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace

Choose the namespace where you want to create your bucket. [Learn more](#)

Global namespace

By default, S3 creates general purpose buckets in the global namespace.

Account Regional namespace (recommended)

General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name

Info

agentcore-kb-demo

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

Object Ownership

Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

Object Ownership

ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

ACLs enabled

Objects in this bucket can be owned by and its objects can be specified using ACLs.

Object Ownership

Bucket owner enforced

Default encryption

Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Info

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).

Server-side encryption with Amazon S3 managed keys (SSE-S3)

Server-side encryption with AWS Key Management Service keys (SSE-KMS)

Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

Disable

Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

aws

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

49

Upload files to bucket

agentcore-kb-demo-0810

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Objects (0)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Find objects by prefix

Name

Type

Last modified

Size

Storage class

No objects

You don't have any objects in this bucket.

Upload

Upload

Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API.

Learn more

Drag and drop files and folders you want to upload here, or choose Add files or Add folder.

Files and folders (2 total, 15.4 MB)

Remove

Add files

Add folder

Find by name

Name

wellarchitected-framework.pdf

wellarchitected-cost-optimization-pillar.pdf

Folder

-

-

Type

application/pdf

application/pdf

Size

13.5 MB

1.9 MB

Destination

Info

Destination

s3://agentcore-kb-demo-0810

Destination details

Bucket settings that impact new objects stored in the specified destination.

Permissions

Grant public access and access to other AWS accounts.

Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload



Upload Complete!

Amazon S3 > Buckets > aaron-agentcore-kb-demo

aaron-agentcore-kb-demo

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Objects (2)

Copy S3 URI

Copy URL

Download

Open L^a

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions.



[Learn more](#)

Find objects by prefix

< 1 >

☐	Name	Type	Last modified	Size	Storage class
☐	 wellarchitected-cost-optimization-pillar.pdf	pdf	August 13, 2026, 11:19:20 (UTC+08:00)	1.9 MB	Standard
☐	 wellarchitected-framework.pdf	pdf	August 13, 2026, 11:19:22 (UTC+08:00)	13.5 MB	Standard

Create Knowledge Base

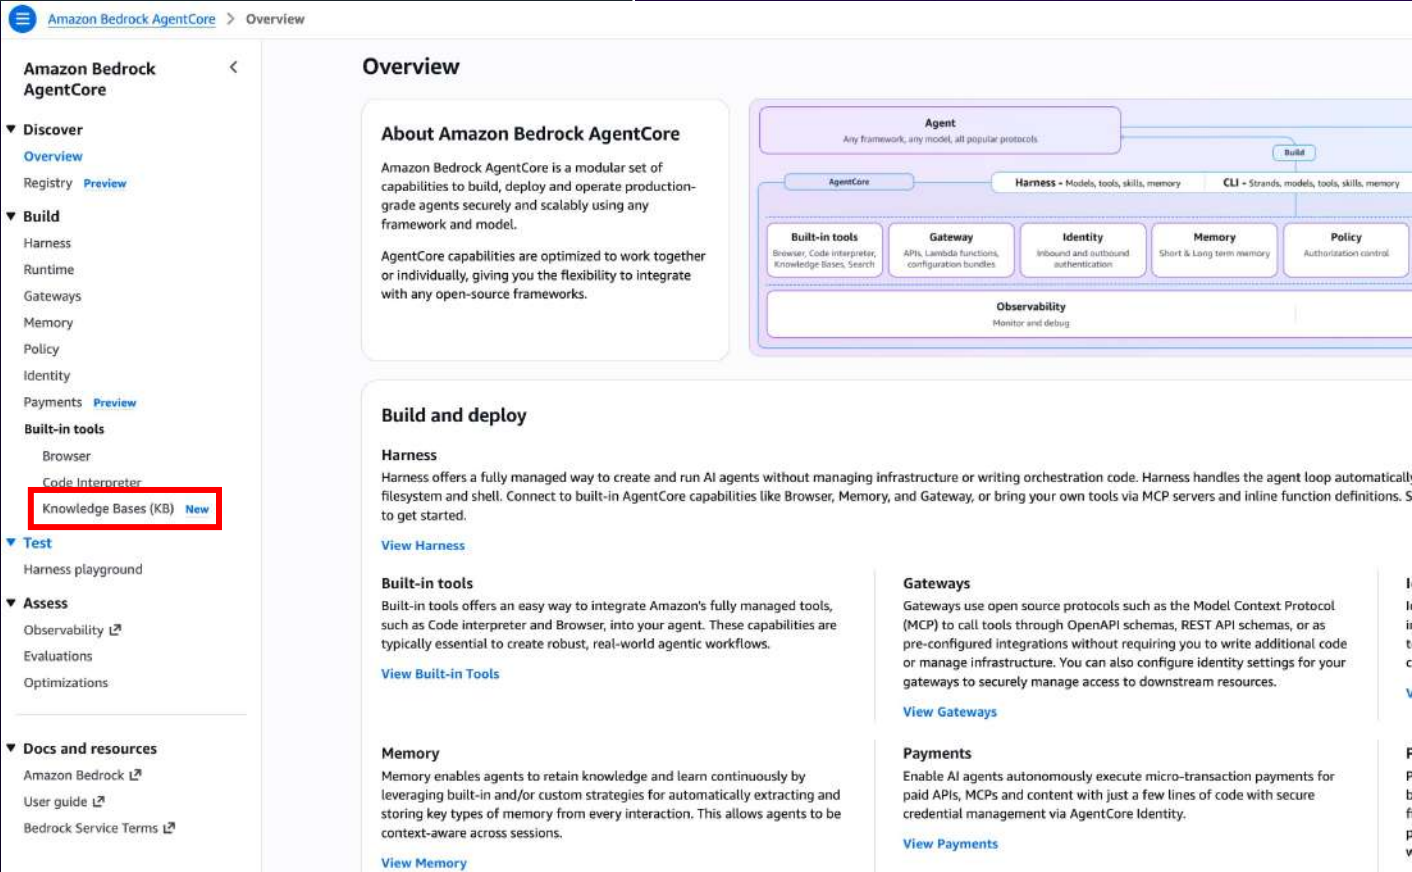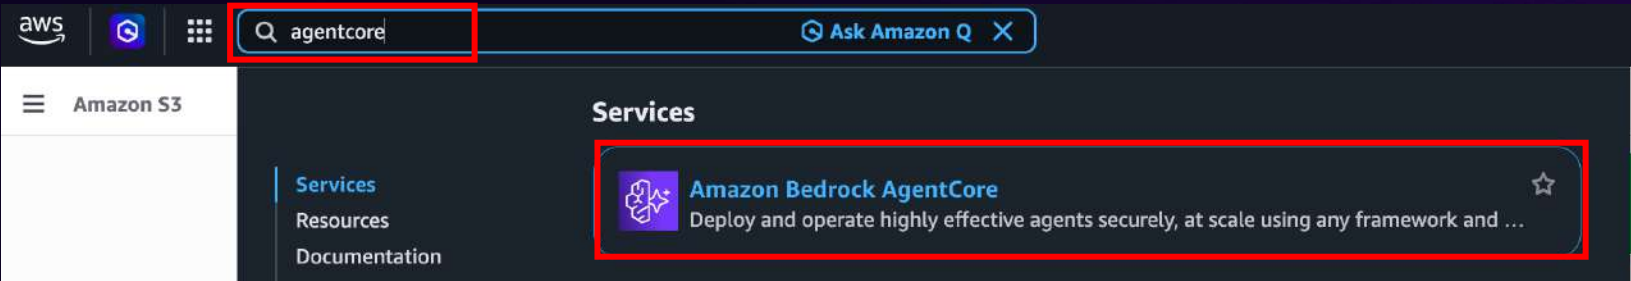

Create Knowledge Base

Knowledge Bases (KB)


▼ How it works [Info](#)



Create a KB


Create a KB using either a Managed KB with native connectors, parsing, vector storage, and embeddings, or bring your own vector store for greater control over indexing and retrieval. Connect data sources and keep them synchronized to ensure they are retrieval ready.

Create Managed KB ▼



Integrate it within agents through Gateway

Use your KB within any application or add it as an [AgentCore Gateway](#) target to make it available to your agents. Leverage strategies like Agentic Retrieval to access relevant information from your data and support complex, multi-step workflows.



Assess performance

Test your KB to validate retrieval quality pre-deployment, then monitor retrieval metrics, sessions, traces, and spans to understand the performance, latency, and reliability of your KB from development through production.

View observability ↗

Knowledge Bases (KB)

View and manage your KBs. Select up to 5 KBs to test retrieval strategies.

Find KB

< 1 > ⚙

Name ▼

Status ▼

Type ▼

Data sources ▼

Creation time ▼

Last sync date ▼

Last sync warnings

No Knowledge Base

No Knowledge Base to display

Create Managed KB ▼

aws

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

53

Create Knowledge Base

Create Managed Knowledge Base (KB)

KB details

KB name

agentcore-wa-kb-demo

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). Character count: 20/100.

▼ Additional configurations

KB description - optional

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). Character count: 0/200.

Embeddings model

Embeddings model used by Bedrock Managed Knowledge Base which converts your data into vector embeddings for semantic search and retrieval. [Learn more](#)

☒ Managed embeddings model - recommended

This creates embeddings for your Managed KB at no additional cost.

☐ Bedrock embeddings model

This offers greater control over the embedding process. Only models that support floating-point vector embeddings and a 1,024 vector dimension are available for selection. Usage is metered separately based on your selection.

IAM Permissions

Select the correct permissions to access other AWS services or perform actions needed for this resource. See [service roles](#) for Amazon Bedrock.

☒ Create and use a new service role

☐ Use an existing service role

Service role name

AmazonBedrockExecutionRoleForKnowledgeBase_x7jwl

KMS key for managed vector store

The managed data store is encrypted by default with an AWS owned KMS key. You can choose your own KMS key below.

☐ Customize encryption settings (Advanced)

Create Knowledge Base

Data source

Select the type of data source to connect to your KB. You may add additional data sources once your KB is created.

Data source name

wa-s3-source

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Data source type

 Amazon S3 ☒

 SharePoint Online ☐

 Confluence Cloud ☐

 Google Drive ☐

 Web Crawler ☐

 Box ☐

 One Drive ☐

 Custom ☐

Data source location

☒ This AWS account

☐ Other AWS account

S3 URI

Enter the S3 bucket location containing your source files. To enhance search relevance and filtering capabilities, you can include metadata by adding a .metadata.json file for each source file.

s3://agentcore-kb-demo-0810

X

View

Browse S3

► Additional configurations - optional

► Advanced configurations - optional

Cancel

Create Knowledge Base

Create Knowledge Base

Sync completed for data source - 'wa-s3-source'

Notifications 0 0 2 0 0

agentcore-wa-kb-demo

Delete

Test

Use with AgentCore Gateway

Knowledge Base (KB) overview

Knowledge Base name

agentcore-wa-kb-demo

Service role

AmazonBedrockExecutionRoleForKnowledgeBase_x7jwl

Knowledge base type

Managed vector store

Knowledge Base description

-

Embeddings model

Managed

Embeddings type

Float

Vector dimensions

1024

Managed store KMS

-

Status

Available

Created date

August 10, 2026, 16:30 (UTC+08:00)

Knowledge Base ID

D3V2GS6TQT

Data source (1)

Sync

Add

Find data source

Data so...

Status

wa-s3-so...

Available

Data sour...

Last sync ...

Last sync ...

Text chun...

Parsing strategy

wa-s3-so...

S3

August 10...

-

Default

Managed parser

Invocation code

Info

Use this code snippet directly to invoke this KB in your agent.

Check Knowledge Base response

Configurations

API

Retrieval and response generation

☐ Agentic retrieval with answer generation - new

☐ Agentic retrieval only - new

☒ Standard retrieval only

☐ Standard retrieval with answer generation

KBs (1)

agentcore-wa-kb-demo

Managed embeddings model

Source chunks

Metadata filters

Other configurations

Test as a specific user

Guardrails

Test

Preview

Test your KB by running a query to:

Well-Architected Framework 的六大支柱是什麼 ?

Run

Preview

Well-Architected Framework 的六大支柱是什麼 ?

1. Framework

2. These AWS Partners have deep AWS [AWS Well-Architected Partner](https://aws.amazon.com/architecture/well-architected/partners/?ref=wellarchitected-wp) knowledge, and can help you review and improve y...

3. Definitions

4. "We don't want others to know the secrets of our solution implementation!" If you point the team at the questions in the Well-Architected Framework, they will see that none of the questions reveal any...

5. Drive architectures using data: In the cloud, you can collect data on how your architectural choices affect the behavior of your workload. This lets you make fact-based decisions on how to improve you...

Details

Check Knowledge Base response

API

Retrieval and response generation

Agentic retrieval with answer generation - new

Get synthesized answers from your data through intelligent multi-source retrieval and foundation model-powered response generation.

Agentic retrieval only - new

Retrieve relevant passages from your data through intelligent, multi-source retrieval without generating a synthesized response.

Standard retrieval only

Retrieve relevant content directly from a single KB.

Standard retrieval with answer generation

Not supported for Managed KBs. Use agentic retrieval with answer generation instead.

Model

Choose a model for query planning and response generation. The default selection is a Managed model.

Managed model

Equivalent to Claude Sonnet 4.6 or better.

Maximum agentic iterations

Specify the maximum iterations run by the agentic retrieval for the selected Knowledge Base.

5

Enter a value between 2 and 5

KBs (1)

agentcore-wa-kb-demo

Managed embeddings model

Source chunks

Routing instructions - optional

Metadata filters - optional [Info](#)

+ Add Managed KB

You can add up to 4 more Managed KB.

Preview

Test your KB by running a query to generate response

Well-Architected Framework 的六大支柱是什麼？

AWS Well-Architected Framework 的六大支柱如下：

卓越運營 (Operational Excellence)：致力於以正確的方式構建軟體，並持續提供優質的客戶體驗，同時支援有效運行工作負載、深入了解其運作情況，並持續改進支援流程與程序以創造業務價值。 [1] [2]

安全性 (Security)：說明如何利用雲端技術以改善的方式保護資料、系統和資產，從而提升整體安全態勢。 [3] [4]

可靠性 (Reliability)：涵蓋工作負載在預期時能正確且持續執行其預定功能的能力，包括在整個生命週期中運行與測試工作負載的能力。 [5]

性能效率 (Performance Efficiency)：有效利用計算資源以滿足系統需求的能力，並在需求變化和技術演進時維持這種效率。 [6]

成本優化 (Cost Optimization)：以最低價格點運行系統並創造業務價值的能力。 [7]

可持續性 (Sustainability)：透過降低能源消耗、提高整個工作負載各元件的效率，最大化已配置資源的效益並最小化所需的總資源，持續改善可持續性影響的能力。 [8]

這六大支柱共同構成了 AWS Well-Architected Framework 的基礎，幫助組織在雲端上設計和運行可靠、安全、高效、具成本效益且具可持續性的系統。 [9]

View source chunks

Trace details

Well-Architected Framework 的六大支柱是什麼？

Run

Create AgentCore Gateway

Amazon Bedrock AgentCore

Discover

Overview

Registry [Preview](#)

Build

Harness

Runtime

Gateways

Memory

Policy

Identity

Payments [Preview](#)

Built-in tools

Browser

Code Interpreter

Knowledge Bases (KB) [New](#)

Test

Harness playground

Assess

Observability [↗](#)

Evaluations

Optimizations


▼ How it works



Create a gateway

To use tools within your agents, create a gateway to manage MCP, Inference, Agent or Custom targets that point to your tools. You can configure [inbound Auth](#) for the gateway and [outbound Auth](#) for each target to securely manage access to downstream resources.

Create Gateway



Create configuration bundles for your agentic application

Use configuration bundles to customize configurations definitions. Associate configuration bundles to gateway to dynamically route to them as part of your agentic application.

Create configuration bundle



Assess performance using observability

Monitor key metrics, sessions, traces and spans to get real-time insights on performance, accuracy, and throttles of your gateway resource.

View Observability [↗](#)

Gateways

Configuration bundles - new

Gateways (0) [Info](#)

Gateways associate targets to tools to connect to your agent runtime.

Find gateways

Edit

Delete

Create Gateway

Gateway name	Description	Status	Creation time
No gateways found			



© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

59

Create AgentCore Gateway

Step 1

Define gateway details

Step 2

Configure Inbound Identity

Step 3

Add targets

Step 4

Review and create

Define gateway details

Gateway details

Gateway name

wa-kb-gateway-demo

Valid characters are a-z, A-Z, 0-9, and - (hyphen). The name can have up to 50 characters.

Additional configurations - optional

Permissions

IAM permissions

To access other AWS services and resources you need an IAM role. Choose a role with the right permissions.

Create default role

Use another role

A new role will be created with the necessary permissions.

Role name

AmazonBedrockAgentCoreGatewayDefaultServiceRole1786352200944

Maximum 64 characters. Use alphanumeric and +,=, @, _ characters.

Policy - optional

KMS key - optional

Web Application Firewall (WAF) - optional

A Web Application Firewall (WAF) is a security solution that sits between a web application and the internet. It operates at the application layer to inspect, filter, and block malicious HTTP/HTTPS traffic before it reaches your server.

Cancel

Next

Create AgentCore Gateway

Step 1

Define gateway details

Step 2

Configure Inbound Identity

Step 3

Add targets

Step 4

Review and create

Configure Inbound Identity [Info](#)

Inbound Identity is the gatekeeper that controls who can access this MCP Gateway. Configure JWT (like an OAuth token) as the Inbound Identity to validate incoming token signatures and scopes. This is part of the Bedrock AgentCore Identity primitive.

Inbound Identity details

☒ **Use IAM permissions**
This gateway will perform authentication and authorization using AWS Signature Version 4 (SigV4). No further configurations are necessary.

☐ **Use JSON Web Tokens (JWT)**
This gateway will perform authentication and authorization using Identity. Control access to the AgentCore Gateway resource by using a JWT (like OAuth) based authorization server.

☐ **No authorization**
Opt out of managed identity for inbound requests. This gateway will be publicly accessible with no access control.

Cancel

Previous

Next

Create AgentCore Gateway

▼ Target: managed-kb [Info](#)

Select a target protocol

☒ MCP target
The MCP target can be defined as an MCP server, API gateway, Lambda, or REST API to define MCP tools.

☐ Inference target - *new*
The inference target is used to call LLMs with defined models and parameters.

☐ Agent target - *new*
Route Gateway requests to an HTTP-based endpoint such as an AgentCore runtime or A2A.

☐ Custom target - *new*
The HTTP target acts as a fronting layer to multiple targets.

Target name

managed-kb

Valid characters are a-z, A-Z, 0-9, and - (hyphen). The name can have up to 50 characters.

Target description - *optional*

Enter description

Passthrough

Controls whether the Gateway processes requests or forwards them directly to the target. [Learn more](#)

☒ Do not use passthrough - default aggregated
This aggregates all MCP entities across multiple upstream MCP servers and exposes them through a single, unified MCP server interface.

☐ Use passthrough - advanced
The gateway authenticates and forwards requests without routing or transformation. Use this mode when you do not want the gateway to act as a proxy between your client and the upstream MCP server.

Target type

☐ MCP server
Define this target with pre-configured MCP server.

☐ Lambda ARN
Define this target with a Lambda function and S3 resource.

☐ REST API
Define this target with an OpenAPI or Smithy schema.

☐ API Gateway
Define this target with an API Gateway REST API deployed to a stage.

☒ Connectors - *new*
Define this target with pre-configured targets from integration providers.

Pre-configured targets

☒ Knowledge Bases (KB)
Augment your agent using a KB to enable RAG capabilities leveraging your proprietary data.

☐ Other integrations
Explore sample templates designed for experimentation - use them to quickly explore configurations, iterate on your setup, and validate integrations before building your own. Available in the console only.

Runtime retrieval type

☒ Standard retrieval
Query and retrieve information from data sources in a single KB.

☐ Agentic retrieval - *new*
Intelligently query multiple sources to deliver precise, contextual information.

KB: agentcore-wa-kb-demo

Knowledge Base (KB)

Select a previously created Managed KB, Unstructured vector store KB, or [create a new Knowledge Base](#)

agentcore-wa-kb-demo

▶ Runtime configurations - *optional*

Outbound Auth configurations

An Outbound Auth is required to receive access tokens and vend them to the Token Vault to allow an agent to access downstream resources. [Learn more](#)

☒ IAM Role

☐ OAuth client

☐ API key

☐ No authorization

Next



Create AgentCore Gateway

Review and create

Gateway details

Gateway name

wa-kb-gateway-demo

KMS key

-

Gateway description

-

Permissions

IAM role

Policy

-

Edit

Inbound identity

Inbound Auth type

IAM

Allowed scopes

Disabled

JWT schema configuration

Quick create

Custom claims

Disabled

Allowed audiences

Disabled

Allowed clients

Disabled

Edit

Target 1: managed-kb

Target name

managed-kb

Target description

-

Protocol type

MCP

Target type

knowledgeBase

Edit

Cancel

Previous

Create Gateway

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Create AgentCore Gateway

Gateway wa-kb-gateway-demo created successfully

Gateway details

Name

wa-kb-gateway-demo

Gateway ID

wa-kb-gateway-demo-2zewnp3xz7

Description

-

Semantic search

Disabled

Exception level debugging

Enabled

Session timeout (seconds)

-

Status

Ready

Gateway resource ARN

arn:aws:bedrock-agentcore:us-west-2:367215653287:gateway/wa-kb-gateway-demo-2zewnp3xz7

Gateway resource URL

https://wa-kb-gateway-demo-2zewnp3xz7.gateway.bedrock-agentcore.us-west-2.amazonaws.com/mcp

Response streaming

Disabled

Gateway sessions

Disabled

Supported versions

2025-03-26

Request Interceptor Lambda ARN

-

Response Interceptor Lambda ARN

-

Response interceptor payload filter

Disabled

Policy engine enforcement mode

-

Associated policy engine

-

IAM role

arn:aws:iam::367215653287:role/service-role/AmazonBedrockAgentCoreGatewayDefaultServiceRole1786352200944

KMS key

-

WAF

-

View invocation code

Use this code snippet directly to interact with this gateway. Be sure to specify your Client ID, Client secret within the code.

Inbound Auth

Inbound Auth type

IAM permissions

Targets (1)

Info

Targets contain multiple tools that are defined as part of this Gateway various protocols. You can define multiple targets for this Gateway. Some target types require sync and others do not.

Find targets

Target name

managed-kb

Target status

Ready

Path

/managed-kb

Protocol type

MCP

Target type

Knowledge Base

MCP listing mode

-

MCP resource priority

-

Description

-

Last modified

August 10, 2026, 17:03 (UTC+08:00)

Last synced

-

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Create Harness Agent

Amazon Bedrock AgentCore > Harness

Amazon Bedrock AgentCore

Discover

Overview

Registry [Preview](#)

Build

Harness

Runtime

Gateways

Memory

Policy

Identity

Payments [Preview](#)

Built-in tools

Browser

Code Interpreter

Knowledge Bases (KB) [New](#)

Test

Harness playground

Assess

Observability [L2](#)

Evaluations

Optimizations

Docs and resources

Amazon Bedrock [L2](#)

User guide [L2](#)

Bedrock Service Terms [L2](#)

Harness

Use Amazon Bedrock AgentCore to create and run managed Harness that reason, use tools, and complete multi-step tasks autonomously.

How it works



Create a Harness

Quickly create a Harness by defining your model, system prompt, and tools. No infrastructure setup required. Connect to built-in AgentCore capabilities like Browser, Memory, and Gateway, or bring your own tools via MCP servers and inline function definitions.

Quick create Harness



Test Harness in playground

Invoke your Harness directly from the console without writing code. Send messages, adjust model parameters, override tools and system prompts, and run shell commands on the Harness's isolated runtime environment to inspect outputs. Iterate quickly on your configuration before deploying to production.

Test Harness in playground



Assess performance using observability

Monitor sessions, traces, and spans to get real-time insights on your Harness's performance, tool usage, and model behavior. View step-by-step execution traces showing each tool call, model decision, and memory operation. Learn more about enabling observability at the account level.

View observability [L2](#)

Harnesses (0)

Find harnesses

Delete

Edit

Quick create Harness

Name	Status	Latest version	Created at (UTC+08:00)	Last updated at (UTC+08:00)
No harnesses				
No harnesses to display.				
Quick create Harness				

Quick create Harness ▲

Quick create Harness

Advanced create Harness

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Create Harness Agent

Create Harness

Configure your Harness's model, tools, and runtime environment. Settings defined here apply to all invocations by default and can be overridden at invocation time.

Harness name

Name

wa_rag_agent_demo

0-9, _ (underscore). The name must begin with a letter and can have up to 40 characters.

Harness name can not be edited after it is created.

▼ Model and system prompt

Configure the model your Harness uses to reason and generate responses. Define a system prompt to set the Harness's behavior, persona, and instructions across all sessions.

Model source

☒ Bedrock

Access models through the AWS Bedrock infrastructure.

☐ LiteLLM

Access models through the LiteLLM gateway.

☐ OpenAI (direct)

Access models through OpenAI's API infrastructure.

API source

☒ Bedrock

Offer models that use the Converse API.

☐ Bedrock Mantle

Offer models that use the Responses API or Chat Completions API.

Model

Info

Claude Opus 4.6 v1

Global Anthropic Claude Opus 4.6

System prompt - optional

Provide system-level instructions that define how the Harness should behave and respond.

你是 AWS Well-Architected 助理。回答前務必使用知識庫工具檢索，只根據檢索到的內容回答，並附上來源。若知識庫中找不到答案，請誠實說明沒有相關資訊，不要自行編造。

93/20000 characters

Select model

Find available models and inference

1. Categories

Serverless model providers

Amazon

Anthropic

Cohere

DeepSeek

Google

Luma AI

Meta

MiniMax

Mistral AI

Moonshot AI

NVIDIA

2. Models

Claude Sonnet 4 v1

Text & vision model | 200K tokens

Legacy

Claude Haiku 4.5 v1

Text & vision model | 200K tokens

Claude Fable 5 v1

Text & vision model | 1M tokens

Claude Sonnet 4.6 v1

Text & vision model | 1M tokens

Claude Opus 4.6 v1

Text & vision model | 1M tokens

Claude Opus 5 v1

Text & vision model | 1M tokens

Claude Opus 4.8 v1

Text & vision model | 1M tokens

3. Inference

Inference profiles

Cross-region

US Anthropic Claude Opus 4.6

Global Anthropic Claude Opus 4.6

Cancel

Apply

Create Harness Agent

▼ Memory - optional (1)

Memory stores short-term events and long-term memory records (if configured), allowing Harness to remember conversations, improve task execution, and provide personalized responses across sessions.

☒ Enable Memory

Memory type

☒ Create new Memory (managed by Harness)
Enable automatic long-term memory provisioning in the Harness to persist and retrieve conversation history across sessions.

☐ Use existing Memory resource
Select an existing AgentCore Memory instance to persist and retrieve conversation history across sessions.

Memory detail - optional

Strategies

Semantic memory
Summarization

Short-term memory (raw event) expiration (day)

30

Retrieval configs

2 namespaces

Edit

Creating a new Memory (managed by Harness) requires 3-5 minutes for provisioning.

▼ Tools - optional (1)

Configure the tools available to your Harness during invocation. The Harness uses these tools to take actions, retrieve information, and interact with external systems.

☒ Gateway

Route tool calls through an AgentCore Gateway to apply access controls, authentication, and governance policies to your Harness's tool usage. [Create a new Gateway](#)

Select gateway

wa-kb-gateway-demo
wa-kb-gateway-demo-2zewnp3rz7

Outbound Auth configurations

An Outbound Auth is required to receive access tokens and vend them to the Token Vault to allow an agent to access downstream resources. [Learn more](#)

☒ IAM role

☐ OAuth client

☐ No authorization

☐ Browser tool

Give your Harness the ability to navigate and interact with web pages in real time. Useful for tasks that require live web data, form interaction, or multi-step browser automation. [Create a new Browser tool](#)

☐ Code interpreter tool

Allow your Harness to write and execute code in a secure sandboxed environment. Useful for data analysis, computation, and tasks that require programmatic reasoning. [Create a new Code interpreter tool](#)

☐ Remote MCP server

Connect your Harness to an external Model Context Protocol server to access its tools. Provide the server URL and any required authentication headers.

☐ Custom functions

Define an inline tool that executes client-side. The Harness calls this function according to the schema you provide, and your application handles the execution and returns the result.

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Create Harness Agent

wa_rag_agent_demo

View export to code instructions

Delete

Edit

Test Harness

▼ Harness details

Name

wa_rag_agent_demo

Harness ARN

arn:aws:bedrock-agentcore:us-west-2:367215653287:harness/wa_rag_agent_demo-hA82dfCb11

Harness ID

wa_rag_agent_demo-hA82dfCb11

Status

✓ Ready

Runtime ARN

arn:aws:bedrock-agentcore:us-west-2:367215653287:runtime/harness_wa_rag_agent_demo-XMk2cJC9Pd

Runtime ID

harness_wa_rag_agent_demo-XMk2cJC9Pd

IAM role

[AmazonBedrockAgentCoreHarnessDefaultServiceRole-rck1p](#)

Last updated date

August 10, 2026, 18:29 (UTC+08:00)

Created date

August 10, 2026, 18:28 (UTC+08:00)

► View invocation code

Endpoints (1) Info

Delete

Edit

Test endpoint

Create endpoint

An endpoint maps to a specific version, making it easy to update versions without changing client code. The DEFAULT endpoint will always be associated with the latest version.

Find endpoints

< 1 > ⚙

Name	Status	Description	ARN	Associated ve...	CloudWatch	Observability	Last updated ...
○ DEFAULT	✓ Ready	-	arn:aws:bedrock-agentcore:us-west-2:367215653...	Version 1	Logs	Dashboard	August 10, 2026,...

Versions (1) Info

Delete

Edit

Test version

Create version

A snapshot of the Harness is created automatically with each update, allowing you to track changes, manage rollbacks and reference specific states.

Find versions

< 1 > ⚙

Version	Status	Created date (UTC+08:00)
Version 1	✓ Ready	August 10, 2026, 18:28

aws

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Test Harness Agent

The screenshot shows the Amazon Bedrock AgentCore interface. On the left is a navigation sidebar with sections: Discover, Build, Built-in tools, Test, Assess, and Docs and resources. The 'Test' section is active, and 'Harness playground' is highlighted. The main area is titled 'Welcome to Harness playground' and contains the text 'Create a new Harness or select an existing Harr'. There are two paths: one to 'Create new Harness' (highlighted with a red box) and another to 'Select a Harness' (also highlighted with a red box). The 'Select a Harness' dropdown menu is open, showing 'wa_rag_agent_demo' (highlighted with a red box). To the right of the dropdown is a 'Test Harness' button (highlighted with a red box).

Amazon Bedrock AgentCore > Harness > Harness playground

Amazon Bedrock AgentCore

- ▼ Discover
 - Overview
 - Registry [Preview](#)
- ▼ Build
 - Harness
 - Runtime
 - Gateways
 - Memory
 - Policy
 - Identity
 - Payments [Preview](#)
- Built-in tools
 - Browser
 - Code Interpreter
 - Knowledge Bases (KB) [New](#)
- ▼ Test
 - Harness playground**
- ▼ Assess
 - Observability [L2](#)
 - Evaluations
 - Optimizations
- ▼ Docs and resources
 - Amazon Bedrock [L2](#)
 - User guide [L2](#)
 - Bedrock Service Terms [L2](#)

Welcome to Harness playground

Create a new Harness or select an existing Harr

[Create new Harness](#)

Or

[Select a Harness](#)

wa_rag_agent_demo ▼

[Test Harness](#)

Test Harness Agent

Input: 12192 | Output: 713 | Total: 12905 | Latency: 12433ms

Well-Architected Framework 的六大支柱分別是什麼？

18:35:26 GMT+8

▼ Agent trace (1 steps)

Managed-Kb Retrieve

1.9s

["retrievalResults":[{"content":{"text":"Framework\nBased on what we have learned, we have created the AWS Well-Architec..."}]

根據知識庫中的資料，AWS Well-Architected Framework 的六大支柱分別是：

#	支柱名稱	說明
1	卓越營運 (Operational Excellence)	支援開發並有效地執行工作負載的能力，深入了解其營運狀況，並持續改善支援流程和程序以交付業務價值。
2	安全性 (Security)	描述如何利用雲端技術保護資料、系統和資產，以改善安全態勢。
3	可靠性 (Reliability)	工作負載在預期時間內正確且一致地執行其預期功能的能力，包括在整個生命週期中操作和測試工作負載的能力。
4	效能效率 (Performance Efficiency)	有效使用運算資源以滿足系統需求的能力，並在需求變化和技術演進時維持該效率。
5	成本最佳化 (Cost Optimization)	以最低價格點運行系統以交付業務價值的能力。
6	永續性 (Sustainability)	透過降低能源消耗和提高工作負載所有組件的效率，持續改善永續性影響的能力，最大化已佈建資源的效益並最小化所需的總資源。

將這六大支柱融入您的架構設計中，將有助於建構穩定且高效的系統。

來源： [AWS Well-Architected Framework](#)

這份文件對量子運算的區塊鏈挖矿效能有什麼建議？

18:36:35 GMT+8

▼ Agent trace (2 steps)

根據我在知識庫中的檢索，沒有找到任何關於「量子運算的區塊鏈挖矿效能」的相關資訊。

Managed-Kb Retrieve

1.6s

["retrievalResults":[{"content":{"text":"***Compute** (represented by orange container-like icons) - Processes the applic..."}]

經過知識庫檢索確認，AWS Well-Architected Framework 文件中並沒有任何關於「量子運算的區塊鏈挖矿效能」的相關資訊或建議。

這份框架主要聚焦於雲端架構的最佳實踐，涵蓋卓越營運、安全性、可靠性、效能效率、成本最佳化和永續性等面向，但並未涉及量子運算或區塊鏈挖矿的主題。

如果您有其他關於 AWS Well-Architected Framework 的問題，我很樂意為您查詢。

© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.


Try to invoke the harness in your terminal (optional)

Step1: 建立專案與虛擬環境 (以 mac 為例)

mkdir agentcore-test && cd agentcore-test

python3 -m venv .venv

source .venv/bin/activate

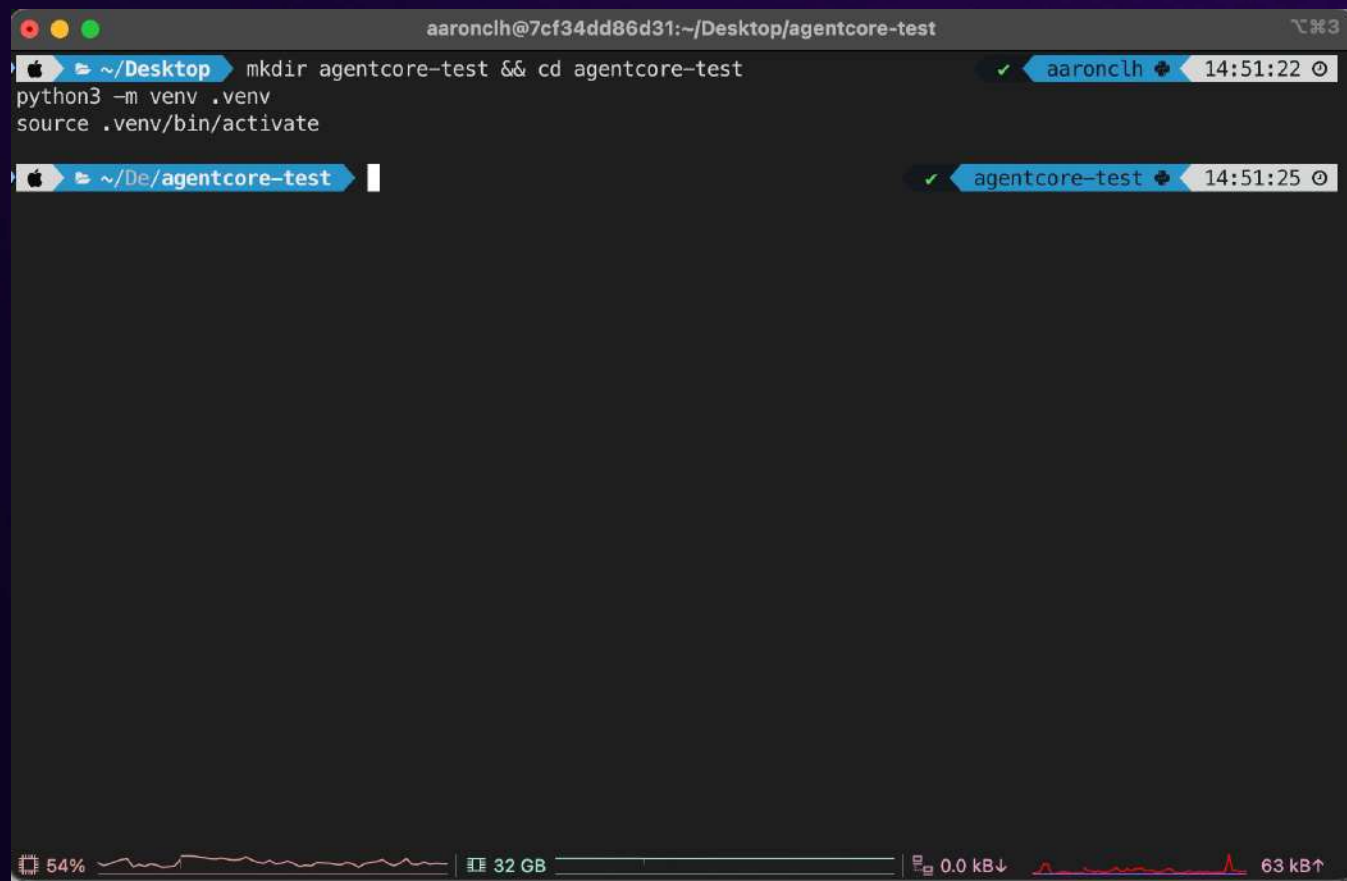

The screenshot shows a terminal window with the following content:

```
aaronclh@7cf34dd86d31:~/Desktop/agentcore-test  
aaronclh ~/Desktop  
$ mkdir agentcore-test && cd agentcore-test  
$ python3 -m venv .venv  
$ source .venv/bin/activate  
agentcore-test  
$
```


The terminal window has a title bar with the text "aaronclh@7cf34dd86d31:~/Desktop/agentcore-test". The first tab is labeled "aaronclh" and the second tab is labeled "agentcore-test". The status bar at the bottom shows "54%", "32 GB", "0.0 kB↓", and "63 kB↑".

Try to invoke the harness in your terminal (optional)

Step2: 安裝新版 boto3

pip install --upgrade "boto3>=1.43.70"

*python -c "import boto3;
print(boto3.__version__)"*

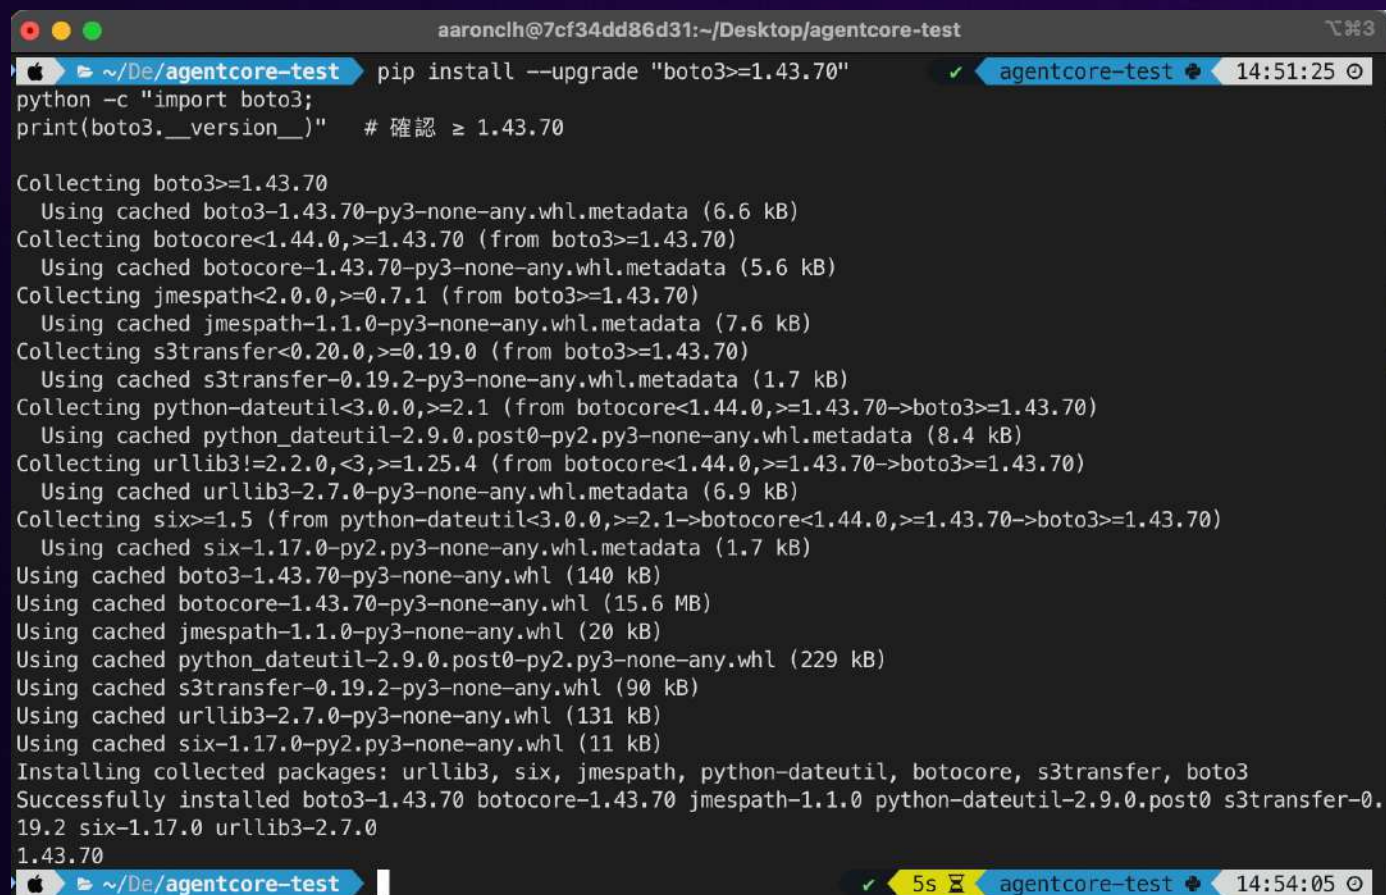

```
aaronclh@7cf34dd86d31:~/Desktop/agentcore-test
~/De/agentcore-test pip install --upgrade "boto3>=1.43.70"  ✓ agentcore-test 14:51:25
python -c "import boto3;
print(boto3.__version__)" # 確認 ≥ 1.43.70

Collecting boto3>=1.43.70
  Using cached boto3-1.43.70-py3-none-any.whl.metadata (6.6 kB)
Collecting botocore<1.44.0,>=1.43.70 (from boto3>=1.43.70)
  Using cached botocore-1.43.70-py3-none-any.whl.metadata (5.6 kB)
Collecting jmespath<2.0.0,>=0.7.1 (from boto3>=1.43.70)
  Using cached jmespath-1.1.0-py3-none-any.whl.metadata (7.6 kB)
Collecting s3transfer<0.20.0,>=0.19.0 (from boto3>=1.43.70)
  Using cached s3transfer-0.19.2-py3-none-any.whl.metadata (1.7 kB)
Collecting python-dateutil<3.0.0,>=2.1 (from botocore<1.44.0,>=1.43.70->boto3>=1.43.70)
  Using cached python_dateutil-2.9.0.post0-py2.py3-none-any.whl.metadata (8.4 kB)
Collecting urllib3!=2.2.0,<3,>=1.25.4 (from botocore<1.44.0,>=1.43.70->boto3>=1.43.70)
  Using cached urllib3-2.7.0-py3-none-any.whl.metadata (6.9 kB)
Collecting six>=1.5 (from python-dateutil<3.0.0,>=2.1->botocore<1.44.0,>=1.43.70->boto3>=1.43.70)
  Using cached six-1.17.0-py2.py3-none-any.whl.metadata (1.7 kB)
Using cached boto3-1.43.70-py3-none-any.whl (140 kB)
Using cached botocore-1.43.70-py3-none-any.whl (15.6 MB)
Using cached jmespath-1.1.0-py3-none-any.whl (20 kB)
Using cached python_dateutil-2.9.0.post0-py2.py3-none-any.whl (229 kB)
Using cached s3transfer-0.19.2-py3-none-any.whl (90 kB)
Using cached urllib3-2.7.0-py3-none-any.whl (131 kB)
Using cached six-1.17.0-py2.py3-none-any.whl (11 kB)
Installing collected packages: urllib3, six, jmespath, python-dateutil, botocore, s3transfer, boto3
Successfully installed boto3-1.43.70 botocore-1.43.70 jmespath-1.1.0 python-dateutil-2.9.0.post0 s3transfer-0.
19.2 six-1.17.0 urllib3-2.7.0
1.43.70
~/De/agentcore-test 5s ✓ agentcore-test 14:54:05
```

Try to invoke the harness in your terminal (optional)

Step3: 取得臨時 AWS 憑證

The screenshot shows the AWS event dashboard for '0813 Test' and a modal for 'AWS account access'.

Event dashboard (0813 Test):

- Event ends in 2 days 19 hours 51 minutes.
- Event dashboard > NTPC AI Hackathon
- Event information:**
 - Start time: 8/13/2026 10:47 AM
 - Duration: 72 hours
 - Accessible Regions: us-west-2, us-east-1
- Workshop:**
 - Title: NTPC AI Hackathon
 - Complexity level: 400
 - Topics: Generative AI, Machine Learning (ML/AI)
- Event outputs (0):**
 - Find outputs
 - No stack outputs to display.

AWS account access modal:

- These environment variables need to be set in your terminal session to run AWS CLI commands against your temporary AWS account. Learn more about the AWS CLI in the [User Guide Version 2](#).
- AWS CLI credentials:**
 - Linux or macOS (bash) | Linux or macOS (fish) | Windows (PowerShell) | Windows (cmd)
 - Copy icon (highlighted with a red box)
- Terminal commands:

```
export AWS_DEFAULT_REGION="us-west-2"
export AWS_ACCESS_KEY_ID="ASIAUXG3ITJT4DIMBVGU"
export AWS_SECRET_ACCESS_KEY="xRiXumbCicsgVC1wpSzcR/ipSJiDRSrYyvzB1Sjw"
export AWS_SESSION_TOKEN="IQoJb3JpZ2luX2VjEBcaCXVzLWVhc3QtMSJIMEYCIQCbhN1/H/hD0nGU3rFAJiu4ZURUbmFS2eYEi5KJ"
```
- Information: Only use us-west-2 and us-east-1 as your Region, unless otherwise directed by the event operator. You can optionally set the AWS_DEFAULT_REGION environment variable to one of the allowed Regions to set the default Region for CLI commands. This value can be overridden with the --region command line parameter.
- Close button

Try to invoke the harness in your terminal (optional)

Step 4: Terminal中貼入憑證



A screenshot of a macOS terminal window titled 'aaronclh@7cf34dd86d31:~/Desktop/agentcore-test'. The terminal shows a series of 'export' commands for AWS credentials. The first command sets 'AWS_DEFAULT_REGION' to 'us-west-2'. The second sets 'AWS_ACCESS_KEY_ID' to a long alphanumeric string. The third sets 'AWS_SECRET_ACCESS_KEY' to another long alphanumeric string. The fourth sets 'AWS_SESSION_TOKEN' to a very long alphanumeric string. The terminal window has a dark background with light text. The status bar at the bottom shows 'agentcore-test' and the time '14:59:40'.

```
aaronclh@7cf34dd86d31:~/Desktop/agentcore-test
export AWS_DEFAULT_REGION="us-west-2"
export AWS_ACCESS_KEY_ID="ASIAUXG3ITJT4DIMBVGU"
export AWS_SECRET_ACCESS_KEY="xRiXumbCicsgVC1wpSzcr/ipSJiDRSrYyvzB1Sjw"
export AWS_SESSION_TOKEN="IQoJb3JpZ2luX2VjEBcaCXVzLWVhc3QtMSJIMEYCIQCbhN1/H/hD0nGU3rFAJiu4ZURUbmFS2eYEi5KIfmj2
yQIhAJ4Z+xmESH2vey9xQ4LR32kV7pgVYFs1kjd0zIbGGT18KqICCD////////wEQAhoMMzI0NzI50Dcw0TUXIgzM0oSqADLvXi+Mr0sq9g
G1Pk2PA+B+CKT400S+tbVf34MzbRey1irlx+PhStNl3MlcyViS4nZrdyc3I14MkejJgCIaJQfExpkTp+oBEOKZanLnYKAJGBaDRynxt/BmfJdy
Qe4BHBu7gnoui90qBsaT7W1JD9wXFIY+11EayQC4eLm9dpDriMgI0a0wgV/Sh/pDQAmT2xhPDNz5NZG/fEjZpDv72oVywWkCkU7DhG+yX1H6Dw
YkoZhXMnb4bxKw4qLB82ECpcPrshx9vk9VXccrVf0sQW1RYw5cVNM81nAfMhWeL+DrMKqL46XaAsBF8auKCBSIh9c8KwfWSSgxL4rhG+QhE0ow
6Mz10wY6nAEwMVMaJYStjEjqPydH9FU7zEu2QnpW2r51AnYG/x8MEkoZGaEZ1xQImJkWzJg1oGypgpWWTpxezU8E6nu9ZS6JLRr207AwjIaQDg
juXjrTbV2f622kxXij+SBWIsFGBcjh4+WkNcHGE+BAPTHH/5DhIsJaZ4p8+CiZEti0icrCUGNKyBAY7Jtp0Erh+yXLYi5IA6GLCsJycKwqeg=
"
```

Try to invoke the harness in your terminal (optional)

Step 5: 建立 invoke.py 並從 Harness 貼上範例程式碼

- Replace **runtimeSessionId** (需 ≥ 33 字元)
- e.g. i-love-aws-and-aaron-so-handsome-6666666666666

```
invoke.py ×
invoke.py > ...
1 import boto3
2 import json
3
4 client = boto3.client('bedrock-agentcore', region_name='us-west-2')
5
6 response = client.invoke_harness(
7     harnessArn='arn:aws:bedrock-agentcore:us-west-2:324729870951:harness/wa_rag_agent_demo-brFD4bJB7D',
8     runtimeSessionId='i-love-aws-and-aaron-so-handsome-6666666666666',
9     messages=[
10         {
11             'role': 'user',
12             'content': [{'text': 'Hello, how can you help me?'}]
13         }
14     ]
15 )
16
17 # Process the streaming response
18 for event in response['stream']:
19     if 'contentBlockDelta' in event:
20         delta = event['contentBlockDelta'].get('delta', {})
21         if 'text' in delta:
22             print(delta['text'], end='')
23 print()
24
```

Try to invoke the harness in your terminal (optional)

Step 6: 執行 python invoke.py

python invoke.py

```
aaronclh@7cf34dd86d31:~/Desktop/agentcore-test
~/De/agentcore-test python invoke.py
✓ agentcore-test 15:11:13
您好！我是 AWS Well-Architected 助理，很高興為您提供幫助。我可以根據 **AWS Well-Architected Framework** 的知識庫，協助您了解雲端架構的最佳實踐。

## 我能幫助您的範圍

根據知識庫，**AWS Well-Architected Framework** 提供了一套一致的最佳實踐，用於評估架構設計，並基於以下**六大支柱**：

| 支柱 | 說明 |
|-----|-----|
| **卓越營運 (Operational Excellence)** | 支援開發和有效運行工作負載，持續改善流程以交付商業價值 |
| **安全性 (Security)** | 利用雲端技術保護資料、系統和資產，提升安全態勢 |
| **可靠性 (Reliability)** | 確保工作負載正確且持續地執行預期功能 |
| **效能效率 (Performance Efficiency)** | 有效使用運算資源以滿足系統需求，並隨需求變化維持效率 |
| **成本最佳化 (Cost Optimization)** | 以最低價格運行系統並交付商業價值 |
| **永續性 (Sustainability)** | 持續降低能源消耗、提高所有元件的效率 |

您可以就這六大支柱的任何相關問題向我諮詢，例如：
- 架構設計的最佳實踐
- 特定支柱的深入指引
- 如何評估您的架構是否符合最佳實踐

34% 33 GB 0.0 kB↓ 4.1 kB↑
```

Amazon SageMaker AI



© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Amazon SageMaker AI and Amazon Bedrock





Amazon SageMaker AI

Build, train, and deploy AI models for any use case with fully managed infrastructure, tools, and workflows



© 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved. Amazon Confidential and Trademark.



Build AI models FMs from scratch

Create your own ML models, including FMs, with integrated purpose-built tools and high-performance, cost-effective infrastructure



Customize AI models

Accelerate AI model customization from months to days with serverless reinforcement learning and an AI agent-guided workflow (in preview)



Implement ModelOps and governance

Create reliable and repeatable workflows incorporating MLOps practices with purpose-built tooling



Improve AI model governance

Enhance model governance and compliance with built-in governance tools



Manage and deploy AI models for inference

Easiest way to deploy AI & ML models including foundation models (FMs) to make inference requests at the best price performance for any use case

SageMaker AI supports ML, Deep Learning and GenAI

AMAZON SAGEMAKER AI

Classical ML

(Tabular Inputs)

Predictive maintenance
Financial risk prediction
Demand forecasting
Fraud detection
Churn prediction
Personalized recommendations

Deep Learning

(Unstructured Inputs)

Computer vision
Meta data enrichment
Sentiment analysis
Topic modelling
Intelligent data processing
Autonomous driving


AI Models

(Unstructured outputs)

Summarization
Information extraction
Visual content generation
Code generation
Audio/music generation
Synthetic data generation




Model
Building



Model
Deployment



Model Training
and Customization




Scalable ModelOps
and Governance



Amazon SageMaker AI simplifies



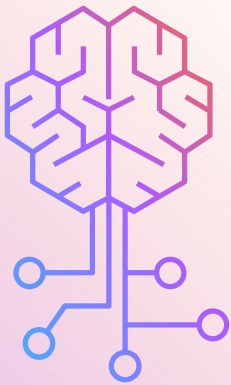


Model Building

Single, fully managed IDE for notebooks, code, and data

AMAZON SAGEMAKER STUDIO

Tools for every step of the AI model lifecycle under one unified visual user interface

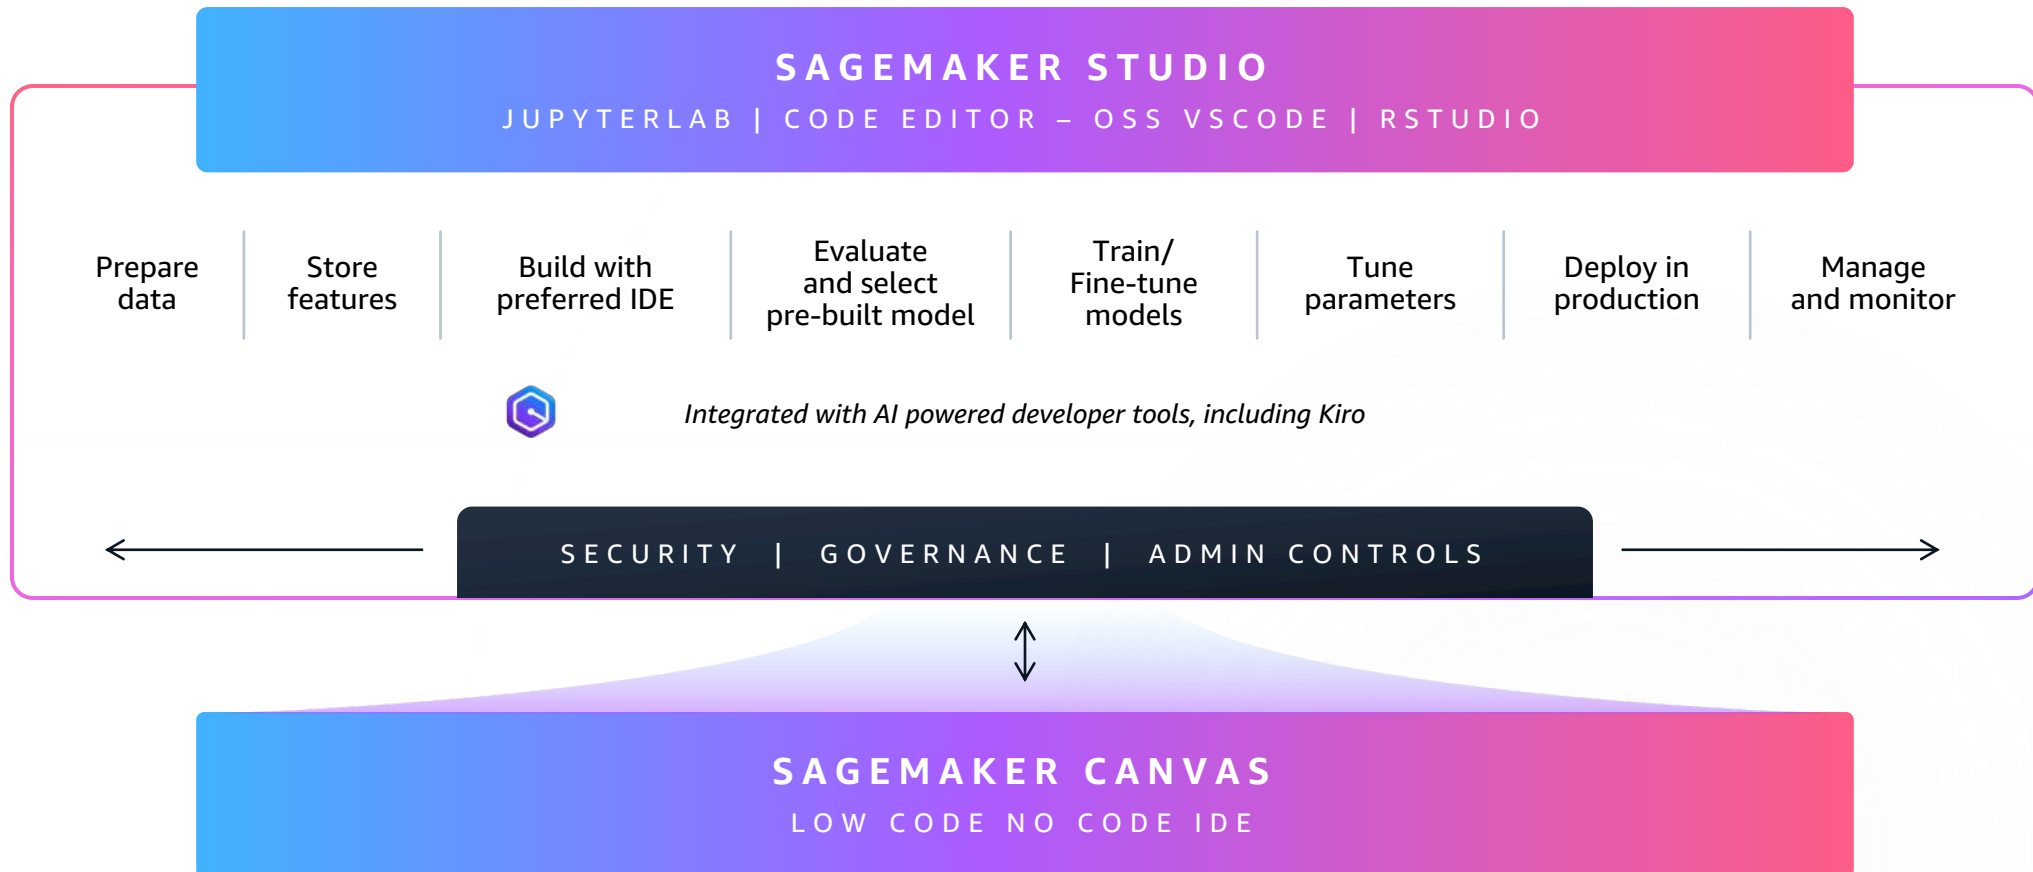

AMAZON SAGEMAKER STUDIO


Tools for every step of the AI model lifecycle under one unified visual user interface

Choice of fully managed IDE's

Purpose-built tools for AI/ML development w/ genAI support


Securely run anywhere

Specialized genAI and ML development apps from leading partners

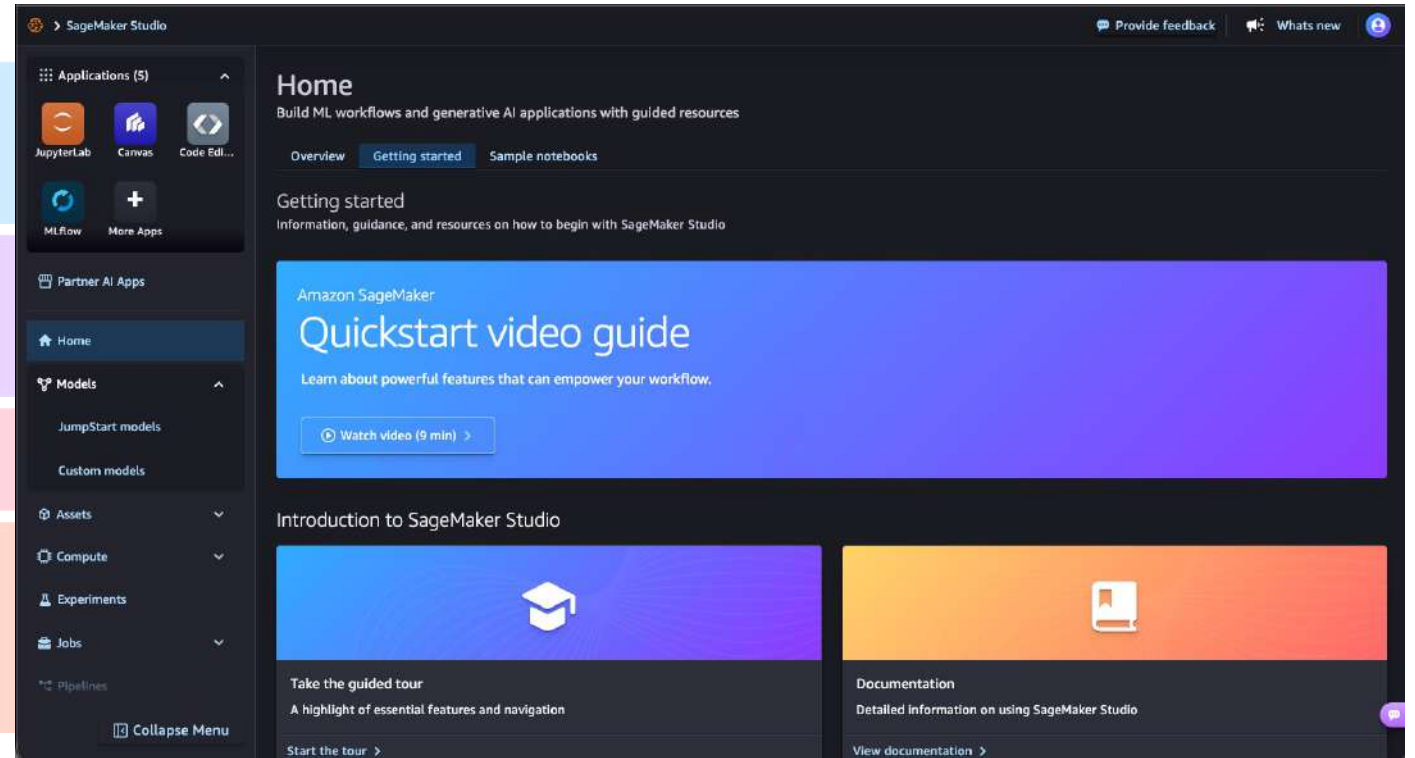

Amazon SageMaker Studio





Model Training

Fast and cost-efficient AI
model training

SageMaker AI offers two training options

Purpose-built infrastructure for FM training

Fully managed training jobs

Fully managed resilient infrastructure for large-scale and cost-effective training

Focus on model building rather than IT

Provide access to flexible on-demand GPU cluster with a pay as you go option



Amazon SageMaker HyperPod

Resilient and **self orchestration** infrastructure for maximum resource control

Customize and manage cluster orchestration (Slurm or EKS)

Schedule workloads to maximize cluster utilization across teams





Amazon SageMaker JumpStart

AI Model hub with access to AI models that you can deploy with just a few clicks



AI hub with foundation models

Access AI models including top open-weight and proprietary models that can be fine tuned easily for your use case



Ease of use

Easily use pre-trained models on SageMaker AI instances like Trainium2 and optimized hosting configurations through presets



Evaluate and customize

Evaluate, fine-tune, and optimize deployment using a few clicks



Data security and access control

Keep inference and training data private and curate who can access and use models within your organization



Share and collaborate within your organization

Share models and notebooks with others within your organization, and allow them to train with their own data or deploy as-is for inferencing



Amazon SageMaker JumpStart


AI Model hub with foundation models, built-in algorithms, and prebuilt AI solutions


Access publicly available AI models

Hundreds of built-in algorithms with pretrained models from popular model hubs

Fully customizable solutions for common use cases with reference architectures

Share AI models and notebooks across your organization

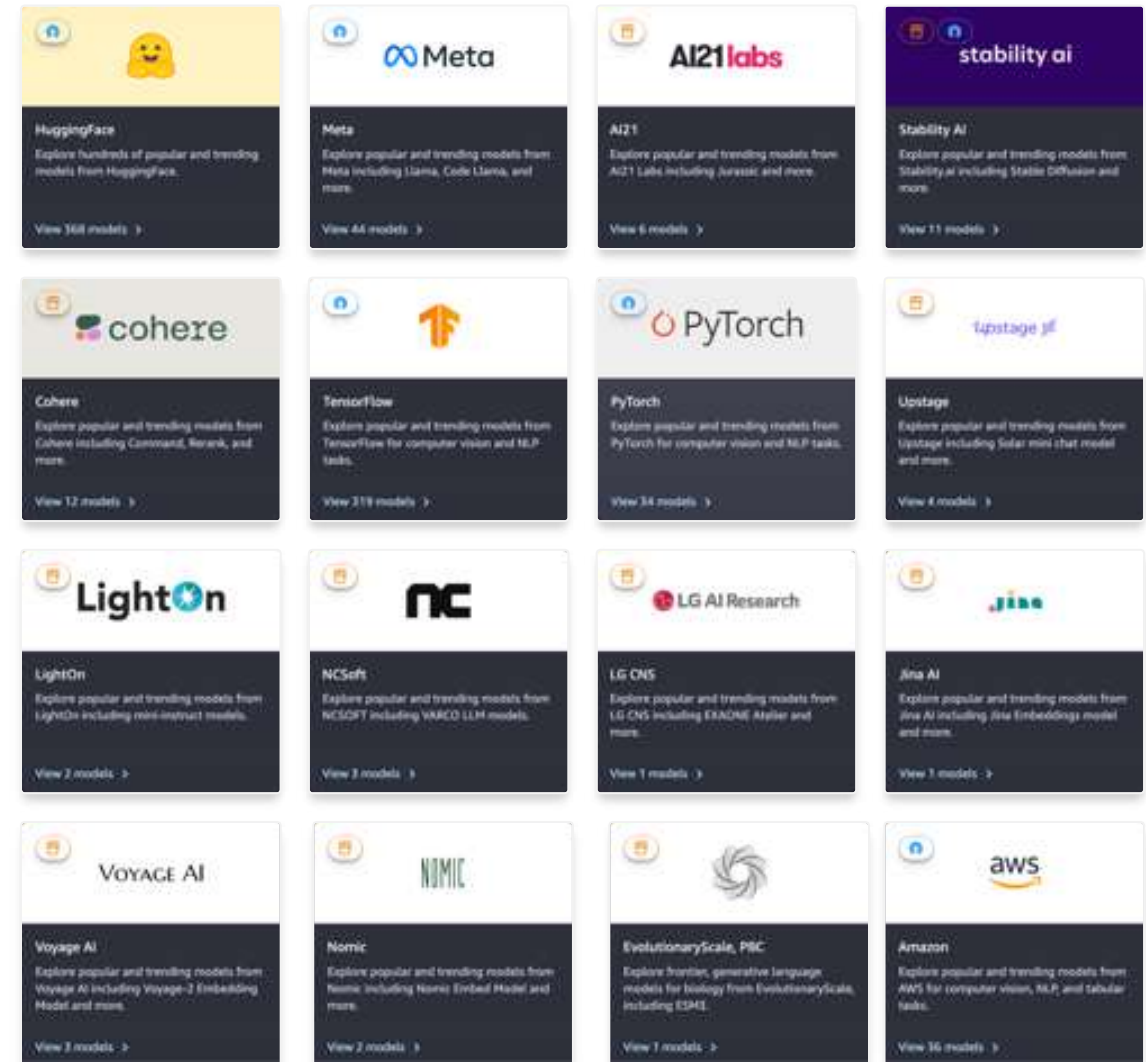

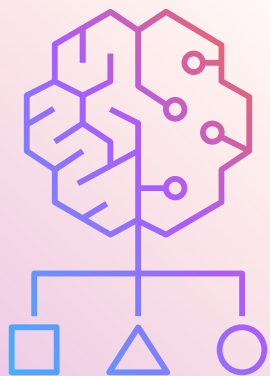

Model Deployment

Easily deploy AI models —
From low latency and high throughput
to long-running inference

Model deployment on Amazon SageMaker AI

Real-time
synchronous
response


— Invoke —>
<— Response —

Near real-time
asynchronous
response

Invoke →  →
<— Response 

Offline batch
inference

Submit →  →
<— Complete 

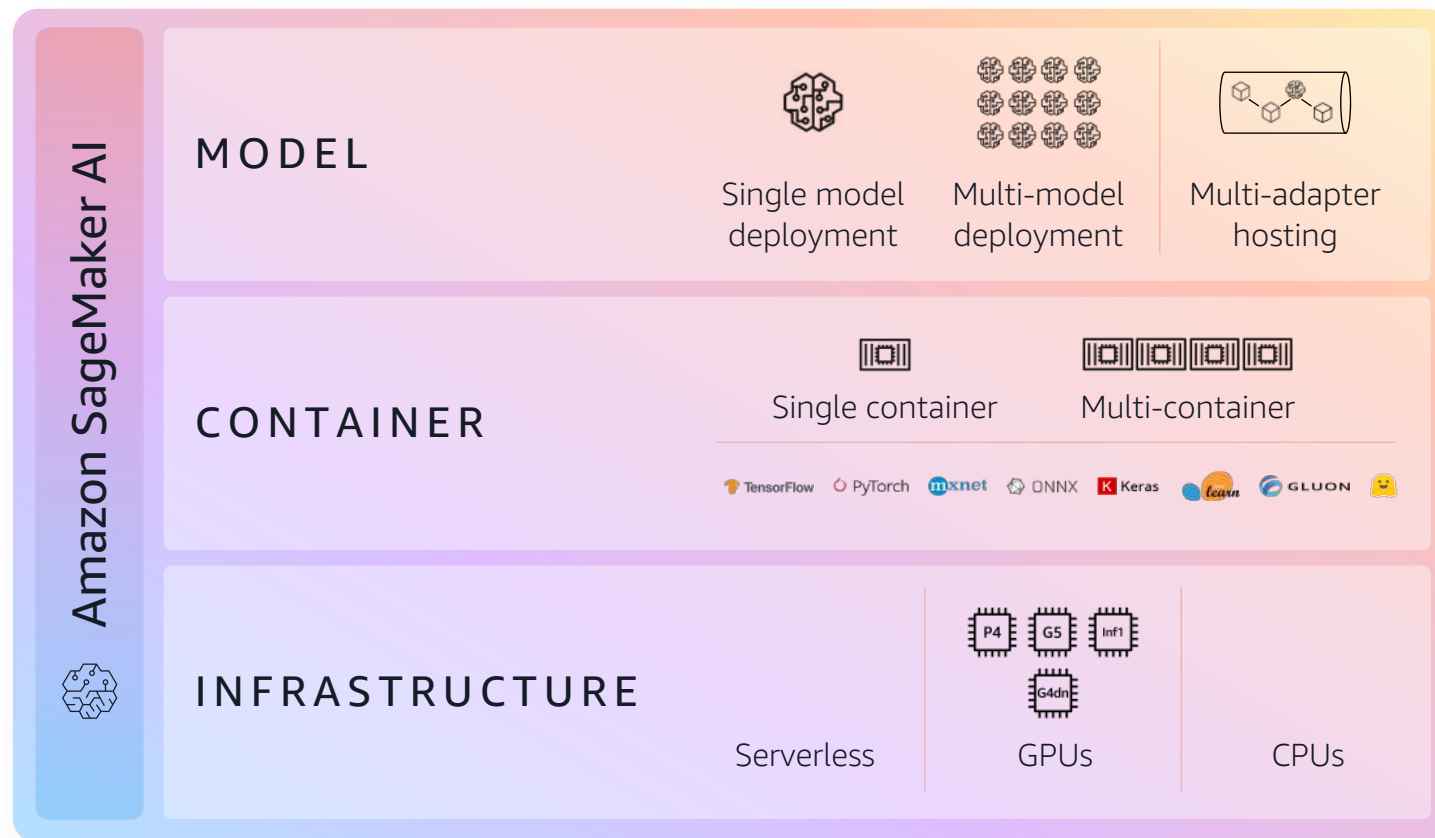

How to Setup Amazon SageMaker Studio?

A single web-based interface for end-to-end AI model development



Create a SageMaker domain

The screenshot shows the Amazon SageMaker AI console interface. On the left sidebar, under the 'Applications and IDEs' section, the 'SageMaker Studio' link is highlighted with a red box. The main content area features a large 'SageMaker Studio' header with the text 'The first fully integrated development environment (IDE) for machine learning.' Below this, a 'Get Started' section contains a link to 'Create an Amazon SageMaker domain' and a prominent orange button labeled 'Create a SageMaker domain', which is also highlighted with a red box. The bottom section of the console displays 'What's new' updates, including a note about G7 instance types, and a 'Pricing (US)' section.



Set up SageMaker domain

The screenshot shows the Amazon SageMaker AI console interface. The top navigation bar includes the AWS logo, a search bar, and account information (United States (Oregon), Account ID: 3247-2987-0951). The left sidebar contains navigation links for 'Amazon SageMaker AI', 'Dashboard', 'What's new', 'Environment configuration' (Domains, Images, Lifecycle configurations, Role manager), 'Applications and IDEs' (SageMaker Studio, Canvas, RStudio, Notebooks, TensorBoard, Profiler, Partner AI Apps), and 'Model training & customization' (Training & tuning jobs, JumpStart model hub, Nova Forge, HyperPod clusters). The main content area is titled 'Set up SageMaker domain' and includes a sub-header 'Use SageMaker domain as the central store to manage the configuration of SageMaker for your organization.' Below this, there are two primary setup options: 'Set up for single user (Quick setup)' and 'Set up for organizations'. The 'Quick setup' option is highlighted with a blue border and includes a list of pre-configured settings: 'New IAM role with AmazonSageMakerFullAccess policy', 'Public internet access through secure gateway', 'Secure workspace with standard encryption', 'SageMaker MLflow', and 'All SageMaker Studio applications and IDEs'. The 'Organizations' option is for more complex setups, including 'Custom IAM role with granular permissions and policies', 'IAM or IAM Identity Center authentication', 'VPC networking and security group configuration', 'Custom KMS encryption keys', 'Custom SageMaker Studio interface', 'SageMaker MLflow', and 'EBS storage options'. A red box highlights the 'Set up' button at the bottom right of the 'Organizations' section.

Set up SageMaker domain

Use SageMaker domain as the central store to manage the configuration of SageMaker for your organization.

Set up for single user (Quick setup)

Let Amazon SageMaker configure your account, and set up permissions for your SageMaker domain.

- ✓ New IAM role with AmazonSageMakerFullAccess policy
- ✓ Public internet access through secure gateway
- ✓ Secure workspace with standard encryption
- ✓ SageMaker MLflow
- ✓ All SageMaker Studio applications and IDEs

Perfect for single user domains and first time users looking to get started with SageMaker.

Set up for organizations

Control all aspects of account configuration, including permissions, integrations, and encryption.


- ✓ Custom IAM role with granular permissions and policies
- ✓ IAM or IAM Identity Center authentication (successor to AWS SSO)
- ✓ VPC networking and security group configuration
- ✓ Custom KMS encryption keys for enhanced data protection
- ✓ Custom SageMaker Studio interface
- ✓ SageMaker MLflow
- ✓ EBS storage options for private and shared spaces

Better for admins with large user groups, but you can always update your account configuration settings later if you want to do a quick setup now.


[Other domain setup options](#)

Set up


Set up SageMaker domain

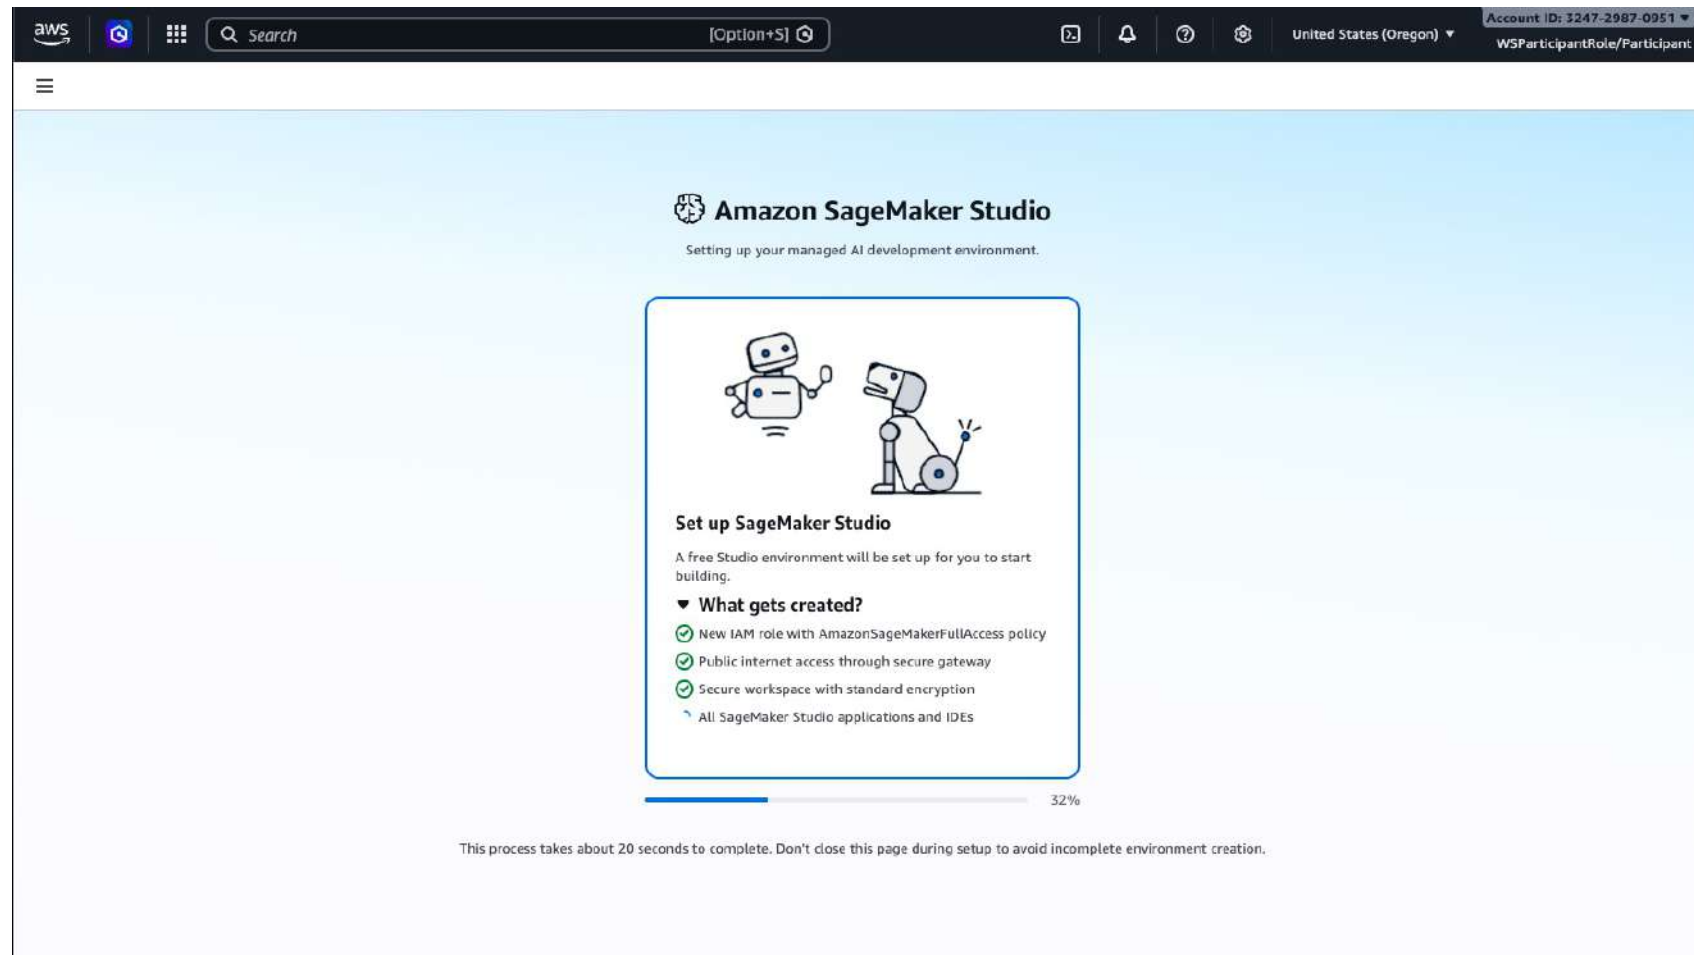

Welcome to SageMaker Studio!

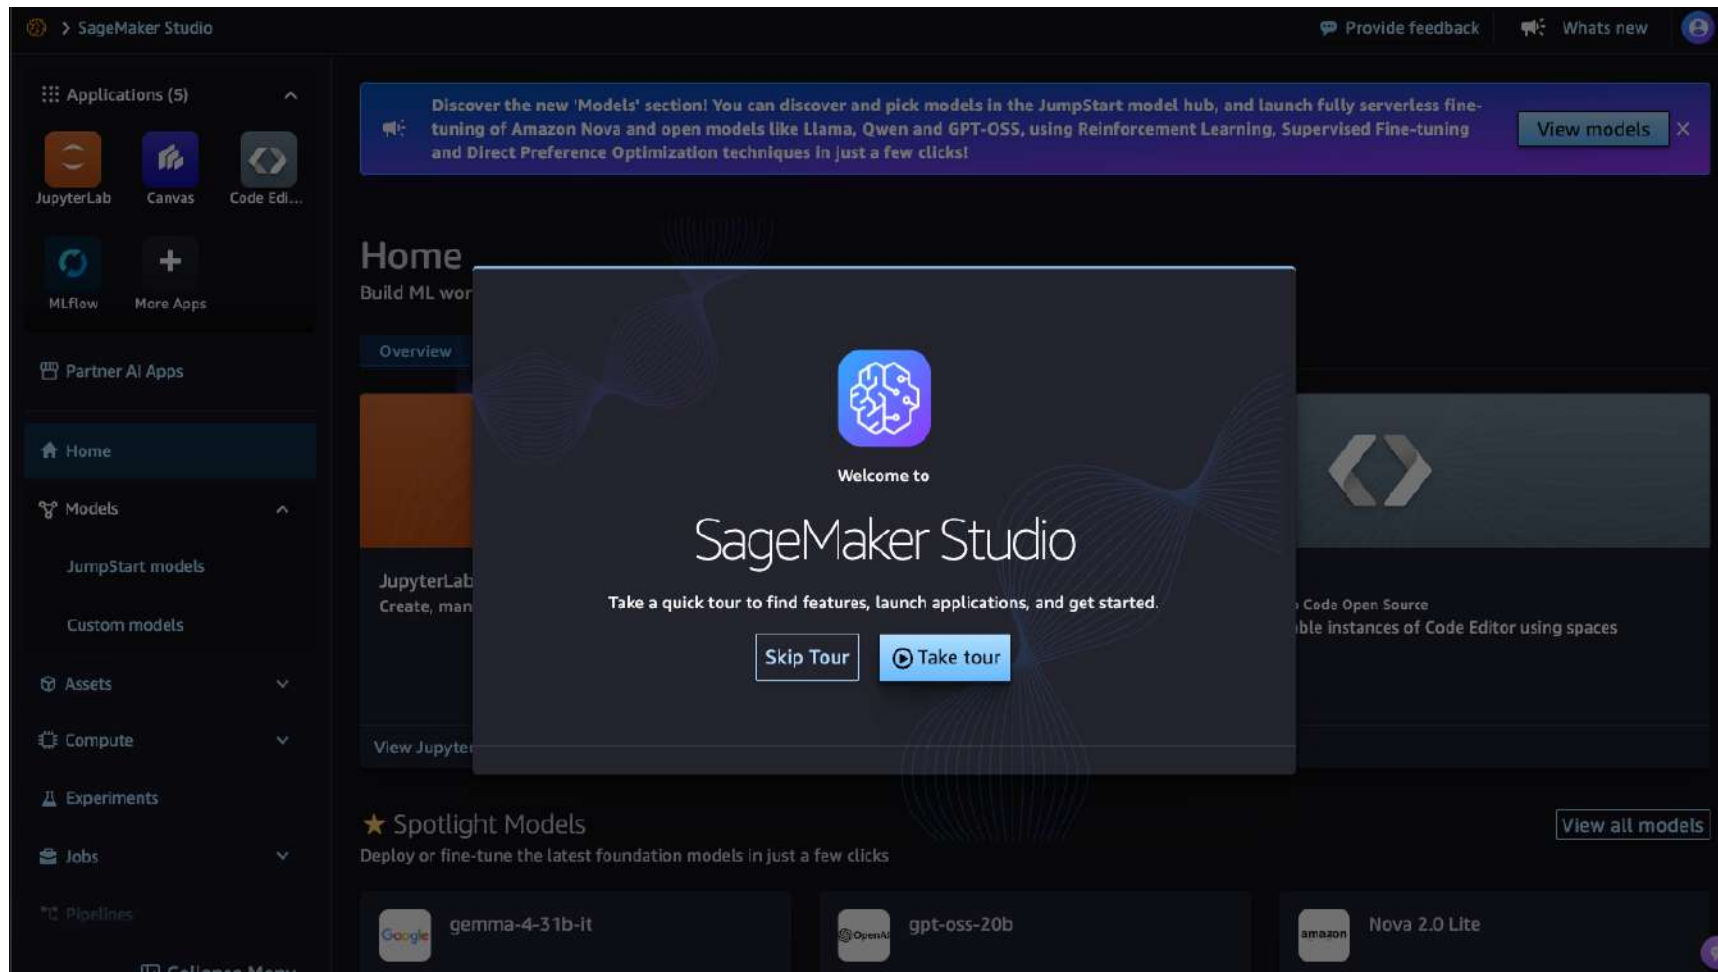

How to Create a Jupyter Lab?

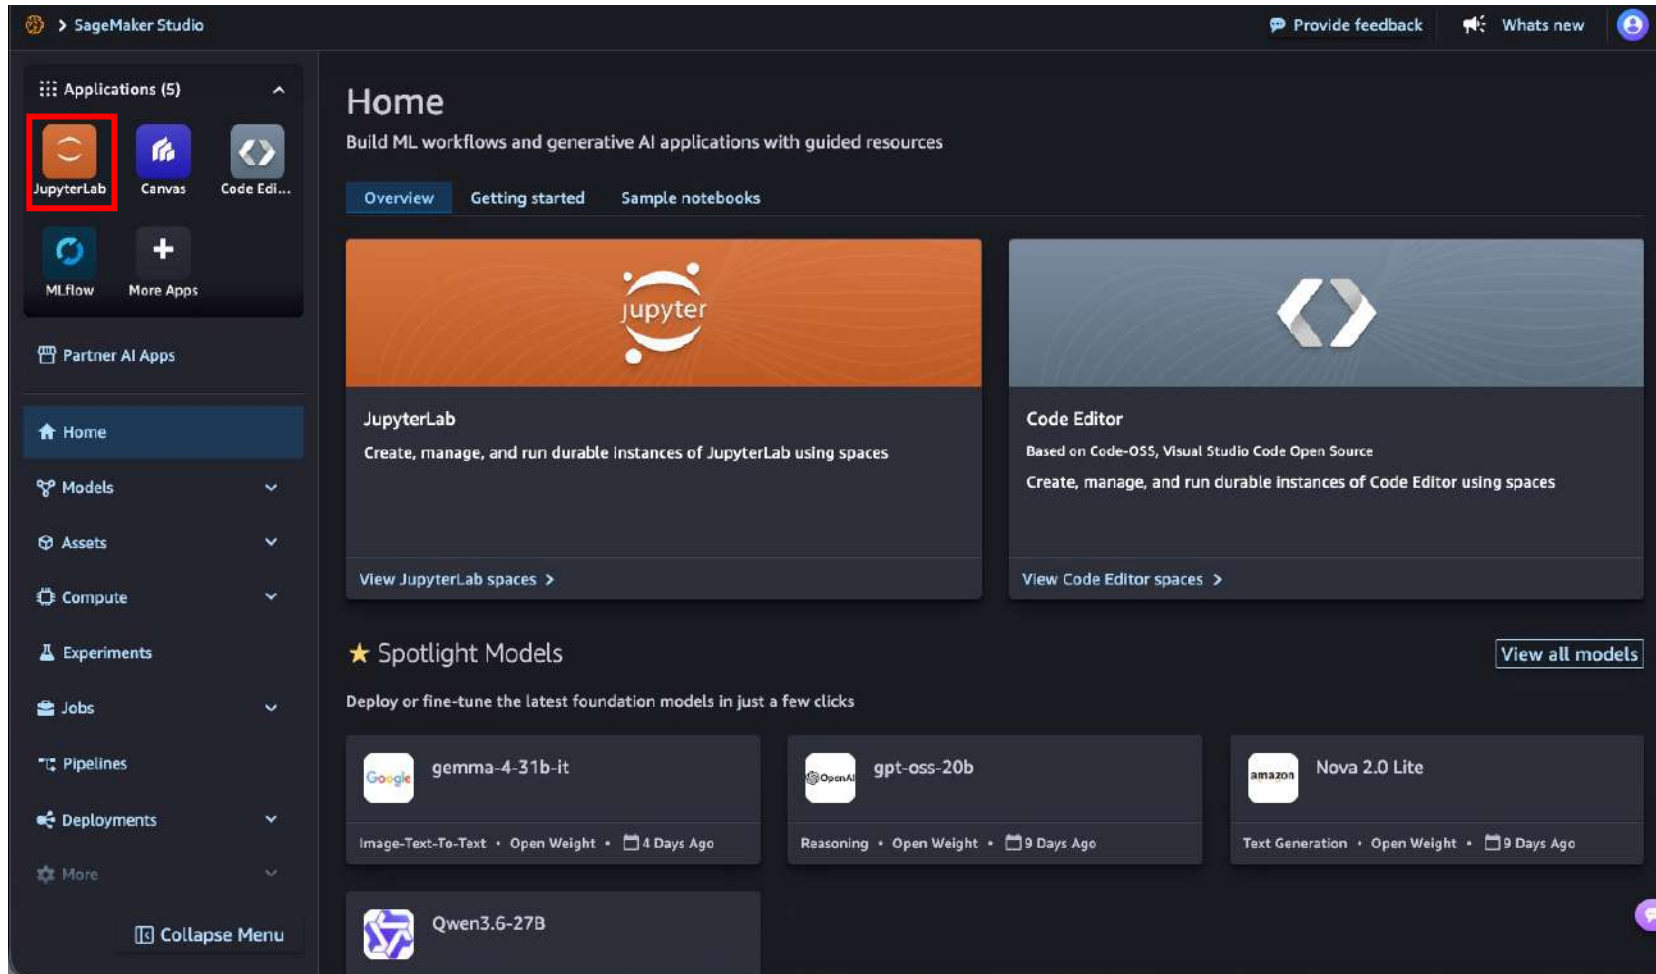

How to Create a Jupyter Lab?

JupyterLab

JupyterLab is a web-based IDE for your notebooks, code, and data. Create a dedicated environment with your preferred configuration and storage to start developing ML projects.

Space templates

- Quick start**
ml.t3.medium • 5 GB • 4 GiB RAM
Perfect for notebook prototyping, small datasets, and early experimentation. Ideal for learning and lightweight development tasks.
Launch now >
- General purpose CPU**
ml.c5.large • 5 GB • 4 GiB RAM
Balanced compute, memory, and networking resources for everyday ML development. Good for data preprocessing and simple model experimentation.
Launch now >
- Accelerated compute**
ml.g6.xlarge • 5 GB • 16 GiB RAM
GPU-powered for deep learning and generative AI. Ideal for model fine-tuning, computer vision, and NLP tasks.
Launch now >

Search...

Filter spaces: **Running**

Name	Application	Status	Type	Last modified	Action
No JupyterLab spaces					
You don't have any JupyterLab spaces to display.					
0 results Results are cached Refresh Go to page Page 0 of 0					


Introducing spaces New
JupyterLab and Code Editor now come with durable instances that allow

Open Jupyter Lab

The screenshot displays the AWS SageMaker Studio JupyterLab interface. On the left is a sidebar with navigation options: Applications (5), Partner AI Apps, Home, Models, Assets, Compute, Experiments, Jobs, Pipelines, Deployments, and More. The main area features the JupyterLab logo and a description: "JupyterLab is a web-based IDE for your notebooks, code, and data. Create a dedicated environment with your preferred configuration and storage to start developing ML projects." Below this are three space templates: "Quick start" (ml.t3.medium), "General purpose CPU" (ml.c5.large), and "Accelerated compute" (ml.g6.xlarge). A search bar and a "Filter spaces: Running" dropdown are present. A table lists the running spaces, with one entry highlighted by a red box. The table has columns: Name, Application, Status, Type, Last modified, and Action. The highlighted row shows a space named "quickstart-default-..." with status "Running" and an "Open" button. A notification at the bottom states: "Your space is being created and started. JupyterLab will open in a new tab once the space is running. If you navigate away from this page or if pop-ups are disabled in your browser, the new tab will not open automatically."

Name	Application	Status	Type	Last modified	Action
quickstart-default-...	JupyterLab	Running	Private	33 seconds ago	Stop Open

Done!

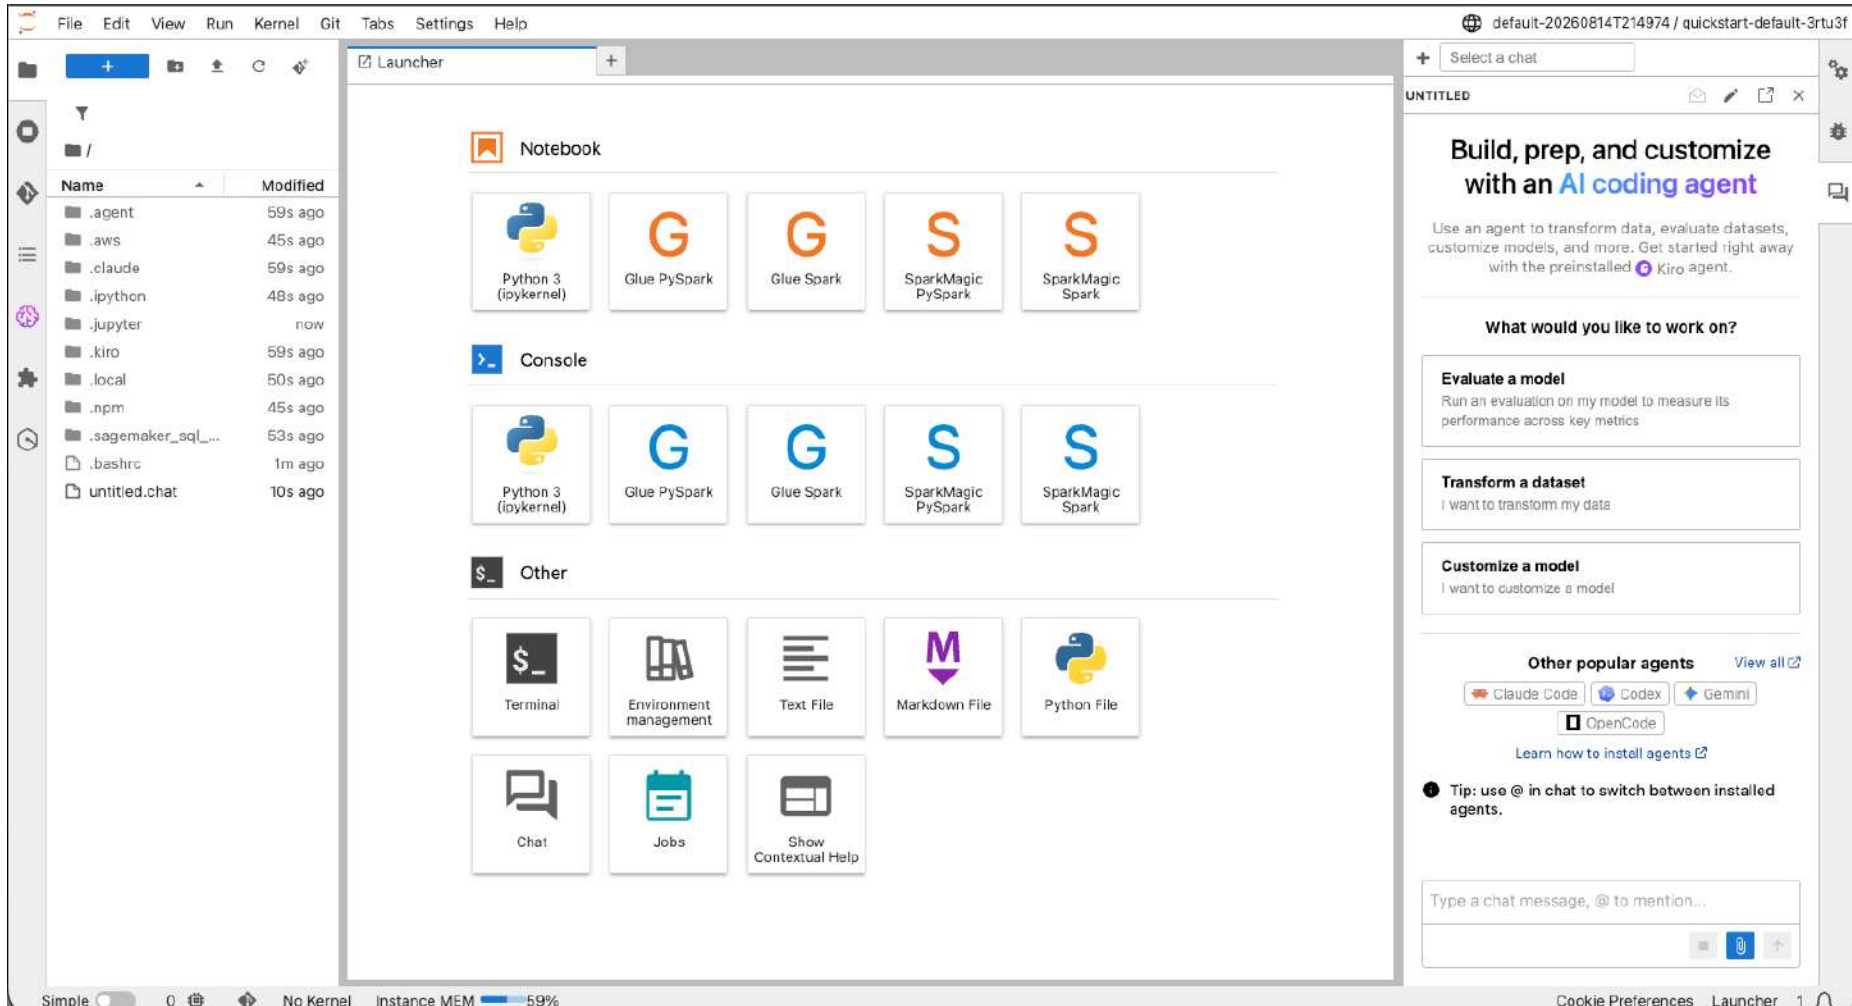

Finding the entry point for SageMaker Studio

The screenshot shows the Amazon SageMaker AI console interface. The top navigation bar includes the AWS logo, a search bar, and account information (United States (Oregon), Account ID: 1247-2987-0951, WSParticipantRole/Participant). The left sidebar lists navigation options under 'Amazon SageMaker AI', including 'Environment configuration' (Domains, Images, Lifecycle configurations, Role manager) and 'Applications and IDEs' (SageMaker Studio, Canvas, RStudio, Notebooks, TensorBoard, Profiler, Partner AI Apps). The main content area is titled 'Domains (1)' and includes a description: 'In SageMaker AI, a domain is an environment for your team to access SageMaker resources. A domain consists of a list of authorized users and users within a domain can share notebook files and other artifacts with each other. One account can have either one or multiple domains.' Below this is a search bar and a table of domains.

Name	Id	Status	Created on	Modified on	Actions
QuickSetupDomain-20260814T214974	d-5hbyqcg0wv4	InService	Aug 14, 2026 13:49 UTC	Aug 14, 2026 13:50 UTC	Open Studio

Useful Link

- Amazon Bedrock: <https://aws.amazon.com/tw/bedrock/>
- Amazon Bedrock AgentCore: <https://aws.amazon.com/tw/bedrock/agentcore>
- Amazon SageMaker AI: <https://aws.amazon.com/tw/sagemaker/ai/>
- Strands Agents: <https://strandsagents.com/>
- Kiro: <https://kiro.dev/>
- Skill Builder: <https://skillbuilder.aws/>

Thank You!

