


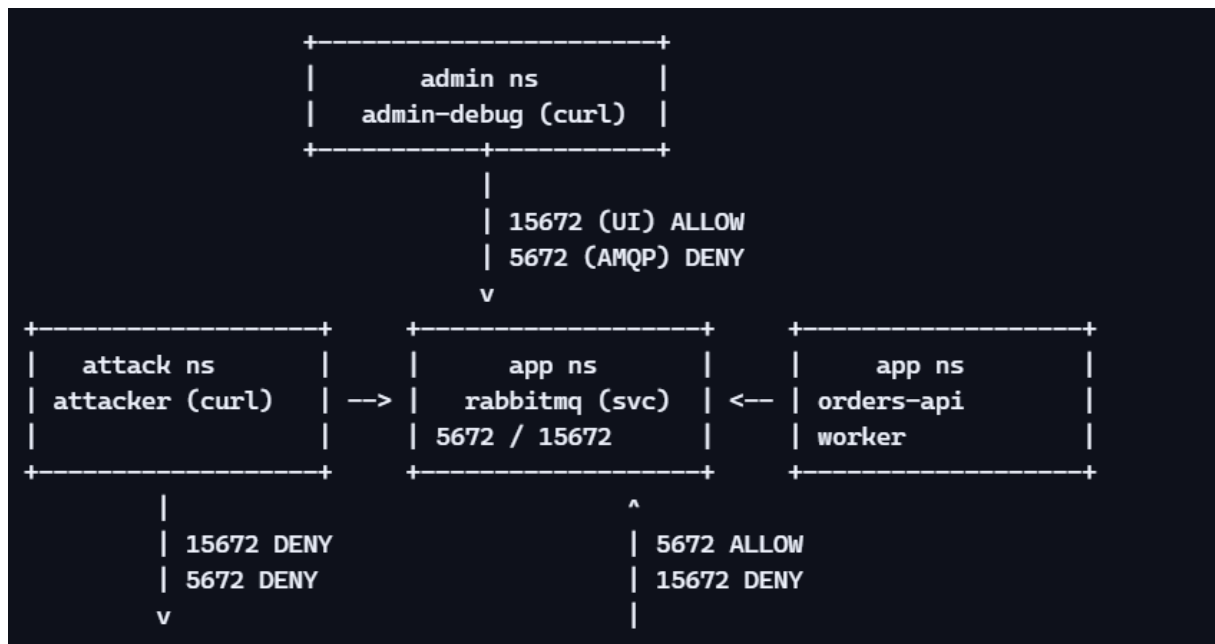

attacker → RabbitMQ (doit être BLOQUÉ)

UI (15672) :

```

haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$ kubectl exec -n attack attacker -- curl -m 3 -s rabbitmq.app.svc.cluster.local:15672
command terminated with exit code 7
haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$

```

AMQP (5672) :

```

haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$ kubectl exec -n attack attacker -- sh -c "nc -z rabbitmq.app.svc.cluster.local 5672"
command terminated with exit code 1
haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$

```

admin-debug → RabbitMQ (UI OK, AMQP BLOQUÉ)

UI (15672) :

```

haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$ kubectl exec -n admin admin-debug -- curl -m 3 -s rabbitmq.app.svc.cluster.local:15672
<!DOCTYPE html>
<html>
  <head>
    <meta http-equiv="X-UA-Compatible" content="IE=edge" />
    <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
    <title>RabbitMQ Management</title>
    <script src="js/ejs-1.0.min.js" type="text/javascript"></script>
    <script src="js/jquery-3.5.1.min.js"></script>
    <script src="js/jquery.flot-0.8.1.min.js" type="text/javascript"></script>
    <script src="js/jquery.flot-0.8.1.time.min.js" type="text/javascript"></script>
    <script src="js/sammy-0.7.6.min.js" type="text/javascript"></script>
    <script src="js/json2-2016.10.28.js" type="text/javascript"></script>
    <script src="js/base64.js" type="text/javascript"></script>
    <script src="js/global.js" type="text/javascript"></script>
    <script src="js/main.js" type="text/javascript"></script>
    <script src="js/prefs.js" type="text/javascript"></script>
    <script src="js/formatters.js" type="text/javascript"></script>
    <script src="js/charts.js" type="text/javascript"></script>
    <script src="js/oidc-oauth/bootstrap.js" type="module"></script>

    <link href="css/main.css" rel="stylesheet" type="text/css"/>
    <link href="favicon.ico" rel="shortcut icon" type="image/x-icon"/>

    <script type="module">
      window.oauth = oauth_initialize_if_required();
    </script>

<!--[if lte IE 8]>
  <script src="js/excanvas.min.js" type="text/javascript"></script>
  <link href="css/evil.css" rel="stylesheet" type="text/css"/>
<![endif]-->
</head>

  <body>
    <div id="outer"></div>
    <div id="debug"></div>
    <div id="scratch"></div>
  </body>
</html>
haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$ █

```

AMQP (5672) :

```

haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$ kubectl exec -n admin admin-debug -- sh -c "nc -z rabbitmq.app.svc.cluster.local 5672"
command terminated with exit code 1
haouch_m@ISR-SAK5-MAS26-4:~/policies/netpol$ █

```