


**M0**

```
Fit 1: Multilinear of L,P vs provided Mdot
Fit: -7.70278503673134 - 1.005665316322131 logL + 2.038772075142484 logP
R^2: 0.206365452135026
```

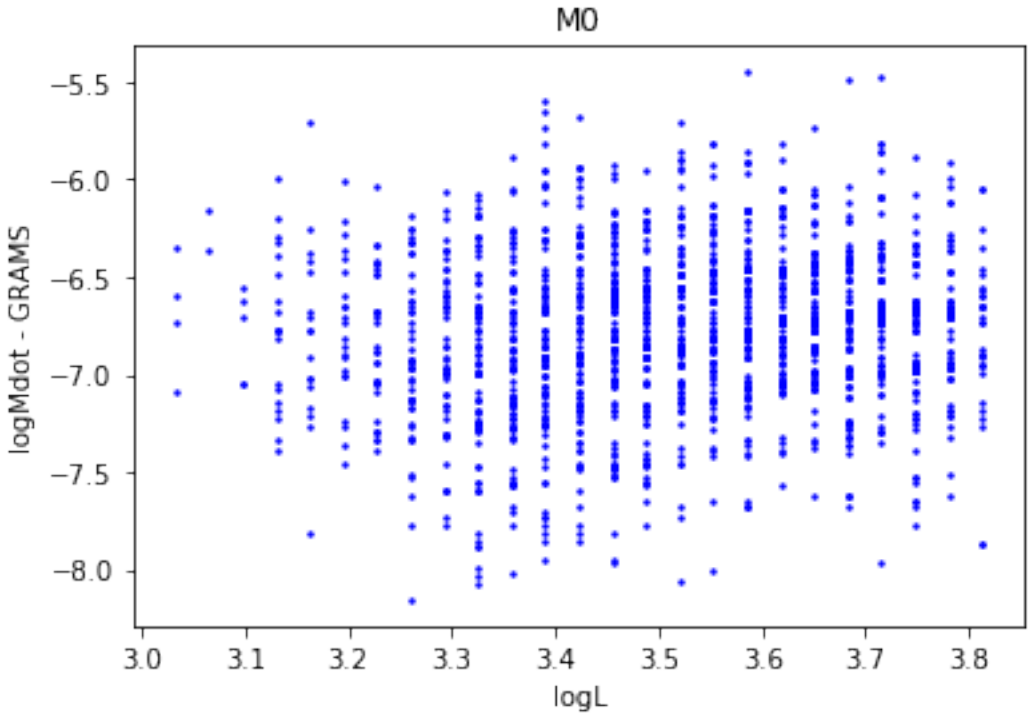

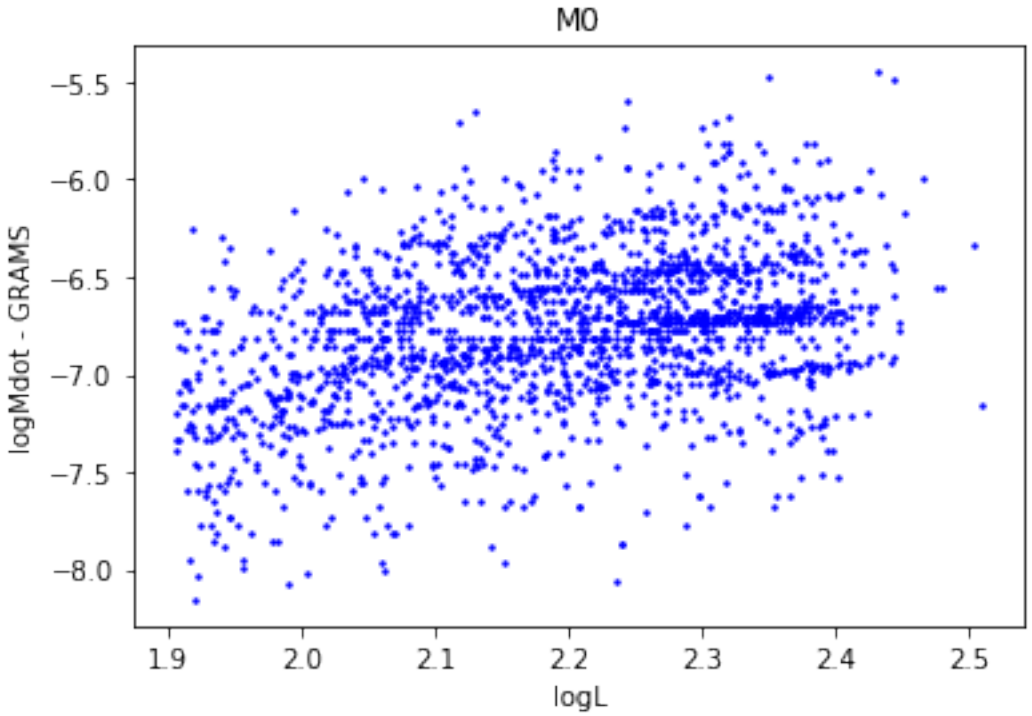



Fit 2: GRMAS Mdot vs Formula Mdot

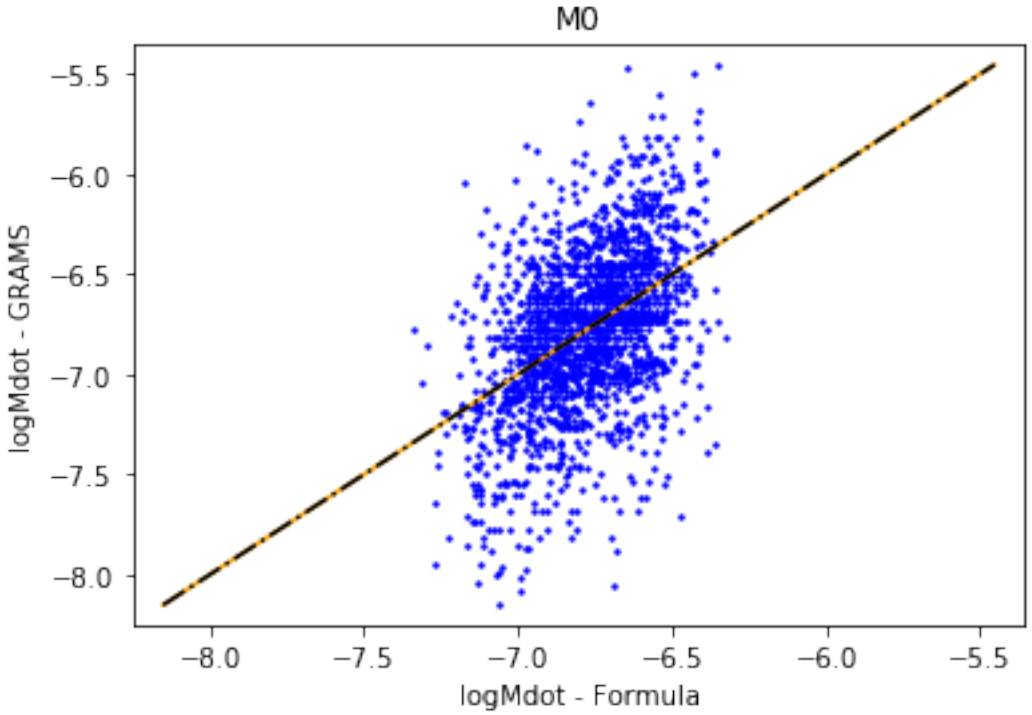



Quality of Fit Line:
Fit: logMdot_GRAMS=-0.000 + 1.000 * logMdot_Formula
R^2: 0.206365452135026

Fit 3: Mdot Residual (GRAMS-Formula) vs logL

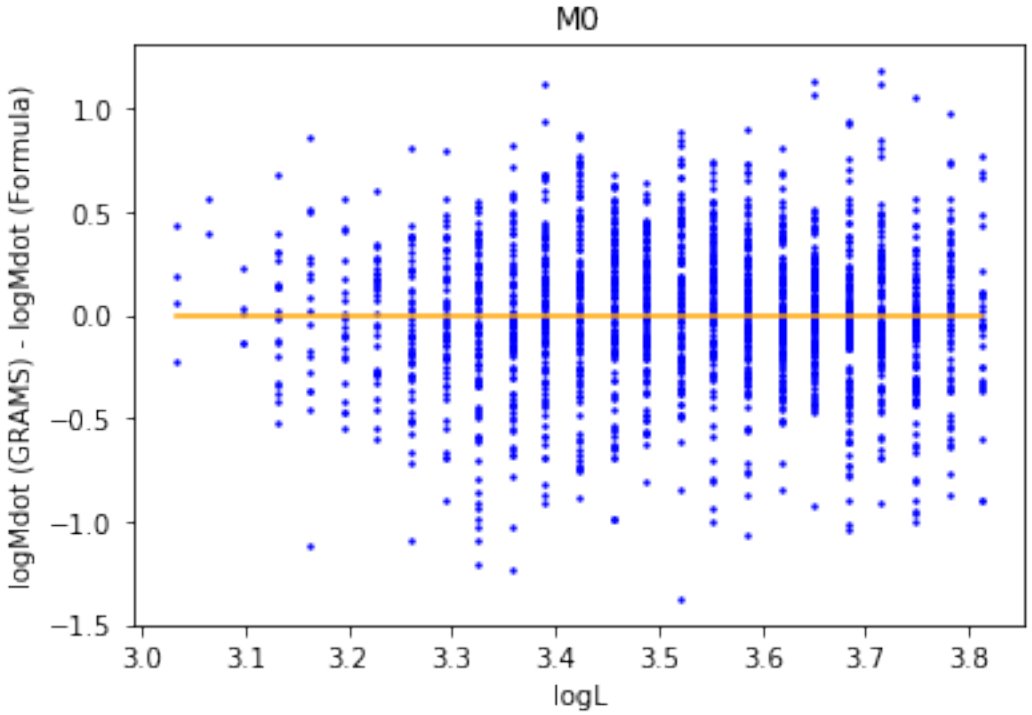


Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logL
R^2: 2.220446049250313e-16


Fit 4: Mdot Residual (GRAMS-Formula) vs logP

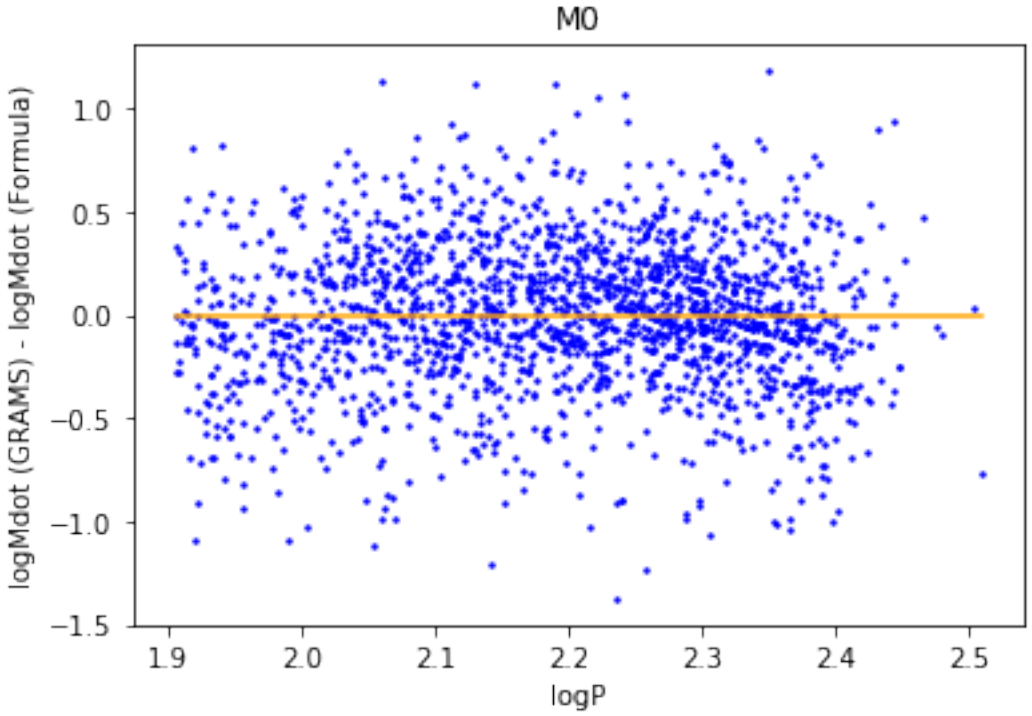



Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logP
R^2: 0.0


**M1**

```
Fit 1: Multilinear of L,P vs provided Mdot
Fit: -9.403984550657132 - 0.773042066730322 logL + 2.712893057502261 logP
R^2: 0.34292097808195976
```

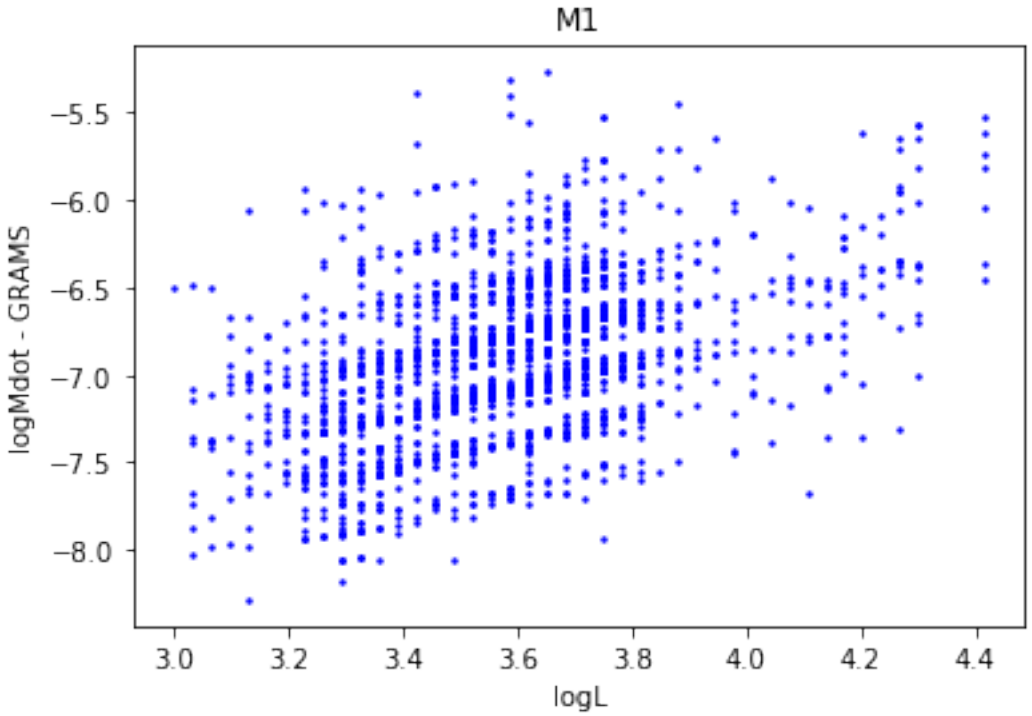

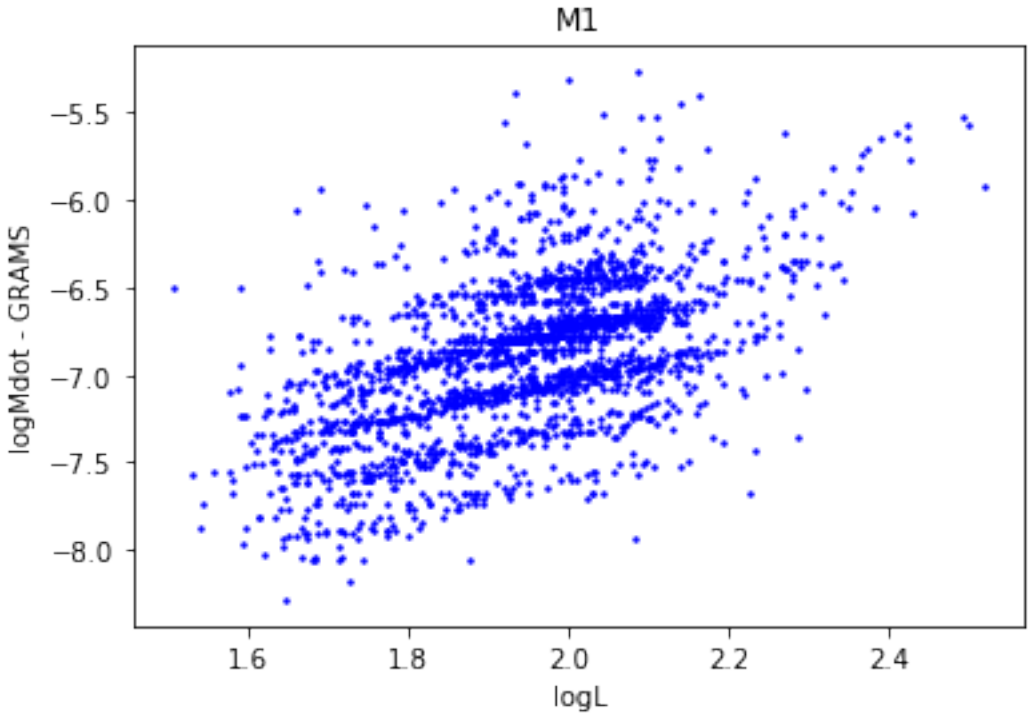



Fit 2: GRMAS Mdot vs Formula Mdot

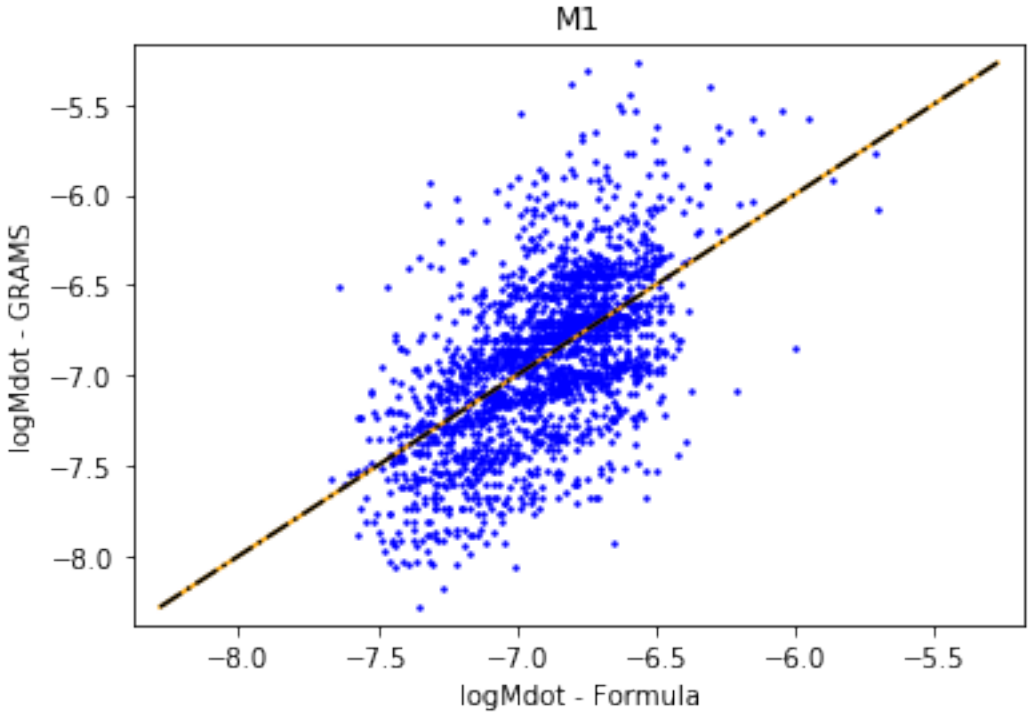



Quality of Fit Line:
Fit: logMdot_GRAMS=0.000 + 1.000 * logMdot_Formula
R^2: 0.34292097808195965

Fit 3: Mdot Residual (GRAMS-Formula) vs logL

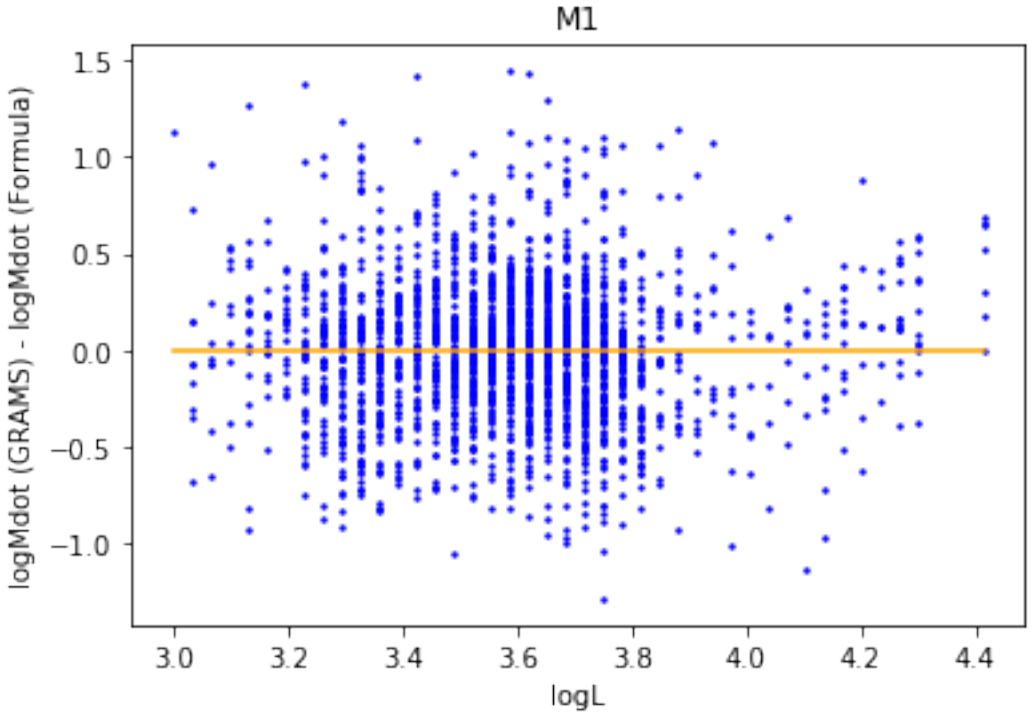


Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logL
R^2: -2.220446049250313e-16


Fit 4: Mdot Residual (GRAMS-Formula) vs logP

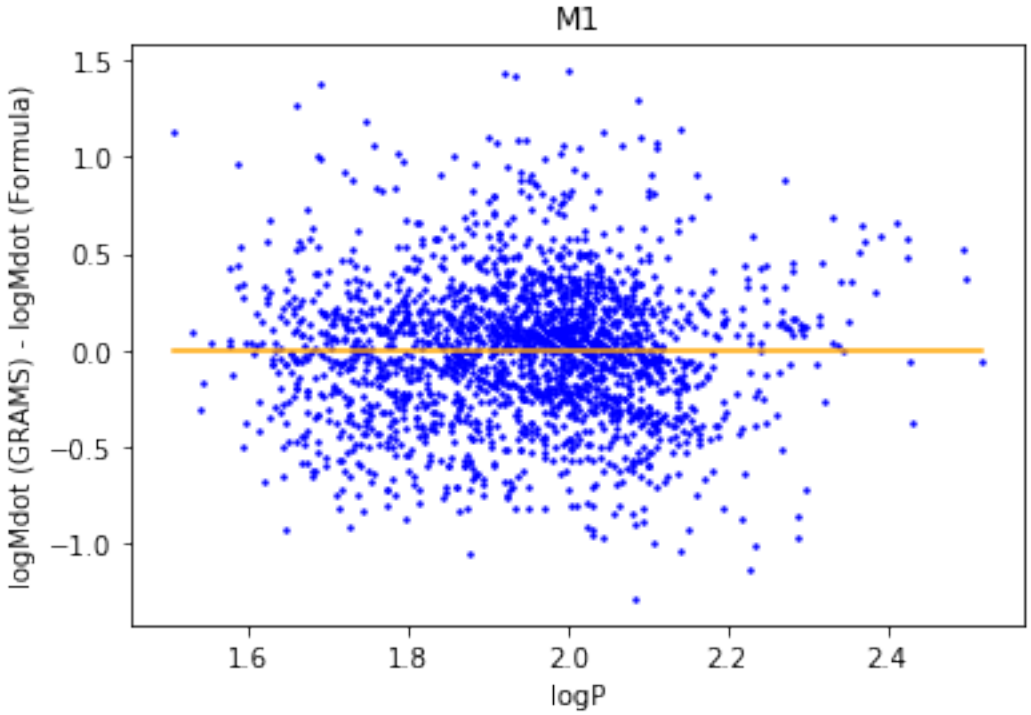



Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logP
R^2: -4.440892098500626e-16


**C0**

```
Fit 1: Multilinear of L,P vs provided Mdot
Fit: -9.728225500352163 - 0.2789546923594075 logL + 1.6553157873966 logP
R^2: 0.27075891452518297
```

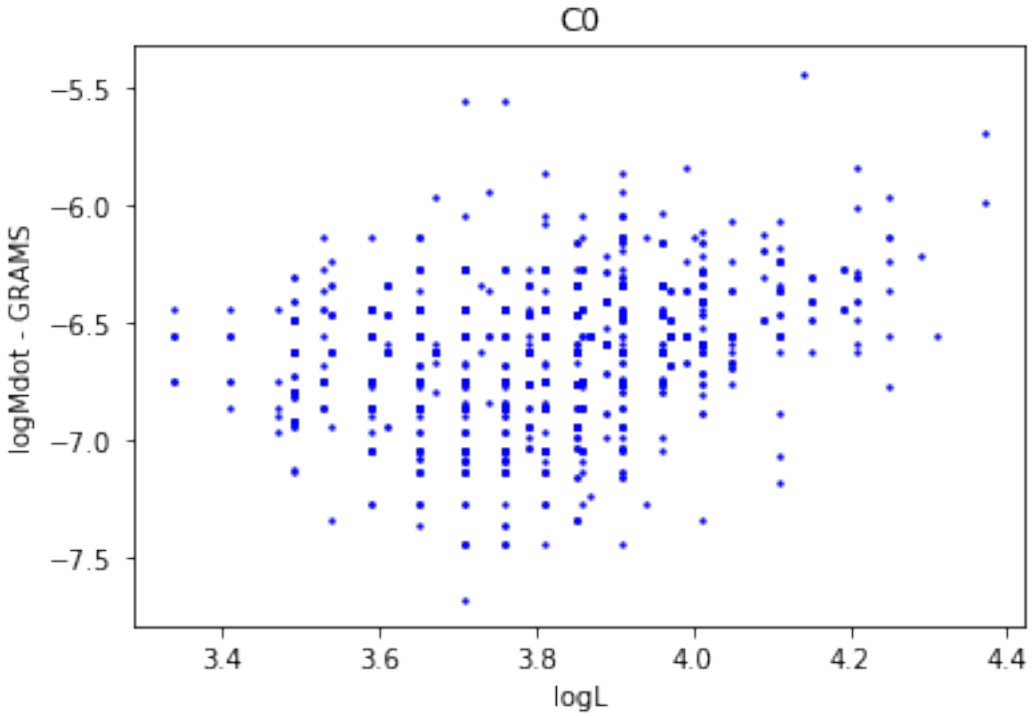

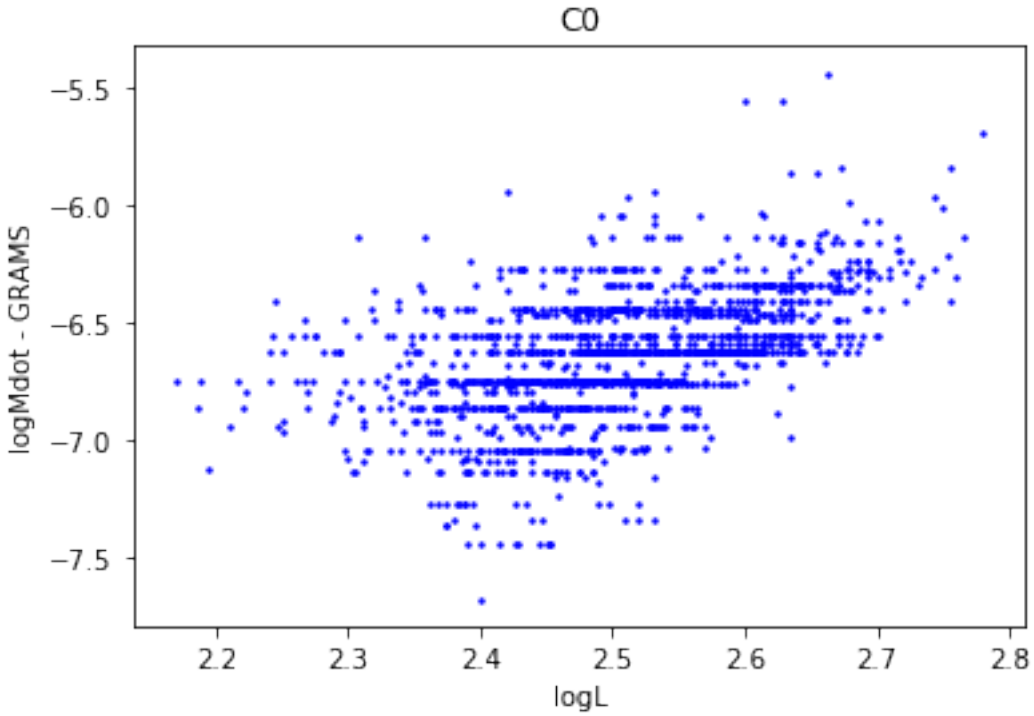



Fit 2: GRMAS Mdot vs Formula Mdot

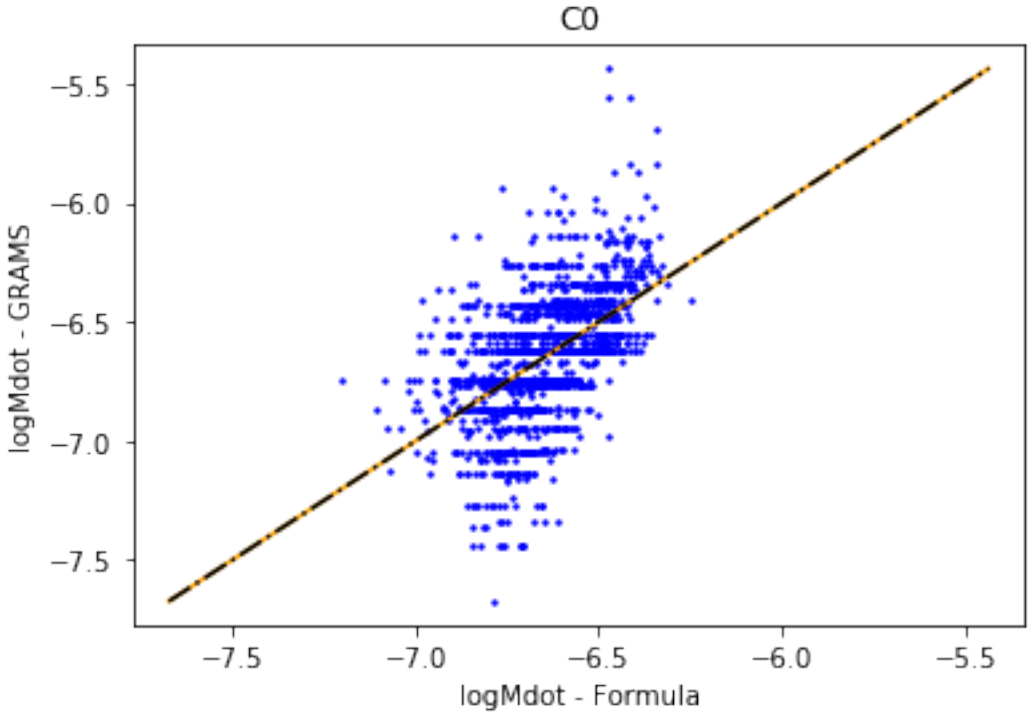



Quality of Fit Line:
Fit: logMdot_GRAMS=0.000 + 1.000 * logMdot_Formula
R^2: 0.27075891452518297

Fit 3: Mdot Residual (GRAMS-Formula) vs logL

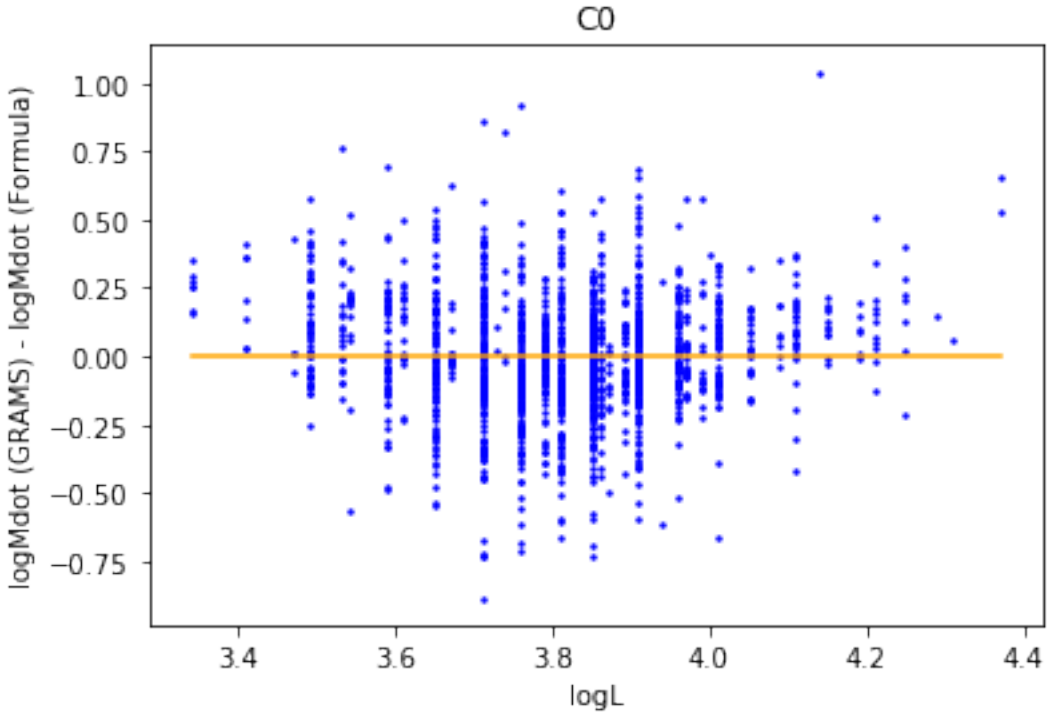


Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logL
R^2: 0.0


Fit 4: Mdot Residual (GRAMS-Formula) vs logP

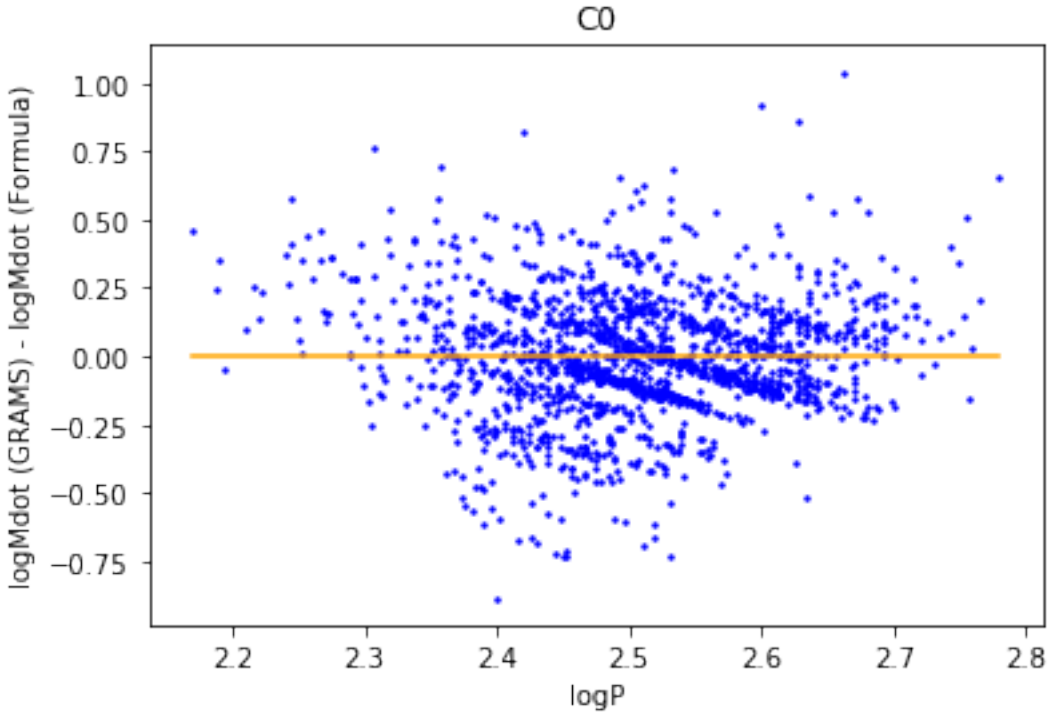



Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logP
R^2: 0.0


**C0x**

```
Fit 1: Multilinear of L,P vs provided Mdot
Fit: -11.194038051386617 - 0.28171625884724905 logL + 2.5037891787567528 logP
R^2: 0.3015761690347418
```

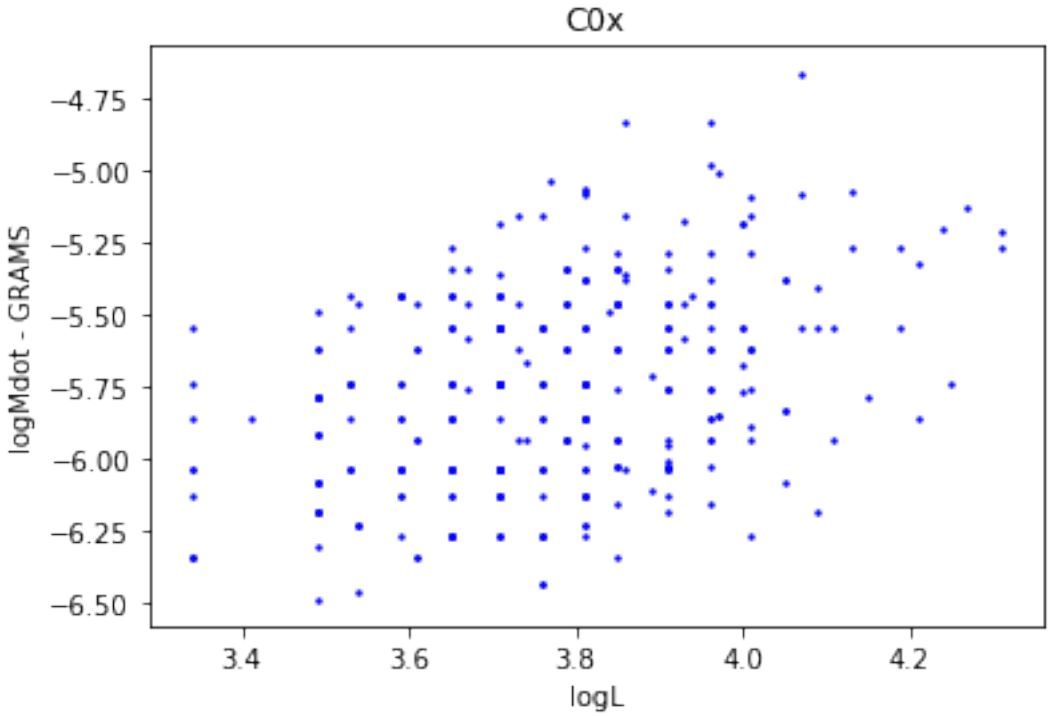

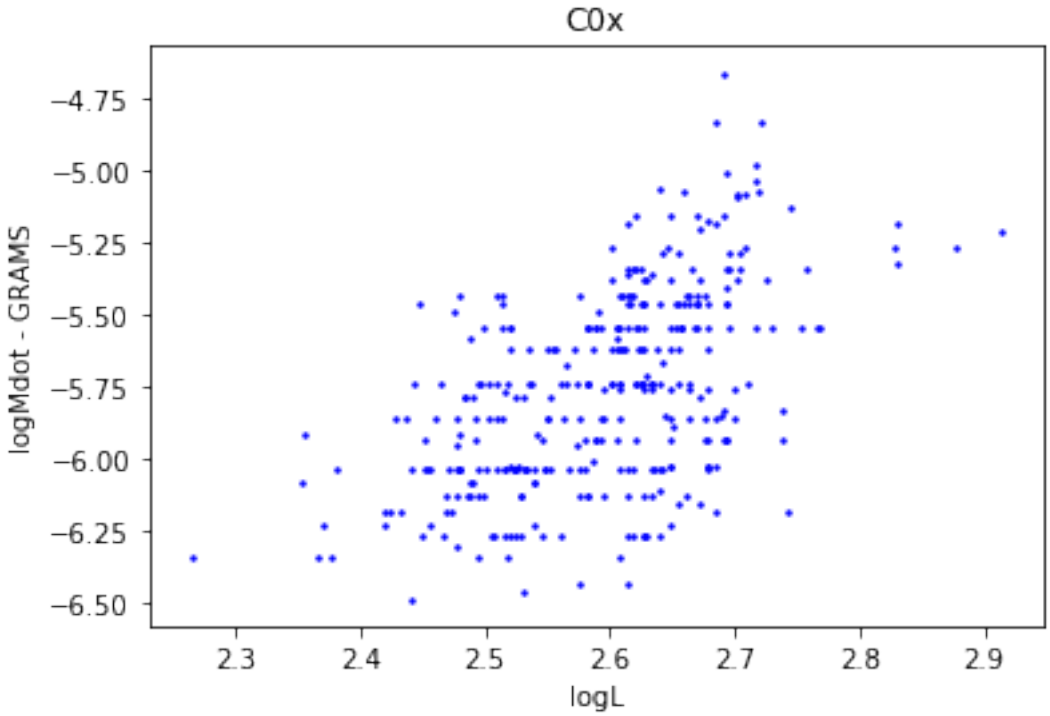



Fit 2: GRMAS Mdot vs Formula Mdot

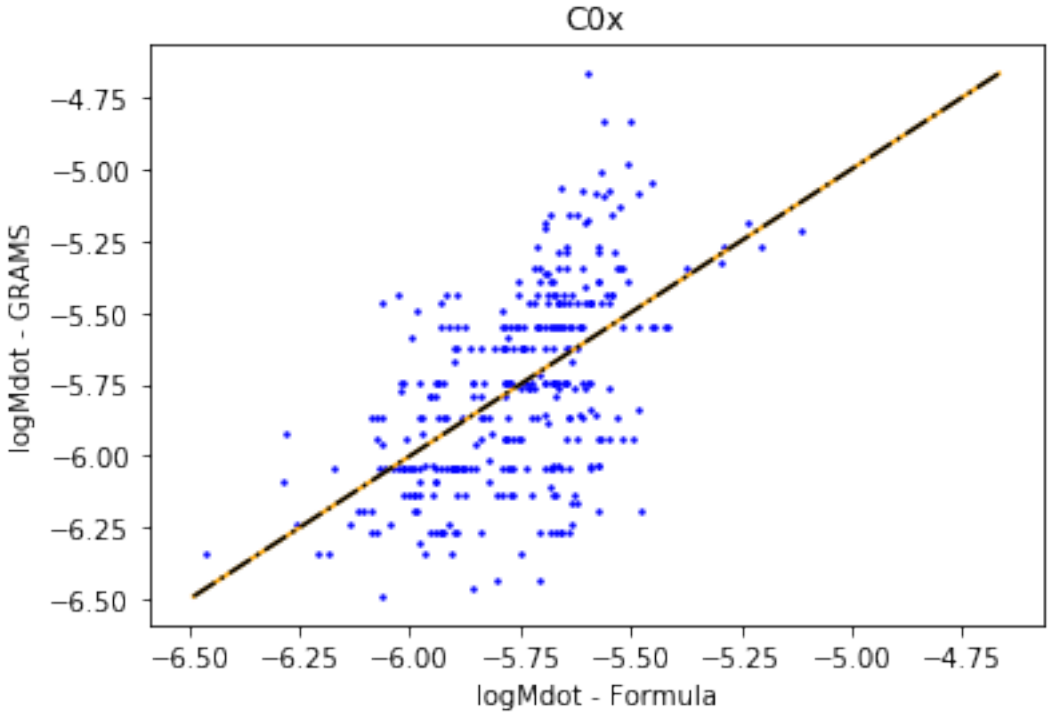



Quality of Fit Line:
Fit: logMdot_GRAMS=-0.000 + 1.000 * logMdot_Formula
R^2: 0.30157616903474205

Fit 3: Mdot Residual (GRAMS-Formula) vs logL

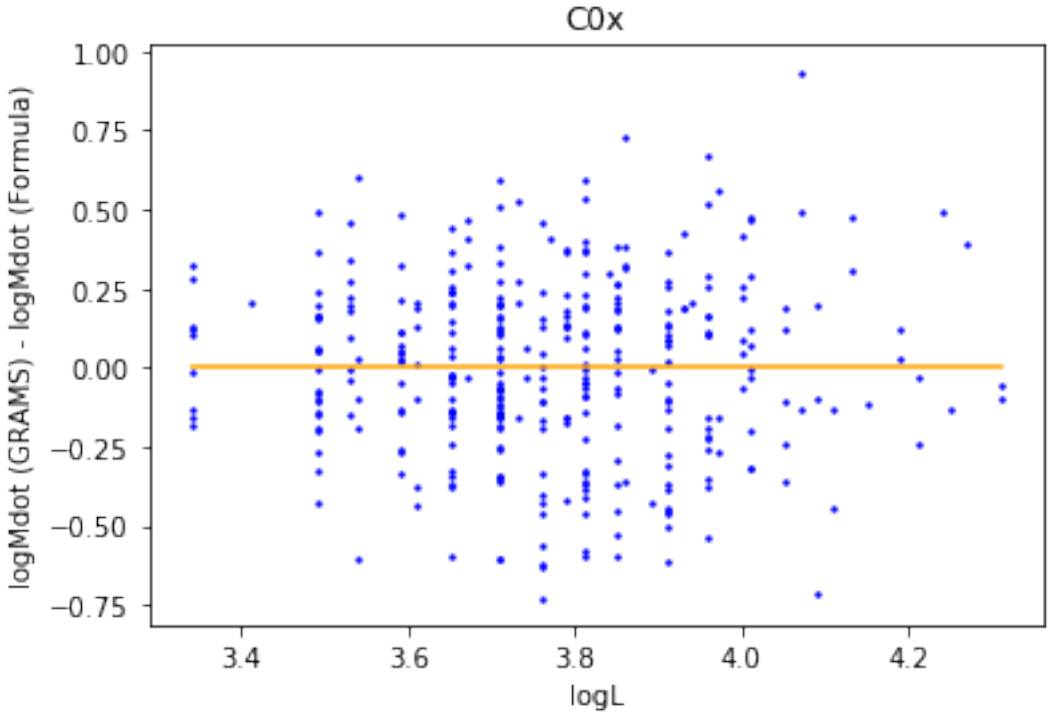


Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logL
R^2: 1.1102230246251565e-16


Fit 4: Mdot Residual (GRAMS-Formula) vs logP

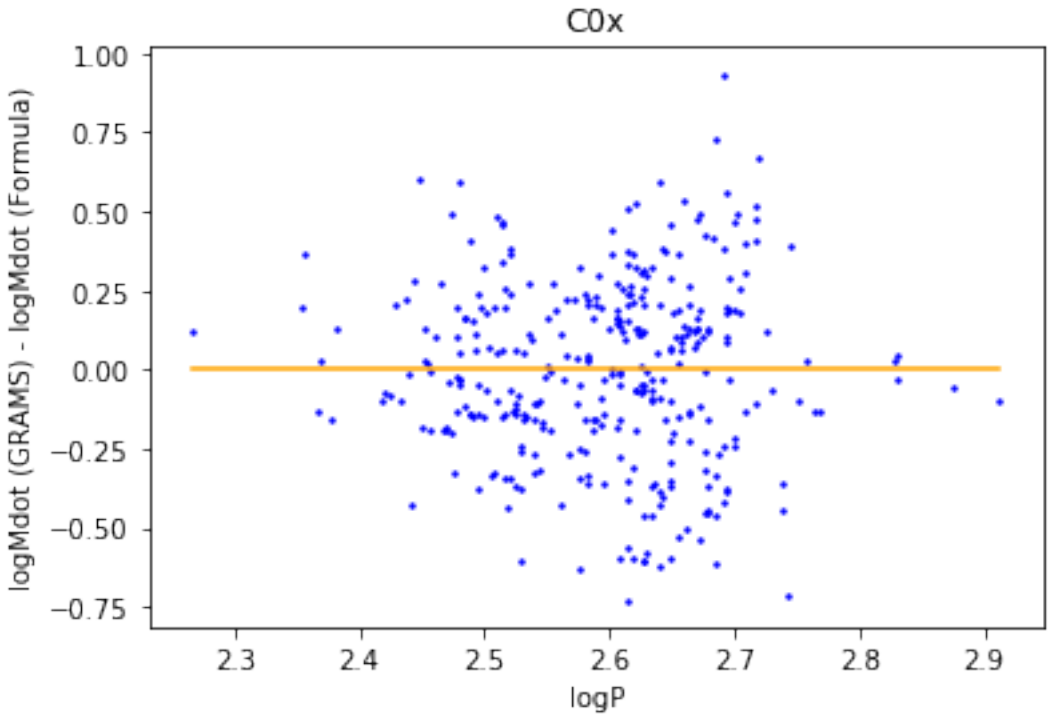



Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logP
R^2: 1.1102230246251565e-16


**C1**

```
Fit 1: Multilinear of L,P vs provided Mdot
Fit: -10.498663222022232 - 0.22406251828404 logL + 2.103540946168206 logP
R^2: 0.3821221063701795
```

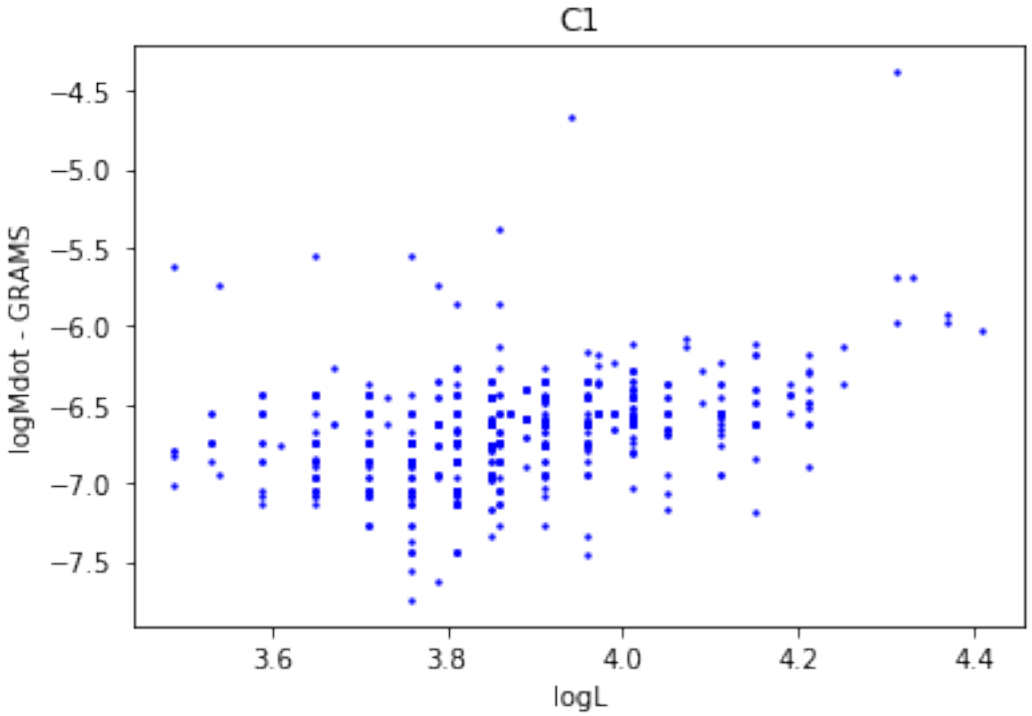

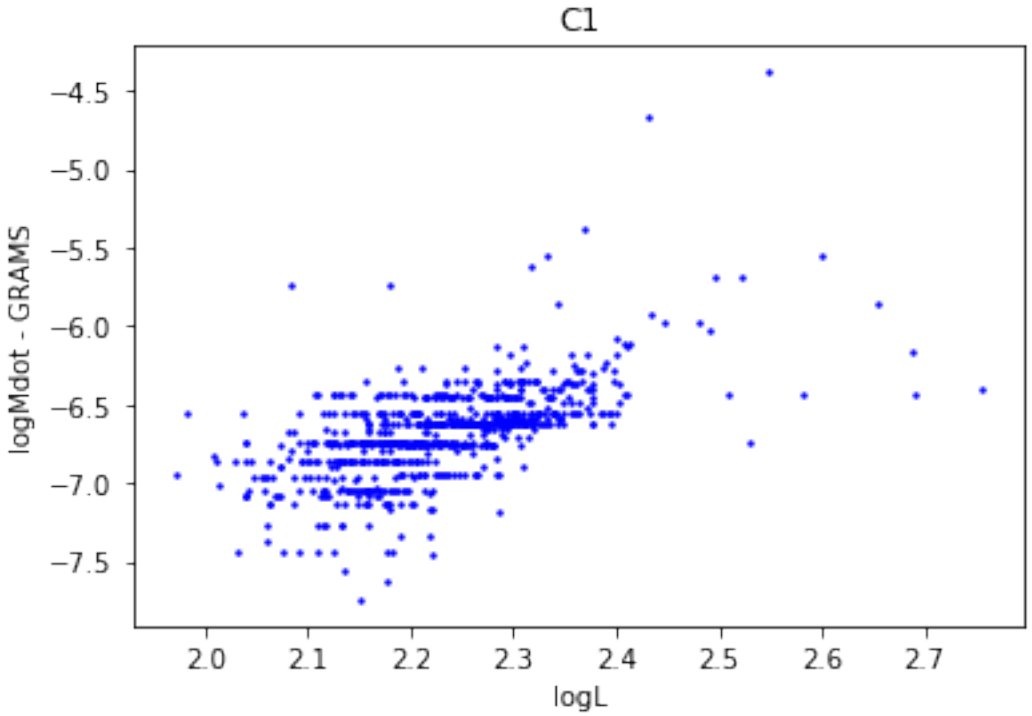



Fit 2: GRMAS Mdot vs Formula Mdot

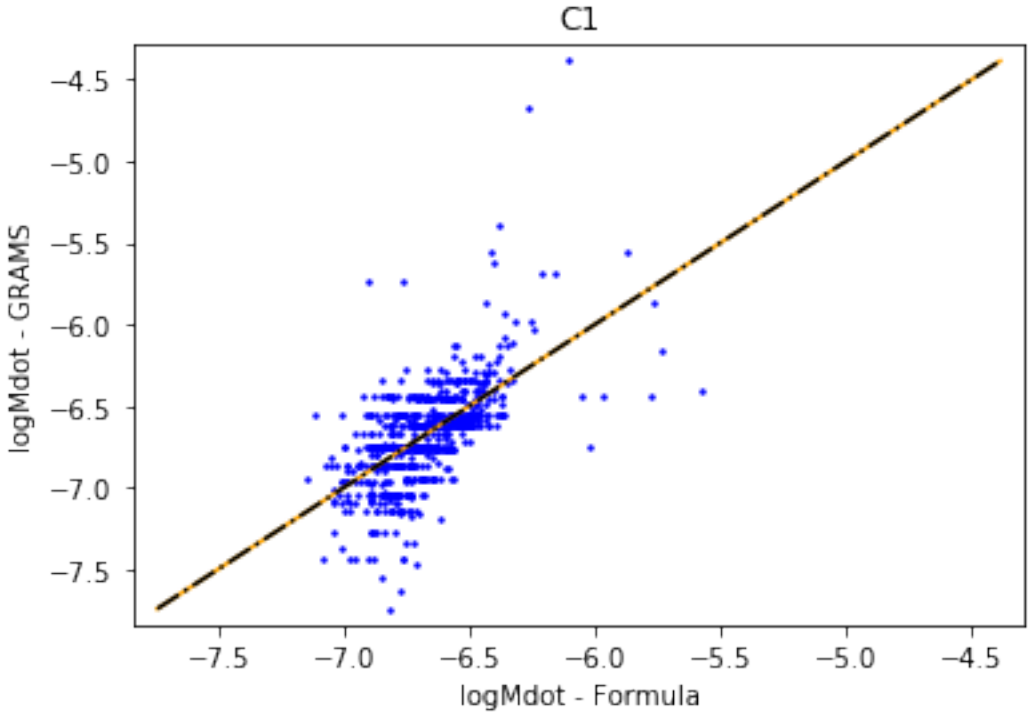



Quality of Fit Line:
Fit: logMdot_GRAMS=-0.000 + 1.000 * logMdot_Formula
R^2: 0.3821221063701795

Fit 3: Mdot Residual (GRAMS-Formula) vs logL

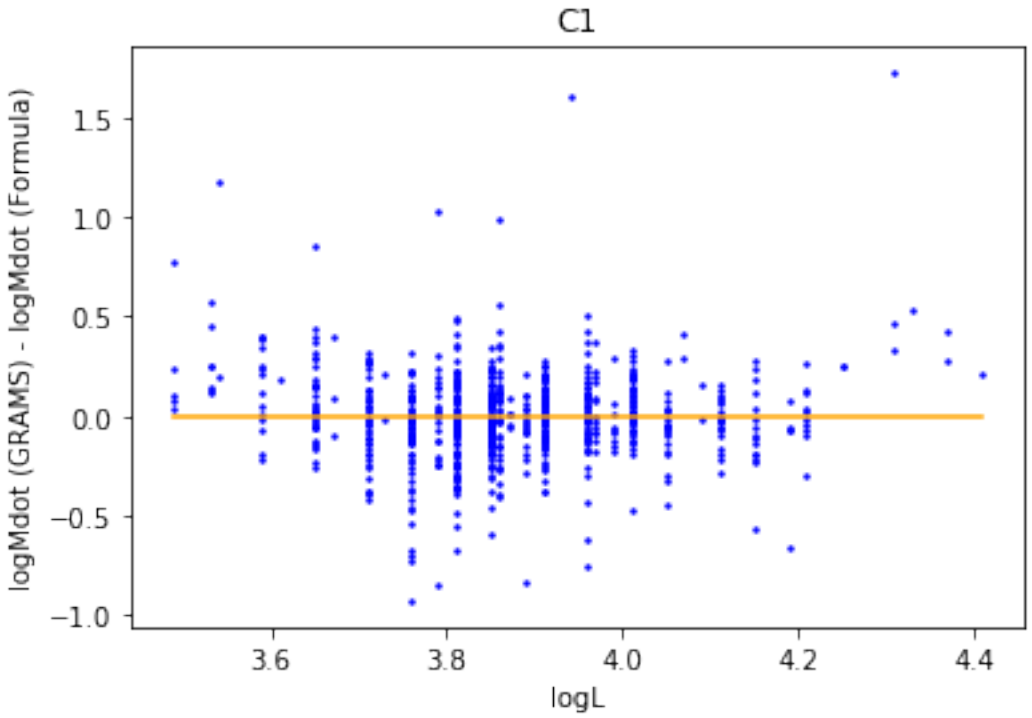


Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + 0.000 * logL
R^2: 0.0

Fit 4: Mdot Residual (GRAMS-Formula) vs logP

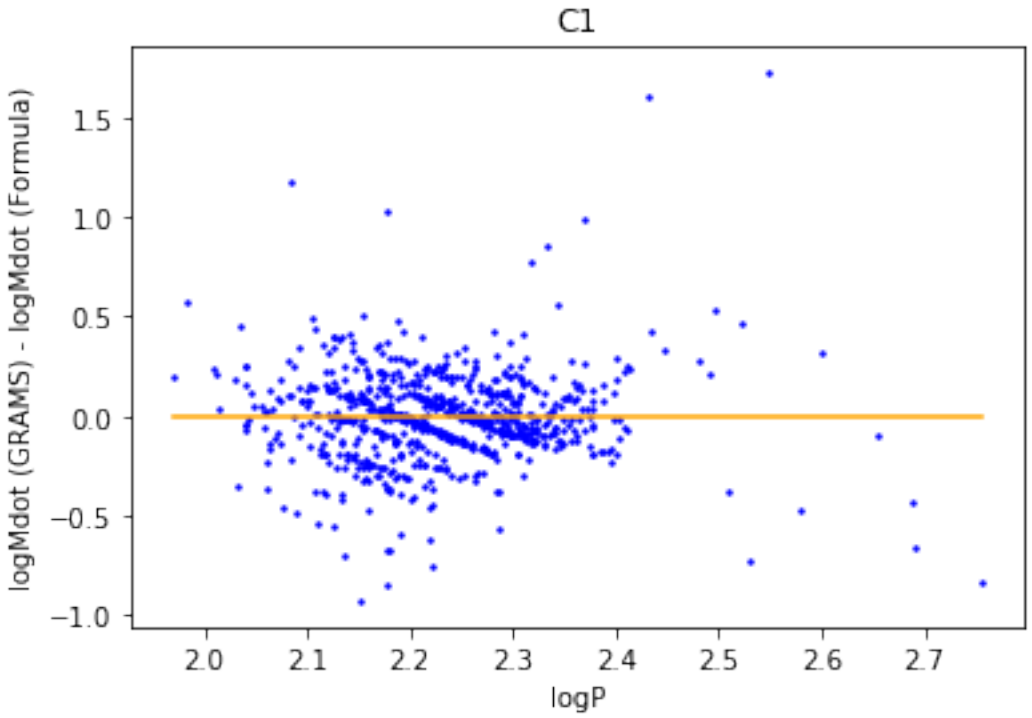


Quality of Residual Fit:
Fit: logMdot (GRAMS) - logMdot (Formula)=-0.000 + -0.000 * logP
R^2: -2.220446049250313e-16