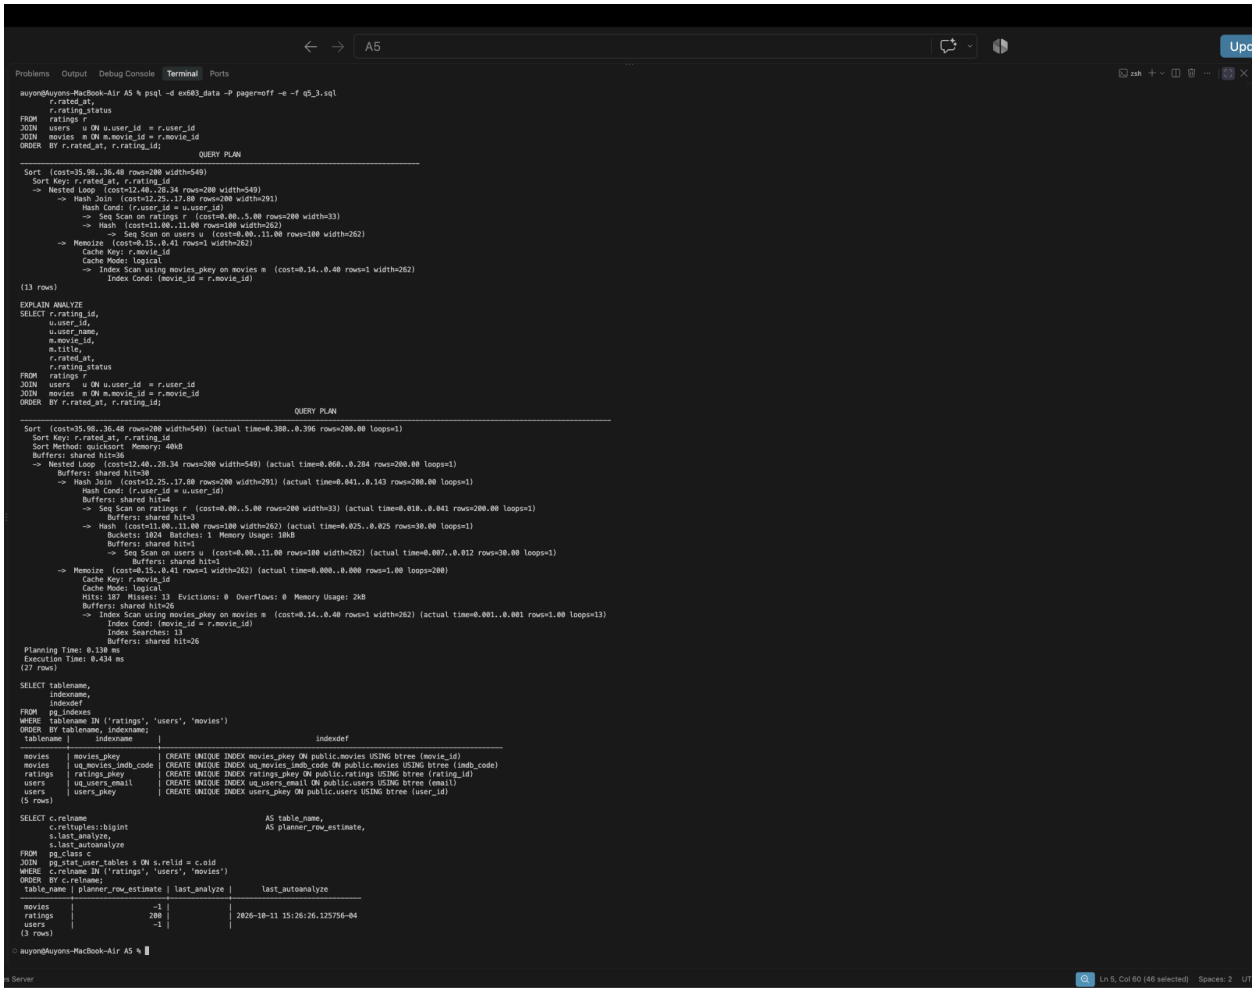

A5
Problems Output Debug Console Terminal Ports
zsh
auyon@Auyons-MacBook-Air A5 % psql -d ex603_data -P pager=off -e -f q5_3.sql
r.rated_at,
r.rating_status
FROM ratings r
JOIN users u ON u.user_id = r.user_id
JOIN movies m ON m.movie_id = r.movie_id
ORDER BY r.rated_at, r.rating_id;
QUERY PLAN
Sort (cost=35.98..36.48 rows=200 width=549)
Sort Key: r.rated_at, r.rating_id
-> Nested Loop (cost=12.40..28.34 rows=200 width=549)
-> Hash Join (cost=12.25..17.00 rows=200 width=291)
Hash Cond: (r.user_id = u.user_id)
-> Seq Scan on ratings r (cost=0.00..5.00 rows=200 width=33)
-> Hash (cost=11.00..11.00 rows=100 width=262)
-> Seq Scan on users u (cost=0.00..11.00 rows=100 width=262)
-> Memoize (cost=0.15..0.41 rows=1 width=262)
Cache Key: r.movie_id
Cache Mode: logical
-> Index Scan using movies_pkey on movies m (cost=0.14..0.40 rows=1 width=262)
Index Cond: (movie_id = r.movie_id)
(13 rows)
EXPLAIN ANALYZE
SELECT r.rating_id,
u.user_id,
u.user_name,
m.movie_id,
m.title,
r.rated_at,
r.rating_status
FROM ratings r
JOIN users u ON u.user_id = r.user_id
JOIN movies m ON m.movie_id = r.movie_id
ORDER BY r.rated_at, r.rating_id;
QUERY PLAN
Sort (cost=35.98..36.48 rows=200 width=549) (actual time=0.380..0.396 rows=200.00 loops=1)
Sort Key: r.rated_at, r.rating_id
Sort Method: quicksort Memory: 40kB
Buffers: shared hit=36
-> Nested Loop (cost=12.40..28.34 rows=200 width=549) (actual time=0.060..0.284 rows=200.00 loops=1)
Buffers: shared hit=30
-> Hash Join (cost=12.25..17.00 rows=200 width=291) (actual time=0.041..0.143 rows=200.00 loops=1)
Hash Cond: (r.user_id = u.user_id)
Buffers: shared hit=4
-> Seq Scan on ratings r (cost=0.00..5.00 rows=200 width=33) (actual time=0.010..0.041 rows=200.00 loops=1)
Buffers: shared hit=3
-> Hash (cost=11.00..11.00 rows=100 width=262) (actual time=0.025..0.025 rows=30.00 loops=1)
Buckets: 1024 Batches: 1 Memory Usage: 10kB
Buffers: shared hit=1
-> Seq Scan on users u (cost=0.00..11.00 rows=100 width=262) (actual time=0.007..0.012 rows=30.00 loops=1)
Buffers: shared hit=1
-> Memoize (cost=0.15..0.41 rows=1 width=262) (actual time=0.000..0.000 rows=1.00 loops=200)
Cache Key: r.movie_id
Cache Mode: logical
Hits: 187 Misses: 13 Evictions: 0 Overflows: 0 Memory Usage: 2kB
Buffers: shared hit=26
-> Index Scan using movies_pkey on movies m (cost=0.14..0.40 rows=1 width=262) (actual time=0.001..0.001 rows=1.00 loops=13)
Index Cond: (movie_id = r.movie_id)
Index Searches: 13
Buffers: shared hit=26
Planning Time: 0.130 ms
Execution Time: 0.434 ms
(27 rows)
SELECT tablename,
indexname,
indexdef
FROM pg_indexes
WHERE tablename IN ('ratings', 'users', 'movies')
ORDER BY tablename, indexname;
tablename | indexname | indexdef
movies | movies_pkey | CREATE UNIQUE INDEX movies_pkey ON public.movies USING btree (movie_id)
movies | uq_movies_imdb_code | CREATE UNIQUE INDEX uq_movies_imdb_code ON public.movies USING btree (imdb_code)
ratings | ratings_pkey | CREATE UNIQUE INDEX ratings_pkey ON public.ratings USING btree (rating_id)
users | uq_users_email | CREATE UNIQUE INDEX uq_users_email ON public.users USING btree (email)
users | users_pkey | CREATE UNIQUE INDEX users_pkey ON public.users USING btree (user_id)
(5 rows)
SELECT c.relname AS table_name,
c.reltuples::bigint AS planner_row_estimate,
s.last_analyze,
s.last_autoanalyze
FROM pg_class c
JOIN pg_stat_user_tables s ON s.relid = c.oid
WHERE c.relname IN ('ratings', 'users', 'movies')
ORDER BY c.relname;
table_name | planner_row_estimate | last_analyze | last_autoanalyze
movies | -1 | |
ratings | 200 | 2026-10-11 15:26:26.125756-04
users | -1 | |
(3 rows)
auyon@Auyons-MacBook-Air A5 %
Ln 5, Col 60 (46 selected) Spaces: 2 UT