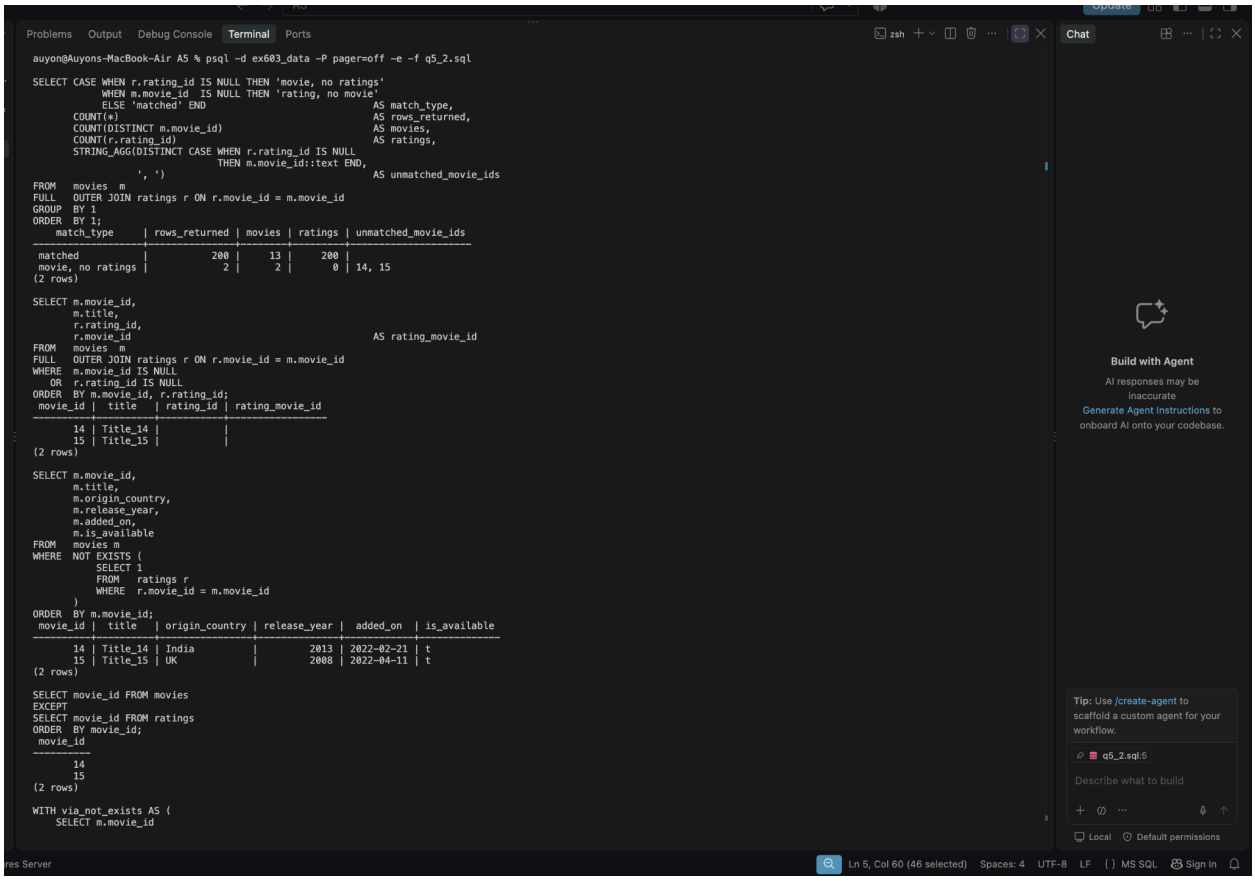


```
Problems  Output  Debug Console  Terminal  Ports                                                    zsh

auyon@Auyons-MacBook-Air A5 % psql -d ex603_data -P pager=off -e -f q5_2.sql

SELECT CASE WHEN r.rating_id IS NULL THEN 'movie, no ratings'
            WHEN m.movie_id  IS NULL THEN 'rating, no movie'
            ELSE 'matched' END                                  AS match_type,
       COUNT(*)                                                 AS rows_returned,
       COUNT(DISTINCT m.movie_id)                               AS movies,
       COUNT(r.rating_id)                                       AS ratings,
       STRING_AGG(DISTINCT CASE WHEN r.rating_id IS NULL
                                THEN m.movie_id::text END,
                  ', ')                                         AS unmatched_movie_ids
FROM   movies  m
FULL   OUTER JOIN ratings r ON r.movie_id = m.movie_id
GROUP  BY 1
ORDER  BY 1;
     match_type     | rows_returned | movies | ratings | unmatched_movie_ids
--------------------+---------------+--------+---------+---------------------
 matched            |           200 |     13 |     200 |
 movie, no ratings  |             2 |      2 |       0 | 14, 15
(2 rows)

SELECT m.movie_id,
       m.title,
       r.rating_id,
       r.movie_id                                               AS rating_movie_id
FROM   movies  m
FULL   OUTER JOIN ratings r ON r.movie_id = m.movie_id
WHERE  m.movie_id IS NULL
   OR  r.rating_id IS NULL
ORDER  BY m.movie_id, r.rating_id;
 movie_id |  title   | rating_id | rating_movie_id
----------+----------+-----------+-----------------
       14 | Title_14 |           |
       15 | Title_15 |           |
(2 rows)

SELECT m.movie_id,
       m.title,
       m.origin_country,
       m.release_year,
       m.added_on,
       m.is_available
FROM   movies m
WHERE  NOT EXISTS (
           SELECT 1
           FROM   ratings r
           WHERE  r.movie_id = m.movie_id
       )
ORDER  BY m.movie_id;
 movie_id |  title   | origin_country | release_year |  added_on  | is_available
----------+----------+----------------+--------------+------------+--------------
       14 | Title_14 | India          |         2013 | 2022-02-21 | t
       15 | Title_15 | UK             |         2008 | 2022-04-11 | t
(2 rows)

SELECT movie_id FROM movies
EXCEPT
SELECT movie_id FROM ratings
ORDER  BY movie_id;
 movie_id
----------
       14
       15
(2 rows)

WITH via_not_exists AS (
    SELECT m.movie_id
```

Chat

Build with Agent

AI responses may be inaccurate

Generate Agent Instructions to onboard AI onto your codebase.

Tip: Use /create-agent to scaffold a custom agent for your workflow.

q5_2.sql:5

Describe what to build

Local Default permissions

res Server Ln 5, Col 60 (46 selected) Spaces: 4 UTF-8 LF { } MS SQL Sign In



```
(2 rows)

WITH via_not_exists AS (
    SELECT m.movie_id
    FROM   movies m
    WHERE  NOT EXISTS (SELECT 1 FROM ratings r
                       WHERE  r.movie_id = m.movie_id)
),
via_except AS (
    SELECT movie_id FROM movies
    EXCEPT
    SELECT movie_id FROM ratings
)
SELECT (SELECT COUNT(*) FROM via_not_exists)              AS not_exists_count,
       (SELECT COUNT(*) FROM via_except)                  AS except_count,
       (SELECT COUNT(*) FROM (SELECT movie_id FROM via_not_exists
                              EXCEPT
                              SELECT movie_id FROM via_except) a)
                                                          AS only_in_not_exists,
       (SELECT COUNT(*) FROM (SELECT movie_id FROM via_except
                              EXCEPT
                              SELECT movie_id FROM via_not_exists) b)
                                                          AS only_in_except;
 not_exists_count | except_count | only_in_not_exists | only_in_except
------------------+--------------+---------------------+----------------
                2 |            2 |                   0 |              0
(1 row)

auyon@Auyons-MacBook-Air A5 %
```

es Server Ln 5, Col 60 (46 selected) Spaces: 4